

# Loadcenters and Circuit Breakers

Residential Loadcenters and Breaker Family



|            |   |           |
|------------|---|-----------|
| <b>1.1</b> | <b>Type CH Loadcenters and Circuit Breakers</b> |           |
|            | Overview  | V1-T1-2   |
|            | Single-Phase                                    | V1-T1-6   |
|            | Three-Phase                                     | V1-T1-11  |
|            | CH Specialty Products                           | V1-T1-13  |
|            | Spa Panels                                      | V1-T1-13  |
|            | Surge Panel                                     | V1-T1-14  |
|            | Plug-On Neutral Loadcenter                      | V1-T1-16  |
|            | Type CH Renovation Loadcenter                   | V1-T1-17  |
|            | Type CH Retrofit Interior Kits                  | V1-T1-18  |
|            | Non-Metallic Loadcenter                         | V1-T1-20  |
|            | CH Loadcenter Options and Accessories           | V1-T1-21  |
|            | CH Circuit Breakers                             | V1-T1-31  |
| <b>1.2</b> | <b>Type BR Loadcenters and Circuit Breakers</b> |           |
|            | Overview  | V1-T1-42  |
|            | Single-Phase                                    | V1-T1-54  |
|            | Three-Phase                                     | V1-T1-54  |
|            | BR Specialty Products                           | V1-T1-57  |
|            | BR Quick Connect Neutral Loadcenters            | V1-T1-57  |
|            | Spa Panels                                      | V1-T1-58  |
|            | Riser Panel                                     | V1-T1-59  |
|            | Type BR Renovation Loadcenter                   | V1-T1-60  |
|            | Type BR Retrofit Interior Kits                  | V1-T1-61  |
|            | BR Loadcenter Options and Accessories           | V1-T1-63  |
|            | BR Circuit Breakers                             | V1-T1-77  |
| <b>1.3</b> | <b>Loadcenter Interiors/OEM Loadcenters</b>     |           |
|            | Product Description                             | V1-T1-89  |
|            | Standards and Certifications                    | V1-T1-90  |
|            | Product Selection                               | V1-T1-90  |
| <b>1.4</b> | <b>Enclosed Breakers</b>                        |           |
|            | Product Description                             | V1-T1-94  |
|            | Standards and Certifications                    | V1-T1-94  |
|            | Product Selection                               | V1-T1-95  |
|            | Dimensions                                      | V1-T1-95  |
| <b>1.5</b> | <b>Classified Circuit Breakers</b>              |           |
|            | Product Description                             | V1-T1-96  |
|            | Product Selection                               | V1-T1-97  |
|            | Accessories                                     | V1-T1-99  |
|            | Technical Data                                  | V1-T1-99  |
|            | Wiring Diagrams                                 | V1-T1-100 |



# Revision notes

## Volume 1—Residential and Light Commercial, CA08100002E

Tab 1—Loadcenters and Circuit Breakers

| Revision date | Section | Change page(s)    | Description   |
|---------------|---------|-------------------|---|
| 01/25/2018    | 1.1     | V1-T1-2–V1-T1-30  | Rearrange layout, content edits                               |
| 01/25/2018    | 1.1     | V1-T1-38          | Content edits   |
| 01/25/2018    | 1.2     | V1-T1-42–V1-T1-70 | Rearrange layout, content edits                               |
| 01/25/2018    | 1.2     | V1-T1-72–V1-T1-79 | Content edits   |
| 01/25/2018    | 1.2     | V1-T1-85          | Content edits   |
| 01/25/2018    | 1.3     | V1-T1-90          | Content edits   |
| 02/19/2018    | All     | All               | Change to revision date to match print version, February 2018 |



*Powering Business Worldwide*

Eaton Type CH Convertible Family



### Contents

| <i>Description</i>                              | <i>Page</i>     |
|---|-----------------|
| Overview  |                 |
| Standards and Certifications . . . . .          | <b>V1-T1-3</b>  |
| Catalog Number Selection . . . . .              | <b>V1-T1-5</b>  |
| Product Selection . . . . .                     | <b>V1-T1-6</b>  |
| CH Specialty Products . . . . .                 | <b>V1-T1-13</b> |
| CH Loadcenter Options and Accessories . . . . . | <b>V1-T1-21</b> |
| CH Circuit Breakers . . . . .                   | <b>V1-T1-31</b> |

### Overview

#### Product Description

Loadcenters are enclosures specifically designed to house the branch circuit breakers and wiring required to distribute power to individual circuits. They contain either a main breaker when used at the service entrance point or a main lug when used as a sub-panel to add circuits to existing service. The main breaker protects the main entire panel and can be used as a service disconnect. The branch breakers protect the wires leading to individual electrical loads such as fixtures and outlets.

#### Features, Benefits and Functions

##### Loadcenter Construction

Eaton’s Type CH loadcenters feature silver flash plated copper bus in all interiors. Stabs are rated 200 A throughout the CH line. Therefore, the sum of the handle ratings connected to any one stab is limited to 200 A maximum. NEMA 1 boxes are manufactured from cold rolled 16 gauge sheet steel. Raintight boxes are manufactured from galvanized steel. All boxes and trims are finished using an electrostatic powder coat, baked urethane paint process.

##### Neutrals

Eaton Type CH loadcenters feature two types of neutrals:

##### Insulated/Bondable Split Neutral

Panels are supplied with split insulated neutrals with an insulated cross strap. For service entrance applications, the neutral must be bonded by using the bonding strap supplied with the panel. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

##### Insulated/Bondable Single Neutral

Panels are supplied with a single insulated neutral. For service entrance applications, all that is required to bond the neutral is to loosen the bonding screw and the neutral screw directly beside it, insert the bonding strap into the neutral bar, and re-tighten both connections. The single neutral can be moved by the contractor to the other side of the panel, if desired. When used as a service entrance panel, unused neutral connections may be used for the termination of equipment grounds. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

##### Inboard Plug-On Neutral

Code changes and higher safety standards are leading to more arc fault circuit interrupter (AFCI) installations. With the electrical contractor in mind, Eaton has revolutionized the way Combination AFCIs are installed with the Plug-on Neutral line of loadcenters and breakers.

This unique product solution enables the contractor to connect the breaker directly to the neutral bar, eliminating the need for wiring a pigtail.

##### Grounds

In service entrance applications where the neutral is bonded, unused neutral holes may be used for terminating ground conductors. In sub-feed panels, the neutral must be isolated (non-bonded), and ground wires must be terminated on a separate ground bar.

The insulated/bondable single/split neutral panels have sufficient terminations for both ground and neutral conductors. The insulated/bondable single split neutral panels are supplied with a separate factory-installed ground bar if the catalog number contains a “G.” If not, a separate ground bar should be installed. Insulated/Bondable Single Neutral panels are supplied without a ground bar (unless otherwise noted), and ground bar kits, if needed, must be purchased separately.

**Neutral and Ground Terminals**

The standard terminals on grounds and neutrals are rated to accept (3)—#14—#10 Cu/Al or (1)—#14—4 wires. For larger cables, add-on neutral lugs may be ordered from the Accessories.

**Note:** NEC® allows only one current carrying conductor per hole on neutrals unless otherwise noted.

**Bottom-Fed Loadcenters**

When the power cable is brought into the loadcenter from below the panel; then the main lug panels, and single-phase, 225 A and below, loadcenters can be rotated 180 degrees to allow straight-in wiring of power cables to the main terminals. Because the CSR main circuit breaker handle operates horizontally, the orientation of the main circuit breaker handle is consistent with the requirements of NEC Article 240.81.

**Gutter Splicing**

Loadcenters are not UL listed as wiring troughs. Therefore, gutter splicing of riser cables to tap off to the main device is not permitted. Refer to NEC Article 373.8.

**Fire Rating**

Due to the numerous openings in both loadcenter boxes and trims, they should not be mounted in firewalls. There is no approval method for sealing the enclosures for this application.

**Date Code**

The date of manufacture of each loadcenter is printed on the outside of the carton as well as inside the loadcenter. On the carton, the date code is printed on the end carton label. In the loadcenter, the date code is located on the small white label located on the right side wall (with the main device on top).

The date code is in the following format: F # # # &. The “F” is the numeric code for the Lincoln, IL plant, and the three numbers are the year and week of manufacture, e.g., 023. The “&” sign at the end signifies the decade of the 2000s. The “!” at the end signifies the decade of the 2010s. Therefore, the date code F023& would indicate that the product was manufactured in the 23rd week of 2000. The 1980s are represented by a “+” sign and the 1990s are represented by a “=” at the end of the code.

**Plug-On Type CH Breakers**

Quick-make, quick-break switch mechanism combined with inverse time element tripping operation and trip-free handle design. Type CH circuit breakers trip to the OFF position eliminating nuisance callbacks. The thermal-magnetic trip curve avoids nuisance tripping on mild overloads while reacting almost instantaneously to severe short-circuit conditions. CHF breakers include a ‘trip flag’ to differentiate between a tripped breaker and one that has been turned off. Multipole breakers have internal common trip connection to operate all poles simultaneously. Handles are marked with ON-OFF indication and ampere rating of the breaker. Type CH breakers meet UL Standard 489, NEMA standards, and Federal Spec Classification W-C 375 b/Gen. They are UL listed under File Number E11713, E8741, E3624 and E51287; and CSA® certified file number LR87196, except Type CHT breakers.

**Type CH Circuit Breaker Ratings**

Single- and double-pole CH breakers rated 15 and 20 A have low instantaneous magnetic trip levels. The 15 and 20 A breakers with “HM” suffix have high magnetic trip settings recommended for circuits with inherently high inrush currents. All Type CH breakers are marked for heating, air conditioning and refrigeration (HACR) equipment application. Single-pole 15–20 A breakers are also suitable for switching duty (SWD). Shunt trip coils operate on 120 Vac and require one additional pole space per breaker.

**Standards and Certifications****UL® Listings**

All Eaton Type CH loadcenters are listed under the UL 67 certification in file E8741.



# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Type CH Loadcenter

Extra 1.5 inch Knockout (38.1 mm)

- Larger knockout provides easier installation and time savings for renovation installations

Top or Bottom Feed

- Straight-in wiring saves labor and material
- One panel for either top or bottom applications

2/0 Lug

- Easily removable and can be installed in any location on the neutral bar

Commercial Grade Main Breaker

- 25 kAIC series rated main breaker in 150 A–225 A loadcenters. 35, 42 and 100 kAIC series ratings are available
- Optional convertible design—reduces inventory requirements

One Piece Silver-Flashed Copper Bus

- Provides superior conductivity, corrosion resistance and durability

Drywall Marking on Enclosure

- Indicates proper mounting depth for flush applications

Steel Backpan

- Provides solid and reliable breaker mounting—single piece design for stability and durability

“Tangential” Center Knockout

- Easier installation for conduit applications

Unique Sandalwood Finish

- Aesthetically appealing, scratch-resistant powder coating

Neutral Bus (Strap)

- Easily removable for sub-panel applications

Bonding Z-Strap

- Provides easy field conversion for service entrance applications

Twin Neutral Bars


- Minimum 150% neutral capacity

Type CHF AFCI/GFCI/Thermal-Magnetic Breakers

- Advanced electronics effectively reduce nuisance tripping
- CHF AFCI breakers have a standard diagnostic LED indicating 1 of 7 trip codes
- Mechanical flag for trip indication (on thermal-magnetic AFCI and GFCI)
- All CH breakers provide industry exclusive 2-position handle with simple 1 step reset

Single Keyhole Mounting

- One keyhole at the top and bottom provides easier mounting and leveling

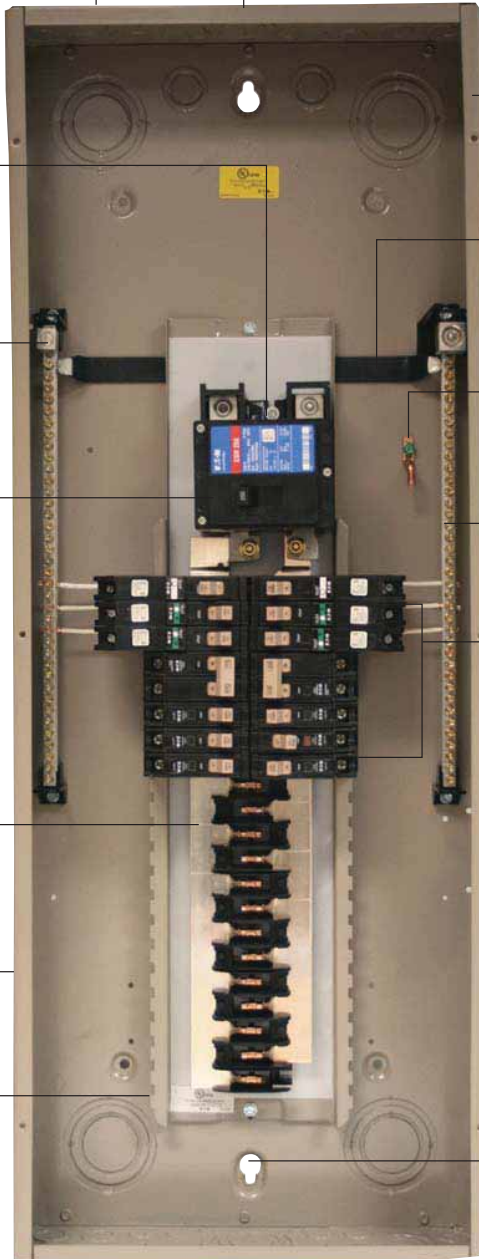


#### Warranty

The minimum warranty for residential loadcenters, breakers and surge protection devices shall be as follows:


- Lifetime loadcenter warranty
- Lifetime warranty on CH circuit breakers
- Lifetime warranty on CHSPT2ULTRA including \$75,000 connected equipment warranty
- 1-year warranty on plug-in surge protective device (CHSA)

### Catalog Number Selection

#### Loadcenters 100–225 A and 12–42 Circuits

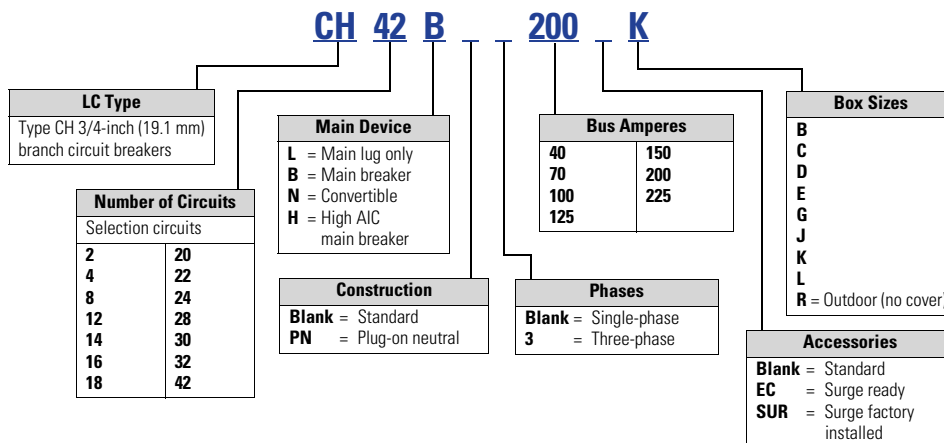

#### Indoor Covers Ordered Separately

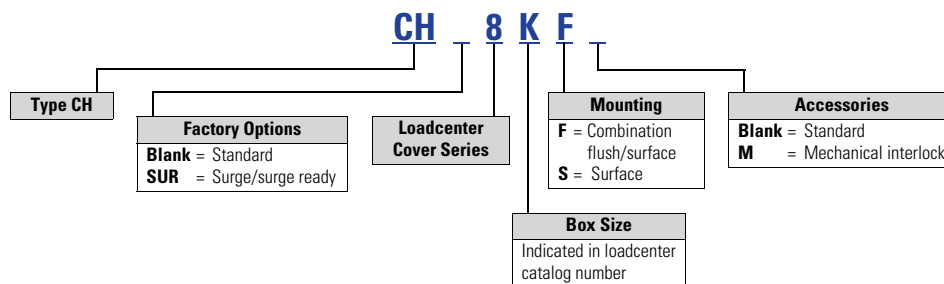

**Note:** All combinations are not valid, refer to the catalog section.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

#### 1

#### Product Selection

#### Single-Phase—Main Circuit Breaker Loadcenters—10/25 kAIC

CH42B200K



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral (Unless Otherwise Noted)

| Main Breaker Type | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) of Poles | Enclosure Type | Box Size     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter <sup>①②</sup> Catalog Number | Loadcenter Cover Catalog Number | Combination <sup>③</sup> | Surface |       |
|-------------------|--------------------|--|----------------|--------------|---|---|---------------------------------|--------------------------|---------|-------|
| CH<br>10 kAIC     | 100                | 14   | Indoor         | B            | #6–1/0  | CH14B100B <sup>④</sup>                  | CH8BF                           | CH8BS                    |         |       |
|                   |                    | 14   | Outdoor        | B            | #6–1/0  | CH14B100R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   |                    | 18   | Indoor         | C            | #6–1/0  | CH18B100C <sup>④</sup>                  | CH8CF                           | CH8CS                    |         |       |
|                   |                    | 18   | Outdoor        | C            | #6–1/0  | CH18B100R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   |                    | 22   | Indoor         | C            | #6–1/0  | CH22B100C <sup>④</sup>                  | CH8CF                           | CH8CS                    |         |       |
|                   |                    | 22   | Outdoor        | C            | #6–1/0  | CH22B100R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   |                    | 30   | Indoor         | D            | #6–1/0  | CH30B100D <sup>④</sup>                  | CH8DF                           | CH8DS                    |         |       |
|                   |                    | 30   | Outdoor        | D            | #6–1/0  | CH30B100R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   | 125                | 22   | Indoor         | C            | #6–1/0  | CH22B125C <sup>④</sup>                  | CH8CF                           | CH8CS                    |         |       |
|                   |                    | 22   | Outdoor        | C            | #6–1/0  | CH22B125R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   |                    | 30   | Indoor         | D            | #6–1/0  | CH30B125D <sup>④</sup>                  | CH8DF                           | CH8DS                    |         |       |
|                   |                    | 30   | Outdoor        | D            | #6–1/0  | CH30B125R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   |                    | CSR<br>25 kAIC                             | 150            | 8            | Outdoor   | E                                       | #2–300 kcmil                    | CH8B150RF <sup>⑥</sup>   | —       | —     |
|                   |                    |  |                | 24           | Indoor  | E                                       | #2–300 kcmil                    | CH24B150E <sup>④</sup>   | CH8EF   | CH8ES |
| 24                | Outdoor            |  |                | E            | #2–300 kcmil  | CH24B150R <sup>⑤</sup>                  | —                               | —                        |         |       |
| 32                | Indoor             |  |                | J            | #2–300 kcmil  | CH32B150J <sup>④</sup>                  | CH8JF                           | CH8JS                    |         |       |
| 32                | Outdoor            |  |                | J            | #2–300 kcmil  | CH32B150R <sup>⑤</sup>                  | —                               | —                        |         |       |
| 200               | 8                  |  | Outdoor        | E            | #2–300 kcmil  | CH8B200RF <sup>⑥</sup>                  | —                               | —                        |         |       |
|                   | 24                 |  | Indoor         | E            | #2–300 kcmil  | CH24B200E <sup>④</sup>                  | CH8EF                           | CH8ES                    |         |       |
|                   | 24                 |  | Outdoor        | E            | #2–300 kcmil  | CH24B200R <sup>⑤</sup>                  | —                               | —                        |         |       |
|                   | 32                 |  | Indoor         | J            | #2–300 kcmil  | CH32B200J <sup>④</sup>                  | CH8JF                           | CH8JS                    |         |       |
|                   | 32                 |  | Outdoor        | J            | #2–300 kcmil  | CH32B200R <sup>⑤</sup>                  | —                               | —                        |         |       |
| 225               | 42                 | Indoor                                     | K              | #2–300 kcmil | CH42B200K <sup>④</sup>                                | CH8KF                                   | CH8KS                           |                          |         |       |
|                   | 42                 | Outdoor                                    | K              | #2–300 kcmil | CH42B200R <sup>⑤</sup>                                | —                                       | —                               |                          |         |       |
|                   | 32                 | Indoor                                     | J              | #2–300 kcmil | CH32B225J <sup>④</sup>                                | CH8JF                                   | CH8JS                           |                          |         |       |
|                   | 32                 | Outdoor                                    | J              | #2–300 kcmil | CH32B225R <sup>⑤</sup>                                | —                                       | —                               |                          |         |       |
| DK<br>10 kAIC     | 300                | 42   | Indoor         | PM           | (2) 3/0–250 kcmil                                     | CH42PM300                               | CH7PMF <sup>⑦</sup>             | CH7PMS                   |         |       |
|                   |                    | 42   | Indoor         | PM           | (2) 3/0–250 kcmil                                     | CH42PM400                               | CH7PMF <sup>⑦</sup>             | CH7PMS                   |         |       |
|                   | 400                | 42   | Indoor         | PM           | (2) 3/0–250 kcmil                                     | CH42PM300                               | CH7PMF <sup>⑦</sup>             | CH7PMS                   |         |       |
|                   |                    | 42   | Indoor         | PM           | (2) 3/0–250 kcmil                                     | CH42PM400                               | CH7PMF <sup>⑦</sup>             | CH7PMS                   |         |       |

#### Notes

- ① All main circuit breaker loadcenters are listed for use as service entrance equipment.
- ② Ground bar kits priced separately. See **Page V1-T1-24**.
- ③ Combination style covers may be used in surface or flush applications.
- ④ Can be top or bottom fed by rotating the enclosure and trim 180 degrees.
- ⑤ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑥ Panel includes #4–300 kcmil feed-through lugs.
- ⑦ This cover is for flush applications only (not combination).

Box sizes **Pages V1-T1-29 and V1-T1-30**.

### Single-Phase—High Interrupting Rated Main Circuit Breaker Loadcenters—100 kAIC

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type             | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter <sup>①</sup> Catalog Number | Loadcenter Cover Catalog Number Combination <sup>②</sup> | Surface |
|-------------------------------|--------------------|---|----------------|----------|---|--|--|---------|
| CHB4<br>100 kAIC <sup>⑤</sup> | 100                | 32                                      | Indoor         | L        | #6–1/0  | CH32H100L <sup>③</sup>                 | CH8LF  | CH8LS   |
|                               |                    | 32                                      | Outdoor        | L        | #6–1/0  | CH32H100R <sup>④</sup>                 | —  | —       |
| CHH<br>100 kAIC <sup>⑤</sup>  | 150                | 32                                      | Indoor         | L        | #2/0–300 kcmil  | CH32H150L                              | CH8LF  | CH8LS   |
|                               |                    | 32                                      | Outdoor        | L        | #2/0–300 kcmil  | CH32H150R <sup>④</sup>                 | —  | —       |
|                               | 200                | 32                                      | Indoor         | L        | #2/0–300 kcmil  | CH32H200L                              | CH8LF  | CH8LS   |
|                               |                    | 32                                      | Outdoor        | L        | #2/0–300 kcmil  | CH32H200R <sup>④</sup>                 | —  | —       |
|                               |                    | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42H200L                              | CH8LF  | CH8LS   |
|                               |                    | 42                                      | Outdoor        | L        | #2/0–300 kcmil  | CH42H200R <sup>④</sup>                 | —  | —       |
|                               | 225                | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42H225L                              | CH8LF  | CH8LS   |
|                               |                    | 42                                      | Outdoor        | L        | #2/0–300 kcmil  | CH42H225R <sup>④</sup>                 | —  | —       |

#### Notes

- ① All main circuit breaker loadcenters are listed for use as service entrance equipment.
- ② Combination style covers may be used in surface or flush applications.
- ③ Loadcenter can be top or bottom fed by rotating the enclosure and trim 180 degrees.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑤ Series rated for 100 kAIC with all Types CH, CHT and CHP breakers.



# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Single-Phase—Main Lug Loadcenters

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Single Neutral

| Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) |                 | Enclosure Type  | Type of Trim (Included) | Box Size                           | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number                |
|--------------------|-----------------------------------|-----------------|-----------------|-------------------------|------------------------------------|--|--|
|                    | Space                             | Poles           |                 |                         |                                    |  |  |
| 40                 | Surface                           | Outdoor         | Indoor          | Surface (no door)       | 5                                  | #14–6  | <b>CH2L40SP</b> <sup>(2)(3)</sup>        |
|                    |                                   | Outdoor         | Outdoor         | —                       | 5R                                 | #14–6  | <b>CH2L40RP</b> <sup>(2)(3)(4)</sup>     |
|                    |                                   |                 | Indoor          | Flush (no door)         | 5                                  | #14–6  | <b>CH2L40FP</b> <sup>(2)(3)</sup>        |
| 70                 | Flush                             | Outdoor         | Indoor          | Surface (no door)       | 5                                  | #14–2  | <b>CH2L70SP</b> <sup>(2)(3)</sup>        |
|                    |                                   | Outdoor         | Outdoor         | —                       | 5R                                 | #14–2  | <b>CH2L70RP</b> <sup>(2)(3)(4)</sup>     |
|                    |                                   |                 | Indoor          | Flush (no door)         | 5                                  | #14–2  | <b>CH2L70FP</b> <sup>(2)(3)</sup>        |
| 125                | Surface (No Door)                 | Outdoor         | Indoor          | Surface (no door)       | 6                                  | #14–1/0  | <b>CH2L125SP</b> <sup>(2)(3)</sup>       |
|                    |                                   | Outdoor         | Outdoor         | —                       | 6R                                 | #14–1/0  | <b>CH2L125RP</b> <sup>(2)(3)(4)</sup>    |
|                    |                                   |                 | Outdoor         | —                       | —                                  | #14–1/0  | <b>CH2L125RSE2P</b> <sup>(4)(5)(6)</sup> |
|                    |                                   | Outdoor         | Indoor          | Flush (no door)         | 6                                  | #14–1/0  | <b>CH2L125FP</b> <sup>(2)(3)</sup>       |
|                    |                                   |                 | Indoor          | Surface (no door)       | 7                                  | #14–1/0  | <b>CH4L125SP</b> <sup>(2)(7)</sup>       |
|                    | Flush (No Door)                   | Indoor          | Flush (no door) | 7                       | #14–1/0                            | <b>CH4L125RP</b> <sup>(2)(4)(7)</sup>              |  |
|                    |                                   | Indoor          | Indoor          | Flush (no door)         | 7                                  | #14–1/0  | <b>CH4L125FP</b> <sup>(2)(7)</sup>       |
|                    |                                   |                 | Outdoor         | —                       | 6R                                 | #14–1/0  | <b>CH6L125R</b> <sup>(2)(6)(7)</sup>     |
|                    |                                   | Indoor          | Indoor          | Surface (no door)       | 7                                  | #6–1/0   | <b>CH8L125SP</b> <sup>(2)(8)</sup>       |
|                    |                                   |                 | Outdoor         | —                       | 7R                                 | #6–1/0   | <b>CH8L125RP</b> <sup>(2)(8)(7)</sup>    |
| Outdoor            | Indoor                            | Flush (no door) | 7               | #6–1/0                  | <b>CH8L125FP</b> <sup>(2)(8)</sup> |  |  |

#### Notes

- ① Requires the use of Type CHT breakers.
- ② Ground bar kits priced separately, see **Page V1-T1-24**.
  - For 2/4 and 6/12 circuit loadcenters, use Type GBK5 or GBK520 ground bar
  - For 4/8 and 8/16 circuit loadcenters, use Type GBK10 ground bar
  - Ground bars mount to the left side wall of the enclosure for the 4/8, 6/12 and 8/16 circuit loadcenters
- ③ Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not used as a lighting and appliance panelboard.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑤ For use as service entrance applications only.
- ⑥ Neutral/ground holes (6) #14–6 and (3) #14–2/0 AWG Cu/Al.
- ⑦ Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.
- ⑧ Suitable for use as service equipment when a main breaker is used or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.

Box sizes **Pages V1-T1-29 and V1-T1-30**.

CH42L225G



### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral—Factory-Installed Ground Bar

| Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number | Loadcenter Cover           |         |
|--------------------|---|----------------|----------|--|---------------------------|----------------------------|---------|
|                    |   |                |          |  |                           | Catalog Number Combination | Surface |
| 125                | 12                                      | Indoor         | B        | #6–2/0   | CH12L125B <sup>①</sup>    | CH8BF                      | CH8BS   |
|                    | 12                                      | Outdoor        | B        | #6–2/0   | CH12L125R <sup>①②</sup>   | —                          | —       |
|                    | 16                                      | Indoor         | B        | #6–2/0   | CH16L125B <sup>①</sup>    | CH8BF                      | CH8BS   |
|                    | 16                                      | Outdoor        | B        | #6–2/0   | CH16L125R <sup>①②</sup>   | —                          | —       |
|                    | 20                                      | Indoor         | C        | #6–2/0   | CH20L125C <sup>①</sup>    | CH8CF                      | CH8CS   |
|                    | 20                                      | Outdoor        | C        | #6–2/0   | CH20L125R <sup>①②</sup>   | —                          | —       |
|                    | 24                                      | Indoor         | C        | #6–2/0   | CH24L125C <sup>①</sup>    | CH8CF                      | CH8CS   |
|                    | 24                                      | Outdoor        | C        | #6–2/0   | CH24L125R <sup>①②</sup>   | —                          | —       |
| 150                | 24                                      | Indoor         | D        | #4–300 kcmil                                       | CH24L150D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 24                                      | Outdoor        | D        | #4–300 kcmil                                       | CH24L150R <sup>②③</sup>   | —                          | —       |
|                    | 32                                      | Indoor         | D        | #4–300 kcmil                                       | CH32L150D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 32                                      | Outdoor        | D        | #4–300 kcmil                                       | CH32L150R <sup>②③</sup>   | —                          | —       |
| 200                | 12                                      | Indoor         | D        | #4–300 kcmil                                       | CH12L200D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 12                                      | Outdoor        | D        | #4–300 kcmil                                       | CH12L200R <sup>②③</sup>   | —                          | —       |
|                    | 16                                      | Indoor         | D        | #4–300 kcmil                                       | CH16L200D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 16                                      | Outdoor        | D        | #4–300 kcmil                                       | CH16L200R <sup>②③</sup>   | —                          | —       |
| 225                | 24                                      | Indoor         | D        | #4–300 kcmil                                       | CH24L225D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 24                                      | Outdoor        | D        | #4–300 kcmil                                       | CH24L225R <sup>②③</sup>   | —                          | —       |
|                    | 32                                      | Indoor         | D        | #4–300 kcmil                                       | CH32L225D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 32                                      | Outdoor        | D        | #4–300 kcmil                                       | CH32L225R <sup>②③</sup>   | —                          | —       |
|                    | 42                                      | Indoor         | G        | #4–300 kcmil                                       | CH42L225G <sup>③</sup>    | CH8GF                      | CH8GS   |
|                    | 42                                      | Outdoor        | G        | #4–300 kcmil                                       | CH42L225R <sup>②③</sup>   | —                          | —       |
| 400                | 42                                      | Indoor         | P        | (2) 1/0–300 kcmil<br>(1) 750 kcmil                 | CH42PL400 <sup>④</sup>    | CH7PF <sup>⑤</sup>         | CH7PS   |

#### Notes

- ① Suitable for use as service equipment when not more than six disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ② Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ③ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down bracket kit catalog number **CH125RB**.
- ④ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and must be a Type CHB.  
**The breaker cannot be a Type CH.**
- ⑤ This cover is for flush application only (not combination).

Box sizes **Pages V1-T1-29** and **V1-T1-30**.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Convertible Loadcenters MCB or MLO—Base Units and Main Devices—10/25/35 kAIC

Complete assembly consists of: loadcenter, cover, and either main breaker kit or main lug kit.

#### Indoor—Single-Phase—Three-Wire—120/240 V—Insulated/Bondable Split Neutral—Top or Bottom Feed

| Maximum Main Ampere Rating | Maximum Number of Single Poles | Box Size | Loadcenter Box and Panel Catalog Number ① | Loadcenter Cover Catalog Number |         | Main Lug Kit |                | Main Breaker Kit |              | Catalog Number |            |
|----------------------------|--------------------------------|----------|---|---------------------------------|---------|--------------|----------------|------------------|--------------|----------------|------------|
|                            |                                |          |   | Combination                     | Surface | Wire Size    | Catalog Number | kAIC Rating      | Wire Size    |                |            |
| 125                        | 22                             | C        | CH22N125C                                 | CH8CF                           | CH8CS   | #10–1/0      | CHL125N        | 10               | #10–1/0      | CH2100N ③      | —          |
|                            |                                |          |   |                                 |         |              |                |                  |              | CH2125N ③      | —          |
| 200                        | 32                             | J        | CH32N200J                                 | CH8JF                           | CH8JS   | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2200N       | CSH2200N ④ |
| 225                        | 42                             | K        | CH42N225K                                 | CH8KF                           | CH8KS   | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2200N       | CSH2200N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2225N       | CSH2225N ④ |

#### Outdoor—Single-Phase—Three-Wire—120/240 V—Insulated/Bondable Split Neutral (Unless Otherwise Noted)

| Maximum Main Ampere Rating | Maximum Number of Single Poles | Box Size | Loadcenter Box and Panel Catalog Number ① | Main Lug Kit |                | Main Breaker Kit |              | Catalog Number |            |
|----------------------------|--------------------------------|----------|---|--------------|----------------|------------------|--------------|----------------|------------|
|                            |                                |          |   | Wire Size    | Catalog Number | kAIC Rating      | Wire Size    |                |            |
| 125                        | 22                             | C        | CH22N125R ⑤                               | #10–1/0      | CHL125N        | 10               | #10–1/0      | CH2100N ③      | —          |
|                            |                                |          |   |              |                |                  |              | CH2125N ③      | —          |
| 200                        | 8                              | E        | CH8N200RF ⑤⑥⑦                             | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N   |
|                            |                                |          |   |              |                |                  |              | CSR2150N       | CSH2150N   |
|                            |                                |          |   |              |                |                  |              | CSR2175N       | CSH2175N   |
|                            |                                |          |   |              |                |                  |              | CSR2200N       | CSH2200N   |
| 200                        | 32                             | J        | CH32N200R ⑤                               | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2200N       | CSH2200N ④ |
| 225                        | 42                             | K        | CH42N225R ⑤                               | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2200N       | CSH2200N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2225N       | CSH2225N ④ |

#### Notes

- ① Panel does not include main. Order main breaker or main lug kit separately.
- ② If 35 kAIC is required, use CSH breaker.
- ③ Hold-down kit included.
- ④ 35 kAIC series combination rating is obtained when Types CH, CHT and CHP branch breakers are used with CSH main.
- ⑤ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑥ Includes feed-through lugs for both phase and neutral conductors.
- ⑦ Insulated/bondable single neutral.

Interrupting rating depends on main circuit breaker selected.

### Three-Phase—Main Circuit Breaker Loadcenters—10 kAIC

CH42B3200L



#### Three-Phase Four-Wire—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number <sup>①②</sup> | Loadcenter Cover Catalog Number |         |
|-------------------|--------------------|---|----------------|----------|---|---|---------------------------------|---------|
|                   |                    |   |                |          |   |   | Combination                     | Surface |
| CC<br>10 kAIC     | 150                | 30                                      | Indoor         | L        | #1–4/0  | CH30B3150L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #1–4/0  | CH30B3150R <sup>③</sup>                 | —                               | —       |
|                   | 200                | 30                                      | Indoor         | L        | #2/0–300 kcmil  | CH30B3200L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH30B3200R <sup>③</sup>                 | —                               | —       |
|                   |                    | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42B3200L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH42B3200R <sup>③</sup>                 | —                               | —       |
|                   | 225                | 30                                      | Indoor         | L        | #2/0–300 kcmil  | CH30B3225L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH30B3225R <sup>③</sup>                 | —                               | —       |
|                   |                    | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42B3225L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH42B3225R <sup>③</sup>                 | —                               | —       |
|                   | 400                | 42                                      | Indoor         | PM       | (2) 3/0–350 kcmil                                     | CH424PM400                              | CH7PMF <sup>④</sup>             | CH7PMS  |

### Three-Phase—High Interrupting Rated Main Circuit Breaker Loadcenters—100 kAIC

#### Three-Phase Four-Wire—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral

| Main Breaker Type            | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) of Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number <sup>①②</sup> | Loadcenter Cover Catalog Number |         |
|------------------------------|--------------------|--|----------------|----------|---|---|---------------------------------|---------|
|                              |                    |  |                |          |   |   | Combination                     | Surface |
| CHH<br>100 kAIC <sup>⑤</sup> | 200                | 30   | Indoor         | L        | #2/0–300 kcmil  | CH30H3200L                              | CH8LF                           | CH8LS   |
|                              |                    |  | Outdoor        | L        | #2/0–300 kcmil  | CH30H3200R <sup>③</sup>                 | —                               | —       |
|                              |                    | 42   | Indoor         | L        | #2/0–300 kcmil  | CH42H3200L                              | CH8LF                           | CH8LS   |
|                              |                    |  | Outdoor        | L        | #2/0–300 kcmil  | CH42H3200R <sup>③</sup>                 | —                               | —       |
|                              | 225                | 42   | Indoor         | L        | #2/0–300 kcmil  | CH42H3225L                              | CH8LF                           | CH8LS   |
|                              |                    |  | Outdoor        | L        | #2/0–300 kcmil  | CH42H3225R <sup>③</sup>                 | —                               | —       |

#### Notes

- ① All main circuit breaker loadcenters are listed for use as service entrance equipment.
- ② Ground bar kits priced separately. For ground bar kits, see **Page V1-T1-24**.
- ③ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ④ This cover for flush application only (not combination).
- ⑤ 100 kAIC series combination rating is obtained when Types CH and CHP branch breakers are used with CHH main.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Three-Phase—Main Lug Loadcenters

#### Three-Phase Four-Wire—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral (Unless Otherwise Noted)

| Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) |                 | Enclosure Type | Type of Trim Included | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number  | Loadcenter Cover Catalog Number |        |
|--------------------|-----------------------------------|-----------------|----------------|-----------------------|----------|--|----------------------------|---------------------------------|--------|
|                    | Spaces                            | Poles           |                |                       |          |  |                            | Combination                     | Single |
| 125                | 6                                 | 12 <sup>①</sup> | Indoor         | Surface, no door      | 7        | #14–1/0  | CH6L3125SP <sup>②③④</sup>  | —                               | —      |
|                    | 6                                 | 12 <sup>①</sup> | Outdoor        | —                     | 7R       | #14–1/0  | CH6L3125RP <sup>②③④⑤</sup> | —                               | —      |
|                    | 6                                 | 12 <sup>①</sup> | Indoor         | Flush, no door        | 7        | #14–1/0  | CH6L3125FP <sup>②③④</sup>  | —                               | —      |
|                    | 12                                | 12              | Indoor         | —                     | B        | #6–2/0   | CH12L3125B <sup>⑥⑦</sup>   | CH8BF                           | CH8BS  |
|                    | 12                                | 12              | Outdoor        | —                     | B        | #6–2/0   | CH12L3125R <sup>⑥⑦</sup>   | —                               | —      |
|                    | 18                                | 18              | Indoor         | —                     | C        | #6–2/0   | CH18L3125C <sup>⑥⑦</sup>   | CH8CF                           | CH8CS  |
|                    | 18                                | 18              | Outdoor        | —                     | C        | #6–2/0   | CH18L3125R <sup>⑥⑦⑧</sup>  | —                               | —      |
|                    | 24                                | 24              | Indoor         | —                     | C        | #6–2/0   | CH24L3125C <sup>⑥⑦</sup>   | CH8CF                           | CH8CS  |
| 150                | 30                                | 30              | Indoor         | —                     | D        | #4–300 kcmil                                       | CH30L3150D <sup>⑥⑦</sup>   | CH8DF                           | CH8DS  |
|                    | 30                                | 30              | Outdoor        | —                     | D        | #4–300 kcmil                                       | CH30L3150R <sup>⑥⑦⑧</sup>  | —                               | —      |
| 225                | 24                                | 24              | Indoor         | —                     | D        | #4–300 kcmil                                       | CH24L3225D <sup>⑥⑦</sup>   | CH8DF                           | CH8DS  |
|                    | 24                                | 24              | Outdoor        | —                     | D        | #4–300 kcmil                                       | CH24L3225R <sup>⑥⑦⑧</sup>  | —                               | —      |
|                    | 30                                | 30              | Indoor         | —                     | D        | #4–300 kcmil                                       | CH30L3225D <sup>⑥⑦</sup>   | CH8DF                           | CH8DS  |
|                    | 30                                | 30              | Outdoor        | —                     | D        | #4–300 kcmil                                       | CH30L3225R <sup>⑥⑦⑧</sup>  | —                               | —      |
|                    | 42                                | 42              | Indoor         | —                     | G        | #4–300 kcmil                                       | CH42L3225G <sup>⑥⑧</sup>   | CH8GF                           | CH8GS  |
|                    | 42                                | 42              | Outdoor        | —                     | G        | #4–300 kcmil                                       | CH42L3225R <sup>⑥⑦⑧</sup>  | —                               | —      |
| 400                | 42                                | 42              | Indoor         | —                     | P        | (2) 1/0–300 kcmil<br>(1) 750 kcmil                 | CH424PL400 <sup>⑩⑪</sup>   | CH7PF <sup>⑫</sup>              | CH7PS  |

#### Notes

- ① Requires the use of Type CHT breakers.
- ② Suitable for use as service equipment when not more than two service disconnecting means are provided or when not more than six service disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ③ Ground bar kits priced separately, see **Page V1-T1-24**.
  - Use GBK10 ground bar
  - Ground bars mount to the left side wall of the enclosure.
- ④ Insulated/bondable single neutral.
- ⑤ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑥ Ground bar Type GBK14 is installed.
- ⑦ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down bracket kit catalog number Type **CH125RB**. Suitable for use as service equipment when not more than six service disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑧ Ground bar Type GBK21 is installed.
- ⑨ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down kit catalog number Type **CH125RB**.
- ⑩ For ground bar kits, see **Page V1-T1-24**.
- ⑪ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and must be a Type CHB. **The breaker cannot be a Type CH.**
- ⑫ This cover for flush application only (not combination).

Box sizes **Pages V1-T1-29** and **V1-T1-30**.

### Spa Panels



### Contents

| <b>Description</b>                          | <b>Page</b> |
|---|-------------|
| Overview .....                              | V1-T1-2     |
| CH Specialty Products                       |             |
| Spa Panels                                  |             |
| Surge Panel .....                           | V1-T1-14    |
| Plug-On Neutral Loadcenter .....            | V1-T1-16    |
| Type CH Renovation Loadcenter .....         | V1-T1-17    |
| Type CH Retrofit Interior Kits .....        | V1-T1-18    |
| CH Loadcenter Options and Accessories ..... | V1-T1-21    |
| CH Circuit Breakers .....                   | V1-T1-31    |

## CH Specialty Products

### Spa Panels

#### Product Description

Eaton's CH Spa Panels are premium factory-assembled "combination" units that provide ground fault protection, as well as a convenient way to turn spa pumps on and off. The NEC requires that all pool and spa pumps be protected by a ground fault interrupter and a disconnect switch mounted within 10 feet of the tub or the spa.

#### Features

- Two extra circuits for additional loads
- Limited lifetime warranty
- UL Listed
- Tough powder-coated galvanized steel enclosure
- Factory-installed two-pole ground fault circuit interrupter (GFCI)

#### Product Selection

##### CH Spa Panel



#### Single-Phase Three-Wire—120/240 Vac Insulated/Bondable Neutral—Factory-Installed Ground Bar

| Main Ampere Rating | Circuit Breaker Included | Enclosure Type | Type of Trim Included | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number     |
|--------------------|--------------------------|----------------|-----------------------|----------|--|--------------------|
| 30                 | CH230GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | <b>CH30SPAST</b> ① |
| 40                 | CH240GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | <b>CH40SPAST</b> ② |
| 50                 | CH250GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | <b>CH50SPAST</b> ③ |
| 60                 | CH260GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | <b>CH60SPAST</b> ④ |

#### Notes

- ① Includes a CH230GFT breaker, factory installed, and two extra circuits for convenience.
- ② Includes a CH240GFT breaker, factory installed, and two extra circuits for convenience.
- ③ Includes a CH250GFT breaker, factory installed, and two extra circuits for convenience.
- ④ Includes a CH260GFT breaker, factory installed, and two extra circuits for convenience.

Surge Panel



### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-2     |
| CH Specialty Products                       |             |
| Spa Panels .....                            | V1-T1-13    |
| Surge Panel                                 |             |
| Plug-On Neutral Loadcenter .....            | V1-T1-16    |
| Type CH Renovation Loadcenter .....         | V1-T1-17    |
| Type CH Retrofit Interior Kits .....        | V1-T1-18    |
| CH Loadcenter Options and Accessories ..... | V1-T1-21    |
| CH Circuit Breakers .....                   | V1-T1-31    |

### Surge Panel

#### Product Description

Eaton's Type CH Surge Loadcenter includes a factory-mounted and wired surge suppressor device. There is a knockout in the cover that allows the user to view the status indication lights on the surge suppressor. The CH Surge Loadcenter reduces the surge current, helping protect sensitive home electronic equipment.

Save labor by installing a factory-mounted surge protective device.

#### Factory-Installed Surge Protection

- Includes a CHSPT2ULTRA and a two-pole 50 A circuit breaker
- Increases the effectiveness of surge protection due to reduced lead length
- A modified deadfront allows for easy viewing of indicating lights

#### Surge Ready

- Provides a mounting provision for CHSPT2ULTRA
- A modified deadfront allows for easy viewing of indicating lights

#### Product Selection

##### Surge Installed Loadcenters

| Ampere Rating | Type          | Number of Circuits | Loadcenter Catalog Number | Loadcenter Cover |          |
|---------------|---------------|--------------------|---------------------------|------------------|----------|
|               |               |                    |                           | Catalog Number   | Surface  |
| 225           | Convertible   | 42                 | CHSUR42N225L ①            | CHSUR8LF         | CHSUR8LS |
| 225           | Convertible ② | 42                 | CHSUR42L225L2 ①           | CHSUR8LF         | CHSUR8LS |
| 200           | Main breaker  | 42                 | CHSUR42B200L2 ①           | CHSUR8LF         | CHSUR8LS |
| 225           | Convertible   | 32                 | CHSUR32N225K ①            | CHSUR8KF         | CHSUR8KS |
| 225           | Convertible ② | 32                 | CHSUR32L225K ①            | CHSUR8KF         | CHSUR8KS |
| 200           | Main breaker  | 32                 | CHSUR32B200K ①            | CHSUR8KF         | CHSUR8KS |
| 150           | Main breaker  | 32                 | CHSUR32B150K ①            | CHSUR8KF         | CHSUR8KS |
| 100           | Main breaker  | 32                 | CHSUR32B100K ①            | CHSUR8KF         | CHSUR8KS |
| 125           | Convertible ② | 24                 | CHSUR24L125E ①            | CHSUR8EF         | CHSUR8ES |
| 100           | Main breaker  | 24                 | CHSUR24B100E ①            | CHSUR8EF         | CHSUR8ES |
| 200           | Convertible   | 40/40              | BRSUR4040N200             | Cover included   |          |
| 200           | Main lug      | 40/40              | BRSUR4040L200             | Cover included   |          |
| 200           | Main breaker  | 40/40              | BRSUR4040B200             | Cover included   |          |
| 200           | Convertible   | 30/40              | BRSUR3040N200             | Cover included   |          |
| 200           | Main lug      | 30/40              | BRSUR3040L200             | Cover included   |          |
| 200           | Main breaker  | 30/40              | BRSUR3040B200             | Cover included   |          |

#### Notes

- ① Order cover separately.
- ② With main lugs installed.

### Surge Ready Loadcenters (provision only, CHSPT2ULTRA and breaker not included)

| Ampere Rating | Type                     | Number of Circuits | Loadcenter Catalog Number <sup>①</sup> | Loadcenter Cover Catalog Number Combination | Loadcenter Cover Catalog Number Surface |
|---------------|--------------------------|--------------------|--|---|---|
| 225           | Convertible              | 42                 | CHEC42N225L                            | CHSUR8LF                                    | CHSUR8LS                                |
| 225           | Convertible <sup>②</sup> | 42                 | CHEC42L225L                            | CHSUR8LF                                    | CHSUR8LS                                |
| 200           | Main breaker             | 42                 | CHEC42B200L                            | CHSUR8LF                                    | CHSUR8LS                                |
| 225           | Convertible <sup>②</sup> | 32                 | CHEC32L225K                            | CHSUR8KF                                    | CHSUR8KS                                |
| 225           | Convertible              | 32                 | CHEC32N225K                            | CHSUR8KF                                    | CHSUR8KS                                |
| 225           | Convertible              | 32                 | CHEC32N225R <sup>③</sup>               | —   | —                                       |
| 200           | Main breaker             | 32                 | CHEC32B200K                            | CHSUR8KF                                    | CHSUR8KS                                |
| 150           | Main breaker             | 32                 | CHEC32B150K                            | CHSUR8KF                                    | CHSUR8KS                                |
| 100           | Main breaker             | 32                 | CHEC32B100K                            | CHSUR8KF                                    | CHSUR8KS                                |
| 125           | Convertible <sup>②</sup> | 24                 | CHEC24L125E                            | CHSUR8EF                                    | CHSUR8ES                                |
| 100           | Main breaker             | 24                 | CHEC24B100E                            | CHSUR8EF                                    | CHSUR8ES                                |

### Technical Data and Specifications

#### Ratings

- Loadcenter
  - 25 kAIC main breaker, main lug only, and convertible main breaker/main lug
  - Factory installed or provision for field-installed surge suppressor
  - Top or bottom feed
- Surge protective device (CHSPT2ULTRA)
  - Nominal discharge current: 20 kA ( $I_n$ )
  - Surge current capacity per phase: 108 kA
  - Warranty: \$75,000 connected equipment <sup>④</sup>
  - For further product ratings, see Volume 1, Tab 2.1 Surge Protection

#### Notes

- ① Order cover separately.
- ② With main lugs installed.
- ③ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ④ For warranty details, visit [www.eaton.com/surgetrap](http://www.eaton.com/surgetrap).



#### 60-Circuit Plug-On Neutral Loadcenter



### Plug-On Neutral Loadcenter

#### Product Description

Code changes and higher safety standards are leading to more arc fault and ground fault circuit interrupter installations. Eaton offers a unique product solution that enables a direct connection of the breaker to the neutral bar, eliminating the need for wiring a pigtail.

#### Features and Benefits

- Time savings up to 25% per AFCI/GFCI installation
- Eliminates nuisance tripping due to loose pigtail connections
- Clean gutter space
- Easier troubleshooting due to less wiring
- Backed by a limited lifetime warranty

### Contents

| <i>Description</i>                              | <i>Page</i> |
|---|-------------|
| Overview . . . . .                              | V1-T1-2     |
| CH Specialty Products                           |             |
| Spa Panels . . . . .                            | V1-T1-13    |
| Surge Panel . . . . .                           | V1-T1-14    |
| Plug-On Neutral Loadcenter                      |             |
| Type CH Renovation Loadcenter . . . . .         | V1-T1-17    |
| Type CH Retrofit Interior Kits . . . . .        | V1-T1-18    |
| CH Loadcenter Options and Accessories . . . . . | V1-T1-21    |
| CH Circuit Breakers . . . . .                   | V1-T1-31    |

### Product Selection

#### Main Breaker Plug-On Neutral Loadcenters

| Main Breaker Type | Main Ampere Rating | Max. Number 3/4-Inch Poles | Enclosure Type | Wire Size Range for Main Breaker | Catalog Number | Cover Catalog Number |         |
|-------------------|--------------------|----------------------------|----------------|----------------------------------|----------------|----------------------|---------|
|                   |                    |                            |                |                                  |                | Combination          | Surface |
| CSR<br>25 kAIC    | 100                | 24                         | Indoor         | #2–300 kcmil                     | CH24BPN100E    | CH8EF                | CH8ES   |
|                   | 200                | 32                         | Indoor         | #2–300 kcmil                     | CH32BPN200J    | CH8JF                | CH8JS   |
|                   | 200                | 42                         | Indoor         | #2–300 kcmil                     | CH42BPN200K    | CH8KF                | CH8KS   |
|                   | 200                | 60                         | Indoor         | #2–300 kcmil                     | CH60BPN200N    | CH8NF                | CH8NS   |


#### Main Lug Only/Convertible Plug-On Neutral Loadcenters—With Factory Installed Main Lugs

| Max. Ampere Rating | Max. Number 3/4-Inch Poles | Enclosure Type | Catalog Number | Wire Size Range for Main Breaker | Cover Catalog Number |         |
|--------------------|----------------------------|----------------|----------------|----------------------------------|----------------------|---------|
|                    |                            |                |                |                                  | Combination          | Surface |
| 125                | 24                         | Indoor         | CH24NLPN125E ① | #6–300 kcmil                     | CH8NLEF              | CH8NLES |
| 225                | 32                         | Indoor         | CH32NLPN225J   | #6–300 kcmil                     | CH8NLJF              | CH8NLJS |
| 225                | 42                         | Indoor         | CH42NLPN225K   | #6–300 kcmil                     | CH8NLKF              | CH8NLKS |
| 225                | 60                         | Indoor         | CH60NLPN225N   | #6–300 kcmil                     | CH8NLNF              | —       |

#### Note

① Maximum 125 A main device.

Renovation Panel

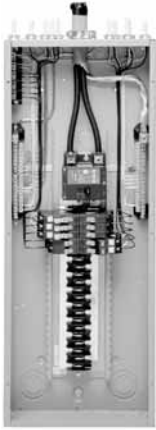

### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-2     |
| CH Specialty Products                       |             |
| Spa Panels .....                            | V1-T1-13    |
| Surge Panel .....                           | V1-T1-14    |
| Plug-On Neutral Loadcenter .....            | V1-T1-16    |
| Type CH Renovation Loadcenter               |             |
| Type CH Retrofit Interior Kits .....        | V1-T1-18    |
| CH Loadcenter Options and Accessories ..... | V1-T1-21    |
| CH Circuit Breakers .....                   | V1-T1-31    |

## Type CH Renovation Loadcenter

### Product Description

Eaton's Renovation Loadcenter is designed for the service contractor. With the addition of a five-circuit terminal block factory mounted in the top left corner of the loadcenter, the service contractor can terminate short-circuit wires instead of having to use expensive wire nuts. Also, the Renovation Loadcenter incorporates a twin-stacked neutral design that places the neutral and ground terminations higher in the loadcenter. Both of these features were added without increasing any size from a standard loadcenter. These features will eliminate the need for wire nuts and make for a much neater installation. There is a provision to field mount a second five-circuit terminal block (RN5TB) in the top right corner of the loadcenter. Choose amongst Eaton's Type CH breaker family for use in the Renovation Panel.

### Product Selection

#### Single-Phase—Main Circuit Breaker Loadcenters 25 kAIC<sup>①</sup>

#### Single-Phase, Three-Wire—120/240 Vac—Stacked Split Neutral

| Main Breaker Type | Main Ampere Rating | Max. Number 3/4-Inch (19.1 mm) of Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 70 °C for Main Breakers | Loadcenter Catalog Number | Cover Catalog Number <sup>②</sup> |         |
|-------------------|--------------------|---|----------------|----------|--|---------------------------|-----------------------------------|---------|
|                   |                    |   |                |          |  |                           | Combination                       | Surface |
| CH                | 100                | 20                                      | Indoor         | C        | #6–1/0   | CH22B100CRN               | CH8CFF                            | CH8CS   |
| CSR               | 150                | 32                                      | Indoor         | J        | #2–300 kcmil   | CH32B150JRN               | CH8JF                             | CH8JS   |
| CSR               | 200                | 32                                      | Indoor         | J        | #2–300 kcmil   | CH32B200JRN               | CH8J                              | CH8JS   |
| CSR               | 200                | 42                                      | Indoor         | K        | #2–300 kcmil   | CH42B200KRN               | CH8KF                             | CH8KS   |

#### Branch Circuit Breakers (CH)

See **Pages V1-T1-2–V1-T1-12.**

#### Renovation Loadcenter

| Description                             | Catalog Number              |
|---|-----------------------------|
| Five-circuit terminal block kit         | <b>RN5TB</b>                |
| Ground bar kits (two maximum per panel) | (See <b>Page V1-T1-24</b> ) |

#### Notes

- ① 100 A main breaker is rated 10 kAIC.
  - ② Combination style covers may be used in surface or flush applications.
- All main circuit breaker loadcenters are listed for use as service entrance equipment. Loadcenters are factory-bonded for service entrance applications. Remove bonding strap for separate neutral and ground bars for sub-feed applications.

#### Type CH Retrofit Interior



*Type CH Retrofit Adjustable Interior*



*Type CH Retrofit Interior Collar and Assembly with Trim*

#### Contents

| <i>Description</i>                              | <i>Page</i> |
|---|-------------|
| Overview . . . . .                              | V1-T1-2     |
| CH Specialty Products                           |             |
| Spa Panels . . . . .                            | V1-T1-13    |
| Surge Panel . . . . .                           | V1-T1-14    |
| Plug-On Neutral Loadcenter . . . . .            | V1-T1-16    |
| Type CH Renovation Loadcenter . . . . .         | V1-T1-17    |
| Type CH Retrofit Interior Kits                  |             |
| CH Loadcenter Options and Accessories . . . . . | V1-T1-21    |
| CH Circuit Breakers . . . . .                   | V1-T1-31    |

### Type CH Retrofit Interior Kits

#### Product Description

Eaton’s unique Retrofit Interior allows the customer to cost-effectively and safely upgrade an electrical service without removing the existing enclosure from the wall.

#### Application Description

The Retrofit Interior is designed and tested specifically for renovating an outdated electrical panel in an apartment, a condominium or a single family home. These outdated panels are being recognized by local inspectors and other authorities as a possible hazard.

#### Opportunities to Retrofit

- Single- or three-phase
- Main lug only or main breaker
- Up to 42 circuits
- Up to 225 A interiors, 400 A available upon request
- Available with CH breakers (3/4-inch) with copper bus or BR breakers (1-inch) with aluminum bus
- The minimum lifetime warranty for residential breakers shall be as follows:
  - Limited lifetime warranty on all CH branch breakers and loadcenters
  - Refer to Eaton for complete warranty details

#### Features and Benefits

##### *Upgrading Existing Electrical Infrastructure Is Simple*

- Replaces vintage brands that have hard to find, expensive replacement breakers
- Safely upgrade to arc fault and ground fault breakers to meet current electrical codes
- Maximizes number of circuits available with compact design
- Eco-friendly in asbestos-filled environments
- Exclusive design

##### *Save Time and Money Throughout the Installation*

- Uses existing panel box and wires
- Eliminates expensive and time-consuming drywall/ paint repair
- Saves 2–3 hours of installation time compared to a complete panel changeout
- Eliminates precise measurements with field-adjustable kit

#### Standards and Certifications

Meets 2017 NEC wire bending requirements.

### CH Specialty Product Selection

To select the retrofit kit:

1. From the existing box size determine which retrofit groups are suitable (may be more than one).
2. Use type of interior, number of phases, and type of main to find the selection chart.
3. Select part number from chart (if main breaker, replace XXX with specific amp rating).

#### How to Order:

1. Measure the existing panel enclosure to determine appropriate kits for your project.
2. Match the existing dimensions with the table below to obtain the correct catalog number.
3. Order your retrofit kit from a local Eaton authorized distributor.

Need assistance or can't find retrofit to fit existing enclosure?

Phone:  
800-330-6479

E-mail:  
FlexCenterLincoln@Eaton.com

Locate an Eaton Certified Contractor at  
EatonCertified.com

### Retrofit Interior Kit Specifications

| Catalog Number ①                        | Cover ②       | Existing Enclosure Parameters—Inches (mm) |               |               |                | Phase  | Main | Bus | Amperes ③ | Spaces / Circuits | UL 67 Listed |
|---|---------------|---|---------------|---------------|----------------|--------|------|-----|-----------|-------------------|--------------|
|   |               | Minimum Depth                             | Maximum Depth | Minimum Width | Minimum Height |        |      |     |           |                   |              |
| <b>CH Retrofit Interiors and Covers</b> |               |   |               |               |                |        |      |     |           |                   |              |
| RWCH6L125N                              | CRWCH6ML****  | 3.13 (79.5)                               | 4.13 (104.9)  | 7.00 (177.8)  | 10.00 (254.0)  | Single | MLO  | CH  | 125       | 6                 | No           |
| RSCH10B125N                             | CRWCH12ML**** | 3.50 (88.9)                               | 4.50 (114.3)  | 8.50 (215.9)  | 16.50 (419.1)  | Single | MCB  | CH  | 125       | 10                | No           |
| RSCH12L125N                             | CRWCH12ML**** | 3.50 (88.9)                               | 4.50 (114.3)  | 8.50 (215.9)  | 16.50 (419.1)  | Single | MLO  | CH  | 125       | 12                | No           |
| RACH22B125_                             | CRACH24ML**** | 3.75 (95.3)                               | 4.25 (108.0)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MCB  | CH  | 125       | 22                | No           |
| RACH24L125_                             | CRACH24ML**** | 3.75 (95.3)                               | 4.25 (108.0)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MLO  | CH  | 125       | 24                | No           |
| RBCH24B200_                             | CRBCH24CS**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 29.00 (736.6)  | Single | MCB  | CH  | 200       | 24                | No           |
| RBCH32L200_                             | CRBCH32ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 29.00 (736.6)  | Single | MLO  | CH  | 200       | 32                | No           |
| RCCH32B200_                             | CRBCH32CS**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 34.00 (863.6)  | Single | MCB  | CH  | 200       | 32                | No           |

### Complete Assembly

**Note:** For complete assembly, interior and cover need to be ordered separately.

#### Adjustable Interior

- Factory installed ground and neutral bars positioned to accept existing wires
- Field adjustable depth matches existing panel box
- Adjustable height enables optional placement of the interior
- Field bondable for service entrance options



Adjustable Interior

#### Standard Trim and Collar

- Standard trim matches new interior
- New circuit directory for updated labeling
- Oversized collar eliminates expensive wall/paint repair



Collar and Assembly with Trim

#### Notes

① Catalog numbers shown with “\_” at the end need one of the following suffixes to denote depth:

J = 3.75–4.25  
K = 4.25–5.00  
L = 5.00–6.00

Example: RBCH24B200J would signify an interior set with a depth range of 3.75 to 4.25 inches.

② \*\*\*\*Denotes characters in the catalog number that relate to overall cover size. Example: CRWCH6ML2620 would signify a cover 26.00 inches H x 20.00 inches W, or CRBCH24CS3324 would be 33.00 inches H x 24.00 inches W.

③ Amperes for MB panels is maximum; catalog number will reflect actual amperage of breaker included.

For UL applications, maximum cover sizes may apply.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

#### 1

#### Non-Metallic Loadcenter

#### Single-Phase—Main Lug Loadcenters, Non-Metallic

2460SNM




#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Trim Type         | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number |
|--------------------|---------------------------------|----------|----------------|-------------------|----------|--|---------------------------|
|                    | Spaces                          | Circuits |                |                   |          |  |                           |
| 40 <sup>①</sup>    | 2                               | 4        | Indoor         | Flush (no door)   | 2        | <sup>②</sup>                                       | TT120FLGNM <sup>②③</sup>  |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | TT120SLGNM <sup>②③</sup>  |
| 60                 | 2                               | 4        | Indoor         | Flush (no door)   | 2        | #14–2  | 2460FNM                   |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | 2460SNM                   |
|                    | 2                               | 4        | Indoor         | Flush (no door)   | 2        |  | 2460FGNM <sup>③</sup>     |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | 2460SGNM <sup>③</sup>     |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | 2460SGNM <sup>③</sup>     |
|                    | 2                               | 4        | Outdoor        | —                 | —        |  | 2460RNM-A2                |

#### Notes

- ① Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ② This device has no main lugs. A Type BR or BD breaker is required to be backed to supply power to branch breakers. This device is single-phase 120 Vac only. With the use of three Type BR breakers, there are two branch circuits available. With the use of three Type BD breakers, there are five branch circuits available.
- ③ Includes GB4NM ground bar.

### Options and Accessories—Mechanical Interlocks

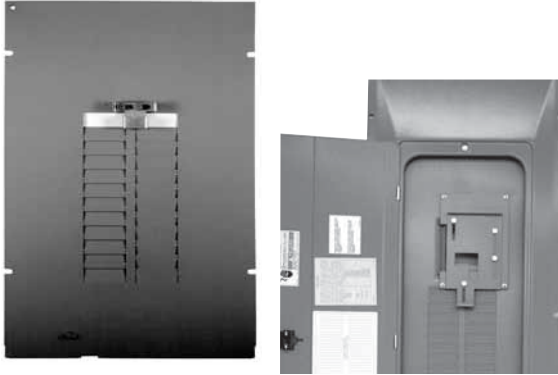

### Contents

| <b>Description</b>                      | <b>Page</b> |
|---|-------------|
| Overview .....                          | V1-T1-2     |
| CH Specialty Products                   |             |
| Spa Panels .....                        | V1-T1-13    |
| Surge Panel .....                       | V1-T1-14    |
| Plug-On Neutral Loadcenter .....        | V1-T1-16    |
| Type CH Renovation Loadcenter .....     | V1-T1-17    |
| Type CH Retrofit Interior Kits .....    | V1-T1-18    |
| CH Loadcenter Options and Accessories   |             |
| Technical Data and Specifications ..... | V1-T1-26    |
| Dimensions .....                        | V1-T1-29    |
| CH Circuit Breakers .....               | V1-T1-31    |

## CH Loadcenter Options and Accessories

### Product Selection

#### CHSF2125



#### Field Installation and Parts

##### Description

- Sub-feed lug blocks—two-pole, 125 A, 3/4-inch (19.1 mm) spaces needed
- Sub-feed lug blocks—three-pole, 125 A, 3/4-inch (19.1 mm) spaces needed
- Neutral/ground lug—add-on neutral or ground lug

##### Ordering Quantity <sup>①</sup>

##### Catalog Number

- 1 **CHSF2125**
- 1 **CHSF3125**
- 1 **NL20**
- 1 **NL30**
- 1 **NL300**

#### CHSF3125



- Filler plates—3/4-inch (19.1 mm) space circuit breaker space
- CSR main circuit breaker filler plate (with hardware)
- Door lock—12–42 circuits, and 100–225 A
- Sandlewood spray paint
- ANSI-61 light gray touchup paint for outdoor loadcenters

- 25 **CHFP**
- 1 **CSRFP**
- 1 **TDL**
- 1 **SPCSW**
- 1 **SPC61**

#### CHFP



- Isolated neutral assembly (computer circuits)
- Circuit directory—adhesive backed
- Cover screws

- 1 **BINA**
- 10 **TCD**
- 25 **LCCS**

#### TDL



- Cover replacement latch 14-5/16 inch (363.55 mm) wide loadcenters only
- Circuit marking strip (next to breakers)
- Circuit identification label (preprinted breaker labels next to breakers)

- 1 **CHRLS**
- 10 **CHMS**
- 25 **CHBL**

#### BINA



- Series rated caution label
- Branch circuit numbering strip
- Bonding strap with screw
- CH plug-on neutral ground bonding strap

- 25 **SRL**
- 20 **CHNS**
- 1 **BSSUSE**
- 1 **BSCHPON**

#### Note

<sup>①</sup> Must be purchased in multiples of ordering quantities indicated.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Main Breaker Kits

| Maximum Main Ampere Rating | Catalog Number |          |
|----------------------------|----------------|----------|
|                            | 25 kAIC        | 35 kAIC  |
| 100                        | CSR2100N       | CSH2100N |
| 150                        | CSR2150N       | CSH2150N |
| 200                        | CSR2200N       | CSH2200N |
| 225                        | CSR2225N       | CSH2225N |

#### Main Lug Kits

| Maximum Main Ampere Rating | Catalog Number |
|----------------------------|----------------|
| 125                        | CHL125N        |
| 225                        | CHL225N        |



#### Main Breaker Kits

| Breaker Ampere Rating | Lug Size     | Catalog Number |
|-----------------------|--------------|----------------|
| 100                   | #2–300 kcmil | CSR2100        |
| 150                   | #2–300 kcmil | CSR2150N       |
| 200                   | #2–300 kcmil | CSR2200N       |
| 225                   | #2–300 kcmil | CSR2225N       |

#### Mechanical Interlock Covers

Covers mechanically interlock two breakers. Type A covers interlock two CH breakers mounted across from one another. Type B covers interlock a main Type CSR breaker with a Type CH.

#### Mechanical Interlocks

|   | Type | Fits Loadcenter Catalog Numbers | Mechanical Interlock Trim/Deadfront Catalog Numbers |         |
|---|------|---------------------------------|---|---------|
|   |      |                                 | Flush   | Surface |
| <b>CH8BRM Type A</b><br>  | A    | CH12L125B                       | CH8BFM  | CH8BSM  |
|   |      | CH16L125B                       |   |         |
|   |      | CH12L3125B                      |   |         |
|   |      | CH14B100B                       |   |         |
|   |      | CH20L125C                       | CH8CFM  | CH8CSM  |
|   |      | CH24L125C                       |   |         |
|   |      | CH18L3125C                      |   |         |
|   |      | CH24L3125C                      |   |         |
|   |      | CH22B100C                       |   |         |
|   |      | CH22N100C                       |   |         |
|   |      | CH24L150D                       | CH8DFM  | CH8DSM  |
|   |      | CH32L150D                       |   |         |
|   |      | CH24L3225D                      |   |         |
|   |      | CH30L3150D                      |   |         |
|   |      | CH42L225G                       | CH8GFM  | CH8GSM  |
| CH42L3225G  |      |                                 |   |         |
| Inner cover of Box B raintight  | —    | CH8BRM                          |   |         |
| Inner cover of Box C raintight  | —    | CH8CRM                          |   |         |
| <b>Indoor</b>   |      |                                 |   |         |
| <b>CH8EFM Type B</b><br> | B    | CH24B150E                       | CH8EFM  | CH8ESM  |
|   |      | CH24B200E                       |   |         |
|   |      | CH24BPN200E                     |   |         |
|   |      | CH32B150J                       | CH8JFM  | CH8JSM  |
|   |      | CH32B200J                       |   |         |
|   |      | CH3242B200J                     |   |         |
|   |      | CH32BPN200J                     |   |         |
|   |      | CH32N200J                       |   |         |
|   |      | CH32B225J                       |   |         |
|   |      | CH42B200K                       | CH8KFM  | CH8KSM  |
|   |      | CH42N200K                       |   |         |
|   |      | CH42BPN200K                     |   |         |
|   |      | CH42B225K                       |   |         |
|   |      | CH60BPN200N                     | CH8NFM  | —       |

### CH8EFM Type B



### Mechanical Interlocks, continued

| Type           | Fits Loadcenter Catalog Numbers     | Mechanical Interlock Trim/Deadfront Catalog Numbers |            |   |
|----------------|-------------------------------------|---|------------|---|
|                |                                     | Flush   | Surface    |   |
| <b>Outdoor</b> |                                     |   |            |   |
| B              | CH8B150RF                           | CH3RDF7M  | —          |   |
|                | CH8B200RF                           |   |            |   |
|                | CH8N200RF                           |   |            |   |
|                | CH12B200RF                          |   |            |   |
|                | CH24B150R                           |   |            |   |
|                | CH24B200R                           |   |            |   |
|                | CH32B150R                           | CH3RDF9M  | —          |   |
|                | CH32B200R                           |   |            |   |
|                | CH32N200R                           |   |            |   |
|                | CH32B225R                           |   |            |   |
|                | CH42B200R                           | CH3RDF10M   | —          |   |
|                | CH42N200R                           |   |            |   |
|                | CH42B225R                           |   |            |   |
|                | <b>Next Generation Power Center</b> |   |            |   |
| B              | CHPC32B150L                         | CHPC8B32LFM   | —          |   |
|                | CHPC32B200L                         |   |            |   |
|                | CHPC32N200L                         |   |            |   |
|                | CHPC42B150L                         | CHPC8B42LFM   | —          |   |
|                | CHPC42B200L                         |   |            |   |
|                | CHPC42N200L                         |   |            |   |
|                | CHPC32B125TR                        | CH3RDF15M   | —          |   |
|                | CHPC32B150TR                        |   |            |   |
|                | CHPC32B200TR                        |   |            |   |
|                | CHPC32N200TR                        |   |            |   |
|                | CHPC42B150TR                        | CH3RDF16M   | —          |   |
|                | CHPC42B200TR                        |   |            |   |
|                | CHPC42N200TR                        |   |            |   |
|                | CHPC32B150TR                        | CH3RDF17M   | —          |   |
|                | CHPC32B200TR                        |   |            |   |
|                | CHPC42B200BR                        | CH3RDF18M   | —          |   |
|                | <b>Vintage <sup>①</sup></b>         |   |            |   |
|                |                                     | CH20JJM200  | CH7JFREPLM | — |
|                | CH24JJM150                          |   |            |   |
|                | CH30JJM150                          |   |            |   |
|                | CH30JJM200                          |   |            |   |
|                | CH30JJM150H                         |   |            |   |
|                | CH3040JMM200                        |   |            |   |
|                | CH304JJM150                         |   |            |   |
|                | CH304JJM200                         |   |            |   |
|                | CH304JJM200H                        |   |            |   |
|                | CH30KKM225                          | CH7KKFREPLM   | —          |   |
|                | CH40KKM200H                         |   |            |   |
|                | CH40KKM225                          |   |            |   |
|                | CH40KKM200H                         |   |            |   |
|                | CH40KKM225H                         |   |            |   |
|                | CH304KKM200                         |   |            |   |
|                | CH304KKM200H                        |   |            |   |
|                | CH304LLM225                         | CH7LLFREPLM   | —          |   |
|                | CH424LLM225H                        |   |            |   |

**Note**

<sup>①</sup> If vintage part number does not match exactly, the cover may not fit. Simple variations such as an "N" at the end of the part number contain minor design variations that will prevent our cover from working with that particular loadcenter.



# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### DS100H1



#### Field Installation Rainproof Conduit Hubs

| Description  | Conduit Size Inches (mm) | Ordering Quantity <sup>①</sup> | Catalog Number |
|--|--------------------------|--------------------------------|----------------|
| Group 1—for use with 70, 100 and 125 A MLO and MCB loadcenters and circuit breaker enclosures  | 0.75 (19.1)              | 1                              | DS075H1        |
|  | 1.00 (25.4)              | 1                              | DS100H1        |
|  | 1.25 (31.8)              | 1                              | DS125H1        |
|  | 1.50 (38.1)              | 1                              | DS150H1        |
|  | 2.00 (50.8)              | 1                              | DS200H1        |
| Group 2—for use with 150, 200 and 225 A MLO and MCB loadcenters and circuit breaker enclosures | 2.00 (50.8)              | 1                              | DS200H2        |
|  | 2.50 (63.5)              | 1                              | DS250H2        |
|  | 3.00 (76.2)              | 1                              | DS300H2        |
| Adapter kit—allows installing a Group 1 hub on devices arranged for Group 2 hubs               | —                        | 1                              | DS900AP        |
| Group 1—small blank hub closure plate  | —                        | 1                              | DS900CP1       |
| Group 2—large blank hub closure plate  | —                        | 1                              | DS900CP2       |

#### GBK14



#### Ground Bar Kits

| Description (See Legend) | Length Inches (mm) | Ordering Quantity <sup>②</sup> | Catalog Number        |
|--------------------------|--------------------|--------------------------------|-----------------------|
| ●○○○○●○                  | 2.54 (64.5)        | 1                              | GBK5 <sup>②</sup>     |
| ●○○○○●■                  | 3.59 (91.2)        | 1                              | GBK520 <sup>②</sup>   |
| ●○○○○●○○○○○              | 4.29 (109.0)       | 1                              | GBK10 <sup>②</sup>    |
| ●○○○○●○○○○○■             | 5.34 (135.6)       | 1                              | GBK1020 <sup>②</sup>  |
| ●○○○○●○○○○○■             | 4.61 (117.1)       | 1                              | GBK13 <sup>②</sup>    |
| ●○○○○●○○○○○              | 5.69 (144.5)       | 1                              | GBK14 <sup>②</sup>    |
| ●○○○○●○○○○○■             | 6.74 (171.2)       | 1                              | GBK1420 <sup>②</sup>  |
| ●○○○○●○○○○○              | 8.14 (206.8)       | 1                              | GBK21 <sup>②</sup>    |
| ●○○○○●○○○○○■             | 9.19 (233.4)       | 1                              | GBK2120 <sup>②</sup>  |
| ○○○○○○●○○○○○             | 7.94 (201.7)       | 1                              | CH9GP21 <sup>③④</sup> |

#### Ground Bar Legend

- = (3) #14–#10 Cu/Al or (1) #14–#4 Cu/Al
- = (1) #6–2/0 Cu/Al
- = (1) 1/0–14 or (3) #10–12 Cu/Al
- = (1) #14–1/0 Cu/Al or (3) #14–#10 Cu/Al
- = Mounting hole

#### Grounded “B” Phase Adapters

| Maximum Amperes | Three-Phase Loadcenter Types of Panels | Kit Catalog Number <sup>⑤</sup> |
|-----------------|--|---------------------------------|
| 125             | 12–32 circuit main lug                 | CHGRD1                          |
| 225             | Main lug and CHH main breaker panels   | CHGRD2                          |
|                 | CC main CB panels                      | CHGRD3                          |

#### Neutral Bar Accessories

| Description   | Catalog Number <sup>⑤</sup> |
|---|-----------------------------|
| Replacement neutral for all B and C type boxes          | CHN125C                     |
| Replacement neutral for all D type boxes                | CHN125D                     |
| Replacement neutral for all E, G, J, K and L type boxes | CHN225L                     |
| Isolated Neutral Assembly (computer circuits)           | BINA                        |

#### Notes


- ① Must be purchased in multiples of ordering quantities indicated.
- ② Distance between mounting holes is 1-3/4 inches (44.5 mm).
- ③ For single- and three-phase 400 A loadcenters.
- ④ Distance between mounting holes is 2-13/32 inches.
- ⑤ Cannot be used in Safety Breaker Panels. Classic Plus Panels only.

### Decorator Cover Accessory

- For easy use with CH loadcenters mounted in living space
- Easily wallpapered or painted to match any decor
- Loadcenter accessory—exclusively from Eaton



*Now you see it ...*



*... Now you don't.*

### Decorator Cover Accessory

#### Catalog Number

#### Corresponding Cover

#### Existing CH Loadcenter Cover

| Catalog Number | Existing CH Loadcenter Cover |
|----------------|------------------------------|
| CH8BF          | CH8KDNB                      |
| CH8CF          | CH8KDNC                      |
| CH8DF/EF       | CH8KDND                      |
| CH8GF/JF       | CH8KDNJ                      |
| CH8KF          | CH8KDNK                      |

### Loadcenter Goof Collars

Don't let an ugly drywall problem ruin a beautiful electrical installation.

Eaton's Goof Collar is designed to cover gaps between the finished drywall and loadcenter enclosure. This is often necessary when upgrading the electrical service and the drywall surrounding the panel is damaged. The collar allows 2 inches of overhang beyond the standard flush trim.



*Before*



*After*

### CH Goof Collars

| Inches (mm)    |               | Catalog Number   |             |
|----------------|---------------|------------------|-------------|
| Height         | Width         | Loadcenter Cover | Goof Collar |
| 21.00 (533.4)  | 19.00 (482.6) | CH8BF            | CH8BFC1921  |
| 26.00 (660.4)  | 19.00 (482.6) | CH8CF            | CH8CFC1926  |
| 34.00 (863.6)  | 19.00 (482.6) | CH8DF            | CH8DFC1934  |
|                |               | CH8EF            |             |
|                |               | CHSUR8EF         |             |
| 39.00 (990.6)  | 19.00 (482.6) | CH8GF            | CH8JFC1939  |
|                |               | CH8JF            |             |
| 42.00 (1066.8) | 19.00 (482.6) | CH8KF            | CH8KFC1942  |
|                |               | CHSUR8KF         |             |
| 44.00 (1117.6) | 19.00 (482.6) | CH8LF            | CH8LFC1944  |
|                |               | CHSUR8LF         |             |

**Technical Data and Specifications****General**

- A. The Contractor shall furnish and install loadcenters incorporating circuit breakers of the number, rating and type as specified herein and as shown on the contract drawings.
- B. The loadcenter and all components shall be designed, manufactured and tested in accordance with the latest applicable standards of UL and NEMA including:
  1. UL 67—standards for panelboards
  2. UL 50—standards for cabinets and boxes
  3. UL 489—standards for molded case circuit breakers
  4. Federal Spec Classification W-C 375
  5. UL 1699—all fault interrupting

**Qualifications**

- A. The manufacturer of the loadcenter shall be the manufacturer of the circuit breaker within the load center. All breakers shall be full size.
- B. For the equipment specified herein, the manufacturer shall be ISO® 9000 certified.
- C. The manufacturer of this equipment shall have produced similar electrical equipment for a minimum period of seven (7) years.

**Manufacturers**

- A. Eaton

**Ratings**

- A. Loadcenters shall be rated for 240 Vac and shall have short-circuit ratings as shown on the drawings or as herein scheduled, but not less than 10,000 amperes rms symmetrical.
- B. Breakers shall be full size and a minimum of 125 A frame. Breakers 10 –125 A trip size shall take up the same pole spacing.
- C. Loadcenters shall be labeled with a UL short-circuit rating. When series ratings are applied with integral or remote devices, a label shall be provided. Series ratings shall cover all trip ratings of installed frames. It shall state the conditions of the UL series ratings including:
  1. Size and type of upstream device.
  2. Branch devices that can be used.
  3. UL series short-circuit rating.

**Construction**

- A. All interiors, with the exception of the branch circuit breakers shall be completely factory assembled with main breakers, main lugs or no main device.
- B. Interiors shall be so designed that circuit breakers can be replaced without disturbing adjacent units and without removing the main bus connectors and shall be so designed that circuits may be changed without machining, drilling or tapping.
- C. Physical means must be provided to prevent the installation of more overcurrent devices than that number for which the enclosure was designed. Full size breakers are required.

**Bus**

- A. Busbars for the main and cross connectors shall be of silver flash plated copper construction in accordance with UL standards. Bussing shall be braced to 65 kAIC.
- B. Neutral bussing shall have a suitable lug for each outgoing feeder requiring a neutral connection of same ampacity as branch.

**Wiring/Termination**

- A. All wire connectors and terminals shall be of the anti-turn solderless type and suitable for copper or aluminum wire of the sizes indicated. All connectors shall meet the "Requirements for Wire Connectors and Soldering Lugs" UL 486B.
- B. All loadcenters where marked shall be suitable for use with 60/75 °C rated wire.

**Circuit Breakers**

- A. Circuit breakers shall be molded case type, 3/4-inch (19.1 mm) wide per pole. Multipole circuit breakers shall be of a stack pole design to provide electrical phase isolation and have an internal common trip.
- B. Each pole of the circuit breaker will have inverse time delay overload and instantaneous short-circuit protection by means of both thermal and magnetic sensors. Circuit breakers shall be quick-make/quick-break.
- C. The circuit breaker calibration shall not be affected by environmental changes in relative humidity. Breakers shall be calibrated after assembly.
- D. All circuit breakers shall be operated by a toggle-type handle and multipole circuit breakers shall have an internal common trip mechanism. The circuit breakers shall incorporate trip mechanisms that are mechanically trip-free from the handle. The handle position shall provide good visual trip indication.
- E. Contacts shall be of non-welding silver alloy.
- F. All branch breaker handles shall be of a different color than the case of the breaker.
- G. All terminals shall be listed for use with copper or aluminum conductors. Terminals shall be of the box lug design. The terminals shall meet UL 486B requirements and shall be suitable for use with either 60 °C or 75 °C wire.
- H. Breakers shall be SWD rated and/or HACR rated as required.
- I. Arc fault interrupting circuit breakers, (AFC), shall be provided on all 15 and 20 A single-phase 120/240 Vac circuits except those indicated as remote controlled breakers. AFI breakers shall be "Classified for mitigating the effects of arcing faults," or conforming to UL Standard 1699 and as defined by per Article 210.12 Section A of the NEC Code.

**Enclosures**

- A. Loadcenters shall have NEMA 1 general purpose or NEMA 3R rainproof enclosures as indicated on the drawings and shall be surface or flush mounted except where noted.
- B. For indoor applications, enclosures shall be rated NEMA 1. Enclosures shall be manufactured from cold-rolled code-gauge sheet steel having multiple knockouts and painted per paint specification. For outdoor applications, enclosures shall be rated NEMA 3R. Enclosures shall be manufactured from galvanized steel which shall be painted per the painted as specified. Enclosures shall be of sufficient size to meet or exceed NEC wire bending space.
- C. The cover shall have an easy adjustment feature for flush applications.
- D. Boxes shall be factory assembled into a single rigid structure.
- E. Provide circuit breaker marking labels and directories.

**Finish**

- A. Boxes and trims shall be finished with a high scratch-resistant aesthetically pleasing finish. The finish shall be polyurethane coating electrostatically applied to a thickness of 1.8 to 2 mils.

All loadcenters shall be provided with provisions for accepting a paintable or wall paperable decorator accessory cover. Where loadcenters are installed in living areas, provide manufacturer designed and tested decorator cover kits.

**CH Loadcenters****Description****Service**

Single-phase, three-wire, 120/240 Vac

Three-phase, four-wire, 208Y/120 Vac

Three-phase, three-wire, 240 V corner grounded delta

Three-phase, three-wire, 240 Vac delta

**Short-Circuit Current Rating**

10 kAIC: All single- and three-phase loadcenters 40–400 A, 2–42 circuits except when series ratings are applied

35 kAIC available on convertible units using CSH main breaker

25 kAIC: All factory-installed main breakers single-phase loadcenters rated 150–225 A using Type CSR main breakers

42 and 100 kAIC are available on some styles: single-phase and three-phase

**Main Breaker/Main Lug Loadcenters**

Single-phase

Three-phase

Main breaker: 100, 125, 150, 200, 225, 400 A

Main breaker: 150, 200, 225, 300, 400 A

Main lugs: 40, 70, 125, 150, 200, 225, 400 A

Main lugs: 125, 150, 200, 225, 400 A

**Convertible Loadcenters**

Main breaker or main lugs: single-phase up to 225 A

**Branch Breakers**

Type CH: 10–150 A. Single-, two- and three-pole. Selected amperages available in shunt trip, HACR and switching duty

Type CH-AFCI arc fault circuit interrupter

Ground fault circuit interrupters: 15–60 A

Type CHP: 10–125 A. Single-, two- and three-pole, three-position commercial trip

Type CH-HID: 15–30 A. Single-, two- and three-pole

Selected amperages available in HACR switching duty

CH-HM high magnetic

Type CHP-HID: 15–30 A. Single-, two- and three-pole

CH-M50 high ambient

Type CHP-GFCI: 15–30 A. Single-pole ground fault breakers

**Enclosures**

NEMA® Type 1 indoor

NEMA Type 3R outdoor

**Loadcenter and Breaker Accessories**

Branch circuit breaker:

Complete line of ground bar kits 5, 10, 14 and 21 circuits, some with additional #2/0 lugs

Auxiliary components

Each terminal will accommodate: (3) #14–#10 Cu/Al or (1) #14–#4 Cu/Al

Hold-down kits

Sub-feed lugs 125, 150 A—two- and three-pole

Handle ties

Shunt trips

Lockoffs

Universal rainproof conduit hubs Group One: 3/4, 1, 1-1/4, 1-1/2, 2 inches (19.1, 25.4, 31.8, 38.1, 50.8 mm)

Lockdogs

Group Two: 2, 2-1/2, 3 inches (50.8, 63.5, 76.2 mm)

Adapter plate

**Bussing**

Silver flash plated copper bus is a standard feature

### Dimensions

Approximate Dimensions in Inches (mm)

#### Residential/Commercial/Unit Enclosure—Box Sizes

**Note:** Box sizes do not include covers/fronts.

#### Residential Loadcenters

| Box Size                  | Height         | Width         | Depth       |
|---------------------------|----------------|---------------|-------------|
| <b>NEMA Type 1 Indoor</b> |                |               |             |
| 5                         | 9.50 (241.3)   | 4.50 (114.3)  | 3.13 (79.4) |
| 6                         | 11.38 (288.9)  | 6.88 (174.6)  | 3.39 (86.1) |
| 7                         | 13.00 (330.2)  | 11.00 (279.4) | 3.69 (93.7) |
| B                         | 16.75 (425.5)  | 14.31 (363.5) | 3.88 (98.4) |
| C                         | 21.00 (533.4)  | 14.31 (363.5) | 3.88 (98.4) |
| D                         | 29.13 (739.8)  | 14.31 (363.5) | 3.88 (98.4) |
| E                         | 29.13 (739.8)  | 14.31 (363.5) | 3.88 (98.4) |
| G                         | 34.13 (866.8)  | 14.31 (363.5) | 3.88 (98.4) |
| J                         | 34.13 (866.8)  | 14.31 (363.5) | 3.88 (98.4) |
| K                         | 37.00 (939.8)  | 14.31 (363.5) | 3.88 (98.4) |
| L                         | 39.00 (990.6)  | 14.31 (363.5) | 3.88 (98.4) |
| N                         | 45.00 (1143.0) | 14.31 (363.5) | 3.88 (98.4) |

#### NEMA Type 3R Outdoor

|    |               |               |              |
|----|---------------|---------------|--------------|
| 5R | 9.50 (241.3)  | 4.50 (114.3)  | 3.13 (79.4)  |
| 6R | 11.75 (298.5) | 6.50 (165.1)  | 4.50 (114.3) |
| 7R | 13.00 (330.2) | 11.00 (279.4) | 3.69 (93.7)  |
| B  | 16.75 (425.5) | 14.31 (363.5) | 5.19 (131.8) |
| C  | 21.00 (533.4) | 14.31 (363.5) | 5.19 (131.8) |
| D  | 29.13 (739.8) | 14.31 (363.5) | 5.19 (131.8) |
| E  | 29.13 (739.8) | 14.31 (363.5) | 5.19 (131.8) |
| G  | 34.13 (866.8) | 14.31 (363.5) | 5.19 (131.8) |
| J  | 34.13 (866.8) | 14.31 (363.5) | 5.19 (131.8) |
| K  | 37.00 (939.8) | 14.31 (363.5) | 5.19 (131.8) |
| L  | 39.00 (990.6) | 14.31 (363.5) | 5.19 (131.8) |

#### Commercial Loadcenters

| Box Size                  | Height         | Width         | Depth        |
|---------------------------|----------------|---------------|--------------|
| <b>NEMA Type 1 Indoor</b> |                |               |              |
| P                         | 54.38 (1381.1) | 21.00 (533.4) | 6.00 (152.4) |
| PM                        | 62.63 (1590.7) | 21.00 (533.4) | 6.00 (152.4) |

#### Types ECB and ECC Unit Enclosures

| Height                      | Width        | Depth        |
|-----------------------------|--------------|--------------|
| <b>NEMA Type 1 Indoor</b>   |              |              |
| 23.25 (590.6)               | 8.88 (225.4) | 4.50 (114.3) |
| <b>NEMA Type 3R Outdoor</b> |              |              |
| 23.69 (601.7)               | 9.31 (236.5) | 5.44 (138.1) |


#### Residential Loadcenter Knockout

Residential NEMA Type 1 Indoor and NEMA Type 3R Outdoor Enclosures.

#### Knockouts for Box Sizes 5, 6, 7, 5R, 6R, 7R

| Code | Diameter    |             |             |             |
|------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | —           | —           | —           |
| B    | 0.50 (12.7) | 0.75 (19.1) | —           | —           |
| C    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           |
| D    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) |
| E    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | —           |
| F    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| G    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           |
| H    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) |
| I    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           |

#### Knockout Positions

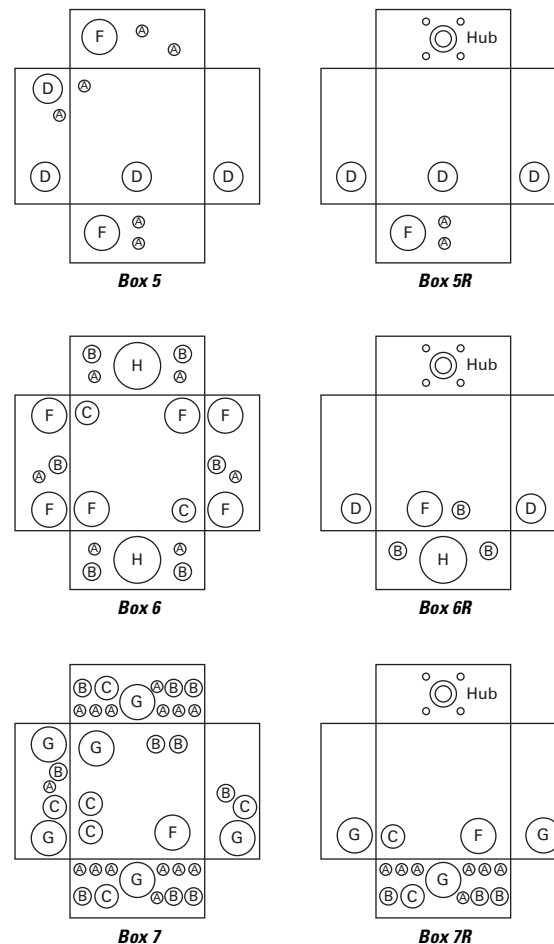

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

Approximate Dimensions in Inches (mm)


#### Residential and Commercial Loadcenter Knockout

Residential NEMA Type 1 indoor and NEMA Type 3R outdoor enclosures.

#### Knockouts for Box Sizes 8, 8R, P, PM, B, C, D, E, G, J, K, L, N and Outdoor Boxes 12–60 Circuits

| Code | Diameter    |             |             |             |             |
|------|-------------|-------------|-------------|-------------|-------------|
| a    | 0.75 (19.1) | —           | —           | —           | —           |
| b    | 0.50 (12.7) | 0.75 (19.1) | —           | —           | —           |
| c    | 0.50 (12.7) | —           | —           | —           | —           |
| d    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| e    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) | —           |
| f    | 0.75 (19.1) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           |
| g    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           | —           |
| h    | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) | —           | —           |
| i    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| j    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           | —           |
| k    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           | —           |
| m    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) |
| n    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           |
| p    | 2.00 (50.8) | 2.50 (63.5) | —           | —           | —           |


#### Knockout Diagram

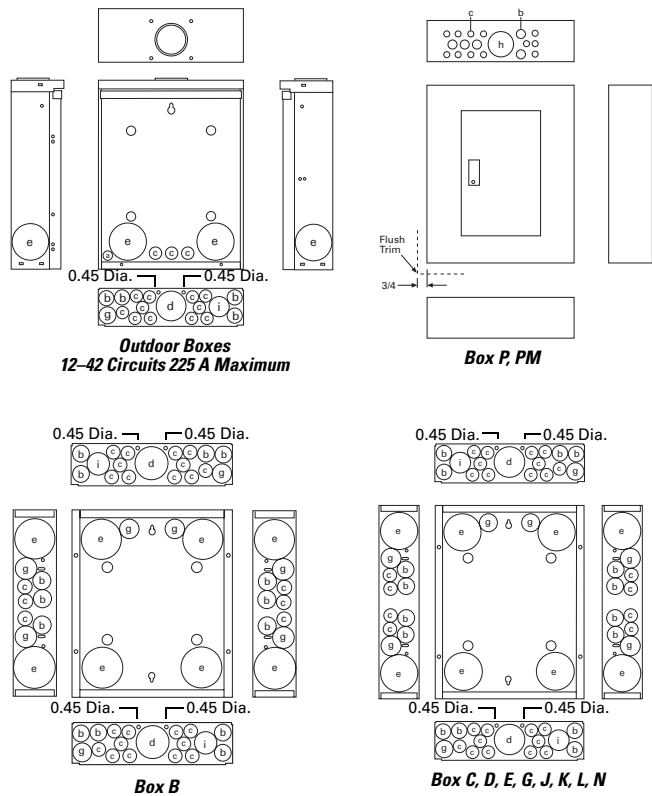


#### Type ECB and ECC Unit Enclosure Knockout

| Code  | Diameter    |             |             |             |             |
|---|-------------|-------------|-------------|-------------|-------------|
| <b>NEMA Type 1 Indoor (Flush and Surface Trims)</b> |             |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) | 2.50 (63.5) |
| <b>NEMA Type 3R Outdoor</b>                         |             |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) | 2.50 (63.5) |

#### NEMA Type 1—Indoor



#### NEMA Type 3R—Outdoor



### Plug-On Circuit Breakers



## CH Circuit Breakers

### Product Description

Quick-make, quick-break switch mechanism combined with inverse time element tripping operation and trip-free handle design. Type CH circuit breakers trip to the OFF position, eliminating nuisance callbacks. The CHF family also includes a trip flag to differentiate between a trip and the breaker being turned off. The thermal-magnetic trip curve avoids nuisance tripping on mild overloads while reacting almost instantaneously to severe short-circuit conditions. Multipole breakers have internal common trip connection to operate all poles simultaneously. Handles are marked with ON-OFF indication and ampere rating of the breaker.

### Special Application Plug-On Circuit Breakers—Type CH 10 kAIC 120 Vac and 120/240 Vac

#### Branch Feeder Type Arc Fault Circuit Breakers

A branch feeder type arc fault circuit interrupter is a device intended to mitigate high current arcing faults in the complete circuit, including connected cords. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults.

The branch feeder type AFCI is required in the 1999 and 2002 National Electrical Code.

The Combination Type AFCI is required in all subsequent editions of the National Electrical Code.

#### Combination Type Arc Fault Circuit Breakers

A combination type arc fault circuit interrupter is a device that offers mitigation of high current arcing faults in the complete circuit, including connected cords. In addition it provides direct detection of persistent low current arcing faults down to 5 amps with associated mitigation of fire hazards in the cords connected to the outlets. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults. The current level of low current arcing faults is limited by the load.

#### Ground Fault Circuit Breakers—Ground Fault Application Notes

Single-pole Type CHGFI are designed for use in two-wire, 120 Vac circuits. The diagram on **Page V1-T1-40** shows a typical wiring configuration.

## Contents

### Description

|   | <i>Page</i>     |
|---|-----------------|
| Overview .....                              | <b>V1-T1-2</b>  |
| CH Specialty Products .....                 | <b>V1-T1-13</b> |
| CH Loadcenter Options and Accessories ..... | <b>V1-T1-21</b> |
| CH Circuit Breakers                         |                 |
| Product Selection .....                     | <b>V1-T1-32</b> |
| Options and Accessories .....               | <b>V1-T1-38</b> |
| Technical Data and Specifications .....     | <b>V1-T1-40</b> |
| Wiring Diagrams .....                       | <b>V1-T1-40</b> |

Two-pole Type CHGFIs are designed for use in three-wire, 120/240 Vac circuits, 120 Vac multiwire circuits employing common, neutral and two-wire, 240 Vac circuits obtained from a 120/240 Vac source.


Diagrams on **Page V1-T1-40** illustrate typical wiring configurations for 120/240 Vac multiwire circuits.

The diagram on **Page V1-T1-40** depicts a 240 Vac, two-wire circuit. Note the "panel neutral" conductor connects to the neutral bar,

even though the neutral is not included in the load circuit. This connection is necessary to supply a 120 Vac power source to the ground fault sensing circuit.

The figures are shown with a 120/240 Vac, single-phase, three-wire power source, but are also applicable to a 120/208 Vac, three-phase, four-wire power supply. For all figures, the electrical operation of the Type CHGFI is not affected by the equipment ground.

### Features

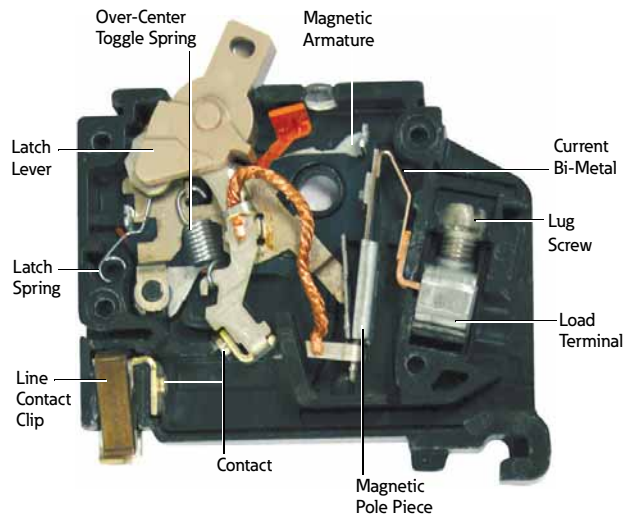



# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1




#### Product Selection

10 kAIC, 120 Vac, 120/240 Vac and 240 Vac

##### Type CH Plug-On Circuit Breakers





#### Type CH Breakers, 3/4-Inch (19.1 mm) per Pole 120, 120/240 or 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Catalog Number   |   |   |
|---------------|---|--|---|---|
|               |   | Single-Pole 120/240 Vac<br>Requires One<br>3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton     | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton | Three-Pole 240 Vac<br>Common Trip Requires Three<br>3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton |
| 10            | (1) #14–8 ①                             |  <b>CH110</b> |  <b>CH210</b>      |  <b>CH310</b>    |
| 15            | (2) #14–10 ①②<br>(1) #14–6 ③            | <b>CH115</b> ⑥⑦  | <b>CH215</b> ⑦  | <b>CH315</b> ⑦  |
| 20            |   | <b>CH120</b> ⑥⑦  | <b>CH220</b> ⑦  | <b>CH320</b> ⑦  |
| 25            |   | <b>CH125</b> ⑦   | <b>CH225</b> ⑦  | <b>CH325</b> ⑦  |
| 30            |   | <b>CH130</b> ⑦   | <b>CH230</b> ⑦  | <b>CH330</b> ⑦  |
| 35            | #14–2 ①<br>#14–6 ③                      | <b>CH135</b> ⑦   | <b>CH235</b> ⑦  | <b>CH335</b> ⑦  |
| 40            | #10–1/0 ④                               | <b>CH140</b> ⑦   | <b>CH240</b> ⑦  | <b>CH340</b> ⑦  |
| 45            | #14–2<br>#3/0                           | <b>CH145</b> ⑦   | <b>CH245</b> ⑦  | <b>CH345</b> ⑦  |
| 50            |   | <b>CH150</b> ⑦   | <b>CH250</b> ⑦  | <b>CH350</b> ⑦  |
| 60            |   | <b>CH160</b>   | <b>CH260</b>  | <b>CH360</b>  |
| 70            |   | <b>CH170</b>   | <b>CH270</b>  | <b>CH370</b>  |
| 80            |   | —  | <b>CH280</b>  | <b>CH3080</b>   |
| 90            |   | —  | <b>CH290</b>  | <b>CH3090</b>   |
| 100           |   | —  | <b>CH2100</b>   | <b>CH3100</b>   |
| 110           |   | —  | <b>CH2110</b>   | —   |
| 125           |   | —  | <b>CH2125</b>   | —   |

##### Type CH Plug-On Circuit Breakers



#### CHF Breakers with Mechanical Trip Flag

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Catalog Number  |   |
|---------------|---|---|---|
|               |   | Single-Pole 120/240 Vac<br>Requires One<br>3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton        | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton |
| 10            | (1) #14–8 ①                             |  <b>CHF110</b> |  <b>CHF210</b>   |
| 15            | (2) #14–10 ①②                           | <b>CHF115</b> ⑥⑦  | <b>CHF215</b> ⑦   |
| 20            |   | <b>CHF120</b> ⑥⑦  | <b>CHF220</b> ⑦   |
| 25            |   | <b>CHF125</b> ⑦   | <b>CHF225</b> ⑦   |
| 30            |   | <b>CHF130</b> ⑦   | <b>CHF230</b> ⑦   |
| 35            | #14–2 ①                                 | <b>CHF135</b> ⑦   | <b>CHF235</b> ⑦   |
| 40            | #14–4 ④                                 | <b>CHF140</b> ⑦   | <b>CHF240</b> ⑦   |
| 45            |   | <b>CHF145</b> ⑦   | <b>CHF245</b> ⑦   |
| 50            |   | <b>CHF150</b> ⑦   | <b>CHF250</b> ⑦   |

##### Notes

- ① For single- and two-pole breakers.
- ② Solid and stranded wire can be used together.
- ③ For three-pole breakers.
- ④ Single-pole and two-pole 40–50 A.
- ⑥ Two-pole 150 A.
- ⑦ Switching duty rated.
- ⑦ HACR rated.

For factory-installed options, refer to **Page V1-T1-39**.

### Type CH AF/GF Single-Pole Circuit Breaker

Type CH AFCI Single-Pole Circuit Breaker



### Dual Purpose Arc Fault/Ground Fault 3/4-Inch (19.1 mm) Wide Circuit Breakers, Type CH, 120 Vac— 10 kAIC <sup>①②</sup>

| Poles                                   | Ampere Rating | Configuration         | Catalog Number          |
|---|---------------|-----------------------|-------------------------|
| Single-pole<br>10 kAIC                  | 15            | Combination AFCI GFCI | CHFAFGF115 <sup>③</sup> |
|   | 20            | Combination AFCI GFCI | CHFAFGF120 <sup>③</sup> |
| Single-pole, plug-on neutral<br>10 kAIC | 15            | Combination AFCI GFCI | CHFAFGF115PN            |
|   | 20            | Combination AFCI GFCI | CHFAFGF120PN            |

### Plug-On Branch Feeder Type Arc Fault Circuit Breakers, Type CH 10 kAIC, 120 Vac and 120/240 Vac

Type CH AFCI Single-Pole Circuit Breaker



### Combination Type CH AFCI 3/4-Inch (19.1 mm) Wide Circuit Breakers

| Poles                   | Ampere Rating | Catalog Number |
|-------------------------|---------------|----------------|
| <b>Standard Pigtail</b> |               |                |
| Single-pole<br>10 kAIC  | 15            | CHFCAF115      |
|                         | 20            | CHFCAF120      |
| Two-pole<br>10 kAIC     | 15            | CH215CAF       |
|                         | 20            | CH220CAF       |

Type CH AFCI Single-Pole Circuit Breaker



### Branch Type CH AFCI 3/4-Inch (19.1 mm) Wide FIRE-GUARD<sup>®</sup> Circuit Breakers

| Poles                             | Ampere Rating | Configuration    | Catalog Number       |
|-----------------------------------|---------------|------------------|----------------------|
| Single-pole<br>10 kAIC            | 15            | AFCI             | CH115AF <sup>③</sup> |
|                                   | 20            | AFCI             | CH120AF <sup>③</sup> |
| Two-pole<br>10 kAIC <sup>④⑤</sup> | 15            | AFCI common trip | CH215AF              |
|                                   | 20            | AFCI common trip | CH220AF              |

### Plug-On Combination Type Arc Fault Circuit Breakers and Ground Fault, Type CH 10 kAIC, 120 Vac and 120/240 Vac <sup>⑥</sup>

Type CH AFCI Single-Pole PON Combo Circuit Breaker



### Combination Type CH AFCI 3/4-Inch (19.1 mm) and CHGFCI Circuit Breakers

| Poles                  | Ampere Rating | Configuration        | Catalog Number |
|------------------------|---------------|----------------------|----------------|
| Single-pole<br>10 kAIC | 15            | AFCI plug-on neutral | CHFCAF115PN    |
|                        | 20            | AFCI plug-on neutral | CHFCAF120PN    |
|                        | 15            | GFCI plug-on neutral | CHFGFT115PN    |
|                        | 20            |                      | CHFGFT120PN    |
|                        | 25            |                      | CHFGFT125PN    |
|                        | 30            |                      | CHFGFT130PN    |

**Notes**

- ① Breaker qualifies as combination arc fault, per UL 1699.
- ② Breaker qualifies as personnel protection ground fault, (5 mA) per UL 943.
- ③ Clamshell packaging available with CS modification code on the end of catalog number.
- ④ Common trip refers to two-pole 240 V load application sourced by 120/240 Vac (see diagram on **Page V1-T1-40**).
- ⑤ Independent trip refers to two-pole multi-wire, home run or shared neutral circuits (see diagrams on **Page V1-T1-40**).
- ⑥ Requires plug-on neutral loadcenter.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers



1

#### Plug-On Ground Fault Circuit Breakers, Type CH 10 kAIC, 120 Vac and 120/240 Vac

##### Type CH Single-Pole





#### Type CH Ground Fault Circuit Breakers (5 Milliampere) 3/4-Inch (19.1 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C ① | Catalog Number—1 per Shelf Carton   |  |
|---------------|---|---|--|
|               |   | Single-Pole 120 Vac Requires<br>One 3/4-Inch (19.1 mm) Space                                | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces                   |
| 15            | #14–6                                     |  CHFGFT115 |  CH215GFT |
| 20            | #14–6                                     | CHFGFT120   | CH220GFT   |
| 25            | #14–6                                     | CHFGFT125   | CH225GFT   |
| 30            | #14–6                                     | CHFGFT130   | CH230GFT   |
| 35            | #14–6                                     | —   | CH235GFT   |
| 40            | #14–6                                     | —   | CH240GFT   |
| 45            | #14–6                                     | —   | CH245GFT   |
| 50            | #14–6                                     | —   | CH250GFT   |
| 60            | #14–6 ①                                   | —   | CH260GFT   |

##### Type CH Two-Pole



#### Type CH Ground Fault Equipment Protectors (30 Milliampere) 3/4-Inch (19.1 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C ① | Catalog Number—1 per Shelf Carton   |   |
|---------------|---|---|---|
|               |   | Single-Pole 120 Vac Requires<br>One 3/4-Inch (19.1 mm) Space                                | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces                    |
| 15            | #14–6                                     |  CHFEP115 |  CH215EPD |
| 20            | #14–6                                     | CHFEP120  | CH220EPD  |
| 25            | #14–6                                     | CHFEP125  | —   |
| 30            | #14–6                                     | CHFEP130  | CH230EPD  |
| 40            | #14–6                                     | —   | CH240EPD  |
| 50            | #14–6                                     | —   | CH250EPD  |
| 60            | #14–6 ①                                   | —   | CH260EPD  |



#### Type CH Switching Neutral Breakers—10 kAIC, 120 Vac and 120/240 Vac

Used to open the neutral along power line(s) for applications of gas pumps.

##### CH220SW



#### 3/4-Inch (19.1 mm) per Pole 120/240 or 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Catalog Number—1 per Shelf Carton   |   |
|---------------|---|---|---|
|               |   | Two-Pole 120 Vac<br>Common Trip Requires<br>Two 3/4-Inch (19.1 mm) Spaces                     | Three-Pole 120/240 Vac<br>Common Trip Requires<br>Three 3/4-Inch (19.1 mm) Spaces               |
| 15            | #14–8                                   |  CH215SW ② |  CH315SW ③ |
| 20            | #14–8                                   | CH220SW ②   | CH320SW ③   |
| 30            | #14–8                                   | CH230SW ②   | CH330SW ③   |
| 40            | #14–8                                   | CH240SW ②   | CH340SW ③   |
| 50            | #14–8                                   | CH250SW ②   | CH350SW ③   |




#### Notes

- ① 60 A breaker listed for 75 °C Cu wire only.
- ② For circuit breakers with shunt trip, add ST suffix. Shunt trip requires one additional pole space.
- ③ Switching duty rated.

### Type CH-HID Circuit Breakers—10 kAIC, 120 Vac, 120/240 and 240 Vac

Suitable for use in circuits for fluorescent and high intensity discharge lighting. Also suitable for HACR applications.


#### 3/4-Inch (19.1 mm) per Pole 120 Vac, 120/240 and 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One<br>3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 240 Vac<br>Common Trip Requires<br>Two 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number | Three-Pole 240 Vac<br>Common Trip Requires<br>Three 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|---|---|
|               |   |                             |                                 |                                    |
| 15            | #14–8                                   | CH115HID   | CH215HID ①  | CH315HID  |
| 20            | #14–8                                   | CH120HID   | CH220HID  | CH320HID  |
| 30            | #14–8                                   | CH130HID   | CH230HID  | CH330HID  |


### Type CHT Twin 10 kAIC, 120/240 Vac, Universal CTL and Non-CTL Plug-On Circuit Breakers

Suitable for CTL and Non-CTL loadcenters.

Type CH and CHT  
Circuit Breakers  
Mounted in Twin  
Breaker Panel



#### Twin (CTL) 3/4-Inch (19.1 mm) per Pole 120 Vac Class CTL 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole Requires<br>One 3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number |
|---------------|---|---|
|               |   |              |
| 15–15         | #14–8                                   | CHT1515 ②③  |
| 15–20         | #14–8                                   | CHT1520 ②③  |
| 20–20         | #14–8                                   | CHT2020 ②③  |

#### Notes

- ① CH215HID is rated for 120/240 V.
- ② Switching duty rated.
- ③ HACR rated.

# 1.1

## Loadcenters and Circuit Breakers




### Type CH Loadcenters and Circuit Breakers

1

#### Type CHP Commercial Breakers—10 kAIC, 120 Vac, 120/240 Vac and 240 Vac

Note: CHP breakers feature on-off and trip positions for commercial applications.

#### 3/4-Inch (19.1 mm) per Pole 120, 120/240 or 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C            | Single-Pole 120/240 Vac<br>Requires One 3/4-Inch<br>(19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac<br>Common Trip<br>Requires Two 3/4-Inch<br>(19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number | Three-Pole 240 Vac<br>Common Trip<br>Requires Three 3/4-Inch<br>(19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|--|--|--|--|
|               |  |                             |   |                                       |
| 10            | (1) #14–8 <sup>①</sup>                             | <b>CHP110</b>  | <b>CHP210</b>  | <b>CHP310</b>  |
| 15            | (2) #14–10 <sup>①②</sup><br>(1) #14–6 <sup>③</sup> | <b>CHP115</b> <sup>⑥⑦</sup>  | <b>CHP215</b> <sup>⑦</sup>   | <b>CHP315</b> <sup>⑦</sup>   |
| 20            |  | <b>CHP120</b> <sup>⑥⑦</sup>  | <b>CHP220</b> <sup>⑦</sup>   | <b>CHP320</b> <sup>⑦</sup>   |
| 25            |  | <b>CHP125</b> <sup>⑦</sup>   | <b>CHP225</b> <sup>⑦</sup>   | <b>CHP325</b> <sup>⑦</sup>   |
| 30            |  | <b>CHP130</b> <sup>⑦</sup>   | <b>CHP230</b> <sup>⑦</sup>   | <b>CHP330</b> <sup>⑦</sup>   |
| 35            | #14–2 <sup>①</sup><br>#14–6 <sup>③</sup>           | <b>CHP135</b> <sup>⑦</sup>   | <b>CHP235</b> <sup>⑦</sup>   | <b>CHP335</b> <sup>⑦</sup>   |
| 40            | #10–1/0 <sup>④</sup>                               | <b>CHP140</b> <sup>⑦</sup>   | <b>CHP240</b> <sup>⑦</sup>   | <b>CHP340</b> <sup>⑦</sup>   |
| 45            | #14–2 <sup>⑤</sup>                                 | <b>CHP145</b> <sup>⑦</sup>   | <b>CHP245</b> <sup>⑦</sup>   | <b>CHP345</b> <sup>⑦</sup>   |
| 50            |  | <b>CHP150</b> <sup>⑦</sup>   | <b>CHP250</b> <sup>⑦</sup>   | <b>CHP350</b> <sup>⑦</sup>   |
| 60            |  | <b>CHP160</b> <sup>⑦</sup>   | <b>CHP260</b> <sup>⑦</sup>   | <b>CHP360</b> <sup>⑦</sup>   |
| 70            |  | <b>CHP170</b>  | <b>CHP270</b>  | <b>CHP370</b>  |
| 80            |  | —  | <b>CHP280</b>  | —  |
| 90            |  | —  | <b>CHP290</b>  | —  |
| 100           |  | —  | <b>CHP2100</b>   | <b>CHP3100</b>   |
| 110           |  | —  | <b>CHP2110</b>   | —  |
| 125           |  | —  | <b>CHP2125</b>   | —  |

#### Notes



- ① For single- and two-pole breakers.
- ② Solid and stranded wire can be used together.
- ③ For three-pole breakers.
- ④ Single-pole 60–70 A, two-pole 80–125 A, three-pole 40–100 A.
- ⑤ Single-pole 40–50 A, two-pole 40–70 A.
- ⑥ Switching duty rated.
- ⑦ HACR rated.

CHP breakers offer on-off and trip positions for commercial applications.

### Type CHP Neutral Switching Breakers—10 kAIC, 120 Vac and 120/240 Vac



Used to open the neutral along power line(s) for applications of gas pumps.

#### 3/4-Inch (19.1 mm) per Pole 120 or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Two-Pole 120 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number | Three-Pole 120/240 Vac Common Trip<br>Requires Three 3/4-Inch (19.1 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|--|--|
|               |   |                               |                                       |
| 15            | #14–8                                   | CHP215SW <sup>①</sup>  | CHP315SW <sup>①</sup>  |
| 20            | #14–8                                   | CHP220SW <sup>①</sup>  | CHP320SW <sup>①</sup>  |



### Type CH-M50 High Ambient Breaker

#### 3/4-Inch (19.1 mm) per Pole 120 or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|---|--|
|               |   |                          |                                   |
| 15            | (1) #14–8                               | CH115M50  | CH215M50   |
| 20            | (2) #14–10                              | CH120M50  | CH220M50   |
| 25            |   | CH125M50  | CH225M50   |
| 30            |   | CH130M50  | CH230M50   |
| 35            |   | CH135M50  | CH235M50   |
| 40            |   | CH140M50  | CH240M50   |
| 45            |   | CH145M50  | CH245M50   |
| 50            |   | CH150M50  | CH250M50   |
| 60            |   | —   | CH260M50   |
| 70            |   | —   | CH270M50   |

### Type CH-HM and CHP-HM High Magnetic Breakers

#### 3/4-Inch (19.1 mm) per Pole 120 or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|---|--|
|               |   |                        |                                 |
| 15            | (1) #14–8                               | CH115HM   | CH215HM  |
| 20            | (2) #14–10                              | CH120HM   | CH220HM  |
| 15            | (1) #14–8                               | CHP115HM  | CHP215HM   |
| 20            | (2) #14–10                              | CHP120HM  | CHP220HM   |

#### Note

<sup>①</sup> For circuit breakers with shunt trip, add ST suffix. Shunt trip requires one additional pole space, obtain pricing from [Page V1-T1-39](#).

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Options and Accessories

CHHT

#### Field Installation Kits and Parts



CHPL



CHPLGF



MCBPL



CHLO



CH125RB



CH9MB270



CHML



#### Description

#### Handle Ties <sup>②</sup>

Handle tie bar for physically joining the handles of two adjacent single-pole Type CH circuit breakers (molded plastic handle cover)

Ordering Quantity <sup>①</sup>

Catalog Number

25

CHHT

Padlockable device for locking the handle of CH AFGF, CAF and GFT breakers into the ON or OFF position.

CHFAFGFLOFF

#### Handle Lockoffs <sup>③④</sup>

Padlockable device for locking the handle of single-, two- or three-pole Type CH circuit breakers (escutcheon mounted) <sup>⑤</sup>

1

CHPL

Padlockable device for locking the handle of a single-pole Type CHGFI circuit breaker (escutcheon mounted) <sup>⑤</sup>

1

CHPLGF

Padlockable bracket for locking the handle of two-, three- and four-pole Type CH circuit breakers

10

CHPLOFF

Padlockable device for locking the handle of main circuit breaker Types CC and CCH into the ON or OFF position.(screw mounted) <sup>⑥</sup>

1

CCPL

Padlockable device for locking the handle of main breaker Types BW and CSR into the ON or OFF position (escutcheon mounted) <sup>⑤</sup>

1

MCBPL

#### Handle Lockdogs <sup>④⑦</sup>

Device used to secure handle in ON or OFF position for single-pole Type CH circuit breakers (handle mounted) <sup>⑧</sup>

10

CHLO

#### Hold-Down Kits <sup>⑨</sup>

Hold-down retainer kit for single-, two-, three-pole Type CH circuit breakers. For 6–24 circuit 125 A single- and three-phase, 12–42 circuit single-phase 225 A and 24–42 circuit three-phase 225 A MLO Type CH loadcenters

1

CH125RB

Hold-down retainer kit for single-, two-, three-pole Type CH circuit breakers for 2–4 circuit MLO CH loadcenters.

1

CH125RB24

#### Mounting Bases

Mounting base for two-pole Type CH circuit breaker—70 A maximum

1

CH9MB270

#### Main Breaker Lug Kits

Types CC and CCH main breaker lug kit (2) 300 kcmil

1

CCL300

Type CSR main breaker lug kit (2) 300 kcmil

1

MCBL300

#### Mechanical Interlock

Type CH for two-, three- and four-pole breakers

10

CHML <sup>Ⓣ</sup>

#### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Handle ties: typically used to join two similar independent single-pole breakers to form a two-pole noncommon trip breaker.
- ③ Handle lockoffs: devices that use a padlock to lock the circuit breaker's handle in the ON or OFF position.
- ④ Requires one additional pole space.
- ⑤ Escutcheon mounted: device mounted semipermanently to the face of the circuit breaker and secured by the loadcenter deadfront.
- ⑥ Screw mounted: device permanently mounted to the face of the circuit breaker by the use of a non-removable screw.
- ⑦ Handle lockdogs: devices that are used to secure a circuit breaker's handle in the ON or OFF position. Handle lockdogs are not padlockable devices.
- ⑧ Handle mounted: device mounted above or below handle using spring pressure.
- ⑨ Hold-down kits: devices used to secure the circuit breaker to the loadcenter for back-feed main application. See NEC Article 408.36(D).
- Ⓣ CHML not suitable to transfer emergency power.

### Shunt Trip Options

| Description<br>Type | Volts  | Catalog Number<br>Suffix Adder <sup>①</sup> |
|---------------------|--------|---|
| CSR                 | 12 DC  | <b>SR12</b>                                 |
| CSR                 | 24 DC  | <b>SR24</b>                                 |
| CSR                 | 120 AC | <b>SR01</b>                                 |
| CH                  | 120 AC | <b>ST <sup>②</sup></b>                      |
| CC                  | 12 DC  | <b>SR12</b>                                 |
| CC                  | 24 DC  | <b>SR24</b>                                 |
| CC                  | 120 AC | <b>SR01</b>                                 |
| CC                  | 208 AC | <b>SR08</b>                                 |
| CC                  | 240 AC | <b>SR02</b>                                 |

### Handle Position Changeability Chart

| Handle Lockoff and<br>Lockdog Types | To Change Handle Position from<br>ON to OFF or OFF to ON You Must... |                  |                                |
|-------------------------------------|--|------------------|--------------------------------|
|                                     | Remove<br>Padlock  | Remove<br>Device | Remove Loadcenter<br>Deadfront |
| Lockoff escutcheon mounted          | Remove   | —                | —                              |
| Lockoff screw mounted               | Remove   | —                | —                              |
| Lockdog handle mounted              | N/A  | Remove           | —                              |

#### Notes

- ① Add suffix indicated to end of breaker catalog number.
- ② Requires one additional pole space.



# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1


#### Technical Data and Specifications

##### Ratings


Single- and two-pole CH breakers rated 15 and 20 A have low instantaneous magnetic trip levels. The 15 and 20 A breakers with “HM” suffix have high magnetic trip settings recommended for circuits with inherently high inrush currents. All Type CH breakers are marked for heating, air conditioning and refrigeration (HACR) equipment application. Single-pole 15–20 A breakers are also suitable for switching duty (SWD). Shunt trip coils operate on 120 Vac and require one additional pole space per breaker.

##### Wiring Diagrams


###### Typical Single-Pole

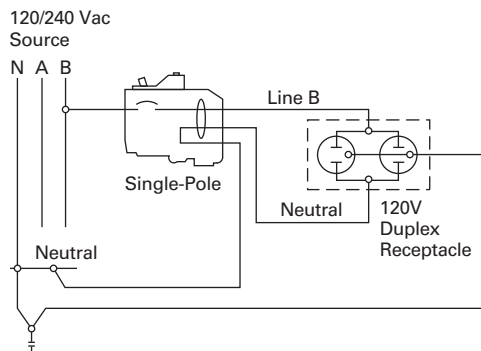


###### Two-Pole 240 V Load Application Sourced by 120/240 Vac

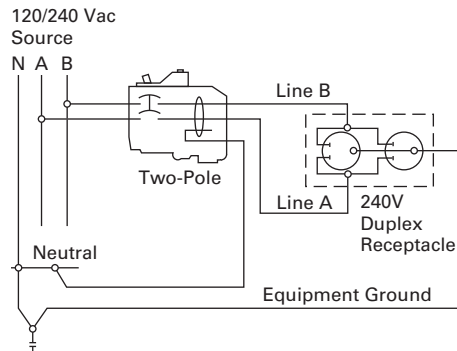


###### Single-Pole 120 V Load Application Sourced by 120/240 Vac

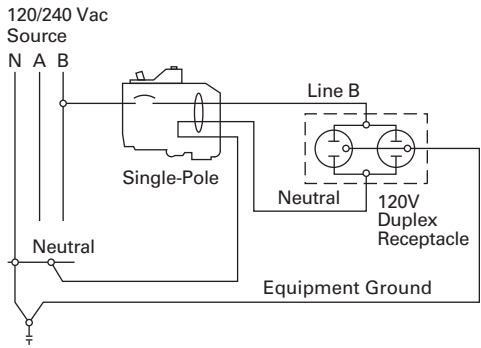


###### Two-Pole Shared Neutral with Duplex Receptacle Application

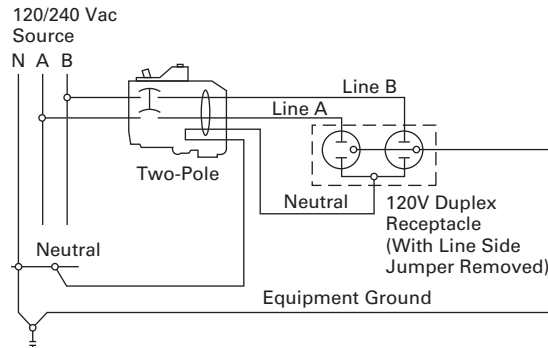


###### Two-Pole Shared Neutral with Multi-Duplex Receptacle Application

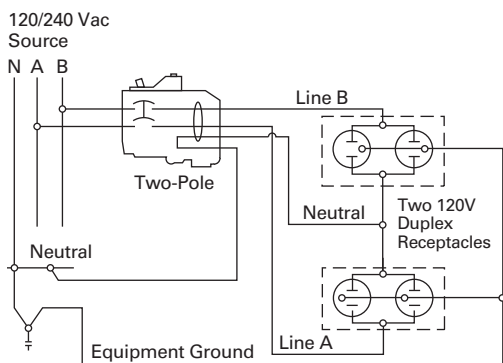


###### Single-Pole 120 V Duplex Receptacle Application

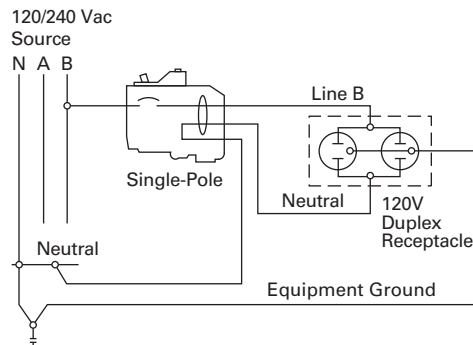


### Two-Pole 120 V Multi-Duplex Receptacle Application

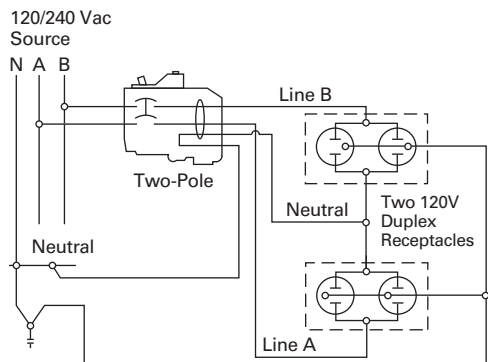

### Two-Pole 120 V Duplex Receptacle Application

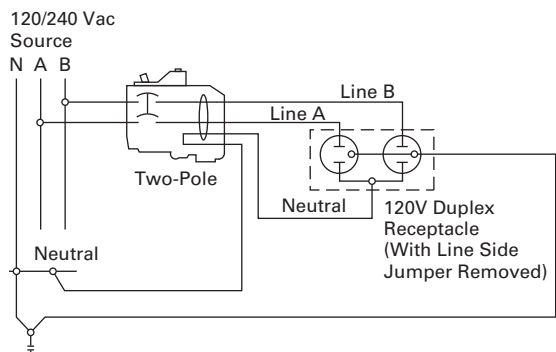

### Two-Pole 240 V Duplex Receptacle Application

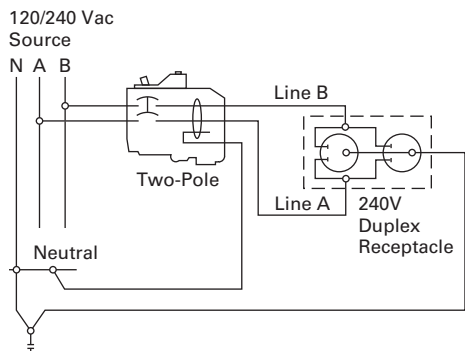

Type BR Loadcenters and Circuit Breakers



### Contents

| <i>Description</i>                              | <i>Page</i>     |
|---|-----------------|
| Overview  |                 |
| Standards and Certifications . . . . .          | <b>V1-T1-43</b> |
| Catalog Number Selection . . . . .              | <b>V1-T1-45</b> |
| Product Selection . . . . .                     | <b>V1-T1-46</b> |
| BR Specialty Products                           |                 |
| BR Quick Connect Neutral Loadcenters . . . . .  | <b>V1-T1-57</b> |
| Spa Panels . . . . .                            | <b>V1-T1-58</b> |
| Riser Panel . . . . .                           | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter . . . . .         | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories . . . . . | <b>V1-T1-63</b> |
| BR Circuit Breakers . . . . .                   | <b>V1-T1-77</b> |

### Overview

#### Product Description

Loadcenters are enclosures specifically designed to house the branch circuit breakers and wiring required to distribute power to individual circuits. They contain either a main breaker when used at the service entrance point or a main lug when used as a sub-panel to add circuits to existing service. The main breaker protects the main entire panel and can be used as a service disconnect. The branch breakers protect the wires leading to individual electrical loads such as fixtures and outlets.

#### Features, Benefits and Functions

##### Loadcenter Construction

Eaton's Type BR loadcenters have standard tin-plated aluminum bus with a limited availability of copper bus. The sum of the handle ratings connected to any stab is limited to 150 A maximum on the 100 and 125 A loadcenters, and 200 A on loadcenters with 150 A or higher main bus. NEMA Type 1 boxes or enclosures are manufactured from galvanized steel. Raintight boxes are manufactured from galvanized steel, then finished using an electrostatic powder coat, baked urethane paint process.

##### Neutrals

Eaton Type CH loadcenters feature two types of neutrals:

##### Insulated/Bondable Split Neutral

Panels are supplied with split insulated neutrals with an insulated cross strap. For service entrance applications, the neutral must be bonded by using the bonding strap supplied with the panel. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

##### Insulated/Bondable Single Neutral

Panels are supplied with a single insulated neutral. For service entrance applications, all that is required to bond the neutral is to loosen the bonding screw and the neutral screw directly beside it, insert the bonding strap into the neutral bar, and re-tighten both connections. The single neutral can be moved by the contractor to the other side of the panel, if desired. When used as a service entrance panel, unused neutral connections may be used for the termination of equipment grounds. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

**Grounds**

In service entrance applications where the neutral is bonded, unused neutral holes may be used for terminating ground conductors. In sub-feed panels, the neutral must be isolated (non-bonded), and ground wires must be terminated on a separate ground bar.

The insulated/bondable single/split neutral panels have sufficient terminations for both ground and neutral conductors. The insulated/bondable single split neutral panels are supplied with a separate factory-installed ground bar if the catalog number contains a "G." If not, a separate ground bar should be installed. Insulated/Bondable Single Neutral panels are supplied without a ground bar (unless otherwise noted), and ground bar kits if needed must be purchased separately.

**Neutral and Ground Terminals**

The standard terminals on grounds and neutrals are rated to accept (3) #14–#10 Cu/Al or (1) #14–4, provided the cables terminated are of the same material. For larger cables, add-on neutral lugs may be ordered from the accessories on **Page V1-T1-68**.

**Note:** NEC allows only one current-carrying conductor per hole on neutrals unless otherwise noted.

**Bottom Fed Loadcenters**

For single-phase 225 A and below loadcenters that are bottom fed, a standard panel can be rotated 180 degrees to allow straight-in wiring of power cables to the main terminals. Because the main circuit breaker handle operates horizontally, the orientation of the main circuit breaker handle is consistent with the requirements of NEC 2008 Article 240.81.

**Gutter Splicing**

Loadcenters are not UL listed as wiring troughs. Therefore, gutter splicing of riser cables to tap off to the main device is not permitted. Refer to NEC 2008 Article 312.8.

**Fire Rating**

Due to the numerous openings in both loadcenter boxes and trims, they should not be mounted in firewalls. There is no approved method for sealing the enclosures for this application.

**Date Code**

The date of manufacture of each loadcenter is printed on the outside of the carton as well as inside the loadcenter. On the carton, the date code is printed on the end carton label. In the loadcenter, the date code is located on the small white label located on the right side wall (with the main device on top).

The date code is in the following format: F # # # &. The "F" is the numeric code for the Lincoln, IL plant, and the three numbers are the year and week of manufacturing, e.g., 023. The "!" sign at the end signifies the decade of the 2010. Therefore, the date code F023! would indicate that the product was manufactured in the 23rd week of 2010. The 1980s are represented by the "+" sign and the 1990s are represented by a "=" at the end of the code.

**Surge Protectors**

Complete home surge protection is available in multiple options, including a factory-installed option that provides the highest level of surge protection in a residential design. See Tab 3 for more details.

**Circuit Breaker Case Interrupting Capacity**

- 10 kAIC
- 22 kAIC
- 25 kAIC

**Warranty Information**

- 10-year limited loadcenter warranty
- 10-year limited branch breaker warranty

**Standards and Certifications****UL Listings**

All Eaton Type BR loadcenters are listed under UL File E52977 except the 2–8 circuit loadcenters, up through and including 125 A, which are listed under UL File E8741.



# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Type BR Loadcenter

Extra 1.5 inch Knockout (38.1 mm)

- Larger knockout provides easier installation and time savings

Top or Bottom Feed

- Straight-in wiring saves labor and material
- One panel for either top or bottom applications

2/0 Lug

- Easily removable and can be installed in any location on the neutral bar

Type BR AFCI Breakers

- Compact design for easier wiring and improved wireway access
- Optional LED indicates one of six trip codes for circuit diagnostics
- Provides a clean gutter space

Standard Tin-Plated Aluminum Bus

- Excellent conductivity and corrosion resistance
- Copper bus options available for select catalog numbers

Drywall Marking on Enclosure

- Indicates proper mounting depth for flush applications

"Tangential" Center Knockout

- Easier installation for conduit applications

Commercial Grade Main Breaker

- 25 kAIC series rated main breaker for superior protection

Neutral Bus (Strap)

- Is easily removable for sub-panel applications

Bonding Z-Strap

- Provides easy field conversion for service entrance applications

Twin Neutral Bars


- Minimum 150% neutral capacity

Steel Backpan

- Provides solid and reliable breaker mounting—single piece design for stability and durability

Single Keyhole Mounting

- One keyhole at the top and bottom provides easier mounting and leveling

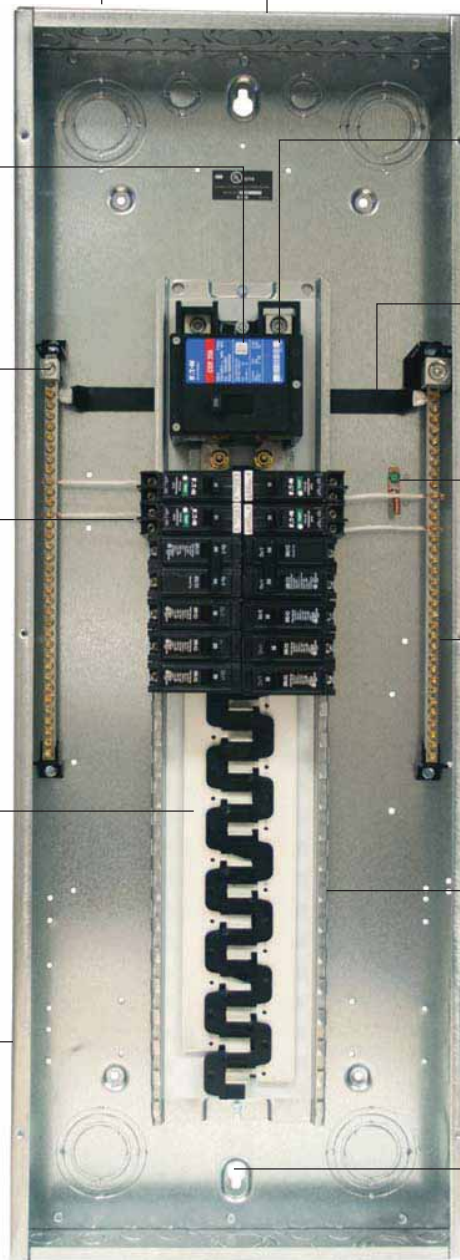


#### Warranty

10-year warranty on all Type BR loadcenters and circuit breakers.

### Catalog Number Selection

#### Single- and Three-Phase Through 600 A

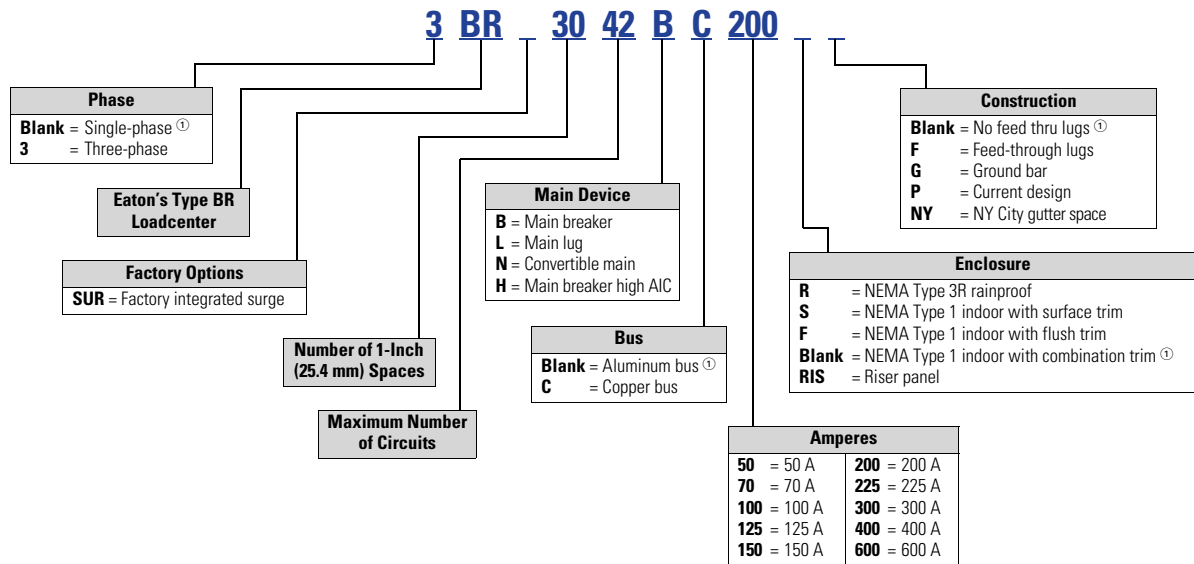

**Note**

Ⓢ No character space used.

#### 1

#### Product Selection

#### Single-Phase—Main Circuit Breaker Loadcenters—10/25 kAIC

BR4040B200



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type           | Main Ampere Rating          | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type           | Box Size                 | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number with Combination <sup>①</sup> or NEMA Type 3R Cover |                         |                           |
|-----------------------------|-----------------------------|---------------------------------|----------|--------------------------|--------------------------|---|---|-------------------------|---------------------------|
|                             |                             | Spaces                          | Circuits |                          |                          |   |   |                         |                           |
| BR<br>10 kAIC               | 100                         | 8                               | 16       | Indoor                   | B1                       | #4–1/0 <sup>②</sup>                                   | BR816B100   |                         |                           |
|                             |                             | 10                              | 20       | Indoor                   | A1                       |   | BR1020B100S11   |                         |                           |
|                             |                             | 10                              | 20       | Indoor                   | A1                       |   | BR1020B100F11   |                         |                           |
|                             |                             | 10                              | 20       | Outdoor                  | B2R                      |   | BR1020B100RF <sup>③④</sup>  |                         |                           |
|                             |                             | 12                              | 12       | Indoor                   | B2                       |   | BR1212B100  |                         |                           |
|                             |                             | 12                              | 20       | Indoor                   | B2                       |   | BR1220B100  |                         |                           |
|                             |                             | 12                              | 24       | Outdoor                  | B2R                      |   | BR1224B100R <sup>④</sup>  |                         |                           |
|                             |                             | 16                              | 16       | Indoor                   | C1                       |   | BR1616B100  |                         |                           |
|                             |                             | 16                              | 20       | Indoor                   | C1                       |   | BR1620B100  |                         |                           |
|                             |                             | 16                              | 24       | Outdoor                  | C1R                      |   | BR1624B100R <sup>④</sup>  |                         |                           |
|                             |                             | 20                              | 24       | Outdoor                  | C3R                      |   | BR2024B100R <sup>④</sup>  |                         |                           |
|                             |                             | 20                              | 20       | Indoor                   | C2                       |   | BR2020B100  |                         |                           |
|                             | 16                          | 24                              | Indoor   | C1                       | BR1624B100               |   |   |                         |                           |
|                             | 30                          | 30                              | Indoor   | D1                       | BR3030B100               |   |   |                         |                           |
|                             | 125                         | 16                              | 24       | Indoor                   | C1                       | #4–2/0  | BR1624B125  |                         |                           |
|                             | 20                          | 24                              | Indoor   | C1                       | BR2024B125               |   |   |                         |                           |
|                             | 20                          | 24                              | Outdoor  | C3R                      | BR2024B125R <sup>④</sup> |   |   |                         |                           |
|                             | 30                          | 30                              | Indoor   | D1                       | BR3030B125               |   |   |                         |                           |
|                             | BRH <sup>⑤</sup><br>22 kAIC | 100                             | 20       | 24                       | Indoor                   | C2  | #4–1/0  | BR2024H100 <sup>⑤</sup> |                           |
| CSR <sup>⑥</sup><br>25 kAIC | 150                         | 8                               | 16       | Outdoor                  | C3R                      | #2–300 kcmil  | BR816B150RF <sup>③④</sup>   |                         |                           |
|                             |                             | 16                              | 30       | Indoor                   | C4                       |   | BR1630B150  |                         |                           |
|                             |                             | 20                              | 30       | Indoor                   | C4                       |   | BR2030B150  |                         |                           |
|                             |                             | 20                              | 30       | Outdoor                  | D1R                      |   | BR2030B150R <sup>④</sup>  |                         |                           |
|                             |                             | 20                              | 40       | Indoor                   | D1                       |   | BR2040B150  |                         |                           |
|                             |                             | 20                              | 40       | Outdoor                  | D1R                      |   | BR2040B150R <sup>④</sup>  |                         |                           |
|                             |                             | 24                              | 30       | Indoor                   | G1                       |   | BR2430B150  |                         |                           |
|                             |                             | 30                              | 30       | Outdoor                  | G1R                      |   | BR3030B150R <sup>④</sup>  |                         |                           |
|                             |                             | 30                              | 30       | Indoor                   | G1                       |   | BR3030B150  |                         |                           |
|                             |                             | 30                              | 40       | Indoor                   | G1                       |   | BR3040B150  |                         |                           |
|                             |                             | 200                             | 4        | 8                        | Outdoor                  |   | 8R  | #2–300 kcmil            | BR48B200RF <sup>③⑦⑧</sup> |
|                             |                             | 8                               | 16       | Outdoor                  | C3R                      |   | BR816B200RF <sup>③④</sup>   |                         |                           |
|                             | 16                          | 32                              | Indoor   | C4                       | BR1632B200               |   |   |                         |                           |
|                             | 20                          | 40                              | Outdoor  | D1R                      | BR2040B200R <sup>④</sup> |   |   |                         |                           |
|                             | 20                          | 40                              | Indoor   | D1                       | BR2040B200               |   |   |                         |                           |
|                             | 24                          | 40                              | Indoor   | G1                       | BR2440B200               |   |   |                         |                           |
|                             | 30                          | 40                              | Outdoor  | G1R                      | BR3040B200R <sup>④</sup> |   |   |                         |                           |
|                             | 30                          | 40                              | Indoor   | G1                       | BR3040B200 <sup>⑨</sup>  |   |   |                         |                           |
|                             | 40                          | 40                              | Outdoor  | L1R                      | BR4040B200R <sup>④</sup> |   |   |                         |                           |
| 40                          | 40                          | Indoor                          | L1       | BR4040B200               |                          |   |   |                         |                           |
| 40                          | 50                          | Indoor                          | L1       | BR4050B200               |                          |   |   |                         |                           |
| 60                          | 120                         | Indoor                          | L3       | BR60120B200              |                          |   |   |                         |                           |
| 60                          | 120                         | Outdoor                         | L3R      | BR60120B200R             |                          |   |   |                         |                           |
| 225                         | 42                          | 42                              | Indoor   | L2                       | #1–250 kcmil             | BR4242B225  |   |                         |                           |
| 42                          | 42                          | Outdoor                         | L2R      | BR4242B225R <sup>④</sup> |                          |   |   |                         |                           |

#### Notes

- ① Combination style covers may be used in surface or flush applications.
- ② Wire range size for BR1020B100SP is #6–#1 Cu/Al.
- ③ Includes through-feed lugs for both phase and neutral conductors.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ 22 kAIC series combination rating is obtained when Types BD, BR, BQ, BQC and GFTCB 10 kAIC branch breakers are used in series with Type BRH main breaker.
- ⑥ 25 kAIC series combination rating is obtained when Types BD, BR, BQ, BQC and GFTCB 10 kAIC branch circuit breakers are used in series with Type CSR main breaker.
- ⑦ Supplied with adapter plate to use DS Group1 hubs on **Page V1-T1-68**. If 2.50-inch (63.5 mm) hub is needed, remove adapter and use ARP00007CH25 hub.
- ⑧ Neutral is bonded—suitable for service entrance only—cannot be converted for sub-feed application.
- ⑨ Add G to the end of the catalog number for factory-installed GBK2120 ground bar.

All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with neutral bonding strap preattached. The maximum rating of the panel is the main circuit breaker rating when used as service entrance equipment. Ground bar kits priced separately. See **Page V1-T1-68**.

### Main Circuit Breaker Loadcenters—10/22 kAIC

B4242DFN



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Commercial Loadcenter Catalog Number <sup>①②③</sup> |                    |
|-------------------|--------------------|---------------------------------|----------|----------------|----------|---|---|--------------------|
|                   |                    | Spaces                          | Circuits |                |          |   | With Flush or NEMA Type 3R Cover                    | With Surface Cover |
| DK <sup>④</sup>   | 300                | 42                              | 42       | Indoor         | 24       | (2) #3/0–250 kcmil                                    | BR4242B300F   | BR4242B300S        |
|                   | 400                | 42                              | 42       | Indoor         | 24       | (2) #3/0–250 kcmil                                    | BR4242B400F   | BR4242B400S        |
|                   |                    | 42                              | 42       | Outdoor        | 47       | (2) #3/0–250 kcmil                                    | BR4242B400R <sup>⑤</sup>                            | —                  |
| HLD <sup>⑥</sup>  | 600                | 42                              | 42       | Indoor         | 24       | (2) #3/0–500 kcmil                                    | —   | BR4242B600S        |

#### Notes

- ① Ground bar kits priced separately. See **Page V1-T1-68**.
- ② The maximum rating of the panel is the main circuit breaker rating when used as service entrance equipment.
- ③ Door lock and key included with loadcenter.
- ④ Type DK main circuit breaker is rated 65 kAIC at 240 Vac and allows a 22 kAIC series rating on the panel when Types BR, BD and BJ branch circuit breakers are used.
- ⑤ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑥ Type HLD main circuit breaker is rated 65 kAIC at 240 Vac. Type HLD circuit breaker **is not** series rated with Types BR, BD and BJ branch circuit breakers.

Box sizes **Pages V1-T1-73 through V1-T1-76**.

Please contact the Lincoln Flex Center for any configurations not listed.



#### Single-Phase—Main Lug Loadcenters

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |                 | Enclosure Type    | Trim Type                | Box Size                     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number    |
|--------------------|---------------------------------|-----------------|-------------------|--------------------------|------------------------------|--|------------------------------|
|                    | Spaces                          | Circuits        |                   |                          |                              |  |                              |
| 70                 | Surface                         | Outdoor         | Indoor            | Surface (no door)        | 5                            | #8–#2  | BR24L70SP <sup>①②</sup>      |
|                    |                                 |                 | Indoor            | Surface (no door)        | 5                            |  | BR24L70SGP <sup>②③</sup>     |
|                    | Outdoor                         | —               | 5R                | BR24L70RP <sup>①②④</sup> |                              |  |                              |
|                    | Indoor                          | Flush (no door) | 5                 | BR24L70FP <sup>①②</sup>  |                              |  |                              |
|                    | Indoor                          | Flush (no door) | 5                 | BR24L70FGP <sup>②⑤</sup> |                              |  |                              |
| 125                | Flush                           | Outdoor         | Indoor            | Surface (no door)        | 6                            | #14–1/0  | BR24L125SP <sup>①②</sup>     |
|                    |                                 |                 | Outdoor           | —                        | 6R                           |  | BR24L125RP <sup>①②④</sup>    |
|                    | Surface (No Door)               | Outdoor         | Outdoor           | —                        | 6R                           | #14–1/0  | BR24L125RSEP <sup>②⑦⑧</sup>  |
|                    |                                 |                 | Indoor            | Flush (no door)          | 6                            |  | BR24L125RSE2P <sup>②⑥⑦</sup> |
|                    |                                 |                 | Indoor            | Flush (no door)          | 6                            |  | BR24L125FF <sup>①②</sup>     |
|                    | Flush (No Door)                 | Outdoor         | Indoor            | Surface (no door)        | 7                            | #14–#1   | BR48L125SP <sup>①⑨</sup>     |
|                    |                                 |                 | Indoor            | Surface (no door)        | 7                            |  | BR48L125SGP <sup>③⑨</sup>    |
|                    |                                 |                 | Outdoor           | —                        | 7R                           |  | BR48L125RP <sup>①④⑨</sup>    |
|                    |                                 |                 | Indoor            | Flush (no door)          | 7                            |  | BR48L125FF <sup>①⑨</sup>     |
|                    |                                 |                 | Indoor            | Flush (with door)        | 7                            |  | BR48L125FDP <sup>①⑨</sup>    |
|                    |                                 |                 | Indoor            | Flush (no door)          | 7                            |  | BR48L125FGP <sup>③⑨</sup>    |
|                    |                                 |                 | Indoor            | Surface (no door)        | 7                            |  | BR612L125SP <sup>①⑩</sup>    |
|                    | Outdoor                         | Outdoor         | Indoor            | Surface (no door)        | 7                            | #14–#1   | BR612L125SGP <sup>⑩⑪</sup>   |
|                    |                                 |                 | Indoor            | Surface (with door)      | 7                            |  | BR612L125SDP <sup>①⑩</sup>   |
|                    |                                 |                 | Indoor            | Surface (with door)      | 7                            |  | BR612L125SDGP <sup>⑩⑪</sup>  |
|                    |                                 |                 | Outdoor           | —                        | 7R                           |  | BR612L125RP <sup>①④⑩</sup>   |
|                    |                                 |                 | Indoor            | Flush (no door)          | 7                            |  | BR612L125FP <sup>①⑩</sup>    |
|                    |                                 |                 | Indoor            | Flush (no door)          | 7                            |  | BR612L125FGP <sup>⑤⑩⑪</sup>  |
|                    |                                 |                 | Indoor            | Flush (with door)        | 7                            |  | BR612L125FDP <sup>⑩</sup>    |
| Indoor             |                                 |                 | Flush (with door) | 7                        | BR612L125FDGP <sup>⑤⑩⑪</sup> |  |                              |
| 8                  | Surface                         | Outdoor         | Indoor            | Surface (no door)        | 7                            | #14–#1   | BR816L125SP <sup>①⑩</sup>    |
|                    |                                 |                 | Indoor            | Surface (no door)        | 7                            |  | BR816L125SGP <sup>⑩⑫</sup>   |
|                    |                                 |                 | Indoor            | Surface (with door)      | 7                            |  | BR816L125SDP <sup>①⑩</sup>   |
|                    |                                 |                 | Indoor            | Surface (with door)      | 7                            |  | BR816L125SDGP <sup>⑩⑫</sup>  |
|                    |                                 |                 | Outdoor           | —                        | 7R                           |  | BR816L125RP <sup>①④⑩</sup>   |
|                    | Flush                           | Outdoor         | Indoor            | Flush (no door)          | 7                            | #14–#1   | BR816L125FP <sup>①⑩</sup>    |
|                    |                                 |                 | Indoor            | Flush (no door)          | 7                            |  | BR816L125FGP <sup>⑤⑩⑫</sup>  |
|                    |                                 |                 | Indoor            | Flush (with door)        | 7                            |  | BR816L125FDP <sup>①⑩</sup>   |
|                    |                                 |                 | Indoor            | Flush (with door)        | 7                            |  | BR816L125FDGP <sup>⑤⑩⑪</sup> |
|                    |                                 |                 | Indoor            | Flush (with door)        | 7                            |  | BR816L125FDGP <sup>⑤⑩⑪</sup> |



#### Notes

- ① Ground bar kits priced separately. See **Page V1-T1-68**.
  - For 2/4 circuit loadcenters, use GBK5 or GBK520 ground bar.
  - For 4/8, 6/12 and 8/16 circuit loadcenters, use GBK10 ground bar.
  - Ground bars mount to the left side wall of the enclosure for the 4/8, 6/12 and 8/16 circuit loadcenters.
- ② Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not used as a lighting and appliance panelboard.
- ③ Ground bar GBK5 is installed.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ CSA and UL approved.
- ⑥ Neutral/ground holes (6) #14–6 and (3) #14–2/0 AWG Cu/Al.
- ⑦ For use as service entrance applications only.
- ⑧ Neutral/ground holes (6) #14–6 and (3) #14–1/0 AWG Cu/Al.
- ⑨ Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.
- ⑩ Suitable for use as service equipment when a main breaker is used or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.
- ⑪ Ground bar GBK10 is installed.
- ⑫ Ground bar GBK14 is installed.

Box sizes **Pages V1-T1-73** through **V1-T1-76**.

### Single-Phase—Main Lug Loadcenters

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral, continued

| Main Ampere Rating   | Maximum Number 1-Inch (25.4 mm) |  | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number with Combination or NEMA Type 3R Cover ① |                                      |
|--|---------------------------------|--|----------------|----------|--|--|--------------------------------------|
|  | Spaces                          | Circuits   |                |          |  |  |                                      |
| <b>BR1224L125</b><br> | 125                             | 12   | 12             | Indoor   | B1   | #6–2/0<br><b>BR1212L125</b> ②③④⑤                                   |                                      |
|  |                                 | 12   | 24             | Indoor   | B1   | <b>BR1224L125</b> ②④⑤  |                                      |
|  |                                 | 12   | 24             | Indoor   | B1   | <b>BR1224L125G</b> ②④⑤   |                                      |
|  |                                 | 12   | 24             | Indoor   | B1   | <b>BR1224L125DG</b> ②④⑤⑥   |                                      |
|  |                                 | 12   | 24             | Outdoor  | B1R  | <b>BR1224L125R</b> ②⑤⑦   |                                      |
|  |                                 | 16   | 16             | Indoor   | B2   | <b>BR1616L125</b> ②④⑤  |                                      |
|  |                                 | 16   | 24             | Indoor   | B2   | <b>BR1624L125</b> ②④   |                                      |
|  |                                 | 16   | 24             | Indoor   | B2   | <b>BR1624L125G</b> ②④  |                                      |
|  |                                 | 16   | 24             | Outdoor  | B2R  | <b>BR1624L125R</b> ②⑦  |                                      |
|  |                                 | 20   | 20             | Indoor   | C1   | <b>BR2020L125</b> ②④⑤  |                                      |
|  |                                 | 20   | 24             | Indoor   | C1   | <b>BR2024L125</b> ②④   |                                      |
|  |                                 | 20   | 24             | Indoor   | C1   | <b>BR2024L125G</b> ②④⑧   |                                      |
|  |                                 | 20   | 24             | Outdoor  | C1R  | <b>BR2024L125R</b> ②⑦  |                                      |
|  |                                 | 24   | 24             | Indoor   | C2   | <b>BR2424L125</b> ②④   |                                      |
|  |                                 | 24   | 24             | Indoor   | C2   | <b>BR2424L125G</b> ②④⑧   |                                      |
|  |                                 | 30   | 42             | Indoor   | D1   | <b>BR3042L125</b> ②④   |                                      |
|  |                                 | 150  | 16             | 30       | Indoor   | C2   | #1–300 kcmil<br><b>BR1630L150</b> ④⑨ |
|  |                                 |  | 20             | 30       | Indoor   | C2   | <b>BR2030L150</b> ④⑨                 |
|  |                                 | <b>BR1224L200</b><br> | 200            | 8        | 16   | Outdoor  | B2R                                  |
| 12   | 24                              |  |                | Indoor   | B2   | <b>BR1224L200</b> ④⑤⑨  |                                      |
| 12   | 24                              |  |                | Outdoor  | B2R  | <b>BR1224L200R</b> ⑤⑦⑨   |                                      |
| 20   | 40                              |  |                | Indoor   | C2   | <b>BR2040L200</b> ④⑨   |                                      |
| 20   | 40                              |  |                | Indoor   | C2   | <b>BR2040L200G</b> ④⑧⑨   |                                      |
| 20   | 40                              |  |                | Outdoor  | C3R  | <b>BR2040L200R</b> ⑦⑨  |                                      |
| 24   | 40                              |  |                | Indoor   | C4   | <b>BR2440L200</b> ④⑨   |                                      |
| 30   | 40                              |  |                | Indoor   | D1   | <b>BR3040L200</b> ④⑨   |                                      |
| 30   | 40                              |  |                | Indoor   | D1   | <b>BR3040L200G</b> ④⑧⑨   |                                      |
| 30   | 40                              |  |                | Outdoor  | D1R  | <b>BR3040L200R</b> ⑦⑨  |                                      |
| 40   | 40                              |  |                | Indoor   | G1   | <b>BR4040L200</b> ④⑨   |                                      |
| 40   | 40                              |  |                | Indoor   | G1   | <b>BR4040L200G</b> ④⑨  |                                      |
| 40   | 40                              |  |                | Outdoor  | G1R  | <b>BR4040L200R</b> ⑦⑨  |                                      |
| 60   | 120                             |  |                | Indoor   | L3   | <b>BR60120L200</b> ⑩   |                                      |
| 225  | 42                              |  |                | 42       | Indoor   | L1   | #1–300 kcmil<br><b>BR4242L225</b> ④  |
|  | 42                              | 42   | Outdoor        | L1R      | <b>BR4242L225R</b> ⑦                               |  |                                      |

#### Notes

- ① Ground bar kits priced separately unless otherwise noted. See **Page V1-T1-68**.
- ② Has notch for BREQS125 hold-down kit.
- ③ Single, movable neutral is provided.
- ④ Combination cover style.
- ⑤ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑥ Ground bars GBK5 and GBK520 installed.
- ⑦ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑧ Ground bar GBK1220 installed.
- ⑨ Has notch for BRHDK125 hold-down kit.
- ⑩ Includes through-feed lugs for both phase and neutral conductors.
- ⑪ Includes main lugs. Loadcenters can convert to main breaker using kit.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Single-Phase—Main Lug Loadcenters—400 and 600 A

4242DFN



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Commercial Loadcenter Catalog Number <sup>①②③</sup> |                    |
|--------------------|---------------------------------|----------|----------------|----------|--|---|--------------------|
|                    | Spaces                          | Circuits |                |          |  | With Flush or NEMA Type 3R Cover                    | With Surface Cover |
| 400                | 12                              | 24       | Outdoor        | 42       | (2) #3/0–400 kcmil                                 | BR1224L400R <sup>④⑤</sup>                           | —                  |
|                    | 42                              | 42       | Indoor         | 22       |  | BR4242L400F   | BR4242L400S        |
|                    | 42                              | 42       | Outdoor        | 46       |  | BR4242L400R <sup>④</sup>                            | —                  |
| 600                | 42                              | 42       | Indoor         | 22       | (2) #2–500 kcmil                                   | —   | BR4242L600S        |

#### Notes

- ① Ground bar kits priced separately unless otherwise noted. See **Page V1-T1-68**.
- ② Has notch for BRHDK125 hold-down kit.
- ③ Ground bar GBK8 installed.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.

**Convertible Loadcenters MCB or MLO—Base Units and Main Devices 10/22/25 kAIC, Complete Assembly Consists of: Loadcenter and Either Main Breaker Kit or Main Lug Kit**

**Note:** Interrupting rating depends on main circuit breaker selected.

**BR3040N200**



**Base Units—Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral (Unless Otherwise Noted)**

| Main Ampere Rating <sup>①</sup> | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size           | Wire Size Range Cu/Al 60 °C or 75 °C for Main                  | Loadcenter Catalog Number With Combination or NEMA Type 3R Cover <sup>②③</sup> |
|---------------------------------|---------------------------------|----------|----------------|--------------------|--|--|
|                                 | Spaces                          | Circuits |                |                    |  |  |
| 125 <sup>④</sup>                | 12                              | 24       | Indoor         | B2                 | See main breaker and main lug kit tables <b>Page V1-T1-54.</b> | <b>BR1224N125</b> <sup>⑤⑥</sup>  |
|                                 | 12                              | 24       | Outdoor        | B2R                |  | <b>BR1224N125R</b> <sup>⑤⑥⑦</sup>  |
|                                 | 16                              | 24       | Indoor         | C1                 |  | <b>BR1624N125</b> <sup>⑤</sup>   |
|                                 | 16                              | 24       | Outdoor        | C1R                |  | <b>BR1624N125R</b> <sup>⑤⑦</sup>   |
|                                 | 20                              | 24       | Indoor         | C2                 |  | <b>BR2024N125</b> <sup>⑤</sup>   |
|                                 | 20                              | 24       | Outdoor        | C3R                |  | <b>BR2024N125R</b> <sup>⑤⑦</sup>   |
| 200 <sup>⑧</sup>                | 8                               | 16       | Outdoor        | C3R                | <b>BR816N200RF</b> <sup>⑦⑨⑩⑪</sup>                             |  |
|                                 | 12                              | 24       | Indoor         | C4                 | <b>BR1224N200</b> <sup>⑩</sup>                                 |  |
|                                 | 12                              | 24       | Outdoor        | C3R                | <b>BR1224N200R</b> <sup>⑦⑩</sup>                               |  |
|                                 | 16                              | 32       | Indoor         | C4                 | <b>BR1632N200</b> <sup>⑩</sup>                                 |  |
|                                 | 20                              | 40       | Indoor         | D1                 | <b>BR2040N200</b> <sup>⑩</sup>                                 |  |
|                                 | 20                              | 40       | Indoor         | D1                 | <b>BR2040N200G</b> <sup>⑫</sup>                                |  |
|                                 | 20                              | 40       | Outdoor        | D1R                | <b>BR2040N200R</b> <sup>⑦⑩</sup>                               |  |
|                                 | 20                              | 40       | Outdoor        | D1R                | <b>BR2040N200RG</b> <sup>⑫</sup>                               |  |
|                                 | 24                              | 40       | Indoor         | G1                 | <b>BR2440N200</b> <sup>⑦⑩</sup>                                |  |
|                                 | 30                              | 40       | Indoor         | G1                 | <b>BR3040N200</b> <sup>⑩</sup>                                 |  |
|                                 | 30                              | 40       | Indoor         | G1                 | <b>BR3040N200G</b> <sup>⑫</sup>                                |  |
|                                 | 30                              | 40       | Outdoor        | G1R                | <b>BR3040N200R</b> <sup>⑦⑩</sup>                               |  |
|                                 | 30                              | 40       | Outdoor        | G1R                | <b>BR3040N200RG</b> <sup>⑫</sup>                               |  |
|                                 | 40                              | 40       | Indoor         | L1                 | <b>BR4040N200</b> <sup>⑩</sup>                                 |  |
|                                 | 40                              | 40       | Indoor         | L1                 | <b>BR4040N200G</b> <sup>⑫</sup>                                |  |
|                                 | 40                              | 40       | Outdoor        | L1R                | <b>BR4040N200R</b> <sup>⑦⑩</sup>                               |  |
|                                 | 40                              | 40       | Outdoor        | L1R                | <b>BR4040N200RG</b> <sup>⑫</sup>                               |  |
|                                 | 40                              | 50       | Indoor         | L1                 | <b>BR4050N200</b>  |  |
| 40                              | 50                              | Outdoor  | L1R            | <b>BR4050N200R</b> |  |  |

**Notes**

- ① The maximum rating of the loadcenter is the main circuit breaker rating when used as service entrance equipment.
- ② 100, 125 and 200 A convertible base unit catalog numbers include interior, box and cover only. Main devices and accessories must be ordered separately for field installation. All convertible base units are listed as suitable for use as service entrance equipment when used per Article 408 of the NEC.
- ③ Ground bar kits priced separately except as noted, refer to **Page V1-T1-68.**
- ④ For main breaker, use Type BR. For main lug use Type BRSF.
- ⑤ BREQS125 hold-down screw comes with loadcenter for back-fed Types BR and BRH main circuit breakers.
- ⑥ Convertible to maximum of 100 A main circuit breaker and 125 A main lug.
- ⑦ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68.**
- ⑧ For main breaker, use Type BW or CSR. For main lug, use Type BRL.
- ⑨ Includes through-feed lugs for both phase and neutral conductors.
- ⑩ No hold-down provisions for back-fed Types BR and BRH main circuit breakers.
- ⑪ Insulated/bondable single neutral.
- ⑫ Includes GBK2120 ground bar.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Convertible Loadcenters MCB or MLO—Base Units and Main Devices 10/22/25 kAIC, Complete Assembly Consists of: Loadcenter and Either Main Breaker Kit or Main Lug Kit

**Note:** Interrupting rating depends on main circuit breaker selected.

#### BW2200



#### Main Devices—Two- and Three-Pole Main Circuit Breakers—120/240 Vac or 208Y/120 Vac or 240 Vac

| Ampere Rating     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | 10 kAIC Catalog Number | 22/25 kAIC Catalog Number ① |
|-------------------|---|------------------------|-----------------------------|
| <b>Two-Pole</b>   |   |                        |                             |
| 100               | #4-1/0  | BR2100                 | BRH2100                     |
| 110               | #4-1/0  | BR2110                 | BRH2110                     |
| 125               | #4-2/0  | BR2125                 | BRH2125                     |
| 125               | #2-300 kcmil  | BW2125                 | CSR2125N                    |
| 150               | #2-300 kcmil  | BW2150                 | CSR2150N                    |
| 175               | #2-300 kcmil  | BW2175                 | CSR2175N                    |
| 200               | #2-300 kcmil  | BW2200                 | CSR2200N                    |
| <b>Three-Pole</b> |   |                        |                             |
| 100               | #1  | BR3100                 | BRH3100                     |

#### BRL200



#### Main Devices—Two- and Three-Pole Main Lug Kits—120/240 Vac or 208Y/120 Vac or 240 Vac

| Ampere Rating     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number |
|-------------------|--|----------------|
| <b>Two-Pole</b>   |  |                |
| 125               | #6-2/0   | BRSF125        |
| 150               | #1-300 kcmil                                       | BRL200         |
| 175               | #1-300 kcmil                                       | BRL200         |
| 200               | #1-300 kcmil                                       | BRL200         |
| <b>Three-Pole</b> |  |                |
| 150               | #6-3/0   | 3BRSF150       |

#### Main Circuit Breaker with Accessory

Example: BW22005R01 (Put description with catalog number on order. See **Page V1-T1-87.**)

#### Main Circuit Breaker Loadcenters—Copper Bus 10/22/25 kAIC

#### BR3030BC100



#### Main Circuit Breaker Loadcenters—With Copper Bus—Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number with Combination Cover ②③ |
|-------------------|--------------------|---------------------------------|----------|----------------|----------|---|---|
|                   |                    | Spaces                          | Circuits |                |          |   |   |
| BR<br>10 kAIC     | 100                | 20                              | 20       | Indoor         | C2       | #4-1/0  | BR2020BC100   |
|                   |                    | 30                              | 30       | Indoor         | D1       | #4-1/0  | BR3030BC100   |
| BRH<br>22 kAIC ④  | 100                | 30                              | 30       | Indoor         | D1       | #4-1/0  | BR3030HC100   |
|                   |                    | 150                             |          | 30             | 30       | Indoor  | G1  |
| CSR<br>25 kAIC    | 200                | 20                              | 40       | Indoor         | D1       | #2-300 kcmil  | BR2040BC200   |
|                   |                    | 30                              | 40       | Indoor         | G1       | #2-300 kcmil  | BR3040BC200   |
|                   |                    | 40                              | 40       | Indoor         | L1       | #2-300 kcmil  | BR4040BC200   |

#### Main Lug Only Loadcenters—Copper Bus

#### BR816LC125FDP



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Single Neutral with Copper Bus

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Trim Type           | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number |
|--------------------|---------------------------------|----------|----------------|---------------------|----------|--|---------------------------|
|                    | Spaces                          | Circuits |                |                     |          |  |                           |
| 125                | 8                               | 16       | Indoor         | Surface (with door) | 7        | #14-1  | BR816LC125SDP             |
|                    | 8                               | 16       | Indoor         | Flush (with door)   | 7        |  | BR816LC125FDP             |

#### Notes

- ① Series combination rating with Types BD, BR, BQ, BQC and GFTCB is 22 kAIC with BRH main and 25 kAIC with CSR main.
  - ② All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with neutral bonding strap preattached. The maximum rating of the panel is the main circuit breaker rating when used as service entrance equipment.
  - ③ Ground bar kits priced separately. See **Page V1-T1-68.**
  - ④ 22 kAIC series combination rating is obtained when Types BD, BR, BQ, BQC and GFTCB 10 kAIC branch breakers are used in series with Type BRH main breaker.
- Box sizes **Pages V1-T1-73** through **V1-T1-76.**

### Convertible Loadcenters—Copper Bus 10/22/25 kAIC

BR3040NC200



### Convertible—Single-Phase, Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Ampere Rating   | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main                      | Loadcenter Catalog Number (With Combination or NEMA Type 3R Cover) ①②③ |
|----------------------|---------------------------------|----------|----------------|----------|--|--|
|                      | Spaces                          | Circuits |                |          |  |  |
| 125<br>10/22 kAIC ④⑤ | 12                              | 24       | Indoor         | B2       | See main breaker and main lug kit tables on <b>Page V1-T1-54</b> . | <b>BR1224NC125</b> ⑥⑦  |
|                      | 12                              | 24       | Outdoor        | B2R      |  | <b>BR1224NC125R</b> ⑥⑦⑧  |
|                      | 20                              | 24       | Indoor         | C2       |  | <b>BR2024NC125</b> ⑦   |
|                      | 20                              | 24       | Outdoor        | C3R      |  | <b>BR2024NC125R</b> ⑦⑧   |
| 200<br>10/25 kAIC ④⑤ | 20                              | 40       | Indoor         | D1       | <b>BR2040NC200</b>   |  |
|                      | 20                              | 40       | Outdoor        | D1R      | <b>BR2040NC200R</b> ⑧  |  |
|                      | 30                              | 40       | Indoor         | G1       | <b>BR3040NC200</b>   |  |
|                      | 30                              | 40       | Outdoor        | G1R      | <b>BR3040NC200R</b> ⑧  |  |
|                      | 40                              | 40       | Indoor         | L1       | <b>BR4040NC200</b>   |  |
|                      | 40                              | 40       | Outdoor        | L1R      | <b>BR4040NC200R</b> ⑧  |  |

#### Notes

- ① 100, 125 and 200 A convertible base unit catalog numbers include interior, box and cover only. Main devices and accessories must be ordered separately for field installation. All convertible base units are listed as suitable for use as service entrance equipment when used per Article 384 of the NEC.
- ② Ground bar kits priced separately, refer to **Page V1-T1-68**.
- ③ All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with a neutral bonding strap preattached. The maximum main rating of the loadcenter is the main breaker rating when used as service entrance equipment.
- ④ Interrupting rating depends on main circuit breaker selected. See **Page V1-T1-68** for mains.
- ⑤ For main breaker, use Type BW or CSR. For main lug, use Type BRL.
- ⑥ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑦ Hold-down screw BREQS125 comes with loadcenter for back-fed Types BR and BRH main circuit breakers.
- ⑧ For main breaker, use Type BR. For main lug, use Type BRSF.
- ⑨ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.

#### 1 Three-Phase—Type BR Main Circuit Breaker Loadcenters

#### Three-Phase, Four-Wire—Main Lug Loadcenters—Copper Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main | Loadcenter Catalog Number (With Combination or NEMA Type 3R Cover) |
|--------------------|---------------------------------|----------|----------------|----------|---|--|
|                    | Spaces                          | Circuits |                |          |   |  |
| 125                | 12                              | 24       | Indoor         | C1       | #6–3/0  | 3BR1224LC125   |
| 125                | 12                              | 24       | Outdoor        | C1R      | #6–3/0  | 3BR1224LC125R  |
| 150                | 24                              | 42       | Indoor         | D1       | #4–300 kcmil                                  | 3BR2442LC150   |
| 150                | 24                              | 42       | Outdoor        | D1R      | #4–300 kcmil                                  | 3BR2442LC150R  |
| 200                | 12                              | 24       | Indoor         | C4       | #4–300 kcmil                                  | 3BR1224LC200   |
| 200                | 12                              | 24       | Outdoor        | C3R      | #4–300 kcmil                                  | 3BR1224LC200R  |
| 200                | 30                              | 42       | Indoor         | G1       | #4–300 kcmil                                  | 3BR3042LC200   |
| 200                | 30                              | 42       | Outdoor        | G1R      | #4–300 kcmil                                  | 3BR3042LC200R  |
| 200                | 42                              | 42       | Indoor         | L1       | #4–300 kcmil                                  | 3BR4242LC200   |
| 200                | 42                              | 42       | Outdoor        | L1R      | #4–300 kcmil                                  | 3BR4242LC200R  |
| 225                | 30                              | 42       | Indoor         | L1       | #4–300 kcmil                                  | 3BR3042LC225   |
| 225                | 30                              | 42       | Outdoor        | L1R      | #4–300 kcmil                                  | 3BR3042LC225R  |
| 400                | 42                              | 42       | Indoor         | 24       | (2) 3/0–250 kcmil                             | 3BR4242LC400S  |
|                    | 42                              | 42       | Outdoor        | 47       |   | 3BR4242BC400R  |
| 600                | 42                              | 42       | Indoor         | 24       | (2) 3/0–500 kcmil                             | 3BR4242LC600S  |

#### Three-Phase, Four-Wire—Main Circuit Breaker Loadcenters—Copper Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number (With Combination or NEMA Type 3R Cover) |
|-------------------|--------------------|---------------------------------|----------|----------------|----------|---|--|
|                   |                    | Spaces                          | Circuits |                |          |   |  |
| BR 10 kAIC        | 100                | 12                              | 24       | Indoor         | C1       | #14–1/0   | 3BR1224BC100   |
|                   | 100                | 12                              | 24       | Outdoor        | C1R      | #14–1/0   | 3BR1224BC100R  |
| CC 10 kAIC        | 150                | 30                              | 42       | Indoor         | L1       | #6–4/0  | 3BR3042BC150   |
|                   | 150                | 30                              | 42       | Outdoor        | L1R      | #6–4/0  | 3BR3042BC150R  |
|                   | 200                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242BC200   |
|                   | 200                | 42                              | 42       | Outdoor        | L2R      | 2/0–300 kcmil   | 3BR4242BC200R  |
|                   | 225                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242BC225   |
|                   | 225                | 42                              | 42       | Outdoor        | L2R      | 2/0–300 kcmil   | 3BR4242BC225R  |
| DK 22 kAIC        | 400                | 42                              | 42       | Indoor         | 24       | (2) 3/0–250 kcmil                                     | 3BR4242BC400S  |
|                   |                    | 42                              | 42       | Outdoor        | 47       |   | 3BR4242BC400R  |
| HLD 10 kAIC       | 600                | 42                              | 42       | Indoor         | 24       | (2) 3/0–500 kcmil                                     | 3BR4242BC600S  |

3BR4242B200



#### Three-Phase, Four-Wire—Main Circuit Breaker Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral

| Main Breaker Type         | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number <sup>(1)(2)</sup> (With Combination or NEMA Type 3R Cover) |                             |
|---------------------------|--------------------|---------------------------------|----------|----------------|----------|---|--|-----------------------------|
|                           |                    | Spaces                          | Circuits |                |          |   |  |                             |
| BR 10 kAIC                | 100                | 12                              | 24       | Indoor         | C1       | #14–1/0   | 3BR1224B100  |                             |
|                           |                    |                                 | 12       | 24             | Outdoor  | C1R   |  | 3BR1224B100R <sup>(3)</sup> |
| CC 10 kAIC                | 125                | 30                              | 42       | Indoor         | L1       | #6–4/0  | 3BR3042B125  |                             |
|                           | 150                | 30                              | 42       | Indoor         | L1       | #6–4/0  | 3BR3042B150  |                             |
|                           |                    | 30                              | 42       | Outdoor        | L1R      |   |  | 3BR3042B150R <sup>(3)</sup> |
|                           | 200                | 30                              | 42       | Indoor         | L1       | #1–250 kcmil  | 3BR3042B200  |                             |
|                           |                    | 30                              | 42       | Outdoor        | L1R      |   |  | 3BR3042B200R <sup>(3)</sup> |
|                           |                    | 42                              | 42       | Indoor         | L2       |   |  | 3BR4242B200                 |
|                           | 42                 | 42                              | Outdoor  | L2R            |          | 3BR4242B200R <sup>(3)</sup>                           |  |                             |
| CHH 100 kAIC              | 200                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242H200 <sup>(6)</sup>   |                             |
| CC 10 kAIC                | 225                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242B225  |                             |
|                           |                    | 42                              | 42       | Outdoor        | L2R      |   | 3BR4242B225R <sup>(3)</sup>  |                             |
| DK <sup>(4)</sup> 22 kAIC | 400                | 42                              | 42       | Indoor         | 24       | (2) #3/0–250 kcmil                                    | 3BR4242B400S <sup>(7)</sup>  |                             |
|                           |                    | 42                              | 42       | Indoor         | 24       |   | 3BR4242B400F   |                             |
|                           |                    | 42                              | 42       | Outdoor        | 47       |   | 3BR4242B400R <sup>(3)</sup>  |                             |
| LD <sup>(5)</sup>         | 600                | 42                              | 42       | Indoor         | 24       | (2) #3/0–500 kcmil                                    | 3BR4242B600F   |                             |

#### Notes

- <sup>(1)</sup> All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with a neutral bonding strap pre-attached (commercial loadcenters do not have a pre-attached bonding strip). The maximum main rating of the panel is the main circuit breaker rating when used as service entrance equipment.
- <sup>(2)</sup> Ground bar kits priced separately. See **Page V1-T1-68**.
- <sup>(3)</sup> Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- <sup>(4)</sup> Type DK main circuit breaker is rated 65 kAIC at 240 Vac and allows a 22 kAIC series rating on the loadcenter when Types BR, BD and BJ branch circuit breakers are used.
- <sup>(5)</sup> The LD main circuit breaker is rated 65 kAIC at 240 Vac. Type LD circuit breaker **is not** series rated with Types BR, BD and BJ branch circuit breakers.
- <sup>(6)</sup> Includes CHH 100 kAIC rated MCB. 100 kAIC series rating combination is obtained when types BD, BR, BQ, BQC and GFGB branch breakers are used with CHH main.
- <sup>(7)</sup> With surface cover.

### 3BR1224L125



### Three-Phase, Four-Wire—Main Lug Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable (Unless Otherwise Noted)

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number <sup>①</sup><br>(With Combination or NEMA Type 3R Cover) |
|--------------------|---------------------------------|----------|----------------|----------|--|--|
|                    | Spaces                          | Circuits |                |          |  |  |
| 100                | 3                               | 3        | Indoor         | 6        | #6-1/0   | <b>3BR3L100S</b> <sup>②③</sup>   |
|                    | 3                               | 3        | Outdoor        | 6R       |  | <b>3BR3L100R</b> <sup>③④</sup>   |
| 125                | 12                              | 24       | Indoor         | C1       | #6-3/0   | <b>3BR1224L125</b> <sup>⑤⑥</sup>   |
|                    | 12                              | 24       | Outdoor        | C1R      |  | <b>3BR1224L125R</b> <sup>④⑤⑥</sup>   |
| 150                | 18                              | 36       | Indoor         | C2       | #6-4/0   | <b>3BR1836L150</b>   |
|                    | 18                              | 36       | Outdoor        | C3R      |  | <b>3BR1836L150R</b>  |
|                    | 24                              | 42       | Indoor         | D1       | #4-300 kcmil                                       | <b>3BR2442L150</b>   |
|                    | 24                              | 42       | Outdoor        | D1R      |  | <b>3BR2442L150R</b> <sup>④</sup>   |
| 200                | 12                              | 24       | Indoor         | C4       | #4-300 kcmil                                       | <b>3BR1224L200</b> <sup>⑥</sup>  |
|                    | 12                              | 24       | Outdoor        | C3R      |  | <b>3BR1224L200R</b> <sup>④⑥</sup>  |
|                    | 18                              | 36       | Indoor         | C4       | #4-300 kcmil                                       | <b>3BR1836L200</b>   |
|                    | 18                              | 36       | Outdoor        | C3R      |  | <b>3BR1836L200R</b>  |
|                    | 30                              | 42       | Indoor         | G1       | #4-300 kcmil                                       | <b>3BR3042L200</b>   |
|                    | 30                              | 42       | Outdoor        | G1R      |  | <b>3BR3042L200R</b> <sup>④</sup>   |
|                    | 42                              | 42       | Indoor         | L1       | #4-300 kcmil                                       | <b>3BR4242L200</b>   |
|                    | 42                              | 42       | Outdoor        | L1R      |  | <b>3BR4242L200R</b> <sup>④</sup>   |
| 225                | 42                              | 42       | Indoor         | L1       | #4-300 kcmil                                       | <b>3BR4242L225</b>   |
|                    | 42                              | 42       | Outdoor        | L1R      |  | <b>3BR4242L225R</b> <sup>④</sup>   |

### 3BR4242L400F



### Three-Phase, Four-Wire—Main Lug Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Commercial Loadcenter Catalog Number <sup>⑦</sup> |                     |
|--------------------|---------------------------------|----------|----------------|----------|--|---|---------------------|
|                    | Spaces                          | Circuits |                |          |  | With Flush or NEMA Type 3R Cover                  | With Surface Cover  |
| 400                | 42                              | 42       | Indoor         | 22       | (1) 250-750 kcmil                                  | <b>3BR4242L400F</b>                               | <b>3BR4242L400S</b> |
|                    | 42                              | 42       | Outdoor        | 46       | or<br>(2) #3/0-250 kcmil                           | <b>3BR4242L400R</b> <sup>④</sup>                  | —                   |
| 600                | 42                              | 42       | Indoor         | 22       | (2) #2-500 kcmil                                   | —   | <b>3BR4242L600S</b> |

#### Notes

- ① Ground bar kits priced separately. See **Page V1-T1-68**.
- ② Surface cover only.
- ③ Insulated/bondable single neutral.
- ④ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ Has notch for BREQS125 hold-down kit.
- ⑥ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑦ Door lock and key included with loadcenter.

Box sizes **Pages V1-T1-73** through **V1-T1-76**.



# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

3BR3030N100



3BR4242N225NY



### Three-Phase, Four-Wire—Convertible Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Ampere Rating <sup>①</sup> | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main   | Loadcenter Catalog Number <sup>②③</sup> (With Combination or NEMA Type 3R Cover) |
|---------------------------------|---------------------------------|----------|----------------|----------|---|--|
|                                 | Spaces                          | Circuits |                |          |   |  |
| 100 <sup>④</sup>                | 30                              | 30       | Indoor         | D1       | See main breaker and main lug kit tables below. | 3BR3030N100 <sup>⑤</sup>   |
|                                 | 30                              | 30       | Outdoor        | D1R      |   | 3BR3030N100R <sup>⑥⑦</sup>   |
| 125 <sup>④</sup>                | 12                              | 24       | Indoor         | C1       |   | 3BR1224N125 <sup>⑤⑥⑦</sup>   |
|                                 | 12                              | 24       | Outdoor        | C1R      |   | 3BR1224N125R <sup>⑤⑥⑦⑧</sup>   |
| 200                             | 30                              | 42       | Indoor         | L1       |   | 3BR3042N200  |
| 225                             | 42                              | 42       | Indoor         | L2       |   | 3BR4242N225  |
|                                 | 42                              | 42       | Indoor         | B        |   | 3BR4242B225NY <sup>⑨</sup>   |

#### Notes

- ① The maximum rating of the loadcenter is the main circuit breaker rating when used as service entrance equipment.
- ② 100, 125 and 200 A convertible base unit catalog numbers include interior, box and cover only. Main devices and accessories must be ordered separately for field installation.  
All convertible base units are listed as suitable for use as service entrance equipment when used per Article 384 of the NEC.
- ③ Ground bar kits priced separately. See **Page V1-T1-68**.
- ④ For main breaker, use Type BR. For main lug, use Type BRSF.
- ⑤ BREQS125 hold-down screw comes with loadcenter for back-fed Types BR and BRH main circuit breakers.
- ⑥ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑦ Convertible to maximum of 100 A main circuit breaker and 125 A main lug.
- ⑧ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑨ Order 3BR42FTNY or 3BR42STNY cover separately.

Box sizes **Pages V1-T1-73 through V1-T1-76**.

### BR Quick Connect Neutral Loadcenters



### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-42    |
| BR Specialty Products                       |             |
| BR Quick Connect Neutral Loadcenters        |             |
| Spa Panels .....                            | V1-T1-58    |
| Riser Panel .....                           | V1-T1-59    |
| Type BR Renovation Loadcenter .....         | V1-T1-60    |
| BR Loadcenter Options and Accessories ..... | V1-T1-63    |
| BR Circuit Breakers .....                   | V1-T1-77    |

## BR Specialty Products

### BR Quick Connect Neutral Loadcenters

#### Product Description

The Type BR Quick Connect Neutral loadcenters coupled with Type BR Quick Connect Neutral electronic breakers provide a clean, quick connection for an installer looking to save time while providing a professional look.

#### Features and Benefits

- Full-length neutral bars provide over 300% neutral capacity while enhancing installation flexibility for the installer
- Backed-out neutral screws allow an installer to make a quick connection when terminating neutral and ground wires
- Extended circuits (30/60, 40/80) provide maximum flexibility to a contractor on every space possible
- Standard LED diagnostics on AFCI and AF/GF breakers provides installers best-in-class troubleshooting technology
- Cut-to-length neutral wires provides a clean, professional look versus traditional pigtail circuit breakers
- Solid-tip, stranded neutral wires provide a quick connection to the full length neutral bar

## Product Selection

### BR Quick Connect Neutral Loadcenters ①

| Main Device   | Ampere Rating | Spaces | Circuits ② | Incoming Lug Size | Enclosure Type ③ | Box Size | Ground Bar      | Number of Neutral Terminations | Catalog Number |
|---------------|---------------|--------|------------|-------------------|------------------|----------|-----------------|--------------------------------|----------------|
| BR 10 kAIC    | 100           | 30     | 60         | #4-1/0            | Indoor           | D1       | ④               | 96                             | BR3060BQN100   |
| CSR 25 kAIC   | 150           | 30     | 60         | #2-300 kcmil      | Indoor           | G1       | ④               | 102                            | BR3060BQN150   |
| CSR 25 kAIC   | 200           | 30     | 60         | #2-300 kcmil      | Indoor           | G1       | ④               | 102                            | BR3060BQN200   |
| CSR 25 kAIC   | 200           | 40     | 80         | #2-300 kcmil      | Indoor           | L1       | ④               | 128                            | BR4080BQN200   |
| CSR 25 kAIC   | 200           | 30     | 60         | #2-300 kcmil      | Outdoor          | L1R      | ④               | 94                             | BR3060BQN200R  |
| CSR 25 kAIC   | 200           | 40     | 80         | #2-300 kcmil      | Outdoor          | G1R      | ④               | 128                            | BR4080BQN200R  |
| Main lug only | 125           | 24     | 48         | #6-2/0            | Indoor           | C2       | GBK14           | 80                             | BR2448LQN125G  |
| Main lug only | 125           | 30     | 60         | #6-2/0            | Indoor           | D1       | GBK10           | 96                             | BR3060LQN125G  |
| Main lug only | 200           | 30     | 60         | #1-300 kcmil      | Indoor           | D1       | GBK1020 + GBK10 | 96                             | BR3060LQN200G  |
| Main lug only | 200           | 40     | 80         | #1-300 kcmil      | Indoor           | G1       | GBK1020 + GBK10 | 122                            | BR4080LQN200G  |
| Main lug only | 125           | 20     | 40         | #6-2/0            | Outdoor          | C1R      | GBK14           | 68                             | BR2040LQN125RG |
| Main lug only | 200           | 30     | 60         | #1-300 kcmil      | Outdoor          | D1R      | GBK1420         | 94                             | BR3060LQN200RG |
| Convertible   | 200           | 30     | 60         | —                 | Indoor           | G1       | ④               | 102                            | BR3060NQN200   |
| Convertible   | 200           | 40     | 80         | —                 | Indoor           | L1       | ④               | 128                            | BR4080NQN200   |
| Convertible   | 200           | 30     | 60         | —                 | Outdoor          | G1R      | ④               | 94                             | BR3060NQN200R  |
| Convertible   | 200           | 40     | 80         | —                 | Outdoor          | L1R      | ④               | 128                            | BR4080NQN200R  |

### BR Quick Connect Neutral Electronic Breakers

| Ampere Rating | Poles               | Wire Size | Breaker Type           | LED Diagnostics Included | Catalog Number |
|---------------|---------------------|-----------|------------------------|--------------------------|----------------|
| 15            | Single-pole 10 kAIC | #14-4     | Combination AFCI       | Yes                      | BRCAF115QN     |
| 20            | Single-pole 10 kAIC | #14-4     | Combination AFCI       | Yes                      | BRCAF120QN     |
| 15            | Single-pole 10 kAIC | #14-4     | Arc fault/ground fault | Yes                      | BRLAFGF115QN   |
| 20            | Single-pole 10 kAIC | #14-4     | Arc fault/ground fault | Yes                      | BRLAFGF120QN   |

#### Notes

- ① BR Quick Connect Neutral loadcenters accept both standard and Quick Connect Neutral breakers.
- ② Loadcenters accept Type BR twin breakers.
- ③ Combination cover included with every indoor loadcenter.
- ④ Ground bar kit not included. Purchase separately.

Spa Panels



**Contents**

| <i>Description</i>                              | <i>Page</i> |
|---|-------------|
| Overview . . . . .                              | V1-T1-42    |
| BR Specialty Products                           |             |
| BR Quick Connect Neutral Loadcenters . . . . .  | V1-T1-57    |
| Spa Panels                                      |             |
| Riser Panel . . . . .                           | V1-T1-59    |
| Type BR Renovation Loadcenter . . . . .         | V1-T1-60    |
| BR Loadcenter Options and Accessories . . . . . | V1-T1-63    |
| BR Circuit Breakers . . . . .                   | V1-T1-77    |

**Spa Panels**

**Product Description**

Eaton’s BR Spa Panels distribute power to outdoor loads and provide protection for people from electric shock. Save time and money with streamlined installation procedures and easy-access features. Spa panels meet NEC requirements by providing a ground fault circuit interruption device and a disconnect switch in a single simple device. Ships assembled prewired, factory tested and ready to install.

**Features**

- 10-year warranty
- UL Listed
- Factory-installed two-pole ground fault circuit interrupter (GFCI)

**Product Selection**

BR Spa Panel



**Spa Panel—Meets NEC Article 680.40 Through 680.43—Requirements for GFCI Protection**

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) Space Poles |   | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number |
|--------------------|---|---|----------------|----------|--|----------------|
| 40                 | —   | — | Outdoor        | 5R       | #8-#2  | BR40SPAST ①    |
| 50                 | —   | — | Outdoor        | 5R       | #8-#2  | BR50SPAST ②    |

**Notes**

- ① Includes a GFTCB240 breaker, factory installed.
- ② Includes a GFTCB250 breaker, factory installed.

### Riser Panel



### Contents

| <i>Description</i>                          | <i>Page</i>     |
|---|-----------------|
| Overview .....                              | <b>V1-T1-42</b> |
| BR Specialty Products                       |                 |
| BR Quick Connect Neutral Loadcenters .....  | <b>V1-T1-57</b> |
| Spa Panels .....                            | <b>V1-T1-58</b> |
| Riser Panel                                 |                 |
| Type BR Renovation Loadcenter .....         | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories ..... | <b>V1-T1-63</b> |
| BR Circuit Breakers .....                   | <b>V1-T1-77</b> |

## Riser Panel

### Product Description

Eaton's Riser Panel is a loadcenter with an offset interior to allow riser cables to pass through the enlarged gutter. By using lay-in tap lugs, the contractor is able to simply strip off a length of the riser cable's insulation, and tap off to the riser panel's main lugs. These panels are used in the construction of assisted living homes, dormitories, public housing complexes and apartments.

### Product Selection

#### BR1224L125RIS



#### Riser Panel

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number           |
|--------------------|---------------------------------|----------|----------------|----------|--|--------------------------|
|                    | Space                           | Circuits |                |          |  |                          |
| 125                | 12                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR1224L125RIS</b>     |
| 125                | 12                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR1224L125RISBP</b> ① |
| 125                | 20                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR2024L125RIS</b>     |
| 125                | 20                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR2024L125RISBP</b> ① |
| 125                | 20                              | 30       | Indoor         | C2       | #6-2/0   | <b>BR2030L125RIS</b>     |
| 200                | 30                              | 40       | Indoor         | D1       | #1-300   | <b>BR3040L200RIS</b>     |

#### BRGUTTER (Shown with Loadcenter)



#### Riser Panel Accessories

##### Catalog Number

**BRGUTTER** ②

**GTAP250**


#### Notes

- ① Bulk-packaged loadcenter without carton. Must be ordered in multiples of 16.
- ② Refer to **Page V1-T1-74** for dimensions. BRGUTTER is box size C2.

### Accessories

For riser panels not shown, contact the Flex Center at 1-800-330-6479 for both CH and BR riser panels.

#### BR Renovation Loadcenters

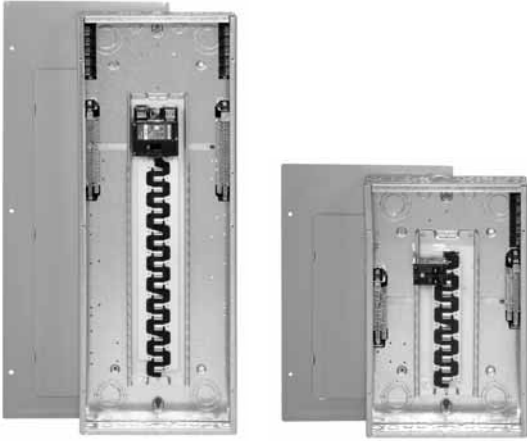

#### Contents

| <i>Description</i>                         | <i>Page</i>     |
|--|-----------------|
| Overview .....                             | <b>V1-T1-42</b> |
| BR Specialty Products                      |                 |
| BR Quick Connect Neutral Loadcenters ..... | <b>V1-T1-57</b> |
| Spa Panels .....                           | <b>V1-T1-58</b> |
| Riser Panel .....                          | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter              |                 |
| BR Loadcenter Options and Accessories..... | <b>V1-T1-63</b> |
| BR Circuit Breakers .....                  | <b>V1-T1-77</b> |

### Type BR Renovation Loadcenter

#### Product Description


- Available in 10, 20, 30 and 40 circuit main breaker styles
- Designed to replace existing loadcenters and fuse boxes
- Type BR loadcenter packaged with circuit breakers
- Factory-installed 5-circuit terminal block(s)
- Twin-stacked neutral design

#### Features, Benefits and Functions

- Factory-installed terminal block(s) allows installer to terminate existing short wires without using wire nuts or junction boxes
- Twin-stacked neutrals are mounted up high in the loadcenter, which allows for all neutral and ground wires to be terminated in the top half of the loadcenter
- Specifically designed for the service contractor—this is the ONLY renovation line in the industry
- Single-pole and two-pole breakers included
- 10-year warranty on loadcenter and breakers

#### Product Selection

##### BR2020B100RN



#### BR Value Packs ①

| Main Breaker Type | Description   | Wire Size Range | Number of 5-Circuit Terminal Blocks | Single-Pole Breakers | Two-Pole Breakers | Catalog Number        |
|-------------------|---|-----------------|-------------------------------------|----------------------|-------------------|-----------------------|
| BR 10 kAIC        | Single-phase 100 A 10k main breaker 10/20 circuit surface-mount box is 11.75" wide x 13" tall | #6-1/0          | 0                                   | (2) BR115            | (1) BR230         | <b>BR1020B100SRNV</b> |
|                   | Single-phase 100 A 10k main breaker 10/20 circuit flush-mount box is 11.75" wide x 13" tall   |                 | 0                                   | (2) BR115            | (1) BR230         | <b>BR1020B100FRNV</b> |

#### Note

① Indoor enclosure type.

Type BR Retrofit Interior



Type BR Retrofit Adjustable Interior



Type BR Retrofit Interior Collar and Assembly with Trim

### Contents

| <b>Description</b>                         | <b>Page</b> |
|--|-------------|
| Overview .....                             | V1-T1-42    |
| BR Specialty Products                      |             |
| BR Quick Connect Neutral Loadcenters ..... | V1-T1-57    |
| Spa Panels .....                           | V1-T1-58    |
| Riser Panel .....                          | V1-T1-59    |
| Type BR Renovation Loadcenter .....        | V1-T1-60    |
| BR Loadcenter Options and Accessories      |             |
| Type BR Retrofit Interior Kits             |             |
| BR Specialty Product Selection .....       | V1-T1-62    |
| Type BR Mechanical Interlock Kits .....    | V1-T1-65    |
| Technical Data and Specifications .....    | V1-T1-70    |
| Dimensions .....                           | V1-T1-73    |
| BR Circuit Breakers .....                  | V1-T1-77    |

### Type BR Retrofit Interior Kits

#### Product Description

Eaton's unique Retrofit Interior allows the customer to cost-effectively and safely upgrade an electrical service without removing the existing enclosure from the wall.

#### Application Description

The Retrofit Interior is designed and tested specifically for renovating an outdated electrical panel in an apartment, a condominium or a single family home. These outdated panels are being recognized by local inspectors and other authorities as a possible hazard.

#### Opportunities to Retrofit

- Single- or three-phase
- Main lug only or main breaker
- Up to 42 circuits
- Up to 225 A interiors, 400 A available upon request
- Available with CH breakers (3/4-inch) with copper bus or BR breakers (1-inch) with aluminum bus
- The minimum lifetime warranty for residential breakers shall be as follows:
  - 10-year warranty on all BR branch breakers and loadcenters
  - Refer to Eaton for complete warranty details

#### Features and Benefits

##### Upgrading Existing Electrical Infrastructure Is Simple

- Replaces vintage brands that have hard to find, expensive replacement breakers
- Safety upgrade to arc fault and ground fault breakers to meet current electrical codes
- Maximizes number of circuits available with compact design
- Eco-friendly in asbestos-filled environments
- Exclusive design

##### Save Time and Money Throughout the Installation

- Uses existing panel box and wires
- Eliminates expensive and time-consuming drywall/paint repair
- Saves 2–3 hours of installation time compared to a complete panel changeout
- Eliminates precise measurements with field-adjustable kit

#### Standards and Certifications

- Meets 2017 NEC wire bending requirements
- UL 67 Listed (for UL listings for specific part numbers, see the table on the following page.



# 1

### BR Specialty Product Selection

To select the retrofit kit:

1. From the existing box size determine which retrofit groups are suitable (may be more than one).
2. Use type of interior, number of phases, and type of main to find the selection chart.
3. Select part number from chart (if main breaker, replace XXX with specific amp rating).

#### How to Order:

1. Measure the existing panel enclosure to determine appropriate kits for your project.
2. Match the existing dimensions with the table below to obtain the correct catalog number.
3. Order your retrofit kit from a local Eaton authorized distributor.

Need assistance or can't find retrofit to fit existing enclosure?

Call Eaton's Residential Flex Center at 1-800-330-6479 or email for all your retrofit needs. Go to [www.eaton.com/eccn](http://www.eaton.com/eccn) to locate an Eaton Certified Contractor.

### Retrofit Interior Kit Specifications

Five recommended groups: existing box height determines retro group size. Approximate Dimensions in Inches (mm).

| Catalog Number ①                        | Cover ②       | Existing Enclosure Parameters—Inches (mm) |               |               |                | Phase  | Main | Bus | Amperes ③ | Spaces / Circuits | UL 67 Listed |
|---|---------------|---|---------------|---------------|----------------|--------|------|-----|-----------|-------------------|--------------|
|   |               | Minimum Depth                             | Maximum Depth | Minimum Width | Minimum Height |        |      |     |           |                   |              |
| <b>BR Retrofit Interiors and Covers</b> |               |   |               |               |                |        |      |     |           |                   |              |
| RTBR8L100P                              | CRTBR8ML****  | 3.13 (79.5)                               | 3.63 (92.2)   | 10.50 (266.7) | 13.00 (330.2)  | Single | MLO  | BR  | 100       | 8/16              | Yes          |
| RUBR8L100_                              | CRUBR8ML****  | 3.75 (95.3)                               | 6.00 (152.4)  | 10.50 (266.7) | 13.00 (330.2)  | Single | MLO  | BR  | 100       | 8/16              | Yes          |
| RTBR12L100P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 10.50 (266.7) | 14.50 (368.3)  | Single | MLO  | BR  | 100       | 12/24             | Yes          |
| RTBR10B100P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 10.50 (266.7) | 14.50 (368.3)  | Single | MLO  | BR  | 100       | 10/20             | Yes          |
| RUBR12L100_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 10.50 (266.7) | 14.50 (368.3)  | Single | MLO  | BR  | 100       | 12/24             | Yes          |
| RUBR10B100_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 10.50 (266.7) | 14.50 (368.3)  | Single | MB   | BR  | 100       | 10/20             | Yes          |
| RTBR12L125P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 11.00 (279.4) | 17.00 (431.8)  | Single | MLO  | BR  | 125       | 12/24             | Yes          |
| RTBR10B125P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 11.00 (279.4) | 17.00 (431.8)  | Single | MB   | BR  | 125       | 10/20             | Yes          |
| RUBR12L125_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 11.00 (279.4) | 17.00 (431.8)  | Single | MLO  | BR  | 125       | 12/24             | Yes          |
| RUBR10B125_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 11.00 (279.4) | 17.00 (431.8)  | Single | MB   | BR  | 125       | 10/20             | Yes          |
| RABR20B125_                             | CRABR20ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MCB  | BR  | 125       | 20/24             | No           |
| RABR20L125_                             | CRABR20ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MLO  | BR  | 125       | 20/24             | No           |
| RBBR20B200_                             | CRBBR20BW**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 29.00 (736.6)  | Single | MLO  | BR  | 200       | 20/40             | No           |
| RCBR40L200_                             | CRCBR40ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 34.00 (863.6)  | Single | MLO  | BR  | 200       | 30/40             | No           |
| RDBR40B200_                             | CRDBR40BW**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 37.00 (939.8)  | Single | MLO  | BR  | 200       | 40/40             | No           |

### Complete Assembly

**Note:** For complete assembly, interior and cover need to be ordered separately.

#### Adjustable Interior

- Factory installed ground and neutral bars positioned to accept existing wires
- Field adjustable depth matches existing panel box
- Adjustable height enables optional placement of the interior
- Field bondable for service entrance options



Adjustable Interior

#### Standard Trim and Collar

- Standard trim matches new interior
- New circuit directory for updated labeling
- Oversized collar eliminates expensive wall/paint repair



Collar and Assembly with Trim

#### Notes

- ① Catalog numbers shown with "\_" at the end need one of the following suffixes to denote depth:  
J = 3.75–4.25  
K = 4.25–5.00  
L = 5.00–6.00  
Example: RUBR12L125J would signify an interior set with a depth range of 3.75 to 4.25 inches.
- ② \*\*\*\* Denotes characters in the catalog number that relate to overall cover size.  
Example: CRTBR12ML2620 would signify a cover 26.00 inches H x 20.00 inches W.
- ③ Amperes for MB panels is maximum; catalog number will reflect actual amperage of breaker included.

For UL applications, maximum cover sizes may apply.

### Options and Accessories—Mechanical Interlocks



### Contents

| Description                           | Page     |
|---------------------------------------|----------|
| Overview                              | V1-T1-42 |
| BR Specialty Products                 |          |
| BR Quick Connect Neutral Loadcenters  | V1-T1-57 |
| Spa Panels                            | V1-T1-58 |
| Riser Panel                           | V1-T1-59 |
| Type BR Renovation Loadcenter         | V1-T1-60 |
| BR Loadcenter Options and Accessories |          |
| Type BR Retrofit Interior Kits        | V1-T1-61 |
| Type BR Mechanical Interlock Kits     | V1-T1-65 |
| Technical Data and Specifications     | V1-T1-70 |
| Dimensions                            | V1-T1-73 |
| BR Circuit Breakers                   | V1-T1-77 |

## BR Loadcenter Options and Accessories

### Product Selection

#### BRSF125



#### 3BRS225



#### BRL200



#### TDL



### Field Installation Kits and Parts

| Number of Poles   | Ampere Rating | Number of 1-Inch (25.4 mm) Spaces Needed | Wire Size Range Cu/Al 60 °C or 75 °C | Ordering Quantity <sup>①</sup> | Catalog Number               |
|---|---------------|--|--------------------------------------|--------------------------------|------------------------------|
| <b>Main and Sub-Feed Lug Blocks</b>                                     |               |  |                                      |                                |                              |
| 2   | 125           | 2  | #8–2/0                               | 1                              | <b>BRSF125</b>               |
|   | 150           | 2  | #8–2/0                               | 1                              | <b>BRSF150</b> <sup>②</sup>  |
|   | 225           | 4  | #2–300 kcmil                         | 1                              | <b>BRS225</b>                |
| 3   | 150           | 3  | #8–2/0                               | 1                              | <b>3BRSF150</b> <sup>②</sup> |
|   | 225           | 6  | #2–300 kcmil                         | 1                              | <b>3BRS225</b>               |
| <b>Main Lugs</b>  |               |  |                                      |                                |                              |
| Two-pole, 200 A stud mounted (includes deadfront filler plate)          |               |  | #1–300 kcmil                         | 1                              | <b>BRL200</b>                |
| Neutral/ground lug  |               |  | #2/0 maximum                         | 1                              | <b>NL20</b>                  |
| Add-on neutral or ground lug  |               |  | #3/0 maximum                         | 1                              | <b>NL30</b>                  |
|   |               |  | 300 kcmil maximum                    | 1                              | <b>NL300</b>                 |
| <b>Filler Plates</b>  |               |  |                                      |                                |                              |
| 1-inch (25.4 mm) circuit breaker space                                  |               |  |                                      | 25                             | <b>BRFP</b>                  |
| BW main circuit breaker space (with hardware)                           |               |  |                                      | 1                              | <b>BWFP</b>                  |
| Door lock—12–42 circuits, and 100–225 A                                 |               |  |                                      | 1                              | <b>TDL</b>                   |
| Door lock—4–8 circuits, 125 A   |               |  |                                      | 1                              | <b>CH9FL</b>                 |
| ANSI-61 light gray touchup paint for current loadcenters                |               |  |                                      | 1                              | <b>SPC61</b>                 |
| Isolated neutral assembly (computer circuits)                           |               |  |                                      | 1                              | <b>BINA</b>                  |
| Circuit directory—adhesive backed                                       |               |  |                                      | 10                             | <b>TCD</b>                   |
| Cover screws  |               |  |                                      | 25                             | <b>LCCS</b>                  |
| Cover replacement latch (gray) 14-5/16 (363.5 mm) wide loadcenters only |               |  |                                      | 1                              | <b>BRRL</b>                  |
| Circuit marking strip (next to breaker)                                 |               |  |                                      | 10                             | <b>BRMS</b>                  |
| Circuit identification label (preprinted breaker labels)                |               |  |                                      | 25                             | <b>CHBL</b>                  |
| Series rated caution label  |               |  |                                      | 25                             | <b>SRL</b>                   |
| Bonding strip with screw  |               |  |                                      | 1                              | <b>BSSUSE</b>                |

#### Notes

- <sup>①</sup> Must be purchased in multiples of ordering quantities indicated.
- <sup>②</sup> #8–2/0 wire size range is 75 °C rated only.



**Three-Phase Accessories****Three-Phase Main Breaker Kits— 10 kAIC**

| <b>Ampere Rating</b> | <b>Wire Size Range<br/>Cu/Al 60 °C or 75 °C</b> | <b>Catalog Number</b> |
|----------------------|---|-----------------------|
| 100                  | #6–4/0  | <b>CC3100N</b>        |
| 125                  | #6–4/0  | <b>CC3125N</b>        |
| 150                  | #6–4/0  | <b>CC3150N</b>        |
| 175                  | #2/0–300 kcmil                                  | <b>CC3175N</b>        |
| 200                  | #2/0–300 kcmil                                  | <b>CC3200N</b>        |
| 225                  | #2/0–300 kcmil                                  | <b>CC3225N</b>        |

**Three-Phase Main Lugs Kit for Convertible Loadcenters**

| <b>Ampere Rating</b> | <b>Wire Size Range<br/>Cu/Al 60 °C or 75 °C</b> | <b>Catalog Number</b> |
|----------------------|---|-----------------------|
| 225                  | #1–300 kcmil                                    | <b>3BRL225</b>        |
| 225                  | #1–300 kcmil                                    | <b>3BRS225</b> ①      |

**Note**

① For subfeed.

Box sizes **Pages V1-T1-73** through **V1-T1-76**.

### Type BR Mechanical Interlock Kits



**Type BR Loadcenter with Mechanical Interlock Kit**

### Type BR Mechanical Interlock Kits

#### Product Description

With the aging electrical infrastructure and frequent severe storms, power outages are becoming more and more frequent, affecting thousands of people nationwide. Eaton mechanical interlock kit provides an easy and cost-effective solution when using backup emergency power.

This solution expands the robust line of emergency power products and accessories.

#### Features and Benefits

- Prevents utility and generator supplies from being on at the same time
- Protects utility linemen from dangerous generator backfeed
- Robust interlock design
- Offered in two unique styles for almost any BR loadcenter, which can reduce inventory levels
- Quick and easy installation—drill points or fixtures for pilot holes are provided on all applicable BR loadcenters; no additional assembly is required

### Contents

#### Description

|  | <i>Page</i>     |
|--|-----------------|
| Overview .....                             | <b>V1-T1-42</b> |
| BR Specialty Products                      |                 |
| BR Quick Connect Neutral Loadcenters ..... | <b>V1-T1-57</b> |
| Spa Panels .....                           | <b>V1-T1-58</b> |
| Riser Panel .....                          | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter .....        | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories      |                 |
| Type BR Retrofit Interior Kits .....       | <b>V1-T1-61</b> |
| Type BR Mechanical Interlock Kits .....    | <b>V1-T1-65</b> |
| Technical Data and Specifications .....    | <b>V1-T1-70</b> |
| Dimensions .....                           | <b>V1-T1-73</b> |
| BR Circuit Breakers .....                  | <b>V1-T1-77</b> |

#### Standards and Certifications

- UL 67 Listed—For use with BR loadcenters
- Meets NEC® Article 702



#### Product Selection



Each mechanical interlock kit includes:

- Interlock assembly
- Hold down kit ①
- New labels
- Necessary screws

Warranty information:

- 10-year warranty on all Type BR circuit breakers and loadcenters
- Refer to Eaton for complete warranty details

#### Mechanical Interlock Kits ②

|  | Description | Catalog Number    |
|--|-------------|-------------------|
|  | Single      | <b>BRMIKBR</b>    |
|  | Bulk pack ③ | <b>BRMIKBRBP</b>  |
|  | Single      | <b>BRMIKCSR</b>   |
|  | Bulk pack ③ | <b>BRMIKCSRBP</b> |

#### Notes

- ① For breakers under 70 A used in backfed applications, add "B" to the end of the catalog string to get the appropriate "hold-down" version.
- ② Clamshell packaged.
- ③ Bulk pack contains 10 units, individually packaged.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Mechanical Interlock Cover

Covers mechanically interlock two breakers—Type BW or CSR main breaker with a Type BR branch breaker.

BR816B100



#### Mechanical Interlock Cover

| Fits Loadcenter Catalog Numbers                    | Mechanical Interlock Trim/Deadfront Catalog Numbers | Mechanical Interlock Kit Catalog Numbers                                |
|--|---|---|
| <b>Indoor</b>                                      |   |   |
| BR816B100  | BRCOVC10M   | BRMIKBR   |
| BR816N100  |   |   |
| BR1212B100   | BRCOVC12M   |   |
| BR1220B100   |   |   |
| BR1220H100   |   |   |
| BR1224N125   | BRCOVC13M   |   |
| BR1616B100   | BRCOVC16M   |   |
| BR1620B100   |   |   |
| BR1624B100   |   |   |
| BR1624B125   | BRCOVC17M   |   |
| BR1624N125   |   |   |
| BR2020B100, BR2020BC100<br>BR2020H100, BR2020HC100 | BRCOVC22M   |   |
| BR2024H100   |   |   |
| BR2020HC100  |   |   |
| BR2030B100   |   |   |
| BR2040B100   |   |   |
| BR2024B125   | BRCOVC23M   |   |
| BR2024N125, BR2024NC125                            |   |   |
| BR3030B100, BR3030BC100                            | BRCOVC59M   |   |
| BR3030H100, BR3030HC100                            |   |   |
| <b>Raintight</b>                                   |   |   |
| BR1020B100R  | BR3RDF1M  | Field-installed interlock kits not available for these catalog numbers. |
| BR1224B100R  |   |   |
| BR1224N125R, BR1224NC125R                          |   |   |
| BR1624B100R  | BR3RDF2M  |   |
| BR1624N125R  |   |   |
| BR2024B100R, BR2024B125R                           | BR3RDF4M  |   |
| BR2024N125R, BR2024NC125R                          |   |   |

BR4040B200



### Mechanical Interlock Cover, continued

| Fits Loadcenter Catalog Numbers                             | Mechanical Interlock Trim/Deadfront Catalog Numbers | Mechanical Interlock Kit Catalog Numbers                                |
|---|---|---|
| <b>Indoor</b>   |   |   |
| BR1630B150  | BRCOV16C4FM   | BRMIKCSR  |
| BR1224N200  |   |   |
| BR1632B200  |   |   |
| BR1632N200  |   |   |
| BR2030B150  | BRCOV20C4FM   |   |
| BR2030H150  |   |   |
| BR2040B150  |   |   |
| BR2040B200, BR2040BC200                                     | BRCOV20D1FM   |   |
| BR2040H200  |   |   |
| BR2040N200, BR2040NC200                                     |   |   |
| BR2430B150, BR2430BC150                                     | BRCOV30G1FM   |   |
| BR3030B150  |   |   |
| BR3030H150  |   |   |
| BR3040B150  |   |   |
| BR2440B200  |   |   |
| BR2440N200  |   |   |
| BR3040B200, BR3040BC200                                     |   |   |
| BR3040N200, BR3040NC200                                     |   |   |
| BR3040H200  |   |   |
| BR4040B200, BR4040BC200                                     | BRCOV40L1FM   |   |
| BR4040H200  |   |   |
| BR4040N200, BR4040NC200                                     |   |   |
| BR4242B225  | BRCOV42L2FM   |   |
| <b>Raintight</b>  |   |   |
| BR816B150RF   | BR3RDF5M ①  |   |
| BR816B200RF   |   |   |
| BR816N200RF   |   |   |
| BR1224N200R   |   |   |
| BR2030B150R   | BR3RDF11M ①   |   |
| BR2040B150R   |   |   |
| BR2040B200R   |   |   |
| BR2040B225R   |   |   |
| BR2040N200R   |   |   |
| BR3030B150R   | BR3RDF12M ①   |   |
| BR3040B200R   |   |   |
| BR3040N200R   |   |   |
| BR4040B200R   | BR3RDF13M ①   |   |
| BR4040N200R   |   |   |
| BR48B200RF  | BR3RDF14M   |   |
| BR4242B225R   | BR3RDF15M ①   |   |
| <b>Mechanical Interlock Loadcenter Replacement Covers ②</b> |   |   |
| BR2020B100M, BR2020BC100M                                   | BRCOV20C2FM   | Field-installed interlock kits not available for these catalog numbers. |
| BR2024H100M   |   |   |
| BR3030BC100M  | BRCOV30D1FM   |   |

**Notes**

- ① Deadfront only.
- ② Can only be provided as replacement covers for factory-installed mechanically interlock loadcenters.

#### DS300H2



#### Field Installation Rainproof Conduit Hubs

| Description  | Conduit Size Inches (mm) | Ordering Quantity <sup>①</sup> | Catalog Number  |
|--|--------------------------|--------------------------------|-----------------|
| Group 1—for use with 70, 100 and 125 A MLO and MCB loadcenters and circuit breaker enclosures and the following 150 and 200 A panels: BR48B200RF   | 0.75 (19.1)              | 1                              | <b>DS075H1</b>  |
|  | 1.00 (25.4)              | 1                              | <b>DS100H1</b>  |
|  | 1.25 (31.8)              | 1                              | <b>DS125H1</b>  |
|  | 1.50 (38.1)              | 1                              | <b>DS150H1</b>  |
|  | 2.00 (50.8)              | 1                              | <b>DS200H1</b>  |
| Group 2—for use with 150, 200 and 225 A MLO and MCB loadcenters and circuit breaker enclosures except for the following 200 A loadcenters: BR48B200RF. Also for use with 400 and 600 A loadcenters and New York City loadcenters manufactured after November 1, 2005 | 2.00 (50.8)              | 1                              | <b>DS200H2</b>  |
|  | 2.50 (63.5)              | 1                              | <b>DS250H2</b>  |
|  | 3.00 (76.2)              | 1                              | <b>DS300H2</b>  |
| Type H conduit hubs for loadcenters PL0724R and S3100RN  | 0.75 (19.1)              | 1                              | <b>RH75P</b>    |
|  | 1.00 (25.4)              | 1                              | <b>RH100P</b>   |
|  | 1.25 (31.8)              | 1                              | <b>RH125P</b>   |
|  | 1.50 (38.1)              | 1                              | <b>RH150P</b>   |
| Adapter kit—Allows installing a Group 1 hub on devices arranged for Group 2 hubs   | —                        | 1                              | <b>DS900AP</b>  |
| Group 1 small blank hub plate with bump  | —                        | 1                              | <b>DS900CP1</b> |
| Group 2 Large blank hub plate with bump  | —                        | 1                              | <b>DS900CP2</b> |

#### GBK14



#### BRGBK39512



#### Ground Bar Kits

| Description (See Legend)     | Length Inches (mm) | Ordering Quantity <sup>①</sup> | Catalog Number                  |
|------------------------------|--------------------|--------------------------------|---------------------------------|
| ●○○○○●○                      | 2.54 (64.5)        | 1                              | <b>GBK5</b> <sup>②</sup>        |
| ●○○○○●●■                     | 3.59 (91.2)        | 1                              | <b>GBK520</b> <sup>②</sup>      |
| ●○○○○●○○○○○                  | 4.29 (109.0)       | 1                              | <b>GBK10</b> <sup>②</sup>       |
| ●○○○○●○○○○○■                 | 5.34 (135.6)       | 1                              | <b>GBK1020</b> <sup>②</sup>     |
| ●○○○○●○○○○○●○○○○○            | 4.61 (117.1)       | 1                              | <b>GBK13</b> <sup>②</sup>       |
| ●○○○○●○○○○○●○○○○○            | 5.69 (144.5)       | 1                              | <b>GBK14</b> <sup>②</sup>       |
| ●○○○○●○○○○○●○○○○○■           | 6.74 (171.2)       | 1                              | <b>GBK1420</b> <sup>②</sup>     |
| ●○○○○●○○○○○●○○○○○●○○○○○      | 8.14 (206.8)       | 1                              | <b>GBK21</b> <sup>②</sup>       |
| ●○○○○●○○○○○●○○○○○●○○○○○■     | 9.19 (233.4)       | 1                              | <b>GBK2120</b> <sup>②</sup>     |
| ○□□□●○○○○○●○○○○○●○○○○○●○○○○○ | 5.78 (146.8)       | 1                              | <b>BRGBK39512</b> <sup>③④</sup> |
| ○○○○○                        | 1.84 (46.7)        | 1                              | <b>GB4NM</b> <sup>⑤</sup>       |

#### Ground Bar Legend

- (3) #14–10 Cu/Al or (1) #14–4 Cu/Al
- (1) #6–2/0 Cu/Al
- (1) #14–1/0 Cu/Al or (3) #14–10 Cu/Al
- (1) #14–6 Cu/Al or (2) #14–12 Cu/Al
- Mounting Hole

#### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Distance between mounting holes is 1.75 inches (44.5 mm).
- ③ For single- and three-phase 400 and 600 A applications.
- ④ Distance between mounting holes is 2.34 inches (59.5 mm).
- ⑤ For non-metallic enclosures. Snaps into molded base.

### Loadcenter Goof Collars

Don't let an ugly drywall problem ruin a beautiful electrical installation.

Eaton's Goof Collar is designed to cover gaps between the finished drywall and loadcenter enclosure.

This is often necessary when upgrading the electrical service and the drywall surrounding the panel is damaged. The collar allows 2 inches of overhang beyond the standard flush trim.



*Before*



*After*

### BR Goof Collars

| Inches (mm)    |               | Catalog Number |                   |
|----------------|---------------|----------------|-------------------|
| Height         | Width         | BR Box Size    | Goof Collar       |
| 21.00 (533.4)  | 19.00 (482.6) | <b>B1</b>      | <b>BRB1GC2119</b> |
| 23.00 (584.2)  | 19.00 (482.6) | <b>B2</b>      | <b>BRB2GC2319</b> |
| 25.00 (635.0)  | 19.00 (482.6) | <b>C1</b>      | <b>BRC1GC2519</b> |
| 27.00 (685.8)  | 19.00 (482.6) | <b>C2</b>      | <b>BRC2GC2719</b> |
| 31.00 (787.4)  | 19.00 (482.6) | <b>C4</b>      | <b>BRC4GC3119</b> |
| 34.00 (863.6)  | 19.00 (482.6) | <b>D1</b>      | <b>BRD1GC3419</b> |
| 38.00 (965.2)  | 19.00 (482.6) | <b>G1</b>      | <b>BRG1GC3819</b> |
| 43.00 (1092.2) | 19.00 (482.6) | <b>L1</b>      | <b>BRL1G4319</b>  |
| 48.00 (1219.2) | 19.00 (482.6) | <b>L2</b>      | <b>BRL2GC4819</b> |

#### Note

Type BD Duplex, BQ and BQC Quadplex circuit breakers can be installed in Circuit Limiting (CTL) listed BR loadcenters. Type BR twin breakers can be installed in Non-CTL BR loadcenters.

**Technical Data and Specifications****General**

- A. The Contractor shall furnish and install deadfront loadcenters incorporating circuit breakers of the number, rating and type as specified herein and as shown on the contract drawings.
- B. The loadcenter and all components shall be designed, manufactured and tested in accordance with the latest applicable standards of UL, NEMA and NEC including:
  - 1. UL 67—Standards for Panelboards.
  - C. UL 50—Standards for Cabinets and Boxes.
  - D. UL 489—Standards for Molded Case Circuit Breakers.
  - E. UL 869—Standards for Service Equipment.
  - F. Federal Specification W-C 375B—Circuit Breakers.
  - G. Federal Specification W-C P115b—Panel Power Distribution Type 1, Class 2.

**Qualifications**

- A. The manufacturer of the loadcenter shall be the manufacturer of the circuit breaker within the loadcenter.
- B. For the equipment specified herein, the manufacturer shall be ISO 9000 certified.
- C. The manufacturer of this equipment shall have produced similar electrical equipment for a minimum period of seven (7) years.

**Manufacturers**

- A. Eaton.

**Ratings**

- A. Loadcenters shall be rated for 120/240 Vac and shall have short-circuit ratings as shown on the drawings or as herein scheduled, but not less than 10,000 amperes rms symmetrical.
- B. Circuit breakers shall be a minimum of 125 A frame. Circuit breakers 15 through 125 A trip size shall take up the same pole spacing.
- C. Loadcenters shall be labeled with a UL short-circuit rating. When series combination ratings are applied with integral or remote upstream devices, a label shall be provided. Series combination ratings shall cover all trip ratings of installed frames. It shall state the conditions of the UL series ratings including:
  - 1. Size and type of upstream device.
  - 2. Branch devices that can be used.
  - 3. UL series short circuit rating.

**Construction**

- A. All interiors, with the exception of the branch circuit breakers, shall be completely factory assembled with main breakers, main lugs, or no main device.
- B. Interiors shall be designed so that circuit breakers can be replaced without disturbing adjacent units and without removing the main bus connectors and shall be designed so that circuits may be changed without machining, drilling, or tapping.
- C. Physical means shall be provided to prevent the installation of more overcurrent devices than that number for which the enclosure was designed, rated and approved. Half-size breakers shall have a UL listed rejection tab over the line terminals. Loadcenter interiors must have notched stabs to accept these rejection tab class CTL breakers, if required and approved.

**Bus**

- A. Busbars for the main and cross connectors shall be [tin-plated aluminum] [copper] in accordance with Underwriters Laboratories standards. Busing shall be braced throughout to conform to industry standard practice governing short-circuit stresses in loadcenters.

**Note:** Note to spec writer—select one (copper available in limited ratings).

- B. Neutral busing shall have a suitable lug for each outgoing feeder requiring a neutral connection of same ampacity as branch.

**Wiring/Termination**

- A. All wire connectors and terminals shall be of the anti-turn solderless type and shall be suitable for copper or aluminum wire of the sizes indicated. All connectors must meet the "Requirements for Wire Connectors and Soldering Lugs" as stated in UL 486B.
- B. All loadcenters where marked shall be suitable for use with 60 °C or 75 °C rated wire.

**Circuit Breakers**

- A. Circuit breakers shall be molded case type. Circuit breakers shall have four-rivet construction (GFI Type—5 rivets). Multipole circuit breakers shall be of a stack pole design to provide electrical phase isolation.
- B. Each pole of the circuit breaker will provide inverse time delay overload and instantaneous short-circuit protection by means of both thermal and magnetic sensors.
- C. The circuit breaker calibration shall not be affected by environmental changes in relative humidity. The thermal bimetal element shall be welded to the steel frame and calibration shall be set independent of the molded case by computer controlled equipment.
- D. All circuit breakers shall be operated by a toggle-type handle and multipole circuit breakers shall have an internal common trip mechanism. The circuit breakers shall incorporate trip mechanisms that are mechanically trip-free from the handle. The handle position shall provide visual trip indication.
- E. Contacts shall be of non-welding silver alloy.
- F. All circuit breakers shall have the trip rating inscribed on the handle on each circuit breaker pole. Also, unique color-coded cases that indicate the UL listed 10 kA or 22 kA interrupting ratings. Breakers shall be able to be used as main or branch disconnect devices.
- G. Branch circuit breakers may also be used in the 1/2-inch (12.7 mm) per pole ratings that include two-pole 1-inch (25.4 mm) wide modules and four-pole 2-inch (50.8 mm) wide modules. Two-pole circuit breakers must incorporate a common trip mechanism.
- H. Circuit breakers shall be completely enclosed in a molded case of thermoset material. No internal aluminum parts shall be used. All internal ferrous parts shall be plated to prevent corrosion.
- I. All terminals shall be listed for use with copper or aluminum conductors. Terminals shall be of the box lug or clamp type design. The terminals shall meet UL 486B requirements and shall be suitable for use with either 60 °C or 75 °C wire.
- J. The calibrated bimetal assembly shall be mechanically isolated from the load terminal using a flexible braided copper shunt wire, such that movement of the terminals due to twisting and overtorquing does not affect breaker calibration.
- K. Breakers shall be SWD rated and/or HACR rated as required.
- L. Arc Fault Interrupting circuit breakers, (AFI), shall be provided on all 15 and 20 A single-phase 120/240 Vac circuits except those indicated as remote controlled breakers. AFI breakers shall be “Classified for mitigating the effects of arcing faults,” or conforming to UL Standard 1699 and as defined by Article 210.12 Section A of the 1999 NEC Code.

**Surge Protection Devices**

See Volume 1, Tab 2 for complete details on surge protection.

**Enclosures**

- A. Loadcenter shall have NEMA Type 1 general purpose or NEMA Type 3R rainproof enclosures as indicated on the drawings and shall be surface or combination flush/surface mounted except where noted.
- B. Boxes shall be made from galvanized sheet steel having multiple knockouts. Rainproof boxes shall use galvanized steel or an approved coating system which meets or exceeds standards for outdoor NEMA Type 3R enclosures. Boxes shall be of sufficient size to provide at least a minimum code gutter space on all sides.
- C. The deadfront shall have an easy adjustment feature for flush applications.
- D. Boxes shall be factory assembled into a single rigid structure.
- E. Unless otherwise noted on drawings, hinged doors covering all circuit breaker handles shall be included in all trims. Trim doors shall not uncover any live parts in making the circuit breaker handles accessible. If key locks are required, all locks shall be keyed alike.
- F. Combination trims for flush and surface panels shall be flat and shall overlap the box by at least 5/8-inch (15.9 mm) all around. Trims shall be mounted by a screwdriver without the need for special tools.

**Finish**

- A. Trims shall be bonderized and finished with a light gray ANSI-61 enamel. The paint finish shall be of a type to which field applied paint will adhere.

**Factory Testing**

- A. The standard factory tests shall be performed on the equipment provided under this section. All tests shall be in accordance with the latest version of UL and NEMA.



**BR Loadcenters****Description****Service**

Single-phase, three-wire, 120/240 Vac

Three-phase, four-wire, 208Y/120 Vac  
Three-phase, three-wire, 240 Vac delta**Short-Circuit Current Rating**

10 kAIC: All single- and three-phase loadcenters 70–225 A, 8 to 42 circuits

25 kAIC: All convertible and factory-installed single-phase loadcenters rated

22 kAIC: All convertible loadcenters using 125 A rated Type BRH main breakers or selected factory installed 125 A rated Type BRH main breaker

150 and 200 A using Type CSR main breakers

**Main Breaker/Main Lug Loadcenters**

Single-phase

Three-phase

Main breaker: 100, 125, 150, 200, 225, 400, 600 A

Main breaker: 100, 125, 150, 200, 225, 400, 600 A

Main lugs: 70, 125, 150, 200, 225, 400, 600 A

Main lugs: 100, 125, 150, 200, 225, 400, 600 A

**Convertible Loadcenters**

Main breaker: single-phase up to 200 A and three-phase up to 225 A

Main lugs: single-phase up to 200 A and three-phase up to 150 A

**Branch Breakers**

Types BR, BRH and BRHH: 10–150 A, single-, two- and three-pole; selected amperage available in switching duty, HACR, shunt trip and high magnetic setting

Type BQ and BQC Multibreaker: 15–30 A. Two of two-pole or one two-pole and two one-pole; takes two 1-inch (25.4 mm) spaces

Type GFTCB: 15–60 A

Type BRW: 15–30 A; two-pole water heater breakers

Types BJ and BJH: 125–225 A; two- and three-pole

Type BRSN: 15–30 A; two-pole switching neutral breakers

Type BD Twin: 10–50 A; two of one-pole; take one 1-inch (25.4 mm) space

Type BR 15–100 A; two-pole, 240 Vac delta breakers

BR-AFCI arc fault circuit interrupter

**Enclosures**

NEMA Type 1 indoor

NEMA 4X

NEMA Type 3R outdoor

Meets or exceeds UL requirements for indoor or outdoor applications

**Loadcenter and Breaker Accessories**

Branch circuit breaker:

Surge protection:

Auxiliary components    Hold-down kits    Handle ties  
Lockoffs                    LockdogsSingle-phase plug-on surge protector    Single-phase bottle type surge protector  
Three-phase bottle type surge protector    Single-phase whole home surge protector

Complete line of ground bar kits 5, 10, 14 and 21 circuit, some with additional #2/0 lugs; each terminal will accommodate: (3) #14–#10 Cu/Al or (1) #14–#4 Cu/Al

Universal rainproof conduit hubs

Main and sub-feed lugs 125, 150, 225 A—two- and three-pole

Group One: 3/4, 1, 1-1/4, 1-1/2, 2 inches (19.1, 25.4, 31.8, 38.1, 50.8 mm)

Shunt trips

Group Two: 2, 2-1/2, 3 inches (50.8, 63.5, 76.2 mm)

Adapter plate

**Bussing**

Tin-plated aluminum as standard

Limited copper bus panels available

### Dimensions

Approximate Dimensions in Inches (mm)

#### Residential/Commercial/New York City Loadcenters, Unit Enclosures—Box Sizes

**Note:** Box sizes do not include covers/fronts.

#### Residential Loadcenters—NEMA Type 1 Indoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| A1       | 15.00 (381.0)  | 11.25 (285.8) | 3.75 (95.3)  |
| B1       | 16.75 (425.5)  | 14.31 (363.5) | 3.88 (98.4)  |
| B2       | 18.75 (476.3)  | 14.31 (363.5) | 3.88 (98.4)  |
| C1       | 21.00 (533.4)  | 14.31 (363.5) | 3.88 (98.4)  |
| C2       | 23.00 (584.2)  | 14.31 (363.5) | 3.88 (98.4)  |
| C4       | 27.00 (685.8)  | 14.31 (363.5) | 3.88 (98.4)  |
| D1       | 29.13 (739.8)  | 14.31 (363.5) | 3.88 (98.4)  |
| G1       | 34.13 (866.8)  | 14.31 (363.5) | 3.88 (98.4)  |
| L1       | 39.00 (990.6)  | 14.31 (363.5) | 3.88 (98.4)  |
| L2       | 45.00 (1143.0) | 14.31 (363.5) | 3.88 (98.4)  |
| L3       | 48.38 (1228.3) | 14.31 (363.5) | 3.88 (98.4)  |
| 2        | 8.63 (219.1)   | 5.00 (127.0)  | 3.50 (88.9)  |
| 3        | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 4        | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 5        | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 6        | 12.00 (304.8)  | 6.88 (174.6)  | 4.50 (114.3) |
| 7        | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 9        | 14.50 (368.3)  | 6.50 (165.1)  | 3.50 (88.9)  |

#### Residential Loadcenters—NEMA Type 3R Outdoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| B1R      | 16.75 (425.5)  | 14.31 (363.5) | 5.19 (131.8) |
| B2R      | 18.75 (476.3)  | 14.31 (363.5) | 5.19 (131.8) |
| C3R      | 25.00 (635.0)  | 14.31 (363.5) | 5.19 (131.8) |
| D1R      | 29.13 (739.8)  | 14.31 (363.5) | 5.19 (131.8) |
| G1R      | 34.13 (866.8)  | 14.31 (363.5) | 5.19 (131.8) |
| L1R      | 39.00 (990.6)  | 14.31 (363.5) | 5.19 (131.8) |
| L2R      | 45.00 (1143.0) | 14.31 (363.5) | 5.19 (131.8) |
| L3R      | 48.75 (1238.2) | 14.31 (363.5) | 5.19 (131.8) |
| 2R       | 8.63 (219.1)   | 5.00 (127.0)  | 3.50 (88.9)  |
| 3R       | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 4R       | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 5R       | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 6R       | 11.75 (298.5)  | 6.50 (165.1)  | 4.50 (114.3) |
| 7R       | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 8R       | 27.00 (685.8)  | 10.50 (266.7) | 4.75 (120.7) |
| 9R       | 14.25 (362.0)  | 6.50 (165.1)  | 4.00 (101.6) |
| C1R      | 21.00 (533.4)  | 14.31 (363.5) | 5.19 (131.8) |

#### Commercial Loadcenters—NEMA Type 1 Indoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| 19       | 44.00 (1117.6) | 16.16 (410.4) | 6.25 (158.8) |
| 20       | 44.00 (1117.6) | 16.16 (410.4) | 6.25 (158.8) |
| 22       | 54.00 (1371.6) | 16.22 (412.0) | 6.31 (160.3) |
| 24       | 66.50 (1689.1) | 16.22 (412.0) | 6.31 (160.3) |

#### Commercial Loadcenters—NEMA Type 3R Outdoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| 42       | 38.00 (965.2)  | 16.31 (414.3) | 6.38 (161.9) |
| 43       | 44.00 (1117.6) | 16.31 (414.3) | 6.38 (161.9) |
| 46       | 54.00 (1371.6) | 16.31 (414.3) | 6.38 (161.9) |
| 47       | 66.56 (1690.7) | 16.31 (414.3) | 6.38 (161.9) |

#### New York City Loadcenters—NEMA Type 1 Indoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| A        | 38.00 (965.2)  | 18.13 (460.4) | 5.00 (127.0) |
| B        | 44.00 (1117.6) | 18.13 (460.4) | 5.00 (127.0) |
| C        | 66.50 (1689.1) | 18.13 (460.4) | 6.25 (158.8) |

#### ECC Unit Enclosures—NEMA Type 1 Indoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.25 (590.6) | 8.88 (225.4) | 4.50 (114.3) |

#### ECC Unit Enclosures—NEMA Type 3R Outdoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.68 (601.7) | 9.31 (236.5) | 5.44 (138.1) |

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1


Approximate Dimensions in Inches (mm)

#### Residential Loadcenter Knockouts




#### Knockouts for Box Sizes A1, B1, B2, C1, C2, C4, D1, G1, L1, L2, B1R, B2R, C1R, C3R, D1R, G1R, L1R, L2R

| Code | Diameter    |             |             |             |             |
|------|-------------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | 0.75 (19.1) | —           | —           | —           |
| B    | 0.50 (12.7) | —           | —           | —           | —           |
| C    | 0.50 (12.7) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| D    | 1.25 (31.8) | 1.25 (31.8) | 2.00 (50.8) | 2.50 (63.5) | —           |
| E    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           | —           |
| F    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.50 (38.1) | 2.00 (50.8) |
| G    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           | —           |
| H    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| I    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| J    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           | —           |




#### Residential NEMA Type 1 Indoor and NEMA Type 3R Outdoor Enclosures






#### Outdoor Boxes B1R, B2R, C1R, C3R, D1R, G1R, L1R, L2R



#### Indoor Boxes A1



#### Indoor Boxes B1, B2




#### Indoor Boxes C1, C2, C4, D1, G1, L1, L2

Approximate Dimensions in Inches (mm)

### Knockouts for Box Sizes 3, 4, 5, 6, 7, 9, 2R, 3R, 4R, 5R, 6R, 7R, 8R, 9R

| Code | Diameter    |             |             |             |
|------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | —           | —           | —           |
| B    | 0.50 (12.7) | 0.75 (19.1) | —           | —           |
| C    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           |
| D    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) |
| E    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | —           |
| F    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| G    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           |
| H    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) |
| I    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           |

### Residential NEMA Type 1 Indoor and NEMA Type 3R Outdoor Enclosures

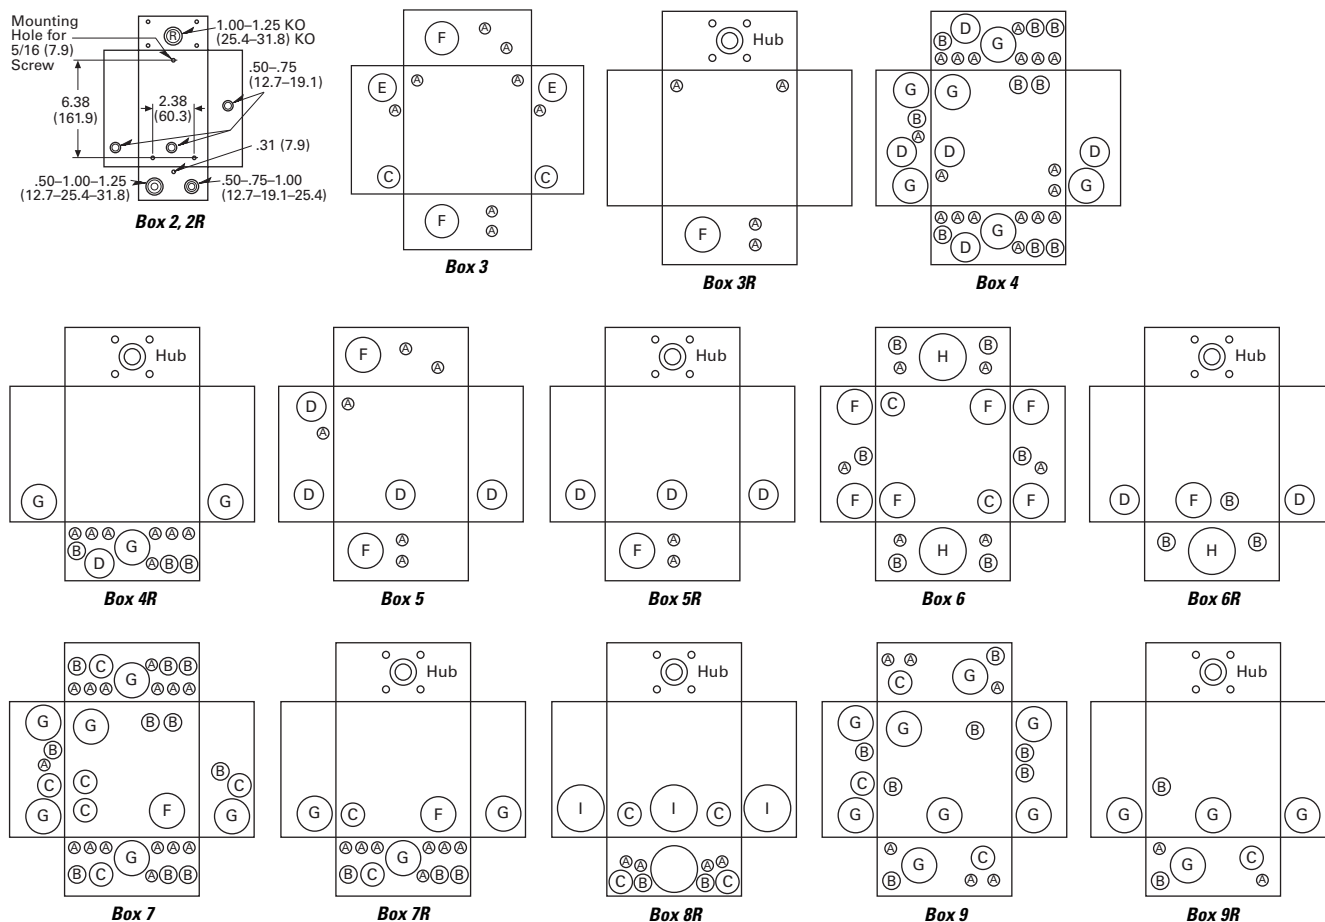

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

Approximate Dimensions in Inches (mm)

#### Commercial Loadcenter Knockouts

##### NEMA Type 1 Indoor Commercial Enclosures Knockouts for Box Sizes 19, 20, 22, 24

| Code | Diameter    |             |             |             |
|------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | —           | —           | —           |
| B    | 0.50 (12.7) | 0.75 (19.1) | —           | —           |
| C    | 0.75 (19.1) | 1.00 (25.4) | 1.50 (38.1) | —           |
| D    | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) | 3.00 (76.2) |
| E    | 2.00 (50.8) | 2.50 (63.5) | 3.00 (76.2) | —           |
| F    | 2.50 (63.5) | 3.00 (76.2) | 3.50 (88.9) | —           |


##### NEMA Type 3R Outdoor Commercial Enclosures Knockouts for Box Sizes 42, 43, 46, 47

| Code | Diameter        |             |             |             |
|------|-----------------|-------------|-------------|-------------|
| A    | 0.50 (12.7)     | —           | —           | —           |
| B    | 0.50 (12.7)     | 0.75 (19.1) | —           | —           |
| C    | 0.75 (19.1)     | 1.00 (25.4) | 1.25 (31.8) | —           |
| D    | 1.50 (38.1)     | 2.00 (50.8) | 2.50 (63.5) | —           |
| E    | 2.00 (50.8)     | 2.50 (63.5) | 3.00 (76.2) | —           |
| F    | 2.50 (63.5)     | 3.00 (76.2) | 3.50 (88.9) | —           |
| G    | 1.25 (31.8)     | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| H    | 3.25 (82.6) Sq. | —           | —           | —           |


#### Unit Enclosure Knockouts, Types ECB and ECC Knockouts

| Code  | Diameter    |             |             |             |
|---|-------------|-------------|-------------|-------------|
| <b>NEMA Type 1 Indoor (Flush and Surface Trims)</b> |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) |
| <b>NEMA Type 3R Outdoor</b>                         |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) |


#### Indoor Commercial Enclosures

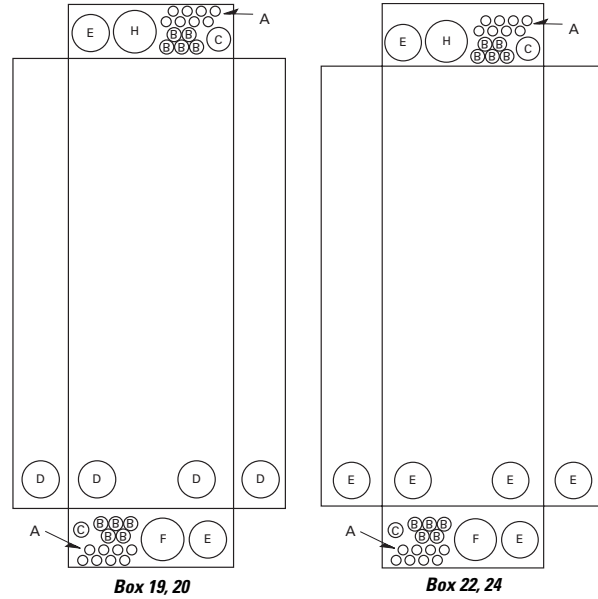

#### Outdoor Commercial Enclosures

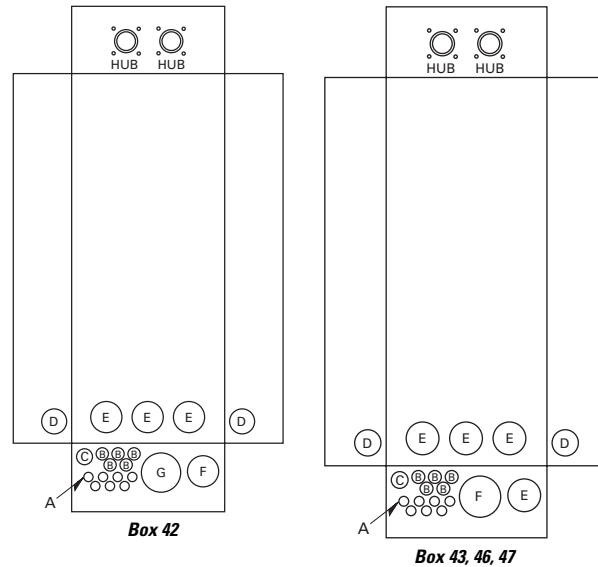

#### Unit Enclosure Knockouts

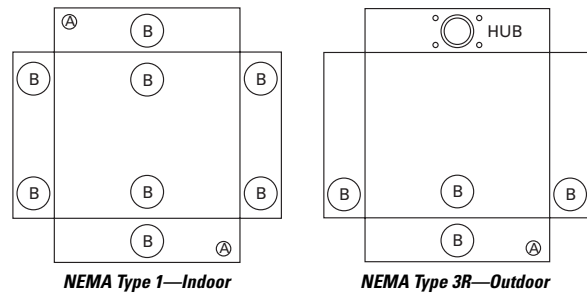

### BR Circuit Breakers



### Contents

| <i>Description</i>                         | <i>Page</i>     |
|--|-----------------|
| Overview .....                             | <b>V1-T1-42</b> |
| BR Specialty Products                      |                 |
| BR Quick Connect Neutral Loadcenters ..... | <b>V1-T1-57</b> |
| Spa Panels .....                           | <b>V1-T1-58</b> |
| Riser Panel .....                          | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter .....        | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories      |                 |
| Type BR Retrofit Interior Kits .....       | <b>V1-T1-61</b> |
| Type BR Mechanical Interlock Kits .....    | <b>V1-T1-65</b> |
| BR Circuit Breakers                        |                 |
| Product Selection .....                    | <b>V1-T1-78</b> |
| Options and Accessories .....              | <b>V1-T1-85</b> |
| Wiring Diagrams .....                      | <b>V1-T1-87</b> |

## BR Circuit Breakers

### Product Description

#### **Plug-On Branch Feeder Type Arc Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac and 120/240 Vac**

A branch feeder type arc fault circuit interrupter is a device intended to mitigate high current arcing faults in the complete circuit, including connected cords. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults.

The branch feeder type AFCI is required in the 1999 and 2002 National Electrical Code.

The Combination Type AFCI is required in the 2005, 2008, and 2011 National Electrical Code.

#### **Plug-On Combination Type Arc Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac and 120/240 Vac**

A combination type arc fault circuit interrupter is a device that includes all of the protection offered by the branch feeder AFCI (mitigation of high current arcing faults in the complete circuit, including connected cords). In addition it provides direct detection of persistent low current arcing faults down to 5 amps with associated mitigation of fire hazards in the cords connected to the outlets. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults. The current level of low current arcing faults is limited by the load.

#### **Plug-On Ground Fault Circuit Breakers, Type GFTCB and GFEP—10/22 kAIC, 120 Vac and 120/240 Vac**

##### **Ground Fault Application Notes**

Single-pole GFTCBs are designed for use in two-wire, 120 Vac circuits. See **Page V1-T1-87** for a typical wiring configuration.

Two-pole GFTCBs are designed for use in three-wire, 120/240 Vac circuits, 120 Vac multiwire circuits employing common, neutral and two-wire, 240 Vac circuits obtained from a 120/240 Vac source.

**Page V1-T1-87** shows typical wiring configurations for a 120/240 Vac multiwire circuits, and a 240 Vac, two-wire circuit. Note the "panel neutral" conductor connects to the neutral bar, even though the neutral is not included in the load circuit. This connection is necessary to supply a 120 Vac power source to the ground fault sensing circuit.

The figures are shown with a 120/240 Vac, single-phase, three-wire power source, but are also applicable to a 120/208 Vac, three-phase, four-wire power supply. For all figures, the electrical operation of the GFTCB is not affected by the equipment ground.

#### **Non-CTL Plug-On Replacement—Circuit Breakers, Type BRD—10 kAIC, 120/240 Vac**

##### **Non-CTL 10 kAIC for Replacement Purposes Only**

For replacement in enclosures manufactured prior to 1968 with unnotched stabs. Circuit breakers do not have rejection tab.

#### Product Selection

Plug-On Circuit Breakers, Types BR—10/22/42 kAIC, 120 Vac, 120/240 Vac and 240 Vac

#### BR120



#### BR215



#### BR320



#### BRH2100



#### BRX2125



#### Type BR Breakers, 1-Inch (25.4 mm) per Pole 120/240, 10, 22 and 42 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 1-Inch (25.4 mm) Space<br>10 per Shelf Carton |                              | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>5 per Shelf Carton |                              | 42 kAIC<br>Catalog<br>Number | 65 kAIC<br>Catalog<br>Number |
|---------------|---|---|------------------------------|---|------------------------------|------------------------------|------------------------------|
|               |   | 10 kAIC<br>Catalog<br>Number  | 22 kAIC<br>Catalog<br>Number | 10 kAIC<br>Catalog<br>Number  | 22 kAIC<br>Catalog<br>Number |                              |                              |
| 10            | #14–4                                   | BR110   | —                            | BR210   | —                            | —                            | —                            |
| 15            | #14–4                                   | BR115 <sup>①②</sup>   | BRH115                       | BR215 <sup>③</sup>  | BRH215                       | —                            | —                            |
| 20            | #14–4                                   | BR120 <sup>①②</sup>   | BRH120                       | BR220 <sup>③</sup>  | BRH220                       | —                            | —                            |
| 25            | #14–4                                   | BR125   | BRH125                       | BR225 <sup>③</sup>  | BRH225                       | —                            | —                            |
| 30            | #14–4                                   | BR130   | BRH130                       | BR230 <sup>③</sup>  | BRH230                       | —                            | —                            |
| 35            | #14–4                                   | BR135   | BRH135                       | BR235 <sup>③</sup>  | BRH235                       | —                            | —                            |
| 40            | #14–4                                   | BR140   | BRH140                       | BR240 <sup>③</sup>  | BRH240 <sup>③</sup>          | —                            | —                            |
| 45            | #14–4                                   | —   | BRH145                       | BR245 <sup>③</sup>  | BRH245                       | —                            | —                            |
| 50            | #14–4                                   | BR150   | BRH150                       | BR250 <sup>③</sup>  | BRH250 <sup>③</sup>          | —                            | —                            |
| 55            | #14–3                                   | BR150   | BRH155                       | BR255   | BRH255                       | —                            | —                            |
| 60            | #8–1/0                                  | BR160   | BRH160                       | BR260   | BRH260                       | BRHH260                      | BRX260                       |
| 70            | #8–1/0                                  | BR170   | BRH170                       | BR270   | BRH270                       | BRHH270                      | BRX270                       |
| 80            | #8–1/0                                  | —   | —                            | BR280   | BRH280                       | BRHH280                      | BRX280                       |
| 90            | #8–1/0                                  | —   | —                            | BR290   | BRH290                       | BRHH290                      | BRX290                       |
| 100           | #8–1/0                                  | —   | —                            | BR2100  | BRH2100                      | BRHH2100                     | BRX2100                      |
| 110           | #8–1/0                                  | —   | —                            | BR2110  | BRH2110                      | BRHH2110                     | BRX2110                      |
| 125           | #4–2/0                                  | —   | —                            | BR2125  | BRH2125                      | BRHH2125                     | BRX2125                      |
| 150           | #4–2/0                                  | —   | —                            | BR2150 <sup>④</sup>   | —                            | —                            | —                            |



#### Notes

- ① One pole, 1-inch (25.4 mm) per pole circuit breakers are available with high magnetic setting for switching large tungsten lamp loads. Add suffix H to catalog number.
- ② Switching duty rated.
- ③ On the black handle breaker, add suffix “B” to the catalog number to obtain a tapped molded opening for proper use with hold-down kits.
- ④ For use as a branch circuit breaker in 400 and 600 ampere panels only.

All Type BR single-, two- and three-pole circuit breakers carry listing for HACR application. For circuit breakers with a shunt trip, add ST suffix.

### BR Breakers

### Type BR Breakers, 1-Inch (25.4 mm) per Pole 240 Vac, 10, 22 and 42 kAIC



Three-Pole 240 Vac  
Common Trip Requires Three  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton



| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | 10 kAIC<br>Catalog Number | 22 kAIC<br>Catalog Number |
|---------------|---|---------------------------|---------------------------|
| 10            | #14–4                                   | BR310                     | —                         |
| 15            | #14–4                                   | BR315 ①                   | BRH315                    |
| 20            | #14–4                                   | BR320 ①                   | BRH320                    |
| 25            | #14–4                                   | BR325                     | BRH325                    |
| 30            | #14–4                                   | BR330                     | BRH330                    |
| 35            | #14–4                                   | BR335                     | BRH335                    |
| 40            | #14–4                                   | BR340                     | BRH340                    |
| 45            | #14–4                                   | BR345                     | BRH345                    |
| 50            | #14–4                                   | BR350                     | BRH350                    |
| 55            | #14–3                                   | BR355                     | BRH355                    |
| 60            | #4–1/0                                  | BR360                     | BRH360                    |
| 70            | #4–1/0                                  | BR370                     | BRH370                    |
| 80            | #4–1/0                                  | BR380                     | BRH380                    |
| 90            | #4–1/0                                  | BR390                     | BRH390                    |
| 100           | #4–1/0                                  | BR3100                    | BRH3100                   |

### Plug-On, Dual Purpose Arc Fault / Ground Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac

#### BRLAFGF115



### Type BR, 1-Inch (25.4 mm) wide Dual Purpose AF/GF Circuit Breakers ②③

| Poles                  | Ampere Rating | Configuration           | Catalog Number |
|------------------------|---------------|-------------------------|----------------|
| Single-pole<br>10 kAIC | 15            | Combination AFGI / GFCI | BRLAFGF115 ④   |
|                        |               |                         | BRAFGF115 ⑤    |
|                        | 20            |                         | BRLAFGF120 ④   |
|                        |               |                         | BRAFGF120 ⑤    |
| Single-pole<br>22 kAIC | 15            | Combination AFGI / GFCI | BRHAFGF115 ⑤   |
|                        | 20            |                         | BRHAFGF120 ⑤   |

### Plug-On Combination Type Arc Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac and 120/240 Vac

#### BRCAF115



### Type BR, 1-Inch (25.4 mm) wide Combination Type AFCI Circuit Breakers

| Poles                  | Ampere Rating | Configuration | Catalog Number |
|------------------------|---------------|---------------|----------------|
| Single-pole<br>10 kAIC | 15            | AFCI          | BRCAF115 ⑥     |
|                        | 20            | AFCI          | BRCAF120 ⑥     |
| Single-pole<br>22 kAIC | 15            | AFCI          | BRHCAF115 ⑥    |
|                        | 20            | AFCI          | BRHCAF120 ⑥    |
| Two-pole<br>10 kAIC    | 15            | AFCI          | BRL215CAF      |
|                        | 20            | AFCI          | BRL220CAF      |

#### Notes

- ① One pole, 1-inch (25.4 mm) per pole circuit breakers are available with high magnetic setting for switching large tungsten lamp loads. Add suffix H to catalog number.
- ② Breaker qualifies as combination arc fault, per UL 1699.
- ③ Breaker qualifies as personnel protection ground fault, (5 mA) per UL 943.
- ④ These catalog numbers will be obsoleted in Q3, 2018 and replaced with BRAFGF short body breakers.
- ⑤ Short body replacing BRLAFGF breakers.
- ⑥ Clamshell packaging available with CS modification code on the end of catalog number.

All Type BR single-, two- and three-pole circuit breakers carry listing for HACR application. For circuit breakers with a shunt trip, add ST suffix. See **Volume 4** for bolt-on AF/GF breakers; QB1015AFGF, QB1020AFGF, QBH1015AFGF and QBH1020AFGF.



# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Plug-On Ground Fault Circuit Breakers, Type GFTCB and GFEP—10/22 kAIC, 120 Vac and 120/240 Vac


Type GFTCB Single-Pole



Type GFTCB Two-Pole



#### Type GFTCB Ground Fault Circuit Breakers—5 Milliamperere—1-Inch (25.4 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC




Single-Pole 120 Vac  
Requires One  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number ①



Two-Pole 120/240 Vac  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
1 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120 Vac<br>Requires One<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number ① | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|---|---|
| 15            | #14–4                                   | GFTCB115  | GFTCB215  |
| 20            | #14–4                                   | GFTCB120  | GFTCB220  |
| 25            | #14–4                                   | GFTCB125  | GFTCB225  |
| 30            | #14–4                                   | GFTCB130  | GFTCB230  |
| 40            | #14–4                                   | GFTCB140  | GFTCB240  |
| 50            | #14–4                                   | —   | GFTCB250 ②  |
| 60            | #14–6                                   | —   | GFTCB260  |

#### Type GFTCBH Ground Fault Breakers—5 Milliamperere—1-Inch (25.4 mm) per Pole 120 Vac or 120/240 Vac, 22 kAIC




Single-Pole 120 Vac  
Requires One  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number



Two-Pole 120/240 Vac  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
1 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120 Vac<br>Requires One<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|---|---|
| 15            | #14–4                                   | GFTCBH115   | GFTCBH215   |
| 20            | #14–4                                   | GFTCBH120   | GFTCBH220   |
| 25            | #14–4                                   | GFTCBH125   | GFTCBH225   |
| 30            | #14–4                                   | GFTCBH130   | GFTCBH230   |

#### Type GFEP Ground Fault Equipment Protectors—30 Milliamperere—1-Inch (25.4 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC



Single-Pole 120 Vac  
Requires One  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number



Two-Pole 120/240 Vac  
Common Trip Requires Two  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number


| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120 Vac<br>Requires One<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|---|--|
| 15            | #14–4                                   | GFEP115   | GFEP215  |
| 20            | #14–4                                   | GFEP120   | GFEP220  |
| 25            | #14–4                                   | GFEP125   | GFEP225  |
| 30            | #14–4                                   | GFEP130   | GFEP230  |
| 40            | #14–4                                   | —   | GFEP240  |
| 50            | #14–4                                   | —   | GFEP250 ②  |

#### Notes

- ① Available with bell alarm or auxiliary switch. See circuit breaker accessories on [Page V1-T1-85](#).
- ② For use with copper wire only.


### CTL Plug-On Circuit Breakers, Type BD Duplex, BQ and BQC Quadplex—10 kAIC, 120/240 Vac

BD2020




#### Class CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—All Circuit Breakers Have Rejection Tab Feature

**Type BD Duplex (UL Type BRD)**




**Single-Pole ①**  
Requires One 1-Inch (25.4 mm) Space  
10 per Shelf Carton

**Type BQ Quadplex Independent Trip (UL Type BRD)**




**Two-Pole ② and Single-Pole ①**  
Requires Two 1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

**Type BQ Quadplex Independent Trip (UL Type BRD)**




**Two-Pole**  
Requires Two 1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

BQ2302115



BQ230230



| Ampere Rating | Catalog Number | Wire Size Range<br>Cu/Al<br>65 °C or 75 °C | Ampere Rating          |                                  |                         | Catalog Number | Ampere Rating                   |                                  |                |
|---------------|----------------|--|------------------------|----------------------------------|-------------------------|----------------|---------------------------------|----------------------------------|----------------|
|               |                |  | Outer Left Single-Pole | Center Two-Pole Independent Trip | Outer Right Single-Pole |                | Outer Two-Pole Independent Trip | Center Two-Pole Independent Trip | Catalog Number |
| 10–10         | BD1010         | #14–4                                      | 15                     | 20                               | 15                      | BQ2202115      | 15                              | 15                               | BQ215215       |
| 15–15         | BD1515         | #14–4                                      | 20                     | 20                               | 20                      | BQ2202120      | 15                              | 20                               | BQ215220       |
| 15–20         | BD1520         | #14–4                                      | 15                     | 30                               | 15                      | BQ2302115      | 15                              | 30                               | BQ215230       |
| 15–30         | BD1530         | #14–4                                      | 20                     | 30                               | 20                      | BQ2302120      | 15                              | 40                               | BQ215240       |
| 20–15         | BD2015         | #14–4                                      | 15                     | 40                               | 15                      | BQ2402115      | 15                              | 50                               | BQ215250       |
| 20–20         | BD2020         | #14–4                                      | 20                     | 40                               | 20                      | BQ2402120      | 20                              | 20                               | BQ220220       |
| 20–30         | BD2030         | #14–4                                      | 15                     | 50                               | 15                      | BQ2502115      | 20                              | 30                               | BQ220230       |
| 25–25         | BD2525         | #14–4                                      | 20                     | 50                               | 20                      | BQ2502120      | 20                              | 40                               | BQ220240       |
| 30–15         | BD3015         | #14–4                                      | —                      | —                                | —                       | —              | 20                              | 50                               | BQ220250       |
| 30–20         | BD3020         | #14–4                                      | —                      | —                                | —                       | —              | 25                              | 25                               | BQ225225       |
| 30–30         | BD3030         | #14–4                                      | —                      | —                                | —                       | —              | 30                              | 30                               | BQ230230       |
| 30–40         | BD3040         | #14–4                                      | —                      | —                                | —                       | —              | 30                              | 40                               | BQ230240       |
| 30–50         | BD3050         | #14–4                                      | —                      | —                                | —                       | —              | 30                              | 50                               | BQ230250       |
| 50–30         | BD5030         | #14–4                                      | —                      | —                                | —                       | —              | 40                              | 40                               | BQ240240       |
| 50–50         | BD5050         | #14–4                                      | —                      | —                                | —                       | —              | 40                              | 50                               | BQ240250       |
| —             | —              | —  | —                      | —                                | —                       | —              | 50                              | 50                               | BQ250250       |

**Notes**

- ① All 15 and 20 A single poles are switch-duty rated.
- ② All Type BD duplex and BQ quadplex circuit breakers carry listing for HACR applications.
- ③ Available with bell alarm or auxiliary switch. See circuit breaker accessories on **Page V1-T1-85**.
- ④ For use with copper wire only.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1


#### Non-CTL Plug-On Replacement—Circuit Breakers, Type BRD—10 kAIC, 120/240 Vac

BR2020




#### Class Non-CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—Breakers Do Not Have Rejection Tab Feature

##### Type BR Duplex




Single-Pole Requires One 1-Inch (25.4 mm) Space 10 per Shelf Carton

##### Type Brand BRD Quadplex Independent Trip



Two-Pole Requires Two 1-Inch (25.4 mm) Spaces 5 per Shelf Carton


##### Type BRD Quadplex Common Trip Center and Outer Poles



Two-Pole Requires Two 1-Inch (25.4 mm) Spaces 5 per Shelf Carton


| Ampere Rating | 120 Vac        |                                      | 120/240 Vac                     |                                  | 120/240 Vac    |                            | 120/240 Vac                 |                |
|---------------|----------------|--------------------------------------|---------------------------------|----------------------------------|----------------|----------------------------|-----------------------------|----------------|
|               | Catalog Number | Wire Size Range Cu/Al 65 °C or 75 °C | Outer Two-Pole Independent Trip | Center Two-Pole Independent Trip | Catalog Number | Outer Two-Pole Common Trip | Center Two-Pole Common Trip | Catalog Number |
| 15–15         | BR1515         | #14–4                                | 15                              | 15                               | BR415          | 15                         | 15                          | BRDC215215     |
| 15–20         | BR1520         | #14–4                                | 20                              | 20                               | BR420          | 30                         | 30                          | BRDC230230     |
| 20–15         | BR2015         | #14–4                                | 30                              | 30                               | BR430          | 30                         | 40                          | BRDC230240     |
| 20–20         | BR2020         | #14–4                                | 20                              | 30                               | BRD220230      | 30                         | 50                          | BRDC230250     |
| 30–30         | BR3030         | #14–4                                | 30                              | 40                               | BRD230240      | —                          | —                           | —              |
| 30–50         | BR3050         | #14–4                                | 30                              | 50                               | BRD230250      | —                          | —                           | —              |

#### CTL and Non-CTL Breakers

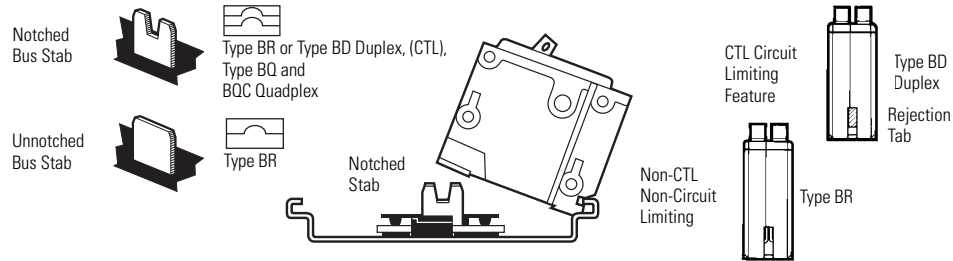


### Common Trip Quadplex Breakers

BQC2302115



#### Class CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—All Circuit Breakers Have Rejection Tab Feature

Type BQC Quadplex Common Trip Center Poles (UL Type BRD)



Two-Pole ① and Single-Pole ②  
Requires Two 1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

120 Vac      120/240 Vac      120 Vac


Type BQC Quadplex Common Trip Center and Outer Poles (UL Type BRD)



Two-Pole ①  
Requires Two 1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

120/240 Vac

BQC2302115



| Ampere Rating             |                                |                            | Catalog Number | Wire Size Range<br>Cu/Al 65 °C<br>or 75 °C | Ampere Rating                 |                                |                   |
|---------------------------|--------------------------------|----------------------------|----------------|--|-------------------------------|--------------------------------|-------------------|
| Outer Left<br>Single-Pole | Center Two-Pole<br>Common Trip | Outer Right<br>Single-Pole |                |  | Outer Two-Pole<br>Common Trip | Center Two-Pole<br>Common Trip | Catalog<br>Number |
| 15                        | 20                             | 15                         | BQC2202115     | #14-4                                      | 15                            | 15                             | BQC215215         |
| 15                        | 25                             | 15                         | BQC2252115     | #14-4                                      | 15                            | 20                             | BQC215220         |
| 15                        | 30                             | 15                         | BQC2302115     | #14-4                                      | 15                            | 30                             | BQC215230         |
| 15                        | 40                             | 15                         | BQC2402115     | #14-4                                      | 20                            | 15                             | BQC220215         |
| 15                        | 50                             | 15                         | BQC2502115     | #14-4                                      | 20                            | 20                             | BQC220220         |
| —                         | —                              | —                          | —              | #14-4                                      | 20                            | 30                             | BQC220230         |
| —                         | —                              | —                          | —              | #14-4                                      | 20                            | 40                             | BQC220240         |
| —                         | —                              | —                          | —              | #14-4                                      | 20                            | 50                             | BQC220250         |
| 20                        | 15                             | 20                         | BQC2152120     | #14-4                                      | 25                            | 25                             | BQC225225         |
| 20                        | 20                             | 20                         | BQC2202120     | #14-4                                      | 25                            | 30                             | BQC225230         |
| 20                        | 25                             | 20                         | BQC2252120     | #14-4                                      | 30                            | 15                             | BQC230215         |
| 20                        | 30                             | 20                         | BQC2302120     | #14-4                                      | 30                            | 30                             | BQC230230         |
| 20                        | 40                             | 20                         | BQC2402120     | #14-4                                      | 30                            | 40                             | BQC230240         |
| 20                        | 50                             | 20                         | BQC2502120     | #14-4                                      | 30                            | 50                             | BQC230250         |
| 30                        | 50                             | 20                         | BQC2502030     | #14-4                                      | 40                            | 30                             | BQC240230         |
| —                         | —                              | —                          | —              | #14-4                                      | 40                            | 40                             | BQC240240         |
| —                         | —                              | —                          | —              | #14-4                                      | 40                            | 50                             | BQC240250         |
| —                         | —                              | —                          | —              | #14-4                                      | 50                            | 20                             | BQC250220         |
| —                         | —                              | —                          | —              | #14-4                                      | 50                            | 50                             | BQC250250         |

**Notes**

- ① All Type BQC quadplex circuit breakers carry listing for HACR applications.
- ② All 15 and 20 ampere single poles are switch-duty rated.

# 1.2

## Loadcenters and Circuit Breakers


### Type BR Loadcenters and Circuit Breakers

1

#### Plug-On Circuit Breakers, Types BJ and BJH—10/22 kAIC, 120/240 Vac and 240 Vac

For Use in Single-Phase and Three-Phase Loadcenters—150 Amperes and Above

##### Type BJ



#### Types BJ and BJH Breakers, 1-Inch (25.4 mm) per Pole, 120/240 or 240 Vac, 10, 22 kAIC



**Two-Pole 120/240 Vac**  
Common Trip Requires Four  
1-Inch (25.4 mm) Spaces <sup>①</sup>  
10 per Shelf Carton



**Three-Pole 240 Vac**  
Common Trip Requires Six  
1-Inch (25.4 mm) Spaces <sup>②</sup>  
5 per Shelf Carton

| Ampere Rating | 10 kAIC        |                | Wire Size Range<br>Cu/Al 60 °C or 75 °C | 22 kAIC        |                |
|---------------|----------------|----------------|---|----------------|----------------|
|               | Catalog Number | Catalog Number |   | Catalog Number | Catalog Number |
| 125           | BJ2125         | BJH2125        | #2–300 kcmil                            | BJ3125         | BJH3125        |
| 150           | BJ2150         | BJH2150        | #2–300 kcmil                            | BJ3150         | BJH3150        |
| 175           | BJ2175         | BJH2175        | #2–300 kcmil                            | BJ3175         | BJH3175        |
| 200           | BJ2200         | BJH2200        | #2–300 kcmil                            | BJ3200         | BJH3200        |
| 225           | BJ2225         | BJH2225        | #2–300 kcmil                            | BJ3225         | BJH3225        |

#### Plug-On Special Application Circuit Breakers—10 kAIC, 120 Vac, 120/240 Vac and 240 Vac

##### BRWH215

Water Heater Breaker



##### BRSN220

Switching Neutral Breaker



#### Special Application Circuit Breakers, 1-Inch (25.4 mm) per Pole

##### Water Heater Breakers



**Two-Pole 120/240 Vac**  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces

With Isolated Line Terminals  
for Separately Metered  
Water Heaters

5 per Shelf Carton

10 kAIC

Ampere Rating      Catalog Number

##### Switching Neutral Breakers



**Two-Pole 120 Vac**  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces

With Switching Neutral Pole  
for Gasoline Pump Applications

5 per Shelf Carton

10 kAIC

Ampere Rating      Catalog Number

##### 240 V Breakers



**Two-Pole 240 Vac**  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces

Where Voltage to  
Ground is 240 Vac

5 per Shelf Carton

10 kAIC

Ampere Rating      Catalog Number

##### Non-Automatic Molded Case Switches



**Two-Pole 240 Vac**  
Requires Two  
1-Inch (25.4 mm) Spaces

For Use as Disconnect Contains No  
Magnetic or Thermal Trip Properties

5 per Shelf Carton

5 kAIC

Ampere Rating      Catalog Number

| Ampere Rating | Catalog Number | Ampere Rating | Catalog Number | Wire Size Range<br>Cu/Al<br>60 °C or<br>75 °C | Ampere Rating | Catalog Number | Ampere Rating | Catalog Number |
|---------------|----------------|---------------|----------------|---|---------------|----------------|---------------|----------------|
| 15            | BRWH215        | 15            | BRSN215        | #14–4   | 10            | BR210H         | —             | —              |
| 20            | BRWH220        | 20            | BRSN220        | #14–4   | 15            | BR215H         | —             | —              |
| 30            | BRWH230        | 25            | BRSN225        | #14–4   | 20            | BR220H         | —             | —              |
| —             | —              | 30            | BRSN230        | #14–4   | 25            | BR225H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 30            | BR230H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 35            | BR235H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 40            | BR240H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 45            | BR245H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 50            | BR250H         | 50            | BR250NA        |
| —             | —              | —             | —              | #14–4   | 55            | BR255H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 60            | BR260H         | 60            | BR260NA        |
| —             | —              | —             | —              | #4–1/0  | 70            | BR270H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 80            | BR280H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 90            | BR290H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 100           | BR2100H        | 100           | BR2100NA       |

##### Notes

① Breaker uses two 1-inch (25.4 mm) pole spaces on left side and two 1-inch (25.4 mm) pole spaces on right side of loadcenter.


② Breaker uses three 1-inch (25.4 mm) pole spaces on left side and three 1-inch (25.4 mm) pole spaces on right side of loadcenter.

If BJ or BJH breakers are used as a main or a back feed device, a hold-down kit is required. See **Page V1-T1-85**.

### Options and Accessories

#### Field Installation Kits and Parts

THS1



BHLW2



BRQLW



MCBPL (Installed)



BHLW



BRLW2



#### Description

#### New Products

Padlockable device for locking the handle of BR long body AF/GF breaker into the ON or OFF position

**BRLAFGFLOFF**

Padlockable device for locking the handle of BR short body BRCAF, BRAFGF, QBCAF, QBAFGF breakers into the ON or OFF position

**BRCAFLOFF**

#### Handle Ties <sup>②</sup>

Handle tie bar for physically joining the handles of two adjacent single-pole Type BR circuit breakers (metal cylinder pin type)

10

**BHT**

Handle tie bar for joining two independent outside poles of Types BQ and BQC Quadplex and outside poles of two Type BD duplex circuit breakers

10

**THOW**

Handle tie bar for joining two adjacent outside poles of Types BQ and BQC Quadplex and outside poles of two Type BD duplex circuit breakers

10

**THS1**

#### Handle Lockoffs <sup>③④</sup>

Padlockable device for locking the handle of single-, two- or three-pole Type BR Circuit Breakers and single-pole of a Type BD Duplex or one independent outside pole of a Type BQ or BQC Quadplex circuit breakers (escutcheon mounted) <sup>⑤</sup>

10

**BRLW**

Padlockable device for locking the handle of a single-pole Type BR circuit breaker (handle mounted) <sup>⑥</sup>

10

**BRLW1**

Padlockable device for locking the handle of a two- and three-pole Type BR circuit breaker (handle mounted) <sup>⑥</sup>

10

**BRLW2**

Padlockable device for locking the handle of a single-pole Type BD Duplex, BQ or BQC Quadplex breaker (handle mounted) <sup>⑥</sup>

10

**BRDL1**

Padlockable device for locking the handle of the two center poles and the two outer poles of a two-pole Types BQ and BQC quadplex circuit breakers (escutcheon mounted) <sup>⑤</sup>

10

**BRQLW**

Padlockable device for locking the handle of main circuit breaker Types CC and CHH into the ON or OFF position (screw mounted) <sup>⑦</sup>

1

**CCPL**

Padlockable device for locking the handle of main breaker Types BW and CSR into the ON or OFF position (escutcheon mounted) <sup>⑤</sup>

1

**MCBPL**

Device used to secure handle in ON or OFF position for single-, two- or three-pole Type BR circuit breakers and single-pole of Type BD duplex and one independent outside pole of Type BQ or BQC Quadplex circuit breakers (escutcheon mounted) <sup>⑤</sup>

10

**BHLW**

Device used to secure handle in ON or OFF position for single-pole Type BR circuit breakers (handle mounted) <sup>⑥</sup>

10

**BHLW1**

Device used to secure handle in ON or OFF position for two- and three-pole Type BR circuit breakers (handle mounted) <sup>⑥</sup>

10

**BHLW2**

Device used to secure handle in ON or OFF position for single-pole Type GFTCB ground fault circuit breakers (handle mounted) <sup>⑥</sup>

10

**BHGW**

Device used to secure handle in ON or OFF position for one independent outside pole of Types BQ and BQC Quadplex or single-pole Type BD duplex circuit breakers (handle mounted) <sup>⑥</sup>

10

**HLW1**

#### Notes


- ① Must be purchased in multiples of ordering quantities indicated.
- ② Handle ties: typically used to join two similar independent single-pole breakers to form a two-pole noncommon trip breaker.
- ③ Handle lockoffs: devices that use a padlock to lock the circuit breaker's handle in the ON or OFF position.
- ④ See table on **Page V1-T1-86** for handle position changeability chart.
- ⑤ Escutcheon mounted: device mounted semipermanently to the face of the circuit breaker and secured by the loadcenter deadfront.
- ⑥ Handle mounted: device mounted directly to the handle by the use of a set screw.
- ⑦ Screw mounted: device permanently mounted to the face of the circuit breaker by the use of a non-removable screw.
- ⑧ Hold-down kits: devices used to secure the circuit breaker to the loadcenter for back-feed main application. See NEC Article 408.36(D). Add "B" suffix to two-pole breaker for tapped hole for hold-down kit (ex. BR230B) for BR breakers below 60 A.

1

BREQS125



BRHDK125



BRML



#### Field Installation Kits and Parts, continued

| Description  | Ordering Quantity <sup>①</sup> | Catalog Number   |
|--|--------------------------------|------------------|
| <b>Hold-Down Kits <sup>②</sup></b>   |                                |                  |
| Hold-down retainer kit for three-pole Type BR circuit breakers in S3100 and 3100R loadcenters only                     | 1                              | <b>BRHDB</b>     |
| Hold-down screw kit for two- and three-pole Type BR circuit breakers in single-phase MLO loadcenters through 100–125 A | 1                              | <b>BREQS125</b>  |
| Hold-down screw kit for two- and three-pole Type BR circuit breakers in MLO loadcenters 150–225 A                      | 1                              | <b>BRHDK125</b>  |
| Hold-down screw kit for two-pole Types BJ and BJH circuit breakers in MLO loadcenters 125–225 A                        | 1                              | <b>BJHDS</b>     |
| Hold-down screw kit for three-pole Types BJ and BJH circuit breakers in MLO loadcenters 125–225 A                      | 1                              | <b>BJHDS3P</b>   |
| <b>Main Breaker Lug Kits</b>   |                                |                  |
| Types CC and CHH main breaker lug kit (2) 300 kcmil  | 1                              | <b>CCL300</b>    |
| Types BW/CSR main breaker lug kit (2) 300 kcmil  | 1                              | <b>MCBL300</b>   |
| <b>Mechanical Interlocks</b>   |                                |                  |
| Types BR for two-, three- and four-pole breakers   | 10                             | <b>BRML</b>      |
| <b>Padlock Brackets</b>  |                                |                  |
| BR padlock mounting bracket  | 10                             | <b>BRPLOFF</b>   |
| BR three-pole lock-off bracket   | 10                             | <b>BRPLOFF3P</b> |
| BJ two-pole lock-off bracket   | 10                             | <b>BJL2P</b>     |
| BJ three-pole lock-off bracket   | 10                             | <b>BJL3P</b>     |

#### Shunt Trips, Auxiliary and Alarm Contacts

| Description  | Catalog Number <sup>②</sup><br>Suffix Adder |
|--|---|
| <b>Shunt Trip for Types BW/CSR</b>                 |   |
| 12 Volts   | <b>SR12</b>                                 |
| 24 Volts   | <b>SR24</b>                                 |
| 120 Volts  | <b>SR01</b>                                 |
| <b>Shunt Trip for Types BR</b>                     |   |
| 120 Volts  | <b>ST</b>                                   |
| <b>Auxiliary Contact for Types BW/CSR</b>          |   |
| 1NO and 1NC  | <b>AL1</b>                                  |
| 2NO and 2NC  | <b>AL2</b>                                  |
| <b>Alarm Contacts for Types BW/CSR</b>             |   |
| Types BW/CSR                                       | <b>CR1</b>                                  |
| <b>Alarm Contacts for Type GFTCB (Single-Pole)</b> |   |
| Alarm contact for GFTCB (single-pole)              | <b>W1</b>                                   |
| 1NO and 1NC  | <b>W2</b>                                   |

#### Handle Position Changeability Chart


| Handle Lockoff and Lockdog Types | To Change Handle Position from ON to OFF, or OFF to ON You Must... |               |                             |
|----------------------------------|--|---------------|-----------------------------|
|                                  | Remove Padlock   | Remove Device | Remove Loadcenter Deadfront |
| Lockoff escutcheon mounted       | Remove   | —             | —                           |
| Lockoff handle mounted           | Remove   | Remove        | —                           |
| Lockoff screw mounted            | Remove   | —             | —                           |
| Lockdog escutcheon mounted       | N/A  | Remove        | Remove                      |
| Lockdog handle mounted           | N/A  | Remove        | —                           |

#### Notes


- ① Must be purchased in multiples of ordering quantities indicated.
- ② Add suffix indicated to end of breaker catalog number.

### Wiring Diagrams


**Single-Pole 120 V Load Application Sourced by 120/240 Vac**

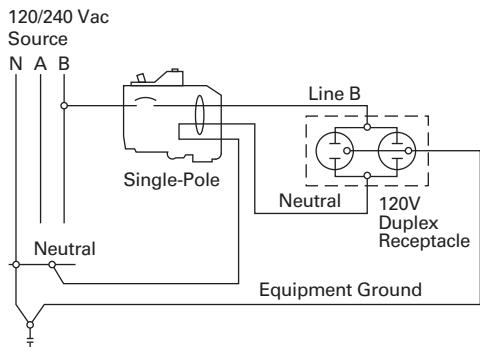


**Two-Pole Shared Neutral with Duplex Receptacle Application**

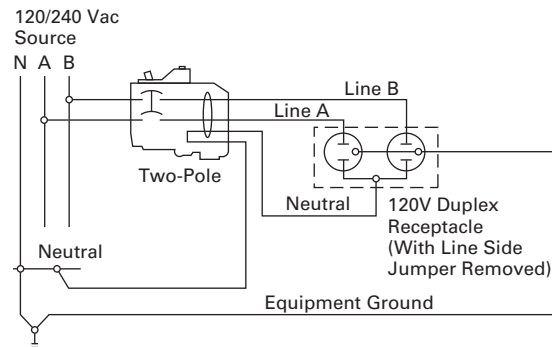


**Two-Pole Shared Neutral with Multi-Duplex Receptacle Application**

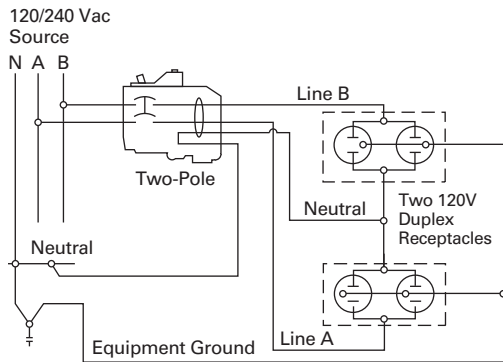


**Single-Pole 120 V Load Application Sourced by 120/240 Vac**

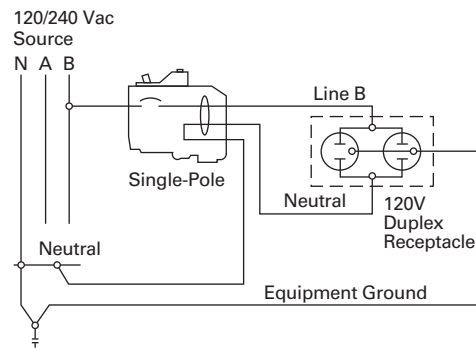

**Two-Pole 240 V Load Application Sourced by 120/240 Vac**

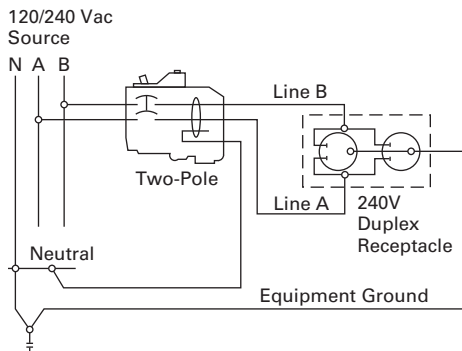

**Single-Pole 120 V Duplex Receptacle Application**

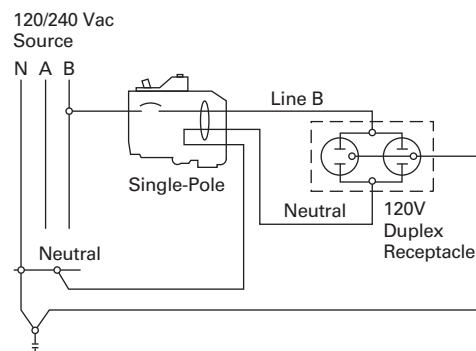




# 1.2


## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers


#### 1 Two-Pole 120 V Multi-Duplex Receptacle Application

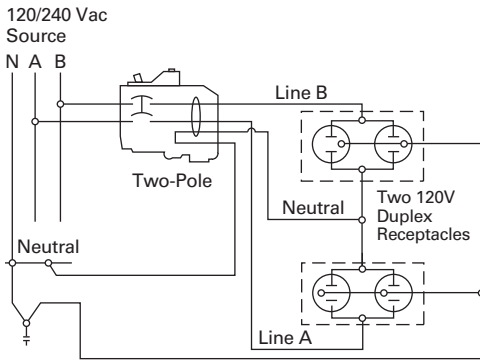

#### Two-Pole 120 V Duplex Receptacle Application

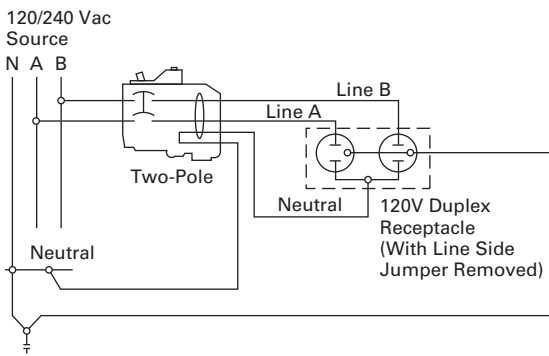

#### Two-Pole 240 V Duplex Receptacle Application

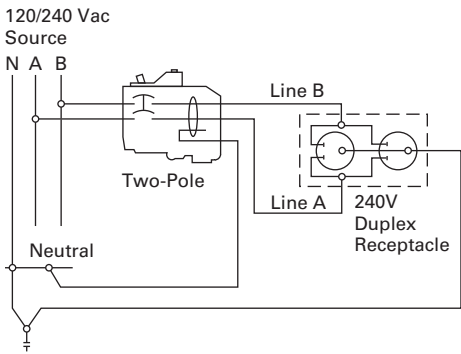

### OEM Loadcenters



### Contents

| <i>Description</i>                     | <i>Page</i> |
|--|-------------|
| Standards and Certifications . . . . . | V1-T1-90    |
| Product Selection . . . . .            | V1-T1-90    |

### Product Description

As a leader in the electrical distribution equipment business, Eaton has a unique product offering for equipment manufacturers, panel builders and virtually any OEM that has a need for power distribution within their equipment. The OEM interior offering consists of a wide variety of power distribution options utilizing components from Eaton's CH and BR loadcenter product lines. With high-volume, standardized products, OEMs can expect to receive high-quality products covering configurations meeting virtually any power distribution need.

Coupled with Eaton's expertise in circuit breaker design and manufacturing, OEM interiors provide solid power distribution and circuit protection in a compact, easy-to-install package. Interiors are offered from 2 to 42 circuits and from 70 to 225 A.

### Quality

Built in ISO 9002 certified manufacturing facilities, customers can be assured of the process quality in place for the manufacture of these products. Utilizing the latest in computer-controlled plating, painting, molding, stamping and welding processes, Eaton's customers have come to expect consistent high-quality from shipment to shipment.

### Two Products Offer Design Flexibility

As a manufacturer of two lines of loadcenters, Eaton is in a unique position to offer the broadest range of interiors in the market. Each line has its own unique characteristics that appeal to various segments of the market. OEM interiors are UL recognized components and are listed in either of the following UL files: E8741 or E52977.

The CH interiors feature 100% copper bus and use the CH 3/4-inch (19.1 mm) wide circuit breaker, which minimizes panel space. Recognized by contractors for its sturdy design, the CH interior will appeal to those customers seeking an industrial quality bolted busbar and the space saving of 3/4-inch (19.1 mm) per bus stab. With a typical 12 circuit CH interior, this space savings amounts to an inch and a half savings over its 1-inch (25.4 mm) counterparts. The stab rating of the CH interiors is 140 A maximum meaning that the handle rating of breakers mounted across from one another may not exceed 140 A.

The BR interiors are manufactured of formed, plated aluminum or copper, and use Eaton's Type BR 1-inch (25.4 mm) wide circuit breaker. This design affords customers the most circuit flexibility as many of these interiors allow the installation of standard single- and two-pole breakers as well as duplex (two poles in a 1-inch (25.4 mm) space) or quadplex (four poles in a 2-inch (50.8 mm) space) breakers.

The stab rating of the BR interiors is 200 A maximum, meaning that the handle rating of the breakers that are mounted across from one another may not exceed 200 A.

The interiors are designed for either horizontal (single-row breaker mounting), or vertical (double-row breaker mounting). To comply with National Electrical Code (NEC) requirements, if mounted horizontally, when the breaker is ON, the handle should be in the UP position. When mounted vertically, the handle toggles from left to right, so this is not a concern.

#### 1

### Standards and Certifications

#### Class CTL

National Electrical Code Paragraph 384.15 requires branch circuit panelboards to be provided with physical means to prevent the installation of more overcurrent devices than that number of which the enclosure was designed, rated and approved. Class CTL Duplex, Quadplex and twin breakers (identified by a catalog number prefix BD, BQ, BQC and CHT) are equipped with a UL listed rejection tab over the line terminal. All OEM interiors have appropriately notched stabs to accept these rejection tab Class CTL breakers.

Duplex, Quadplex and twin breakers manufactured without the rejection tab (identified by a catalog number prefix BR, BRD and CHT) are available for replacement purposes in older interiors.

#### Federal Specifications

All loadcenter enclosures meet Federal Specifications W-P-115b, Type 1, Class 2 requirements.

All 120/240 V breakers, both 1-inch (25.4 mm), 1/2-inch (12.7 mm) and 3/4-inch (19.1 mm) per pole meet the requirement of Federal Specifications W-C 375B/Gen Type 1.

#### Canadian Standards Association Listing

All single-pole and two-pole, 120/240 V breakers, both 1-inch (25.4 mm), 1/2-inch (12.7 mm) and 3/4-inch (19.1 mm) per pole, 225 A maximum, are listed as Certified by the Canadian Standards Association, Guide No. 69-11.19, Class 1432, File 18328.

#### Underwriters Laboratories Listing

All grounding bars manufactured comply with Underwriters Laboratories standards and are listed under Guide No. DHJR, File E31424, Volume W, Section 17.

All circuit breakers 10 A and larger comply with the Underwriters Laboratories "Standard for Branch Circuit and Service Circuit-Breakers" UL 489; Guide No. 60 10.2 File E31424, and "Requirements for Wire Connectors and Soldering Lugs," UL 486B, Guide No. 461 10-C File E7830.

All Eaton breakers where marked, are suitable for use with 60/75 °C rated wire, unless otherwise specified.

All devices comply with the 22 kAIC–10 kAIC UL series connected components File DKSY2 of the Recognized Components Index.

#### Lighting and Appliance Panelboards

Lighting and appliance branch circuit panelboards are defined in NEC (Article 408) as "One having more than 10 percent of its overcurrent devices rated 30 A or less for which neutral connections are provided." Article 408 also limits the number of overcurrent devices (branch circuit poles) to a maximum of 42 in any one cabinet. When the 42 poles are exceeded, two or more separate panels are required.

For more details and engineering drawings, see BR.31.02.S.E.



### Product Selection

#### Type CH Loadcenter Interior Assemblies—Copper Bus

| Ampere Rating   | Maximum Number 1-Inch (24.5 mm) Spaces |    | UL File Reference | Main Terminal Size (Per Phase) | Standard Package Quantity | Catalog Number |
|---|--|----|-------------------|--------------------------------|---------------------------|----------------|
|   | Single Poles                           |    |                   |                                |                           |                |
| <b>Single-Phase Single Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |    |                   |                                |                           |                |
| 70  | 2                                      | 2  | E8741             | (1) #8–#2 AWG Cu/Al            | 1                         | CH9MB270       |
| 125   | 2                                      | 2  | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH2L125INT     |
| <b>Single-Phase Double Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |    |                   |                                |                           |                |
| 125   | 4                                      | 4  | E8741             | (1) 2/0–#14 AWG Cu/Al          | 20                        | CH4L125INT     |
| 125   | 8                                      | 8  | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH8L125INT     |
| 125   | 12                                     | 12 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH12L125INT    |
| 125   | 16                                     | 16 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH16L125INT    |
| 200   | 12                                     | 12 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 20                        | CH12L200INT    |
| 200   | 16                                     | 16 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH16L200INT    |
| 225   | 24                                     | 24 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH24L225INT    |
| 225   | 32                                     | 32 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH32L225INT    |
| 225   | 42                                     | 42 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH42L225INT    |
| <b>Three-Phase Double Row Breaker Mounting—208Y/120 Vac, Four-Wire—240 Vac, Three-Wire—120/240 Vac, Four-Wire Delta</b> |  |    |                   |                                |                           |                |
| 125   | 12                                     | 12 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 10                        | CH12L3125INT   |
| 125   | 18                                     | 18 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 10                        | CH18L3125INT   |
| 125   | 24                                     | 24 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 10                        | CH24L3125INT   |
| 225   | 24                                     | 24 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH24L3225INT   |
| 225   | 30                                     | 30 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH30L3225INT   |
| 225   | 42                                     | 42 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH42L3225INT   |

BR Loadcenter Interior Assembly



### Type BR Loadcenter Interior Assemblies—Aluminum Bus

| Ampere Rating  | Maximum Number 1-Inch (24.5 mm) Spaces | Single Poles | UL File Reference | Main Terminal Size (Per Phase)      | Standard Package Quantity | Catalog Number |
|--|--|--------------|-------------------|-------------------------------------|---------------------------|----------------|
| <b>Single-Phase Single Row Breaker Mounting— 120/240 Vac, Three-Wire</b>   |  |              |                   |                                     |                           |                |
| 70   | 2                                      | 4            | E8741             | (1) #8-#2 AWG Cu/Al                 | 20                        | 24INT70B       |
| 125  | 2                                      | 4            | E8741             | (1) 1/0-#14 AWG Cu<br>2/0-12 AWG Al | 20                        | 24INT125B      |
| 125  | 6                                      | 12           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 612INT125SRB   |
| <b>Single-Phase Double Row Breaker Mounting— 120/240 Vac, Three-Wire</b>   |  |              |                   |                                     |                           |                |
| 125  | 4                                      | 8            | E8741             | (1) 2/0-#14 AWG Cu/Al               | 20                        | 48INT125B      |
| 125  | 6                                      | 12           | E8741             | (1) 2/0-#14 AWG Cu/Al               | 20                        | 612INT125B     |
| 125  | 8                                      | 16           | E8741             | (1) 2/0-#14 AWG Cu/Al               | 20                        | 816INT125B     |
| 125  | 12                                     | 12           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 1212INT125B    |
| 125  | 12                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 1224INT125B    |
| 125  | 16                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 1624INT125B    |
| 125  | 20                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 10                        | 2024INT125B    |
| 125  | 24                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 10                        | 2424INT125B    |
| 200  | 8                                      | 16           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 20                        | 816INT200B     |
| 200  | 12                                     | 24           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 20                        | 1224INT200B    |
| 200  | 30                                     | 40           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 10                        | 3040INT200B    |
| 225  | 42                                     | 42           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 10                        | 4242INT225B    |
| <b>Three-Phase Double Row Breaker Mounting— 208Y/120 Vac, Four-Wire— 240 Vac, Three-Wire— 120/240 Vac, Four-Wire Delta</b> |  |              |                   |                                     |                           |                |
| 125  | 12                                     | 24           | E52977            | (1) 2/0-#8 AWG Cu/Al                | 10                        | 1224INT3125B   |
| 150  | 18                                     | 36           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 1836INT3150B   |
| 150  | 24                                     | 42           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 2442INT3150B   |
| 200  | 30                                     | 42           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 3042INT3200B   |
| 225  | 42                                     | 42           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 4242INT3225B   |

### Type BR Loadcenter Interior Assemblies—Copper Bus

| Ampere Rating  | Maximum Number 1-Inch (24.5 mm) Spaces | Single Poles | UL File Reference | Main Terminal Size (Per Phase) | Standard Package Quantity | Catalog Number |
|--|--|--------------|-------------------|--------------------------------|---------------------------|----------------|
| <b>Single-Phase Double Row Breaker Mounting— 120/240 Vac, Three-Wire</b>   |  |              |                   |                                |                           |                |
| 125  | 8                                      | 16           | E5297             | (1) 2/0-#14 AWG Cu/Al          | 20                        | 816INT125BC    |
| 125  | 12                                     | 12           | E5297             | (1) 2/0-#14 AWG Cu/Al          | 20                        | 1212INT125BC   |
| 200  | 12                                     | 24           | E5297             | (1) 300 kcmil-#1 AWG Cu/Al     | 20                        | 1224INT200BC   |
| <b>Three-Phase Double Row Breaker Mounting— 208Y/120 Vac, Four-Wire— 240 Vac, Three-Wire— 120/240 Vac, Four-Wire Delta</b> |  |              |                   |                                |                           |                |
| 125  | 12                                     | 24           | E52977            | (1) 2/0-#8 AWG Cu/Al           | 10                        | 1224INT3125BC  |
| 200  | 12                                     | 24           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al     | 10                        | 1224INT3200BC  |

# 1.3

## Loadcenters and Circuit Breakers

### Loadcenter Interiors/OEM Loadcenters

1

#### Neutral Assemblies

| Ampere Rating | UL File Rating | Main Incoming Terminal Wire Size Range 60 °C or 75 °C | Number of Terminals |                             | Standard Package Quantity | Figure | Dimensions—Inches (mm) |                 | Catalog Number |
|---------------|----------------|---|---------------------|-----------------------------|---------------------------|--------|------------------------|-----------------|----------------|
|               |                |   | #14–4 AWG Cu/Al     | #6–1/0 AWG Cu #6–2/0 AWG Al |                           |        | Overall Length A       | Mounting B      |                |
| 125           | E52977         | #6–1/0 AWG Cu #6–2/0 AWG Al                           | 10                  | —                           | 20                        | 1      | 5.938 (150.83)         | 5.400 (137.16)  | 10NEU125B      |
| 125           | E52977         | #6–1/0 AWG Cu #6–2/0 AWG Al                           | 17                  | —                           | 20                        | 1      | 8.388 (213.06)         | 7.850 (199.40)  | 17NEU125B      |
| 125           | E52977         | #6–1/0 AWG Cu #6–2/0 AWG Al                           | 20                  | —                           | 20                        | 1      | 9.438 (239.73)         | 8.900 (226.06)  | 20NEU125B      |
| 225           | E52977         | #1–300 kcmil Cu/Al                                    | 24                  | 1                           | 20                        | 2      | 10.913 (277.19)        | 10.300 (261.62) | 24NEU225B      |
| 225           | E52977         | #1–300 kcmil Cu/Al                                    | 35                  | 1                           | 20                        | 2      | 15.813 (401.65)        | 15.200 (386.08) | 35NEU225B      |
| 125           | —              | —   | 4                   | 2                           | 1                         | 3      | 2.266 (57.56)          | 0.594 (15.09)   | BINA           |

Figure 1

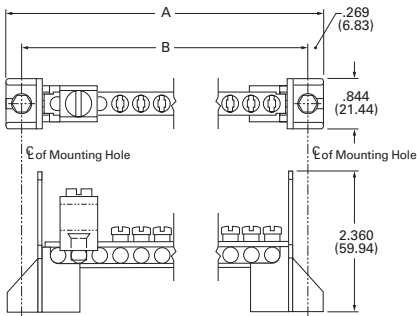


Figure 2


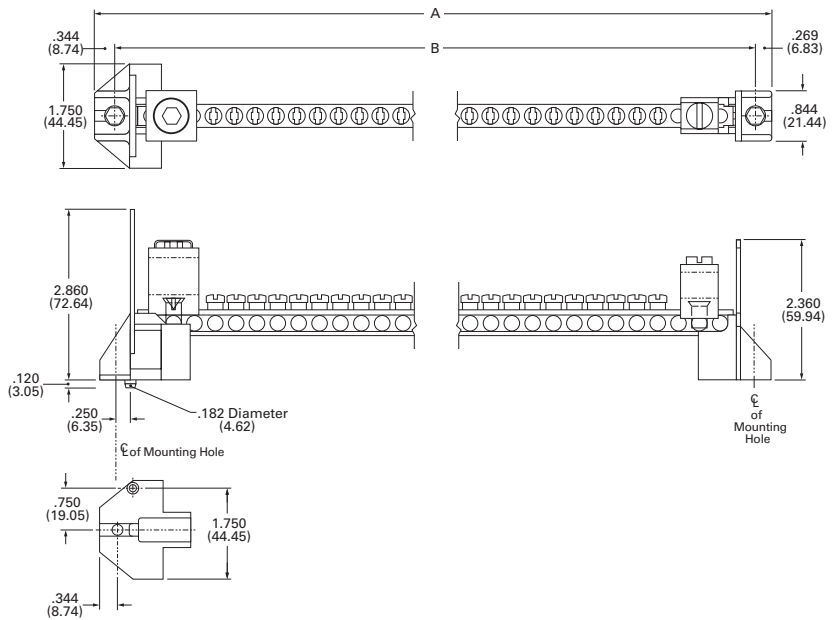


Figure 3



### Add-on Lugs for Neutral Assemblies

| Description                  | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Ordering<br>Quantity <sup>①</sup> | Catalog<br>Number |
|------------------------------|---|-----------------------------------|-------------------|
| Neutral/ground lug           | #2/0 maximum                            | 1                                 | NL20              |
| Add-on neutral or ground lug | #3/0 maximum                            | 1                                 | NL30              |
|                              | 300 kcmil maximum                       | 1                                 | NL300             |

GBK14



BRGBK39512



### Ground Bar Kits

| Description<br>(See Legend) | Length<br>Inches (mm) | Ordering<br>Quantity <sup>①</sup> | Catalog<br>Number        |
|-----------------------------|-----------------------|-----------------------------------|--------------------------|
| ●○○○○●○                     | 2.54 (64.5)           | 1                                 | GBK5 <sup>②</sup>        |
| ●○○○○●●■                    | 3.59 (91.2)           | 1                                 | GBK520 <sup>②</sup>      |
| ●○○○○●○○○○○                 | 4.29 (109.0)          | 1                                 | GBK10 <sup>②</sup>       |
| ●○○○○●○○○○○■                | 5.34 (135.6)          | 1                                 | GBK1020 <sup>②</sup>     |
| ○●●●●○●●●●○●●●●○            | 4.61 (117.1)          | 1                                 | GBK13 <sup>②</sup>       |
| ●○○○○●○○○○○○○○○             | 5.69 (144.5)          | 1                                 | GBK14 <sup>②</sup>       |
| ●○○○○●○○○○○○○○○■            | 6.74 (171.2)          | 1                                 | GBK1420 <sup>②</sup>     |
| ●○○○○●○○○○○○○○○○○○○         | 8.14 (206.8)          | 1                                 | GBK21 <sup>②</sup>       |
| ●○○○○●○○○○○○○○○○○○○■        | 9.19 (233.4)          | 1                                 | GBK2120 <sup>②</sup>     |
| ○■●●●○■●●●○■●●●○■●●●○■      | 5.78 (146.8)          | 1                                 | BRGBK39512 <sup>③④</sup> |

#### Ground Bar Legend

- (3) #14–10 Cu/Al or (1) #14–4 Cu/Al
- (1) #6–2/0 Cu/Al
- (1) #14–1/0 Cu/Al or (3) #14–10 Cu/Al
- (1) #14–6 Cu/Al or (2) #14–12 Cu/Al
- Mounting Hole

#### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Distance between mounting holes is 1.75 inches (44.5 mm).
- ③ For single- and three-phase 400 and 600 A applications.
- ④ Distance between mounting holes is 2.34 inches (59.5 mm).

#### Enclosed Breakers



#### Contents

##### Description

|                         |          |
|-------------------------|----------|
| Product Selection ..... | V1-T1-95 |
| Dimensions .....        | V1-T1-95 |

##### Page

|          |
|----------|
| V1-T1-95 |
| V1-T1-95 |

#### Product Overview

Eaton enclosed breakers offer all the advantages of circuit breakers packed in an enclosure for 240 Vac applications and include a wide range of accessories.

#### Product Description

- 100–225 A, 240 Vac maximum
- NEMA 1 general purpose—surface or flush mounting
- NEMA 3R rainproof surface mounting

#### Standards and Certifications

- UL 489
- CSA 22.2
- NEMA 250



### Product Selection

#### Single-Phase and Three-Phase Circuit Breaker Enclosures—10/25 kAIC

##### ECC225R



#### Type ECC Circuit Breaker Enclosure—Order Type CC Circuit Breaker Separately

| Main Ampere Rating                             | Unit Enclosure Type | Mounting Type | Circuit Breaker Type             | Wire Size Range Cu/Al 60 °C or 75 °C | Catalog Number       |
|--|---------------------|---------------|----------------------------------|--------------------------------------|----------------------|
| <b>Single- and Three-Phase—240 Vac Maximum</b> |                     |               |                                  |                                      |                      |
| 100  | Indoor              | Surface       | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH100S</b> ①②③ |
| 150  | Indoor              | Surface       | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH150S</b> ①②③ |
| 200  | Indoor              | Surface       | CCVH factory installed (25 kAIC) | #2/0–300 kcmil                       | <b>ECCVH200S</b> ①②③ |
| 100  | Outdoor             | —             | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH100R</b> ①②④ |
| 150  | Outdoor             | —             | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH150R</b> ①②④ |
| 200  | Outdoor             | —             | CCVH factory installed (25 kAIC) | #2/0–300 kcmil                       | <b>ECCVH200R</b> ①②④ |
| 225  | Indoor              | Flush         | CC/CCV/CCH                       | ⑥                                    | <b>ECC225F</b> ②③⑥   |
| 225  | Indoor              | Surface       | CC/CCV/CCH                       | ⑥                                    | <b>ECC225S</b> ②③⑤   |
| 225  | Outdoor             | —             | CC/CCV/CCH                       | ⑥                                    | <b>ECC225R</b> ②③④⑤  |

##### CCV2200



#### Circuit Breaker 240 Vac for Use in Type ECC Enclosures

| Ampere Rating     | Wire Size Range Cu/Al 60 °C or 75 °C for Line Terminals | Type CCV and CC 10 kAIC Catalog Number | Type CCVH/CCH 25 kAIC Catalog Number |
|-------------------|---|--|--------------------------------------|
| <b>Two-Pole</b>   |   |  |                                      |
| 60                | #4–4/0  | <b>CCV2060</b>                         | <b>CCVH2060</b>                      |
| 70                |   | <b>CCV2070</b>                         | <b>CCVH2070</b>                      |
| 80                |   | <b>CCV2080</b>                         | <b>CCVH2080</b>                      |
| 90                |   | <b>CCV2090</b>                         | <b>CCVH2090</b>                      |
| 100               |   | <b>CCV2100</b>                         | <b>CCVH2100</b>                      |
| 125               |   | <b>CCV2125</b>                         | <b>CCVH2125</b>                      |
| 150               |   | <b>CCV2150</b>                         | <b>CCVH2150</b>                      |
| 175               | #2/0–300 kcmil  | <b>CCV2175</b>                         | <b>CCVH2175</b>                      |
| 200               |   | <b>CCV2200</b>                         | <b>CCVH2200</b>                      |
| 225               |   | <b>CCV2225</b>                         | <b>CCVH2225</b>                      |
| <b>Three-Pole</b> |   |  |                                      |
| 100               | #4–4/0  | <b>CC3100</b>                          | <b>CCH3100</b>                       |
| 125               |   | <b>CC3125</b>                          | <b>CCH3125</b>                       |
| 150               |   | <b>CC3150</b>                          | <b>CCH3150</b>                       |
| 175               | #2/0–300 kcmil  | <b>CC3175</b>                          | <b>CCH3175</b>                       |
| 200               |   | <b>CC3200</b>                          | <b>CCH3200</b>                       |
| 225               |   | <b>CC3225</b>                          | <b>CCH3225</b>                       |

#### Shunt Trips and Auxiliary Contacts

| Description Type         | Volts                 | Catalog Number Suffix Adder ⑦ |
|--------------------------|-----------------------|-------------------------------|
| <b>Shunt Trip</b>        |                       |                               |
| CC                       | 12 DC                 | <b>SR12</b>                   |
| CC                       | 24 DC                 | <b>SR24</b>                   |
| CC                       | 120 AC                | <b>SR01</b>                   |
| CC                       | 208 AC                | <b>SR08</b>                   |
| CC                       | 240 AC                | <b>SR02</b>                   |
| CCV                      | 48–127 AC/48–60 DC    | <b>SR01</b>                   |
| CCV                      | 9–24 AC/12–24 DC      | <b>SR02</b>                   |
| CCV                      | 208–380 AC/100–127 DC | <b>SR04</b>                   |
| <b>Auxiliary Contact</b> |                       |                               |
| CC 1NO and 1NC           | —                     | <b>AL1</b>                    |

#### Dimensions

Approximate Dimensions in Inches (mm)

##### ECC Unit Enclosures—NEMA Type 1 Indoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.25 (590.6) | 8.88 (225.4) | 4.50 (114.3) |

##### ECC Unit Enclosures—NEMA Type 3R Outdoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.68 (601.7) | 9.31 (236.5) | 5.44 (138.1) |

#### Notes

- ① Factory installed CCVH breaker.
- ② Approved for service entrance.
- ③ One ground lug accepting (1) #14–#2 is factory installed. Also, there are pre-drilled holes to accept a GBK5 ground bar.
- ④ Rainproof panels are furnished with hub closures plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ Order circuit breaker separately.
- ⑥ Wire size is determined by the circuit breaker installed in enclosure.
- ⑦ Add suffix indicated to end of breaker catalog number.





### Product Description

Eaton UL classified Replacement Circuit Breakers are available in both 3/4-inch Type CHQ and 1-inch Type CL, single- and two-pole configurations. These breakers are classified as direct replacements by Underwriters Laboratories. In addition to a UL listing, they also come with a 15-year warranty.

### Specified vs. UL Classified

Specified breakers are listed by the manufacturer of the panelboard for use in a particular panel. This doesn't mean that the panelboard manufacturer produced the specified breaker; it merely means that the panelboard manufacturer has tested the breaker in the panel. In fact, through the years, Eaton has manufactured thousands of breakers for other panelboard manufacturers.

UL classified breakers are produced by one manufacturer for use in place of the breakers specified on the panelboard. Like specified breakers, UL classified breakers have been tested in the panels for which they are approved.

### Contents

| <i>Description</i>          | <i>Page</i> |
|-----------------------------|-------------|
| Product Selection . . . . . | V1-T1-97    |
| Accessories . . . . .       | V1-T1-99    |
| Technical Data . . . . .    | V1-T1-99    |
| Wiring Diagrams . . . . .   | V1-T1-100   |

### Testing

Classified breakers are tested extensively in numerous General Electric®, Siemens®, Murray®, Thomas & Betts®, Square D®, and Crouse-Hinds® panels. The tests are conducted with witnesses from Underwriters Laboratories Inc. and involve short-circuit, temperature, and insertion/withdrawal applications. This level of testing ensures that the breakers meet identified standards and have been found suitable by UL for the specified purpose.

### Understanding Classified Breaker Terminology

#### Definitions

**Specified circuit breaker**—each manufacturer lists the brands of circuit breakers that can be used in their panelboards. Often, manufacturers will not list competitors as specified, even though they are suitable replacements.

**Classified circuit breaker**—a breaker that is considered suitable, by a qualified third-party organization, for use in another manufacturer's panelboard.

**Listed breaker**—the listing of a circuit breaker is by an independent third party. Eaton classified breakers are listed by UL.

**Labeled breaker**—a breaker with a label affixed by an independent third party.

**Product Selection**

**Type CHQ Replacement Breakers for Square D Type QO Loadcenters**

10 kAIC, 120 and 120/240 Vac

CHQ120 CHQ230



**Type CHQ Classified Breakers 3/4-Inch (19.1 mm) per Pole  
120 or 120/240 Vac, 10 kAIC**



**Single-Pole 120/240 Vac**  
Requires One  
3/4-Inch (19.1 mm) Space  
10 per Shelf Carton  
Catalog Number



**Two-Pole 120/240 Vac**  
Common Trip Requires Two  
3/4-Inch (19.1 mm) Spaces  
5 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Catalog Number | Catalog Number |
|---------------|---|----------------|----------------|
| 15            | (1) #14–8                               | CHQ115         | CHQ215         |
| 20            | (2) #14–10                              | CHQ120         | CHQ220         |
| 25            |   | CHQ125         | CHQ225         |
| 30            |   | CHQ130         | CHQ230         |
| 35            |   | CHQ135         | CHQ235         |
| 40            |   | CHQ140         | CHQ240         |
| 45            |   | CHQ145         | CHQ245         |
| 50            |   | CHQ150         | CHQ250         |
| 60            |   | —              | CHQ260         |

**Type CHQ Surge Arrester**

Catalog Number

CHQSA

# 1.5

## Loadcenters and Circuit Breakers

### Classified Circuit Breakers

1

#### Type CL Replacement Breakers for Square D HOMELINE, General Electric, Crouse-Hinds, Thomas & Betts, Murray and ITE®/Siemens Loadcenters

CL\_

##### Type CL Breakers, 1-Inch (25.4 mm) per Pole, 10 kAIC



Single-Pole 120/240 V  
Requires One  
1-Inch (25.4 mm) Space  
10 per Shelf Carton  
Catalog Number




Two-Pole 120/240 V  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Single-Pole 120/240 V<br>Requires One<br>1-Inch (25.4 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 V<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|---|
| 15            | #14-4                                   | CL115  | CL215   |
| 20            | #14-4                                   | CL120  | CL220   |
| 25            | #14-4                                   | CL125  | CL225   |
| 30            | #14-4                                   | CL130  | CL230   |
| 35            | #14-4                                   | CL135  | CL235   |
| 40            | #14-4                                   | CL140  | CL240   |
| 45            | #14-4                                   | CL145  | CL245   |
| 50            | #14-4                                   | CL150  | CL250   |

CL\_AF

##### Type CL Classified Arc and Ground Fault Breakers (5 Milliampere), 1-Inch (25.4 mm) per Pole, 10 kAIC



Single-Pole 120/240 V  
Requires One 1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number

| Ampere Rating                | Wire Size Range Cu/Al<br>60 °C or 75 °C | Single-Pole 120/240 V<br>Requires One 1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number |
|------------------------------|---|--|
| <b>Arc Fault Breakers</b>    |   |  |
| 15                           | #14-4                                   | CL115AF  |
| 20                           | #14-4                                   | CL115CAF   |
| 20                           | #14-4                                   | CL120AF  |
| 20                           | #14-4                                   | CL120CAF   |
| <b>Ground Fault Breakers</b> |   |  |
| 15                           | #14-4                                   | CL115GFT   |
| 20                           | #14-4                                   | CL120GFT   |
| 30                           | #14-4                                   | CL130GFT   |

CLR\_

##### Type CL Classified Latching Remote Control Smart Breakers™, 1-Inch (25.4 mm) per Pole, 10 kAIC



Single-Pole 120 V  
Requires One  
1-Inch (25.4 mm) Space  
10 per Shelf Carton  
Catalog Number



Two-Pole 120/240 V  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Single-Pole 120 V<br>Requires One<br>1-Inch (25.4 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 V<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|---|
| 15            | (2) #14-10                              | CLRP115  | CLRP215   |
| 20            | (2) #14-10                              | CLRP120  | CLRP220   |
| 25            | (1) #8-6                                | CLRP125  | CLRP225   |
| 30            | (1) #8-6                                | CLRP130  | CLRP230   |

## Accessories

### CHQ Breaker Accessories

| Description         | Catalog Number |
|---------------------|----------------|
| Breaker handle lock | CHLO           |

## Technical Data

### Arc Fault Application Notes

An arc fault circuit interrupter is a device intended to provide protection from the effects of arc faults by recognizing characteristics unique to arcing and by functioning to de-energize the circuit when the arc fault is detected. As of January 1, 2002, the National Electrical Code (NEC) requires all branch circuits that supply 125 V, single-phase, 15 and 20 A receptacle outlets installed in dwelling unit bedrooms shall be protected by an arc fault circuit interrupter(s). This includes ceiling lighting (recessed, ceiling fans, etc.) as well as smoke detectors and all other bedroom outlets. The 2005 NEC introduced the application of the Combination Type AFCI for bedroom circuits required as of January 1, 2008. The 2008 NEC expands this application to other living areas.

### Ground Fault Application Notes

Single-pole GFTCBs are designed for use in two-wire, 120 Vac circuits. Drawing on **Page V1-T1-100** shows a typical wiring configuration.

Two-pole GFTCBs are designed for use in three-wire, 120/240 Vac circuits, 120 Vac multiwire circuits employing common, neutral and two-wire, 240 Vac circuits obtained from a 120/240 Vac source.

Drawings on **Page V1-T1-100** illustrate typical wiring configurations for 120/240 Vac multiwire circuits.

Drawing on **Page V1-T1-100** depicts a 240 Vac, two-wire circuit. Note the "panel neutral" conductor connects to the neutral bar, even though the neutral is not included in the load circuit. This connection is necessary to supply a 120 Vac power source to the ground fault sensing circuit.


The figures are shown with a 120/240 Vac, single-phase, three-wire power source, but are also applicable to a 120/208 Vac, three-phase, four-wire power supply. For all figures, the electrical operation of the GFTCB is not affected by the equipment ground.

# 1.5


## Loadcenters and Circuit Breakers

### Classified Circuit Breakers


#### 1 Wiring Diagrams Single-Pole 120 V Load Application Sourced by 120/240 Vac

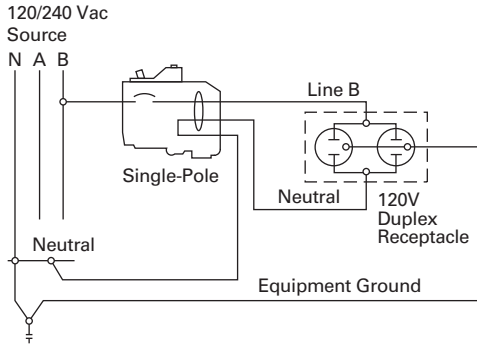


#### Two-Pole 240 V Load Application Sourced by 120/240 Vac

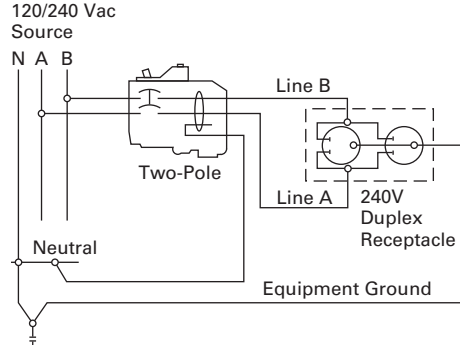


#### Two-Pole Shared Neutral with Multi-Duplex Receptacle Application

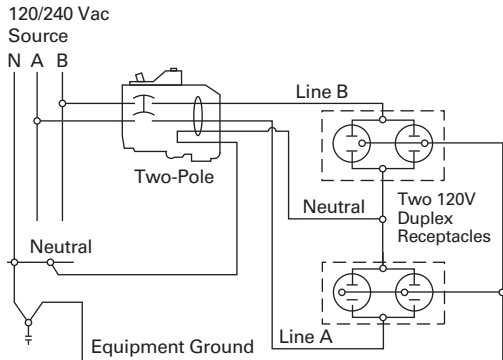


#### Two-Pole Shared Neutral with Duplex Receptacle Application

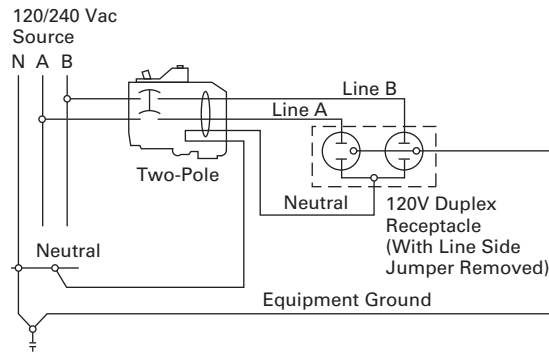


#### Single-Pole 120 V Duplex Receptacle Application

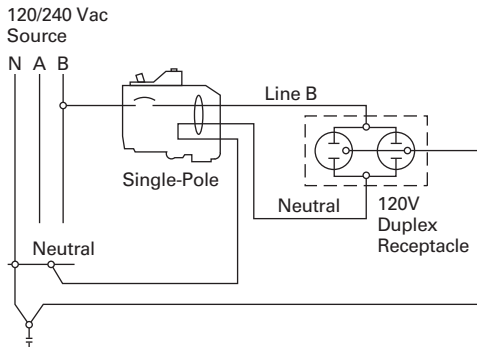


#### Two-Pole 120 V Duplex Receptacle Application

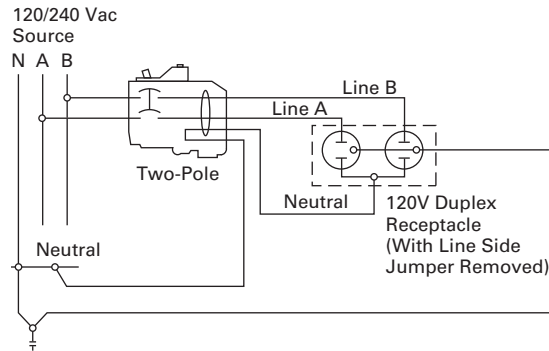

#### Two-Pole 120 V Multi-Duplex Receptacle Application

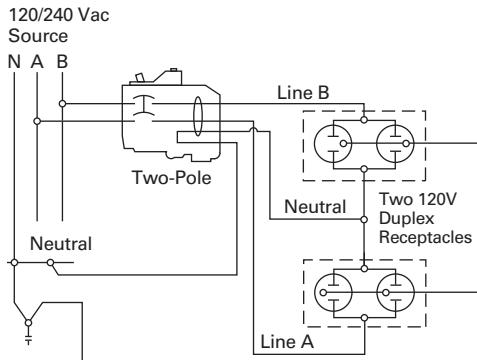

#### Two-Pole 240 V Duplex Receptacle Application

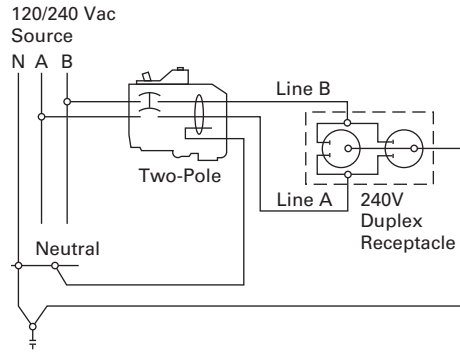

# Loadcenters and Circuit Breakers

Residential Loadcenters and Breaker Family



|            |   |           |
|------------|---|-----------|
| <b>1.1</b> | <b>Type CH Loadcenters and Circuit Breakers</b> |           |
|            | Overview  | V1-T1-2   |
|            | Single-Phase                                    | V1-T1-6   |
|            | Three-Phase                                     | V1-T1-11  |
|            | CH Specialty Products                           | V1-T1-13  |
|            | Spa Panels                                      | V1-T1-13  |
|            | Surge Panel                                     | V1-T1-14  |
|            | Plug-On Neutral Loadcenter                      | V1-T1-16  |
|            | Type CH Renovation Loadcenter                   | V1-T1-17  |
|            | Type CH Retrofit Interior Kits                  | V1-T1-18  |
|            | Non-Metallic Loadcenter                         | V1-T1-20  |
|            | CH Loadcenter Options and Accessories           | V1-T1-21  |
|            | CH Circuit Breakers                             | V1-T1-31  |
| <b>1.2</b> | <b>Type BR Loadcenters and Circuit Breakers</b> |           |
|            | Overview  | V1-T1-42  |
|            | Single-Phase                                    | V1-T1-54  |
|            | Three-Phase                                     | V1-T1-54  |
|            | BR Specialty Products                           | V1-T1-57  |
|            | BR Quick Connect Neutral Loadcenters            | V1-T1-57  |
|            | Spa Panels                                      | V1-T1-58  |
|            | Riser Panel                                     | V1-T1-59  |
|            | Type BR Renovation Loadcenter                   | V1-T1-60  |
|            | Type BR Retrofit Interior Kits                  | V1-T1-61  |
|            | BR Loadcenter Options and Accessories           | V1-T1-63  |
|            | BR Circuit Breakers                             | V1-T1-77  |
| <b>1.3</b> | <b>Loadcenter Interiors/OEM Loadcenters</b>     |           |
|            | Product Description                             | V1-T1-89  |
|            | Standards and Certifications                    | V1-T1-90  |
|            | Product Selection                               | V1-T1-90  |
| <b>1.4</b> | <b>Enclosed Breakers</b>                        |           |
|            | Product Description                             | V1-T1-94  |
|            | Standards and Certifications                    | V1-T1-94  |
|            | Product Selection                               | V1-T1-95  |
|            | Dimensions                                      | V1-T1-95  |
| <b>1.5</b> | <b>Classified Circuit Breakers</b>              |           |
|            | Product Description                             | V1-T1-96  |
|            | Product Selection                               | V1-T1-97  |
|            | Accessories                                     | V1-T1-99  |
|            | Technical Data                                  | V1-T1-99  |
|            | Wiring Diagrams                                 | V1-T1-100 |



# Revision notes

## Volume 1—Residential and Light Commercial, CA08100002E

Tab 1—Loadcenters and Circuit Breakers

| Revision date | Section | Change page(s)    | Description   |
|---------------|---------|-------------------|---|
| 01/25/2018    | 1.1     | V1-T1-2–V1-T1-30  | Rearrange layout, content edits                               |
| 01/25/2018    | 1.1     | V1-T1-38          | Content edits   |
| 01/25/2018    | 1.2     | V1-T1-42–V1-T1-70 | Rearrange layout, content edits                               |
| 01/25/2018    | 1.2     | V1-T1-72–V1-T1-79 | Content edits   |
| 01/25/2018    | 1.2     | V1-T1-85          | Content edits   |
| 01/25/2018    | 1.3     | V1-T1-90          | Content edits   |
| 02/19/2018    | All     | All               | Change to revision date to match print version, February 2018 |



*Powering Business Worldwide*

Eaton Type CH Convertible Family



### Overview

#### Product Description

Loadcenters are enclosures specifically designed to house the branch circuit breakers and wiring required to distribute power to individual circuits. They contain either a main breaker when used at the service entrance point or a main lug when used as a sub-panel to add circuits to existing service. The main breaker protects the main entire panel and can be used as a service disconnect. The branch breakers protect the wires leading to individual electrical loads such as fixtures and outlets.

#### Features, Benefits and Functions

##### Loadcenter Construction

Eaton's Type CH loadcenters feature silver flash plated copper bus in all interiors. Stabs are rated 200 A throughout the CH line. Therefore, the sum of the handle ratings connected to any one stab is limited to 200 A maximum. NEMA 1 boxes are manufactured from cold rolled 16 gauge sheet steel. Raintight boxes are manufactured from galvanized steel. All boxes and trims are finished using an electrostatic powder coat, baked urethane paint process.

##### Neutrals

Eaton Type CH loadcenters feature two types of neutrals:

##### Insulated/Bondable Split Neutral

Panels are supplied with split insulated neutrals with an insulated cross strap. For service entrance applications, the neutral must be bonded by using the bonding strap supplied with the panel. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

### Contents

#### Description

|   | <i>Page</i>     |
|---|-----------------|
| Overview  |                 |
| Standards and Certifications . . . . .          | <b>V1-T1-3</b>  |
| Catalog Number Selection . . . . .              | <b>V1-T1-5</b>  |
| Product Selection . . . . .                     | <b>V1-T1-6</b>  |
| CH Specialty Products . . . . .                 | <b>V1-T1-13</b> |
| CH Loadcenter Options and Accessories . . . . . | <b>V1-T1-21</b> |
| CH Circuit Breakers . . . . .                   | <b>V1-T1-31</b> |

##### Insulated/Bondable Single Neutral

Panels are supplied with a single insulated neutral. For service entrance applications, all that is required to bond the neutral is to loosen the bonding screw and the neutral screw directly beside it, insert the bonding strap into the neutral bar, and re-tighten both connections. The single neutral can be moved by the contractor to the other side of the panel, if desired. When used as a service entrance panel, unused neutral connections may be used for the termination of equipment grounds. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

##### Inboard Plug-On Neutral

Code changes and higher safety standards are leading to more arc fault circuit interrupter (AFCI) installations. With the electrical contractor in mind, Eaton has revolutionized the way Combination AFCIs are installed with the Plug-on Neutral line of loadcenters and breakers.

This unique product solution enables the contractor to connect the breaker directly to the neutral bar, eliminating the need for wiring a pigtail.

##### Grounds

In service entrance applications where the neutral is bonded, unused neutral holes may be used for terminating ground conductors. In sub-feed panels, the neutral must be isolated (non-bonded), and ground wires must be terminated on a separate ground bar.

The insulated/bondable single/split neutral panels have sufficient terminations for both ground and neutral conductors. The insulated/bondable single split neutral panels are supplied with a separate factory-installed ground bar if the catalog number contains a "G." If not, a separate ground bar should be installed. Insulated/Bondable Single Neutral panels are supplied without a ground bar (unless otherwise noted), and ground bar kits, if needed, must be purchased separately.



**Neutral and Ground Terminals**

The standard terminals on grounds and neutrals are rated to accept (3)—#14—#10 Cu/Al or (1)—#14—4 wires. For larger cables, add-on neutral lugs may be ordered from the Accessories.

**Note:** NEC® allows only one current carrying conductor per hole on neutrals unless otherwise noted.

**Bottom-Fed Loadcenters**

When the power cable is brought into the loadcenter from below the panel; then the main lug panels, and single-phase, 225 A and below, loadcenters can be rotated 180 degrees to allow straight-in wiring of power cables to the main terminals. Because the CSR main circuit breaker handle operates horizontally, the orientation of the main circuit breaker handle is consistent with the requirements of NEC Article 240.81.

**Gutter Splicing**

Loadcenters are not UL listed as wiring troughs. Therefore, gutter splicing of riser cables to tap off to the main device is not permitted. Refer to NEC Article 373.8.

**Fire Rating**

Due to the numerous openings in both loadcenter boxes and trims, they should not be mounted in firewalls. There is no approval method for sealing the enclosures for this application.

**Date Code**

The date of manufacture of each loadcenter is printed on the outside of the carton as well as inside the loadcenter. On the carton, the date code is printed on the end carton label. In the loadcenter, the date code is located on the small white label located on the right side wall (with the main device on top).

The date code is in the following format: F # # # &. The “F” is the numeric code for the Lincoln, IL plant, and the three numbers are the year and week of manufacture, e.g., 023. The “&” sign at the end signifies the decade of the 2000s. The “!” at the end signifies the decade of the 2010s. Therefore, the date code F023& would indicate that the product was manufactured in the 23rd week of 2000. The 1980s are represented by a “+” sign and the 1990s are represented by a “=” at the end of the code.

**Plug-On Type CH Breakers**

Quick-make, quick-break switch mechanism combined with inverse time element tripping operation and trip-free handle design. Type CH circuit breakers trip to the OFF position eliminating nuisance callbacks. The thermal-magnetic trip curve avoids nuisance tripping on mild overloads while reacting almost instantaneously to severe short-circuit conditions. CHF breakers include a ‘trip flag’ to differentiate between a tripped breaker and one that has been turned off. Multipole breakers have internal common trip connection to operate all poles simultaneously. Handles are marked with ON-OFF indication and ampere rating of the breaker. Type CH breakers meet UL Standard 489, NEMA standards, and Federal Spec Classification W-C 375 b/Gen. They are UL listed under File Number E11713, E8741, E3624 and E51287; and CSA® certified file number LR87196, except Type CHT breakers.

**Type CH Circuit Breaker Ratings**

Single- and double-pole CH breakers rated 15 and 20 A have low instantaneous magnetic trip levels. The 15 and 20 A breakers with “HM” suffix have high magnetic trip settings recommended for circuits with inherently high inrush currents. All Type CH breakers are marked for heating, air conditioning and refrigeration (HACR) equipment application. Single-pole 15–20 A breakers are also suitable for switching duty (SWD). Shunt trip coils operate on 120 Vac and require one additional pole space per breaker.

**Standards and Certifications****UL® Listings**

All Eaton Type CH loadcenters are listed under the UL 67 certification in file E8741.



# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Type CH Loadcenter

Extra 1.5 inch Knockout (38.1 mm)

- Larger knockout provides easier installation and time savings for renovation installations

Top or Bottom Feed

- Straight-in wiring saves labor and material
- One panel for either top or bottom applications

2/0 Lug

- Easily removable and can be installed in any location on the neutral bar

Commercial Grade Main Breaker

- 25 kAIC series rated main breaker in 150 A–225 A loadcenters. 35, 42 and 100 kAIC series ratings are available
- Optional convertible design—reduces inventory requirements

One Piece Silver-Flashed Copper Bus

- Provides superior conductivity, corrosion resistance and durability

Drywall Marking on Enclosure

- Indicates proper mounting depth for flush applications

Steel Backpan

- Provides solid and reliable breaker mounting—single piece design for stability and durability

“Tangential” Center Knockout

- Easier installation for conduit applications

Unique Sandalwood Finish

- Aesthetically appealing, scratch-resistant powder coating

Neutral Bus (Strap)

- Easily removable for sub-panel applications

Bonding Z-Strap

- Provides easy field conversion for service entrance applications

Twin Neutral Bars


- Minimum 150% neutral capacity

Type CHF AFCI/GFCI/Thermal-Magnetic Breakers

- Advanced electronics effectively reduce nuisance tripping
- CHF AFCI breakers have a standard diagnostic LED indicating 1 of 7 trip codes
- Mechanical flag for trip indication (on thermal-magnetic AFCI and GFCI)
- All CH breakers provide industry exclusive 2-position handle with simple 1 step reset

Single Keyhole Mounting

- One keyhole at the top and bottom provides easier mounting and leveling

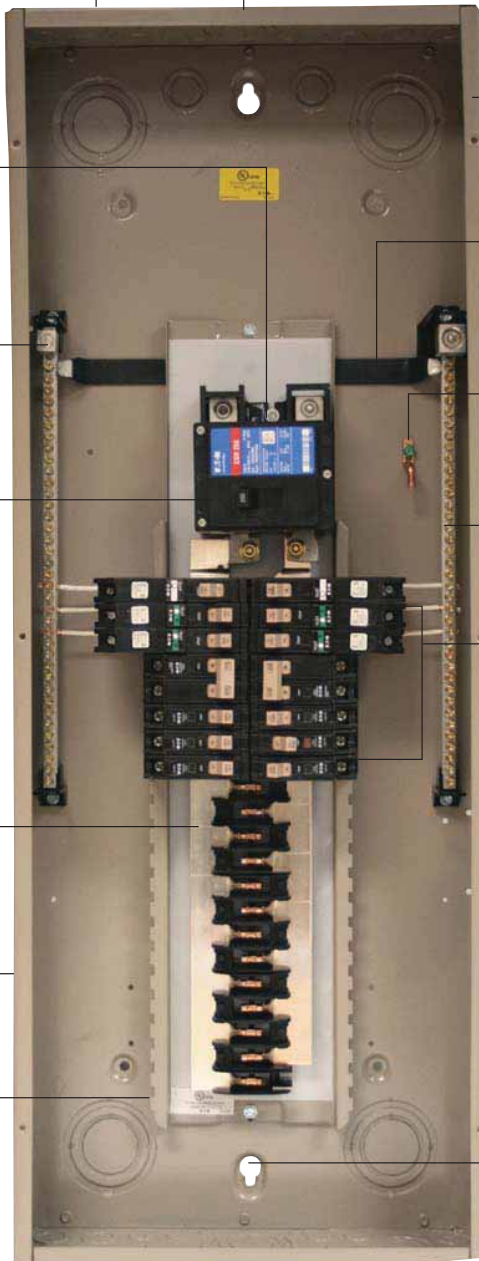


#### Warranty

The minimum warranty for residential loadcenters, breakers and surge protection devices shall be as follows:


- Lifetime loadcenter warranty
- Lifetime warranty on CH circuit breakers
- Lifetime warranty on CHSPT2ULTRA including \$75,000 connected equipment warranty
- 1-year warranty on plug-in surge protective device (CHSA)

### Catalog Number Selection

#### Loadcenters 100–225 A and 12–42 Circuits

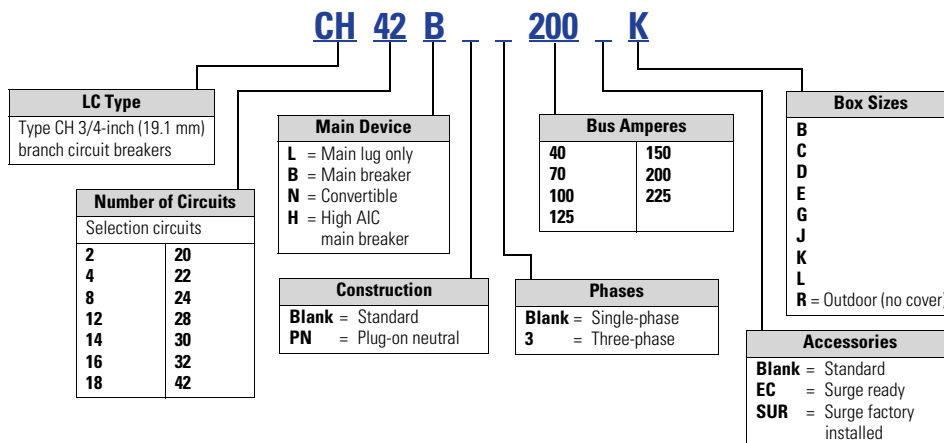

#### Indoor Covers Ordered Separately

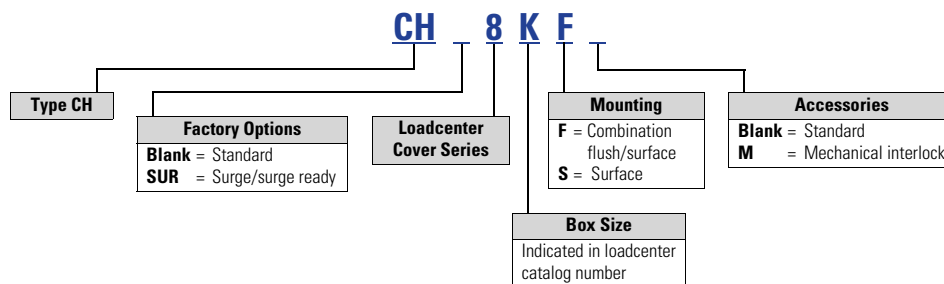

**Note:** All combinations are not valid, refer to the catalog section.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

#### 1

#### Product Selection

#### Single-Phase—Main Circuit Breaker Loadcenters—10/25 kAIC

CH42B200K



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral (Unless Otherwise Noted)

| Main Breaker Type | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) of Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter <sup>①②</sup> Catalog Number | Loadcenter Cover Catalog Number | Combination <sup>③</sup> | Surface             |
|-------------------|--------------------|--|----------------|----------|---|---|---------------------------------|--------------------------|---------------------|
| CH<br>10 kAIC     | 100                | 14   | Indoor         | B        | #6–1/0  | CH14B100B <sup>④</sup>                  | CH8BF                           | CH8BS                    |                     |
|                   |                    | 14   | Outdoor        | B        | #6–1/0  | CH14B100R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   |                    | 18   | Indoor         | C        | #6–1/0  | CH18B100C <sup>④</sup>                  | CH8CF                           | CH8CS                    |                     |
|                   |                    | 18   | Outdoor        | C        | #6–1/0  | CH18B100R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   |                    | 22   | Indoor         | C        | #6–1/0  | CH22B100C <sup>④</sup>                  | CH8CF                           | CH8CS                    |                     |
|                   |                    | 22   | Outdoor        | C        | #6–1/0  | CH22B100R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   | 125                | 125  | 30             | Indoor   | D   | #6–1/0                                  | CH30B100D <sup>④</sup>          | CH8DF                    | CH8DS               |
|                   |                    |  | 30             | Outdoor  | D   | #6–1/0                                  | CH30B100R <sup>⑤</sup>          | —                        | —                   |
|                   |                    |  | 22             | Indoor   | C   | #6–1/0                                  | CH22B125C <sup>④</sup>          | CH8CF                    | CH8CS               |
|                   |                    |  | 22             | Outdoor  | C   | #6–1/0                                  | CH22B125R <sup>⑤</sup>          | —                        | —                   |
|                   |                    |  | 30             | Indoor   | D   | #6–1/0                                  | CH30B125D <sup>④</sup>          | CH8DF                    | CH8DS               |
|                   |                    |  | 30             | Outdoor  | D   | #6–1/0                                  | CH30B125R <sup>⑤</sup>          | —                        | —                   |
| CSR<br>25 kAIC    | 150                | 8  | Outdoor        | E        | #2–300 kcmil  | CH8B150RF <sup>⑥</sup>                  | —                               | —                        |                     |
|                   |                    | 24   | Indoor         | E        | #2–300 kcmil  | CH24B150E <sup>④</sup>                  | CH8EF                           | CH8ES                    |                     |
|                   |                    | 24   | Outdoor        | E        | #2–300 kcmil  | CH24B150R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   |                    | 32   | Indoor         | J        | #2–300 kcmil  | CH32B150J <sup>④</sup>                  | CH8JF                           | CH8JS                    |                     |
|                   |                    | 32   | Outdoor        | J        | #2–300 kcmil  | CH32B150R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   |                    | 200  | 200            | 8        | Outdoor   | E                                       | #2–300 kcmil                    | CH8B200RF <sup>⑥</sup>   | —                   |
|                   | 24                 | Indoor                                     |                | E        | #2–300 kcmil  | CH24B200E <sup>④</sup>                  | CH8EF                           | CH8ES                    |                     |
|                   | 24                 | Outdoor                                    |                | E        | #2–300 kcmil  | CH24B200R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   | 32                 | Indoor                                     |                | J        | #2–300 kcmil  | CH32B200J <sup>④</sup>                  | CH8JF                           | CH8JS                    |                     |
|                   | 32                 | Outdoor                                    |                | J        | #2–300 kcmil  | CH32B200R <sup>⑤</sup>                  | —                               | —                        |                     |
|                   | 42                 | Indoor                                     |                | K        | #2–300 kcmil  | CH42B200K <sup>④</sup>                  | CH8KF                           | CH8KS                    |                     |
|                   | 225                | 225  | 42             | Outdoor  | K   | #2–300 kcmil                            | CH42B200R <sup>⑤</sup>          | —                        | —                   |
| 32                |                    |  | Indoor         | J        | #2–300 kcmil  | CH32B225J <sup>④</sup>                  | CH8JF                           | CH8JS                    |                     |
| 32                |                    |  | Outdoor        | J        | #2–300 kcmil  | CH32B225R <sup>⑤</sup>                  | —                               | —                        |                     |
| 42                |                    |  | Indoor         | K        | #2–300 kcmil  | CH42B225K <sup>④</sup>                  | CH8KF                           | CH8KS                    |                     |
| 42                |                    |  | Outdoor        | K        | #2–300 kcmil  | CH42B225R <sup>⑤</sup>                  | —                               | —                        |                     |
| DK<br>10 kAIC     |                    |  | 300            | 42       | Indoor  | PM                                      | (2) 3/0–250 kcmil               | CH42PM300                | CH7PMF <sup>⑦</sup> |
|                   | 400                | 42   | Indoor         | PM       | (2) 3/0–250 kcmil                                     | CH42PM400                               | CH7PMF <sup>⑦</sup>             | CH7PMS                   |                     |

#### Notes

- ① All main circuit breaker loadcenters are listed for use as service entrance equipment.
- ② Ground bar kits priced separately. See **Page V1-T1-24**.
- ③ Combination style covers may be used in surface or flush applications.
- ④ Can be top or bottom fed by rotating the enclosure and trim 180 degrees.
- ⑤ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑥ Panel includes #4–300 kcmil feed-through lugs.
- ⑦ This cover is for flush applications only (not combination).

Box sizes **Pages V1-T1-29** and **V1-T1-30**.

### Single-Phase—High Interrupting Rated Main Circuit Breaker Loadcenters—100 kAIC

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type             | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter <sup>①</sup> Catalog Number | Loadcenter Cover Catalog Number Combination <sup>②</sup> | Surface |
|-------------------------------|--------------------|---|----------------|----------|---|--|--|---------|
| CHB4<br>100 kAIC <sup>⑤</sup> | 100                | 32                                      | Indoor         | L        | #6–1/0  | CH32H100L <sup>③</sup>                 | CH8LF  | CH8LS   |
|                               |                    | 32                                      | Outdoor        | L        | #6–1/0  | CH32H100R <sup>④</sup>                 | —  | —       |
| CHH<br>100 kAIC <sup>⑤</sup>  | 150                | 32                                      | Indoor         | L        | #2/0–300 kcmil  | CH32H150L                              | CH8LF  | CH8LS   |
|                               |                    | 32                                      | Outdoor        | L        | #2/0–300 kcmil  | CH32H150R <sup>④</sup>                 | —  | —       |
|                               | 200                | 32                                      | Indoor         | L        | #2/0–300 kcmil  | CH32H200L                              | CH8LF  | CH8LS   |
|                               |                    | 32                                      | Outdoor        | L        | #2/0–300 kcmil  | CH32H200R <sup>④</sup>                 | —  | —       |
|                               |                    | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42H200L                              | CH8LF  | CH8LS   |
|                               |                    | 42                                      | Outdoor        | L        | #2/0–300 kcmil  | CH42H200R <sup>④</sup>                 | —  | —       |
|                               | 225                | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42H225L                              | CH8LF  | CH8LS   |
|                               |                    | 42                                      | Outdoor        | L        | #2/0–300 kcmil  | CH42H225R <sup>④</sup>                 | —  | —       |

#### Notes

- ① All main circuit breaker loadcenters are listed for use as service entrance equipment.
- ② Combination style covers may be used in surface or flush applications.
- ③ Loadcenter can be top or bottom fed by rotating the enclosure and trim 180 degrees.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑤ Series rated for 100 kAIC with all Types CH, CHT and CHP breakers.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Single-Phase—Main Lug Loadcenters

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Single Neutral

| Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) |         | Enclosure Type    | Type of Trim (Included)            | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number                |
|--------------------|-----------------------------------|---------|-------------------|------------------------------------|----------|--|--|
|                    | Space                             | Poles   |                   |                                    |          |  |  |
| 40                 | Surface                           | Outdoor | Indoor            | Surface (no door)                  | 5        | #14–6  | <b>CH2L40SP</b> <sup>(2)(3)</sup>        |
|                    |                                   | Outdoor | Outdoor           | —                                  | 5R       | #14–6  | <b>CH2L40RP</b> <sup>(2)(3)(4)</sup>     |
|                    |                                   |         | Indoor            | Flush (no door)                    | 5        | #14–6  | <b>CH2L40FP</b> <sup>(2)(3)</sup>        |
| 70                 | Flush                             | Outdoor | Indoor            | Surface (no door)                  | 5        | #14–2  | <b>CH2L70SP</b> <sup>(2)(3)</sup>        |
|                    |                                   | Outdoor | Outdoor           | —                                  | 5R       | #14–2  | <b>CH2L70RP</b> <sup>(2)(3)(4)</sup>     |
|                    |                                   |         | Indoor            | Flush (no door)                    | 5        | #14–2  | <b>CH2L70FP</b> <sup>(2)(3)</sup>        |
| 125                | Surface (No Door)                 | Outdoor | Indoor            | Surface (no door)                  | 6        | #14–1/0  | <b>CH2L125SP</b> <sup>(2)(3)</sup>       |
|                    |                                   | Outdoor | Outdoor           | —                                  | 6R       | #14–1/0  | <b>CH2L125RP</b> <sup>(2)(3)(4)</sup>    |
|                    |                                   |         | Outdoor           | —                                  | —        | #14–1/0  | <b>CH2L125RSE2P</b> <sup>(4)(5)(6)</sup> |
|                    |                                   | Outdoor | Indoor            | Flush (no door)                    | 6        | #14–1/0  | <b>CH2L125FP</b> <sup>(2)(3)</sup>       |
|                    |                                   |         | Indoor            | Surface (no door)                  | 7        | #14–1/0  | <b>CH4L125SP</b> <sup>(2)(7)</sup>       |
|                    | Flush (No Door)                   | Indoor  | Flush (no door)   | 7                                  | #14–1/0  | <b>CH4L125RP</b> <sup>(2)(4)(7)</sup>              |  |
|                    |                                   | Indoor  | Flush (no door)   | 7                                  | #14–1/0  | <b>CH4L125FP</b> <sup>(2)(7)</sup>                 |  |
|                    |                                   |         | Outdoor           | —                                  | 6R       | #14–1/0  | <b>CH6L125R</b> <sup>(2)(6)(7)</sup>     |
|                    |                                   | Indoor  | Surface (no door) | 7                                  | #6–1/0   | <b>CH8L125SP</b> <sup>(2)(8)</sup>                 |  |
|                    |                                   |         | Outdoor           | —                                  | 7R       | #6–1/0   | <b>CH8L125RP</b> <sup>(2)(8)(7)</sup>    |
| Indoor             | Flush (no door)                   | 7       | #6–1/0            | <b>CH8L125FP</b> <sup>(2)(8)</sup> |          |  |  |
| Outdoor            | Outdoor                           | Indoor  | Surface (no door) | 7                                  | #6–1/0   | <b>CH8L125SP</b> <sup>(2)(8)</sup>                 |  |
|                    |                                   | Outdoor | —                 | 7R                                 | #6–1/0   | <b>CH8L125RP</b> <sup>(2)(8)(7)</sup>              |  |
| Indoor             | Flush (no door)                   | 7       | #6–1/0            | <b>CH8L125FP</b> <sup>(2)(8)</sup> |          |  |  |

#### Notes

- ① Requires the use of Type CHT breakers.
- ② Ground bar kits priced separately, see **Page V1-T1-24**.
  - For 2/4 and 6/12 circuit loadcenters, use Type GBK5 or GBK520 ground bar
  - For 4/8 and 8/16 circuit loadcenters, use Type GBK10 ground bar
  - Ground bars mount to the left side wall of the enclosure for the 4/8, 6/12 and 8/16 circuit loadcenters
- ③ Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not used as a lighting and appliance panelboard.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑤ For use as service entrance applications only.
- ⑥ Neutral/ground holes (6) #14–6 and (3) #14–2/0 AWG Cu/Al.
- ⑦ Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.
- ⑧ Suitable for use as service equipment when a main breaker is used or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.

Box sizes **Pages V1-T1-29 and V1-T1-30**.

CH42L225G



### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral—Factory-Installed Ground Bar

| Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number | Loadcenter Cover           |         |
|--------------------|---|----------------|----------|--|---------------------------|----------------------------|---------|
|                    |   |                |          |  |                           | Catalog Number Combination | Surface |
| 125                | 12                                      | Indoor         | B        | #6–2/0   | CH12L125B <sup>①</sup>    | CH8BF                      | CH8BS   |
|                    | 12                                      | Outdoor        | B        | #6–2/0   | CH12L125R <sup>①②</sup>   | —                          | —       |
|                    | 16                                      | Indoor         | B        | #6–2/0   | CH16L125B <sup>①</sup>    | CH8BF                      | CH8BS   |
|                    | 16                                      | Outdoor        | B        | #6–2/0   | CH16L125R <sup>①②</sup>   | —                          | —       |
|                    | 20                                      | Indoor         | C        | #6–2/0   | CH20L125C <sup>①</sup>    | CH8CF                      | CH8CS   |
|                    | 20                                      | Outdoor        | C        | #6–2/0   | CH20L125R <sup>①②</sup>   | —                          | —       |
|                    | 24                                      | Indoor         | C        | #6–2/0   | CH24L125C <sup>①</sup>    | CH8CF                      | CH8CS   |
|                    | 24                                      | Outdoor        | C        | #6–2/0   | CH24L125R <sup>①②</sup>   | —                          | —       |
| 150                | 24                                      | Indoor         | D        | #4–300 kcmil                                       | CH24L150D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 24                                      | Outdoor        | D        | #4–300 kcmil                                       | CH24L150R <sup>②③</sup>   | —                          | —       |
|                    | 32                                      | Indoor         | D        | #4–300 kcmil                                       | CH32L150D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 32                                      | Outdoor        | D        | #4–300 kcmil                                       | CH32L150R <sup>②③</sup>   | —                          | —       |
| 200                | 12                                      | Indoor         | D        | #4–300 kcmil                                       | CH12L200D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 12                                      | Outdoor        | D        | #4–300 kcmil                                       | CH12L200R <sup>②③</sup>   | —                          | —       |
|                    | 16                                      | Indoor         | D        | #4–300 kcmil                                       | CH16L200D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 16                                      | Outdoor        | D        | #4–300 kcmil                                       | CH16L200R <sup>②③</sup>   | —                          | —       |
| 225                | 24                                      | Indoor         | D        | #4–300 kcmil                                       | CH24L225D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 24                                      | Outdoor        | D        | #4–300 kcmil                                       | CH24L225R <sup>②③</sup>   | —                          | —       |
|                    | 32                                      | Indoor         | D        | #4–300 kcmil                                       | CH32L225D <sup>①</sup>    | CH8DF                      | CH8DS   |
|                    | 32                                      | Outdoor        | D        | #4–300 kcmil                                       | CH32L225R <sup>②③</sup>   | —                          | —       |
|                    | 42                                      | Indoor         | G        | #4–300 kcmil                                       | CH42L225G <sup>③</sup>    | CH8GF                      | CH8GS   |
|                    | 42                                      | Outdoor        | G        | #4–300 kcmil                                       | CH42L225R <sup>②③</sup>   | —                          | —       |
| 400                | 42                                      | Indoor         | P        | (2) 1/0–300 kcmil<br>(1) 750 kcmil                 | CH42PL400 <sup>④</sup>    | CH7PF <sup>⑤</sup>         | CH7PS   |

#### Notes

- ① Suitable for use as service equipment when not more than six disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ② Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ③ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down bracket kit catalog number **CH125RB**.
- ④ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and must be a Type CHB.  
**The breaker cannot be a Type CH.**
- ⑤ This cover is for flush application only (not combination).

Box sizes **Pages V1-T1-29** and **V1-T1-30**.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Convertible Loadcenters MCB or MLO—Base Units and Main Devices—10/25/35 kAIC

Complete assembly consists of: loadcenter, cover, and either main breaker kit or main lug kit.

#### Indoor—Single-Phase—Three-Wire—120/240 V—Insulated/Bondable Split Neutral—Top or Bottom Feed

| Maximum Main Ampere Rating | Maximum Number of Single Poles | Box Size | Loadcenter Box and Panel Catalog Number ① | Loadcenter Cover Catalog Number |         | Main Lug Kit |                | Main Breaker Kit |              | Catalog Number |            |
|----------------------------|--------------------------------|----------|---|---------------------------------|---------|--------------|----------------|------------------|--------------|----------------|------------|
|                            |                                |          |   | Combination                     | Surface | Wire Size    | Catalog Number | kAIC Rating      | Wire Size    |                |            |
| 125                        | 22                             | C        | CH22N125C                                 | CH8CF                           | CH8CS   | #10–1/0      | CHL125N        | 10               | #10–1/0      | CH2100N ③      | —          |
|                            |                                |          |   |                                 |         |              |                |                  |              | CH2125N ③      | —          |
| 200                        | 32                             | J        | CH32N200J                                 | CH8JF                           | CH8JS   | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2200N       | CSH2200N ④ |
| 225                        | 42                             | K        | CH42N225K                                 | CH8KF                           | CH8KS   | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2200N       | CSH2200N ④ |
|                            |                                |          |   |                                 |         |              |                |                  |              | CSR2225N       | CSH2225N ④ |

#### Outdoor—Single-Phase—Three-Wire—120/240 V—Insulated/Bondable Split Neutral (Unless Otherwise Noted)

| Maximum Main Ampere Rating | Maximum Number of Single Poles | Box Size | Loadcenter Box and Panel Catalog Number ① | Main Lug Kit |                | Main Breaker Kit |              | Catalog Number |            |
|----------------------------|--------------------------------|----------|---|--------------|----------------|------------------|--------------|----------------|------------|
|                            |                                |          |   | Wire Size    | Catalog Number | kAIC Rating      | Wire Size    |                |            |
| 125                        | 22                             | C        | CH22N125R ⑤                               | #10–1/0      | CHL125N        | 10               | #10–1/0      | CH2100N ③      | —          |
|                            |                                |          |   |              |                |                  |              | CH2125N ③      | —          |
| 200                        | 8                              | E        | CH8N200RF ⑥⑦                              | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N   |
|                            |                                |          |   |              |                |                  |              | CSR2150N       | CSH2150N   |
|                            |                                |          |   |              |                |                  |              | CSR2175N       | CSH2175N   |
|                            |                                |          |   |              |                |                  |              | CSR2200N       | CSH2200N   |
| 200                        | 32                             | J        | CH32N200R ⑤                               | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2200N       | CSH2200N ④ |
| 225                        | 42                             | K        | CH42N225R ⑤                               | #4–300 kcmil | CHL225N        | 25/35 ②          | #2–300 kcmil | CSR2125N       | CSH2125N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2150N       | CSH2150N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2175N       | CSH2175N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2200N       | CSH2200N ④ |
|                            |                                |          |   |              |                |                  |              | CSR2225N       | CSH2225N ④ |

#### Notes

- ① Panel does not include main. Order main breaker or main lug kit separately.
- ② If 35 kAIC is required, use CSH breaker.
- ③ Hold-down kit included.
- ④ 35 kAIC series combination rating is obtained when Types CH, CHT and CHP branch breakers are used with CSH main.
- ⑤ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑥ Includes feed-through lugs for both phase and neutral conductors.
- ⑦ Insulated/bondable single neutral.

Interrupting rating depends on main circuit breaker selected.



### Three-Phase—Main Circuit Breaker Loadcenters—10 kAIC

CH42B3200L



#### Three-Phase Four-Wire—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number <sup>①②</sup> | Loadcenter Cover Catalog Number |         |
|-------------------|--------------------|---|----------------|----------|---|---|---------------------------------|---------|
|                   |                    |   |                |          |   |   | Combination                     | Surface |
| CC<br>10 kAIC     | 150                | 30                                      | Indoor         | L        | #1–4/0  | CH30B3150L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #1–4/0  | CH30B3150R <sup>③</sup>                 | —                               | —       |
|                   | 200                | 30                                      | Indoor         | L        | #2/0–300 kcmil  | CH30B3200L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH30B3200R <sup>③</sup>                 | —                               | —       |
|                   |                    | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42B3200L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH42B3200R <sup>③</sup>                 | —                               | —       |
|                   | 225                | 30                                      | Indoor         | L        | #2/0–300 kcmil  | CH30B3225L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH30B3225R <sup>③</sup>                 | —                               | —       |
|                   |                    | 42                                      | Indoor         | L        | #2/0–300 kcmil  | CH42B3225L                              | CH8LF                           | CH8LS   |
|                   |                    |   | Outdoor        | L        | #2/0–300 kcmil  | CH42B3225R <sup>③</sup>                 | —                               | —       |
|                   | 400                | 42                                      | Indoor         | PM       | (2) 3/0–350 kcmil                                     | CH424PM400                              | CH7PMF <sup>④</sup>             | CH7PMS  |

### Three-Phase—High Interrupting Rated Main Circuit Breaker Loadcenters—100 kAIC

#### Three-Phase Four-Wire—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral

| Main Breaker Type            | Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) of Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number <sup>①②</sup> | Loadcenter Cover Catalog Number |         |
|------------------------------|--------------------|--|----------------|----------|---|---|---------------------------------|---------|
|                              |                    |  |                |          |   |   | Combination                     | Surface |
| CHH<br>100 kAIC <sup>⑤</sup> | 200                | 30   | Indoor         | L        | #2/0–300 kcmil  | CH30H3200L                              | CH8LF                           | CH8LS   |
|                              |                    |  | Outdoor        | L        | #2/0–300 kcmil  | CH30H3200R <sup>③</sup>                 | —                               | —       |
|                              |                    | 42   | Indoor         | L        | #2/0–300 kcmil  | CH42H3200L                              | CH8LF                           | CH8LS   |
|                              |                    |  | Outdoor        | L        | #2/0–300 kcmil  | CH42H3200R <sup>③</sup>                 | —                               | —       |
|                              | 225                | 42   | Indoor         | L        | #2/0–300 kcmil  | CH42H3225L                              | CH8LF                           | CH8LS   |
|                              |                    |  | Outdoor        | L        | #2/0–300 kcmil  | CH42H3225R <sup>③</sup>                 | —                               | —       |

#### Notes

- ① All main circuit breaker loadcenters are listed for use as service entrance equipment.
- ② Ground bar kits priced separately. For ground bar kits, see **Page V1-T1-24**.
- ③ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ④ This cover for flush application only (not combination).
- ⑤ 100 kAIC series combination rating is obtained when Types CH and CHP branch breakers are used with CHH main.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Three-Phase—Main Lug Loadcenters

#### Three-Phase Four-Wire—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral (Unless Otherwise Noted)

| Main Ampere Rating | Maximum Number 3/4-Inch (19.1 mm) |                 | Enclosure Type | Type of Trim Included | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number  | Loadcenter Cover Catalog Number |        |
|--------------------|-----------------------------------|-----------------|----------------|-----------------------|----------|--|----------------------------|---------------------------------|--------|
|                    | Spaces                            | Poles           |                |                       |          |  |                            | Combination                     | Single |
| 125                | 6                                 | 12 <sup>①</sup> | Indoor         | Surface, no door      | 7        | #14–1/0  | CH6L3125SP <sup>②③④</sup>  | —                               | —      |
|                    | 6                                 | 12 <sup>①</sup> | Outdoor        | —                     | 7R       | #14–1/0  | CH6L3125RP <sup>②③④⑤</sup> | —                               | —      |
|                    | 6                                 | 12 <sup>①</sup> | Indoor         | Flush, no door        | 7        | #14–1/0  | CH6L3125FP <sup>②③④</sup>  | —                               | —      |
|                    | 12                                | 12              | Indoor         | —                     | B        | #6–2/0   | CH12L3125B <sup>⑥⑦</sup>   | CH8BF                           | CH8BS  |
|                    | 12                                | 12              | Outdoor        | —                     | B        | #6–2/0   | CH12L3125R <sup>⑥⑦</sup>   | —                               | —      |
|                    | 18                                | 18              | Indoor         | —                     | C        | #6–2/0   | CH18L3125C <sup>⑥⑦</sup>   | CH8CF                           | CH8CS  |
|                    | 18                                | 18              | Outdoor        | —                     | C        | #6–2/0   | CH18L3125R <sup>⑥⑦⑧</sup>  | —                               | —      |
|                    | 24                                | 24              | Indoor         | —                     | C        | #6–2/0   | CH24L3125C <sup>⑥⑦</sup>   | CH8CF                           | CH8CS  |
| 150                | 30                                | 30              | Indoor         | —                     | D        | #4–300 kcmil                                       | CH30L3150D <sup>⑥⑦</sup>   | CH8DF                           | CH8DS  |
|                    | 30                                | 30              | Outdoor        | —                     | D        | #4–300 kcmil                                       | CH30L3150R <sup>⑥⑦⑧</sup>  | —                               | —      |
| 225                | 24                                | 24              | Indoor         | —                     | D        | #4–300 kcmil                                       | CH24L3225D <sup>⑥⑦</sup>   | CH8DF                           | CH8DS  |
|                    | 24                                | 24              | Outdoor        | —                     | D        | #4–300 kcmil                                       | CH24L3225R <sup>⑥⑦⑧</sup>  | —                               | —      |
|                    | 30                                | 30              | Indoor         | —                     | D        | #4–300 kcmil                                       | CH30L3225D <sup>⑥⑦</sup>   | CH8DF                           | CH8DS  |
|                    | 30                                | 30              | Outdoor        | —                     | D        | #4–300 kcmil                                       | CH30L3225R <sup>⑥⑦⑧</sup>  | —                               | —      |
|                    | 42                                | 42              | Indoor         | —                     | G        | #4–300 kcmil                                       | CH42L3225G <sup>⑥⑧</sup>   | CH8GF                           | CH8GS  |
|                    | 42                                | 42              | Outdoor        | —                     | G        | #4–300 kcmil                                       | CH42L3225R <sup>⑥⑦⑧</sup>  | —                               | —      |
| 400                | 42                                | 42              | Indoor         | —                     | P        | (2) 1/0–300 kcmil<br>(1) 750 kcmil                 | CH424PL400 <sup>⑩⑪</sup>   | CH7PF <sup>⑫</sup>              | CH7PS  |

#### Notes

- ① Requires the use of Type CHT breakers.
- ② Suitable for use as service equipment when not more than two service disconnecting means are provided or when not more than six service disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ③ Ground bar kits priced separately, see **Page V1-T1-24**.
  - Use GBK10 ground bar
  - Ground bars mount to the left side wall of the enclosure.
- ④ Insulated/bondable single neutral.
- ⑤ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ⑥ Ground bar Type GBK14 is installed.
- ⑦ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down bracket kit catalog number Type **CH125RB**. Suitable for use as service equipment when not more than six service disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑧ Ground bar Type GBK21 is installed.
- ⑨ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and requires hold-down kit catalog number Type **CH125RB**.
- ⑩ For ground bar kits, see **Page V1-T1-24**.
- ⑪ Suitable for use as service equipment when a circuit breaker is used as a main breaker. The main breaker is backfed and must be a Type CHB. **The breaker cannot be a Type CH.**
- ⑫ This cover for flush application only (not combination).

Box sizes **Pages V1-T1-29** and **V1-T1-30**.

### Spa Panels



### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-2     |
| CH Specialty Products                       |             |
| Spa Panels                                  |             |
| Surge Panel .....                           | V1-T1-14    |
| Plug-On Neutral Loadcenter .....            | V1-T1-16    |
| Type CH Renovation Loadcenter .....         | V1-T1-17    |
| Type CH Retrofit Interior Kits .....        | V1-T1-18    |
| CH Loadcenter Options and Accessories ..... | V1-T1-21    |
| CH Circuit Breakers .....                   | V1-T1-31    |

## CH Specialty Products

### Spa Panels

#### Product Description

Eaton's CH Spa Panels are premium factory-assembled "combination" units that provide ground fault protection, as well as a convenient way to turn spa pumps on and off. The NEC requires that all pool and spa pumps be protected by a ground fault interrupter and a disconnect switch mounted within 10 feet of the tub or the spa.

#### Features

- Two extra circuits for additional loads
- Limited lifetime warranty
- UL Listed
- Tough powder-coated galvanized steel enclosure
- Factory-installed two-pole ground fault circuit interrupter (GFCI)

#### Product Selection

CH Spa Panel



#### Single-Phase Three-Wire—120/240 Vac Insulated/Bondable Neutral—Factory-Installed Ground Bar

| Main Ampere Rating | Circuit Breaker Included | Enclosure Type | Type of Trim Included | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number         |
|--------------------|--------------------------|----------------|-----------------------|----------|--|------------------------|
| 30                 | CH230GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | CH30SPAST <sup>①</sup> |
| 40                 | CH240GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | CH40SPAST <sup>②</sup> |
| 50                 | CH250GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | CH50SPAST <sup>③</sup> |
| 60                 | CH260GFT                 | Outdoor        | —                     | 5R       | #14–1/0  | CH60SPAST <sup>④</sup> |

#### Notes

- ① Includes a CH230GFT breaker, factory installed, and two extra circuits for convenience.
- ② Includes a CH240GFT breaker, factory installed, and two extra circuits for convenience.
- ③ Includes a CH250GFT breaker, factory installed, and two extra circuits for convenience.
- ④ Includes a CH260GFT breaker, factory installed, and two extra circuits for convenience.

Surge Panel



### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-2     |
| CH Specialty Products                       |             |
| Spa Panels .....                            | V1-T1-13    |
| Surge Panel                                 |             |
| Plug-On Neutral Loadcenter .....            | V1-T1-16    |
| Type CH Renovation Loadcenter .....         | V1-T1-17    |
| Type CH Retrofit Interior Kits .....        | V1-T1-18    |
| CH Loadcenter Options and Accessories ..... | V1-T1-21    |
| CH Circuit Breakers .....                   | V1-T1-31    |

### Surge Panel

#### Product Description

Eaton's Type CH Surge Loadcenter includes a factory-mounted and wired surge suppressor device. There is a knockout in the cover that allows the user to view the status indication lights on the surge suppressor. The CH Surge Loadcenter reduces the surge current, helping protect sensitive home electronic equipment.

Save labor by installing a factory-mounted surge protective device.

#### Factory-Installed Surge Protection

- Includes a CHSPT2ULTRA and a two-pole 50 A circuit breaker
- Increases the effectiveness of surge protection due to reduced lead length
- A modified deadfront allows for easy viewing of indicating lights

#### Surge Ready

- Provides a mounting provision for CHSPT2ULTRA
- A modified deadfront allows for easy viewing of indicating lights

#### Product Selection

##### Surge Installed Loadcenters

| Ampere Rating | Type          | Number of Circuits | Loadcenter Catalog Number | Loadcenter Cover |          |
|---------------|---------------|--------------------|---------------------------|------------------|----------|
|               |               |                    |                           | Catalog Number   | Surface  |
| 225           | Convertible   | 42                 | CHSUR42N225L ①            | CHSUR8LF         | CHSUR8LS |
| 225           | Convertible ② | 42                 | CHSUR42L225L2 ①           | CHSUR8LF         | CHSUR8LS |
| 200           | Main breaker  | 42                 | CHSUR42B200L2 ①           | CHSUR8LF         | CHSUR8LS |
| 225           | Convertible   | 32                 | CHSUR32N225K ①            | CHSUR8KF         | CHSUR8KS |
| 225           | Convertible ② | 32                 | CHSUR32L225K ①            | CHSUR8KF         | CHSUR8KS |
| 200           | Main breaker  | 32                 | CHSUR32B200K ①            | CHSUR8KF         | CHSUR8KS |
| 150           | Main breaker  | 32                 | CHSUR32B150K ①            | CHSUR8KF         | CHSUR8KS |
| 100           | Main breaker  | 32                 | CHSUR32B100K ①            | CHSUR8KF         | CHSUR8KS |
| 125           | Convertible ② | 24                 | CHSUR24L125E ①            | CHSUR8EF         | CHSUR8ES |
| 100           | Main breaker  | 24                 | CHSUR24B100E ①            | CHSUR8EF         | CHSUR8ES |
| 200           | Convertible   | 40/40              | BRSUR4040N200             | Cover included   |          |
| 200           | Main lug      | 40/40              | BRSUR4040L200             | Cover included   |          |
| 200           | Main breaker  | 40/40              | BRSUR4040B200             | Cover included   |          |
| 200           | Convertible   | 30/40              | BRSUR3040N200             | Cover included   |          |
| 200           | Main lug      | 30/40              | BRSUR3040L200             | Cover included   |          |
| 200           | Main breaker  | 30/40              | BRSUR3040B200             | Cover included   |          |

#### Notes

- ① Order cover separately.
- ② With main lugs installed.

### Surge Ready Loadcenters (provision only, CHSPT2ULTRA and breaker not included)

| Ampere Rating | Type                     | Number of Circuits | Loadcenter Catalog Number <sup>①</sup> | Loadcenter Cover Combination | Catalog Number Surface |
|---------------|--------------------------|--------------------|--|------------------------------|------------------------|
| 225           | Convertible              | 42                 | CHEC42N225L                            | CHSUR8LF                     | CHSUR8LS               |
| 225           | Convertible <sup>②</sup> | 42                 | CHEC42L225L                            | CHSUR8LF                     | CHSUR8LS               |
| 200           | Main breaker             | 42                 | CHEC42B200L                            | CHSUR8LF                     | CHSUR8LS               |
| 225           | Convertible <sup>②</sup> | 32                 | CHEC32L225K                            | CHSUR8KF                     | CHSUR8KS               |
| 225           | Convertible              | 32                 | CHEC32N225K                            | CHSUR8KF                     | CHSUR8KS               |
| 225           | Convertible              | 32                 | CHEC32N225R <sup>③</sup>               | —                            | —                      |
| 200           | Main breaker             | 32                 | CHEC32B200K                            | CHSUR8KF                     | CHSUR8KS               |
| 150           | Main breaker             | 32                 | CHEC32B150K                            | CHSUR8KF                     | CHSUR8KS               |
| 100           | Main breaker             | 32                 | CHEC32B100K                            | CHSUR8KF                     | CHSUR8KS               |
| 125           | Convertible <sup>②</sup> | 24                 | CHEC24L125E                            | CHSUR8EF                     | CHSUR8ES               |
| 100           | Main breaker             | 24                 | CHEC24B100E                            | CHSUR8EF                     | CHSUR8ES               |

### Technical Data and Specifications

#### Ratings

- Loadcenter
  - 25 kAIC main breaker, main lug only, and convertible main breaker/main lug
  - Factory installed or provision for field-installed surge suppressor
  - Top or bottom feed
- Surge protective device (CHSPT2ULTRA)
  - Nominal discharge current: 20 kA ( $I_n$ )
  - Surge current capacity per phase: 108 kA
  - Warranty: \$75,000 connected equipment <sup>④</sup>
  - For further product ratings, see Volume 1, Tab 2.1 Surge Protection

#### Notes

- ① Order cover separately.
- ② With main lugs installed.
- ③ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-24**.
- ④ For warranty details, visit [www.eaton.com/surgetrap](http://www.eaton.com/surgetrap).

#### 60-Circuit Plug-On Neutral Loadcenter



### Plug-On Neutral Loadcenter

#### Product Description

Code changes and higher safety standards are leading to more arc fault and ground fault circuit interrupter installations. Eaton offers a unique product solution that enables a direct connection of the breaker to the neutral bar, eliminating the need for wiring a pigtail.

#### Features and Benefits

- Time savings up to 25% per AFCI/GFCI installation
- Eliminates nuisance tripping due to loose pigtail connections
- Clean gutter space
- Easier troubleshooting due to less wiring
- Backed by a limited lifetime warranty

#### Product Selection

##### Main Breaker Plug-On Neutral Loadcenters

| Main Breaker Type | Main Ampere Rating | Max. Number 3/4-Inch Poles | Enclosure Type | Wire Size Range for Main Breaker | Catalog Number | Cover Catalog Number |         |
|-------------------|--------------------|----------------------------|----------------|----------------------------------|----------------|----------------------|---------|
|                   |                    |                            |                |                                  |                | Combination          | Surface |
| CSR<br>25 kAIC    | 100                | 24                         | Indoor         | #2–300 kcmil                     | CH24BPN100E    | CH8EF                | CH8ES   |
|                   | 200                | 32                         | Indoor         | #2–300 kcmil                     | CH32BPN200J    | CH8JF                | CH8JS   |
|                   | 200                | 42                         | Indoor         | #2–300 kcmil                     | CH42BPN200K    | CH8KF                | CH8KS   |
|                   | 200                | 60                         | Indoor         | #2–300 kcmil                     | CH60BPN200N    | CH8NF                | CH8NS   |

##### Main Lug Only/Convertible Plug-On Neutral Loadcenters—With Factory Installed Main Lugs

| Max. Ampere Rating | Max. Number 3/4-Inch Poles | Enclosure Type | Catalog Number            | Wire Size Range for Main Breaker | Cover Catalog Number |         |
|--------------------|----------------------------|----------------|---------------------------|----------------------------------|----------------------|---------|
|                    |                            |                |                           |                                  | Combination          | Surface |
| 125                | 24                         | Indoor         | CH24NLPN125E <sup>①</sup> | #6–300 kcmil                     | CH8NLEF              | CH8NLES |
| 225                | 32                         | Indoor         | CH32NLPN225J              | #6–300 kcmil                     | CH8NLJF              | CH8NLJS |
| 225                | 42                         | Indoor         | CH42NLPN225K              | #6–300 kcmil                     | CH8NLKF              | CH8NLKS |
| 225                | 60                         | Indoor         | CH60NLPN225N              | #6–300 kcmil                     | CH8NLNF              | —       |


#### Note

<sup>①</sup> Maximum 125 A main device.

### Contents

| Description                           | Page     |
|---------------------------------------|----------|
| Overview                              | V1-T1-2  |
| CH Specialty Products                 |          |
| Spa Panels                            | V1-T1-13 |
| Surge Panel                           | V1-T1-14 |
| Plug-On Neutral Loadcenter            |          |
| Type CH Renovation Loadcenter         | V1-T1-17 |
| Type CH Retrofit Interior Kits        | V1-T1-18 |
| CH Loadcenter Options and Accessories | V1-T1-21 |
| CH Circuit Breakers                   | V1-T1-31 |

Renovation Panel

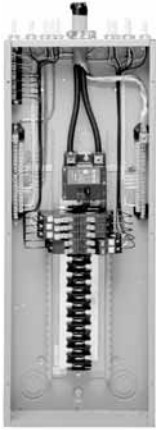

### Type CH Renovation Loadcenter

#### Product Description

Eaton's Renovation Loadcenter is designed for the service contractor. With the addition of a five-circuit terminal block factory mounted in the top left corner of the loadcenter, the service contractor can terminate short-circuit wires instead of having to use expensive wire nuts. Also, the Renovation Loadcenter incorporates a twin-stacked neutral design that places the neutral and ground terminations higher in the loadcenter. Both of these features were added without increasing any size from a standard loadcenter. These features will eliminate the need for wire nuts and make for a much neater installation. There is a provision to field mount a second five-circuit terminal block (RN5TB) in the top right corner of the loadcenter. Choose amongst Eaton's Type CH breaker family for use in the Renovation Panel.

### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-2     |
| CH Specialty Products                       |             |
| Spa Panels .....                            | V1-T1-13    |
| Surge Panel .....                           | V1-T1-14    |
| Plug-On Neutral Loadcenter .....            | V1-T1-16    |
| Type CH Renovation Loadcenter               |             |
| Type CH Retrofit Interior Kits .....        | V1-T1-18    |
| CH Loadcenter Options and Accessories ..... | V1-T1-21    |
| CH Circuit Breakers .....                   | V1-T1-31    |

### Product Selection

#### Single-Phase—Main Circuit Breaker Loadcenters 25 kAIC<sup>①</sup>

#### Single-Phase, Three-Wire—120/240 Vac—Stacked Split Neutral

| Main Breaker Type | Main Ampere Rating | Max. Number 3/4-Inch (19.1 mm) of Poles | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 70 °C for Main Breakers | Loadcenter Catalog Number | Cover Catalog Number <sup>②</sup> |         |
|-------------------|--------------------|---|----------------|----------|--|---------------------------|-----------------------------------|---------|
|                   |                    |   |                |          |  |                           | Combination                       | Surface |
| CH                | 100                | 20                                      | Indoor         | C        | #6–1/0   | CH22B100CRN               | CH8CFF                            | CH8CS   |
| CSR               | 150                | 32                                      | Indoor         | J        | #2–300 kcmil   | CH32B150JRN               | CH8JF                             | CH8JS   |
| CSR               | 200                | 32                                      | Indoor         | J        | #2–300 kcmil   | CH32B200JRN               | CH8J                              | CH8JS   |
| CSR               | 200                | 42                                      | Indoor         | K        | #2–300 kcmil   | CH42B200KRN               | CH8KF                             | CH8KS   |

#### Branch Circuit Breakers (CH)

See **Pages V1-T1-2–V1-T1-12.**

#### Renovation Loadcenter

| Description                             | Catalog Number              |
|---|-----------------------------|
| Five-circuit terminal block kit         | <b>RN5TB</b>                |
| Ground bar kits (two maximum per panel) | (See <b>Page V1-T1-24</b> ) |

#### Notes

- ① 100 A main breaker is rated 10 kAIC.
  - ② Combination style covers may be used in surface or flush applications.
- All main circuit breaker loadcenters are listed for use as service entrance equipment. Loadcenters are factory-bonded for service entrance applications. Remove bonding strap for separate neutral and ground bars for sub-feed applications.

#### Type CH Retrofit Interior



*Type CH Retrofit Adjustable Interior*



*Type CH Retrofit Interior Collar and Assembly with Trim*

### Contents

| <b>Description</b>                              | <b>Page</b> |
|---|-------------|
| Overview . . . . .                              | V1-T1-2     |
| CH Specialty Products                           |             |
| Spa Panels . . . . .                            | V1-T1-13    |
| Surge Panel . . . . .                           | V1-T1-14    |
| Plug-On Neutral Loadcenter . . . . .            | V1-T1-16    |
| Type CH Renovation Loadcenter . . . . .         | V1-T1-17    |
| Type CH Retrofit Interior Kits                  |             |
| CH Loadcenter Options and Accessories . . . . . | V1-T1-21    |
| CH Circuit Breakers . . . . .                   | V1-T1-31    |

### Type CH Retrofit Interior Kits

#### Product Description

Eaton’s unique Retrofit Interior allows the customer to cost-effectively and safely upgrade an electrical service without removing the existing enclosure from the wall.

#### Application Description

The Retrofit Interior is designed and tested specifically for renovating an outdated electrical panel in an apartment, a condominium or a single family home. These outdated panels are being recognized by local inspectors and other authorities as a possible hazard.

#### Opportunities to Retrofit

- Single- or three-phase
- Main lug only or main breaker
- Up to 42 circuits
- Up to 225 A interiors, 400 A available upon request
- Available with CH breakers (3/4-inch) with copper bus or BR breakers (1-inch) with aluminum bus
- The minimum lifetime warranty for residential breakers shall be as follows:
  - Limited lifetime warranty on all CH branch breakers and loadcenters
  - Refer to Eaton for complete warranty details

#### Features and Benefits

##### **Upgrading Existing Electrical Infrastructure Is Simple**

- Replaces vintage brands that have hard to find, expensive replacement breakers
- Safely upgrade to arc fault and ground fault breakers to meet current electrical codes
- Maximizes number of circuits available with compact design
- Eco-friendly in asbestos-filled environments
- Exclusive design

##### **Save Time and Money Throughout the Installation**

- Uses existing panel box and wires
- Eliminates expensive and time-consuming drywall/ paint repair
- Saves 2–3 hours of installation time compared to a complete panel changeout
- Eliminates precise measurements with field-adjustable kit

#### Standards and Certifications

Meets 2017 NEC wire bending requirements.



### CH Specialty Product Selection

To select the retrofit kit:

1. From the existing box size determine which retrofit groups are suitable (may be more than one).
2. Use type of interior, number of phases, and type of main to find the selection chart.
3. Select part number from chart (if main breaker, replace XXX with specific amp rating).

#### How to Order:

1. Measure the existing panel enclosure to determine appropriate kits for your project.
2. Match the existing dimensions with the table below to obtain the correct catalog number.
3. Order your retrofit kit from a local Eaton authorized distributor.

Need assistance or can't find retrofit to fit existing enclosure?

Phone:  
800-330-6479

E-mail:  
FlexCenterLincoln@Eaton.com

Locate an Eaton Certified Contractor at  
EatonCertified.com

### Retrofit Interior Kit Specifications

| Catalog Number ①                        | Cover ②       | Existing Enclosure Parameters—Inches (mm) |               |               |                | Phase  | Main | Bus | Amperes ③ | Spaces / Circuits | UL 67 Listed |
|---|---------------|---|---------------|---------------|----------------|--------|------|-----|-----------|-------------------|--------------|
|   |               | Minimum Depth                             | Maximum Depth | Minimum Width | Minimum Height |        |      |     |           |                   |              |
| <b>CH Retrofit Interiors and Covers</b> |               |   |               |               |                |        |      |     |           |                   |              |
| RWCH6L125N                              | CRWCH6ML****  | 3.13 (79.5)                               | 4.13 (104.9)  | 7.00 (177.8)  | 10.00 (254.0)  | Single | MLO  | CH  | 125       | 6                 | No           |
| RSCH10B125N                             | CRWCH12ML**** | 3.50 (88.9)                               | 4.50 (114.3)  | 8.50 (215.9)  | 16.50 (419.1)  | Single | MCB  | CH  | 125       | 10                | No           |
| RSCH12L125N                             | CRWCH12ML**** | 3.50 (88.9)                               | 4.50 (114.3)  | 8.50 (215.9)  | 16.50 (419.1)  | Single | MLO  | CH  | 125       | 12                | No           |
| RACH22B125_                             | CRACH24ML**** | 3.75 (95.3)                               | 4.25 (108.0)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MCB  | CH  | 125       | 22                | No           |
| RACH24L125_                             | CRACH24ML**** | 3.75 (95.3)                               | 4.25 (108.0)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MLO  | CH  | 125       | 24                | No           |
| RBCH24B200_                             | CRBCH24CS**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 29.00 (736.6)  | Single | MCB  | CH  | 200       | 24                | No           |
| RBCH32L200_                             | CRBCH32ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 29.00 (736.6)  | Single | MLO  | CH  | 200       | 32                | No           |
| RCCH32B200_                             | CRBCH32CS**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 34.00 (863.6)  | Single | MCB  | CH  | 200       | 32                | No           |

### Complete Assembly

**Note:** For complete assembly, interior and cover need to be ordered separately.

#### Adjustable Interior

- Factory installed ground and neutral bars positioned to accept existing wires
- Field adjustable depth matches existing panel box
- Adjustable height enables optional placement of the interior
- Field bondable for service entrance options



Adjustable Interior

#### Standard Trim and Collar

- Standard trim matches new interior
- New circuit directory for updated labeling
- Oversized collar eliminates expensive wall/paint repair



Collar and Assembly with Trim

#### Notes

① Catalog numbers shown with “\_” at the end need one of the following suffixes to denote depth:  
J = 3.75–4.25  
K = 4.25–5.00  
L = 5.00–6.00  
Example: RBCH24B200J would signify an interior set with a depth range of 3.75 to 4.25 inches.

② \*\*\*\*Denotes characters in the catalog number that relate to overall cover size. Example: CRWCH6ML2620 would signify a cover 26.00 inches H x 20.00 inches W, or CRBCH24CS3324 would be 33.00 inches H x 24.00 inches W.

③ Amperes for MB panels is maximum; catalog number will reflect actual amperage of breaker included.

For UL applications, maximum cover sizes may apply.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

#### 1

#### Non-Metallic Loadcenter

#### Single-Phase—Main Lug Loadcenters, Non-Metallic

2460SNM




#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Trim Type         | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number |
|--------------------|---------------------------------|----------|----------------|-------------------|----------|--|---------------------------|
|                    | Spaces                          | Circuits |                |                   |          |  |                           |
| 40 ①               | 2                               | 4        | Indoor         | Flush (no door)   | 2        | ②  | TT120FLGNM ②③             |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | TT120SLGNM ②③             |
| 60                 | 2                               | 4        | Indoor         | Flush (no door)   | 2        | #14-2  | 2460FNM                   |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | 2460SNM                   |
|                    | 2                               | 4        | Indoor         | Flush (no door)   | 2        |  | 2460FGNM ③                |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | 2460SGNM ③                |
|                    | 2                               | 4        | Indoor         | Surface (no door) | 2        |  | 2460SGNM ③                |
|                    | 2                               | 4        | Outdoor        | —                 | —        |  | 2460RNM-A2                |

#### Notes

- ① Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ② This device has no main lugs. A Type BR or BD breaker is required to be backed to supply power to branch breakers. This device is single-phase 120 Vac only. With the use of three Type BR breakers, there are two branch circuits available. With the use of three Type BD breakers, there are five branch circuits available.
- ③ Includes GB4NM ground bar.

### Options and Accessories—Mechanical Interlocks

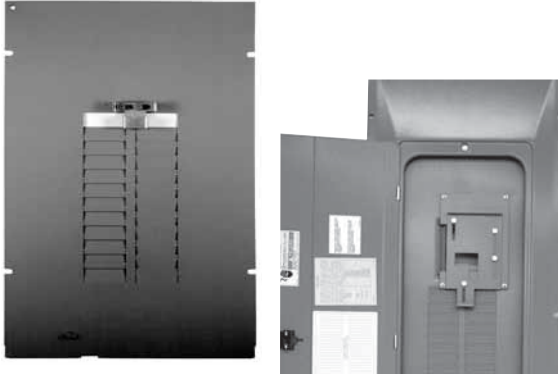

### Contents

| <b>Description</b>                      | <b>Page</b> |
|---|-------------|
| Overview .....                          | V1-T1-2     |
| CH Specialty Products                   |             |
| Spa Panels .....                        | V1-T1-13    |
| Surge Panel .....                       | V1-T1-14    |
| Plug-On Neutral Loadcenter .....        | V1-T1-16    |
| Type CH Renovation Loadcenter .....     | V1-T1-17    |
| Type CH Retrofit Interior Kits .....    | V1-T1-18    |
| CH Loadcenter Options and Accessories   |             |
| Technical Data and Specifications ..... | V1-T1-26    |
| Dimensions .....                        | V1-T1-29    |
| CH Circuit Breakers .....               | V1-T1-31    |

## CH Loadcenter Options and Accessories

### Product Selection

#### CHSF2125



#### Field Installation and Parts

##### Description

- Sub-feed lug blocks—two-pole, 125 A, 3/4-inch (19.1 mm) spaces needed
- Sub-feed lug blocks—three-pole, 125 A, 3/4-inch (19.1 mm) spaces needed
- Neutral/ground lug—add-on neutral or ground lug

##### Ordering Quantity <sup>①</sup>

##### Catalog Number

- 1 **CHSF2125**
- 1 **CHSF3125**
- 1 **NL20**
- 1 **NL30**
- 1 **NL300**

#### CHSF3125



- Filler plates—3/4-inch (19.1 mm) space circuit breaker space
- CSR main circuit breaker filler plate (with hardware)
- Door lock—12–42 circuits, and 100–225 A
- Sandlewood spray paint
- ANSI-61 light gray touchup paint for outdoor loadcenters

- 25 **CHFP**
- 1 **CSRFP**
- 1 **TDL**
- 1 **SPCSW**
- 1 **SPC61**

#### CHFP



- Isolated neutral assembly (computer circuits)
- Circuit directory—adhesive backed
- Cover screws

- 1 **BINA**
- 10 **TCD**
- 25 **LCCS**

#### TDL



- Cover replacement latch 14-5/16 inch (363.55 mm) wide loadcenters only
- Circuit marking strip (next to breakers)
- Circuit identification label (preprinted breaker labels next to breakers)

- 1 **CHRLS**
- 10 **CHMS**
- 25 **CHBL**

#### BINA



- Series rated caution label
- Branch circuit numbering strip
- Bonding strap with screw
- CH plug-on neutral ground bonding strap

- 25 **SRL**
- 20 **CHNS**
- 1 **BSSUSE**
- 1 **BSCHPON**

#### Note

<sup>①</sup> Must be purchased in multiples of ordering quantities indicated.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Main Breaker Kits

| Maximum Main Ampere Rating | Catalog Number |          |
|----------------------------|----------------|----------|
|                            | 25 kAIC        | 35 kAIC  |
| 100                        | CSR2100N       | CSH2100N |
| 150                        | CSR2150N       | CSH2150N |
| 200                        | CSR2200N       | CSH2200N |
| 225                        | CSR2225N       | CSH2225N |

#### Main Lug Kits

| Maximum Main Ampere Rating | Catalog Number |
|----------------------------|----------------|
| 125                        | CHL125N        |
| 225                        | CHL225N        |



#### Main Breaker Kits

| Breaker Ampere Rating | Lug Size     | Catalog Number |
|-----------------------|--------------|----------------|
| 100                   | #2–300 kcmil | CSR2100        |
| 150                   | #2–300 kcmil | CSR2150N       |
| 200                   | #2–300 kcmil | CSR2200N       |
| 225                   | #2–300 kcmil | CSR2225N       |

#### Mechanical Interlock Covers

Covers mechanically interlock two breakers. Type A covers interlock two CH breakers mounted across from one another. Type B covers interlock a main Type CSR breaker with a Type CH.

#### Mechanical Interlocks

|   | Type | Fits Loadcenter Catalog Numbers | Mechanical Interlock Trim/Deadfront Catalog Numbers |         |
|---|------|---------------------------------|---|---------|
|   |      |                                 | Flush   | Surface |
| <b>CH8BRM Type A</b><br>  | A    | CH12L125B                       | CH8BFM  | CH8BSM  |
|   |      | CH16L125B                       |   |         |
|   |      | CH12L3125B                      |   |         |
|   |      | CH14B100B                       |   |         |
|   |      | CH20L125C                       | CH8CFM  | CH8CSM  |
|   |      | CH24L125C                       |   |         |
|   |      | CH18L3125C                      |   |         |
|   |      | CH24L3125C                      |   |         |
|   |      | CH22B100C                       |   |         |
|   |      | CH22N100C                       |   |         |
|   |      | CH24L150D                       | CH8DFM  | CH8DSM  |
|   |      | CH32L150D                       |   |         |
|   |      | CH24L3225D                      |   |         |
|   |      | CH30L3150D                      |   |         |
|   |      | CH42L225G                       | CH8GFM  | CH8GSM  |
| CH42L3225G  |      |                                 |   |         |
| Inner cover of Box B raintight  | —    | CH8BRM                          |   |         |
| Inner cover of Box C raintight  | —    | CH8CRM                          |   |         |
| <b>Indoor</b>   |      |                                 |   |         |
| <b>CH8EFM Type B</b><br> | B    | CH24B150E                       | CH8EFM  | CH8ESM  |
|   |      | CH24B200E                       |   |         |
|   |      | CH24BPN200E                     |   |         |
|   |      | CH32B150J                       | CH8JFM  | CH8JSM  |
|   |      | CH32B200J                       |   |         |
|   |      | CH3242B200J                     |   |         |
|   |      | CH32BPN200J                     |   |         |
|   |      | CH32N200J                       |   |         |
|   |      | CH32B225J                       |   |         |
|   |      | CH42B200K                       | CH8KFM  | CH8KSM  |
|   |      | CH42N200K                       |   |         |
|   |      | CH42BPN200K                     |   |         |
|   |      | CH42B225K                       |   |         |
|   |      | CH60BPN200N                     | CH8NFM  | —       |

### CH8EFM Type B



### Mechanical Interlocks, continued

| Type           | Fits Loadcenter Catalog Numbers     | Mechanical Interlock Trim/Deadfront Catalog Numbers |            |   |
|----------------|-------------------------------------|---|------------|---|
|                |                                     | Flush   | Surface    |   |
| <b>Outdoor</b> |                                     |   |            |   |
| B              | CH8B150RF                           | CH3RDF7M  | —          |   |
|                | CH8B200RF                           |   |            |   |
|                | CH8N200RF                           |   |            |   |
|                | CH12B200RF                          |   |            |   |
|                | CH24B150R                           |   |            |   |
|                | CH24B200R                           |   |            |   |
|                | CH32B150R                           | CH3RDF9M  | —          |   |
|                | CH32B200R                           |   |            |   |
|                | CH32N200R                           |   |            |   |
|                | CH32B225R                           |   |            |   |
|                | CH42B200R                           | CH3RDF10M   | —          |   |
|                | CH42N200R                           |   |            |   |
|                | CH42B225R                           |   |            |   |
|                | <b>Next Generation Power Center</b> |   |            |   |
| B              | CHPC32B150L                         | CHPC8B32LFM   | —          |   |
|                | CHPC32B200L                         |   |            |   |
|                | CHPC32N200L                         |   |            |   |
|                | CHPC42B150L                         | CHPC8B42LFM   | —          |   |
|                | CHPC42B200L                         |   |            |   |
|                | CHPC42N200L                         |   |            |   |
|                | CHPC32B125TR                        | CH3RDF15M   | —          |   |
|                | CHPC32B150TR                        |   |            |   |
|                | CHPC32B200TR                        |   |            |   |
|                | CHPC32N200TR                        |   |            |   |
|                | CHPC42B150TR                        | CH3RDF16M   | —          |   |
|                | CHPC42B200TR                        |   |            |   |
|                | CHPC42N200TR                        |   |            |   |
|                | CHPC32B150TR                        | CH3RDF17M   | —          |   |
|                | CHPC32B200TR                        |   |            |   |
|                | CHPC42B200BR                        | CH3RDF18M   | —          |   |
|                | <b>Vintage <sup>①</sup></b>         |   |            |   |
|                |                                     | CH20JJM200  | CH7JFREPLM | — |
|                | CH24JJM150                          |   |            |   |
|                | CH30JJM150                          |   |            |   |
|                | CH30JJM200                          |   |            |   |
|                | CH30JJM150H                         |   |            |   |
|                | CH3040JMM200                        |   |            |   |
|                | CH304JJM150                         |   |            |   |
|                | CH304JJM200                         |   |            |   |
|                | CH304JJM200H                        |   |            |   |
|                | CH30KKM225                          | CH7KKFREPLM   | —          |   |
|                | CH40KKM200H                         |   |            |   |
|                | CH40KKM225                          |   |            |   |
|                | CH40KKM200H                         |   |            |   |
|                | CH40KKM225H                         |   |            |   |
|                | CH304KKM200                         |   |            |   |
|                | CH304KKM200H                        |   |            |   |
|                | CH304LLM225                         | CH7LLFREPLM   | —          |   |
|                | CH424LLM225H                        |   |            |   |

**Note**

<sup>①</sup> If vintage part number does not match exactly, the cover may not fit. Simple variations such as an "N" at the end of the part number contain minor design variations that will prevent our cover from working with that particular loadcenter.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### DS100H1



#### Field Installation Rainproof Conduit Hubs

| Description  | Conduit Size Inches (mm) | Ordering Quantity <sup>①</sup> | Catalog Number |
|--|--------------------------|--------------------------------|----------------|
| Group 1—for use with 70, 100 and 125 A MLO and MCB loadcenters and circuit breaker enclosures  | 0.75 (19.1)              | 1                              | DS075H1        |
|  | 1.00 (25.4)              | 1                              | DS100H1        |
|  | 1.25 (31.8)              | 1                              | DS125H1        |
|  | 1.50 (38.1)              | 1                              | DS150H1        |
|  | 2.00 (50.8)              | 1                              | DS200H1        |
| Group 2—for use with 150, 200 and 225 A MLO and MCB loadcenters and circuit breaker enclosures | 2.00 (50.8)              | 1                              | DS200H2        |
|  | 2.50 (63.5)              | 1                              | DS250H2        |
|  | 3.00 (76.2)              | 1                              | DS300H2        |
| Adapter kit—allows installing a Group 1 hub on devices arranged for Group 2 hubs               | —                        | 1                              | DS900AP        |
| Group 1—small blank hub closure plate  | —                        | 1                              | DS900CP1       |
| Group 2—large blank hub closure plate  | —                        | 1                              | DS900CP2       |

#### GBK14



#### Ground Bar Kits

| Description (See Legend) | Length Inches (mm) | Ordering Quantity <sup>②</sup> | Catalog Number        |
|--------------------------|--------------------|--------------------------------|-----------------------|
| ●○○○○●○                  | 2.54 (64.5)        | 1                              | GBK5 <sup>②</sup>     |
| ●○○○○●■                  | 3.59 (91.2)        | 1                              | GBK520 <sup>②</sup>   |
| ●○○○○●○○○○○              | 4.29 (109.0)       | 1                              | GBK10 <sup>②</sup>    |
| ●○○○○●○○○○○■             | 5.34 (135.6)       | 1                              | GBK1020 <sup>②</sup>  |
| ●○○○○●○○○○○■             | 4.61 (117.1)       | 1                              | GBK13 <sup>②</sup>    |
| ●○○○○●○○○○○              | 5.69 (144.5)       | 1                              | GBK14 <sup>②</sup>    |
| ●○○○○●○○○○○■             | 6.74 (171.2)       | 1                              | GBK1420 <sup>②</sup>  |
| ●○○○○●○○○○○              | 8.14 (206.8)       | 1                              | GBK21 <sup>②</sup>    |
| ●○○○○●○○○○○■             | 9.19 (233.4)       | 1                              | GBK2120 <sup>②</sup>  |
| ○○○○○○●○○○○○             | 7.94 (201.7)       | 1                              | CH9GP21 <sup>③④</sup> |

#### Ground Bar Legend

- = (3) #14–#10 Cu/Al or (1) #14–#4 Cu/Al
- = (1) #6–2/0 Cu/Al
- = (1) 1/0–14 or (3) #10–12 Cu/Al
- ◐ = (1) #14–1/0 Cu/Al or (3) #14–#10 Cu/Al
- = Mounting hole

#### Grounded “B” Phase Adapters

| Maximum Amperes | Three-Phase Loadcenter Types of Panels | Kit Catalog Number <sup>⑤</sup> |
|-----------------|--|---------------------------------|
| 125             | 12–32 circuit main lug                 | CHGRD1                          |
| 225             | Main lug and CHH main breaker panels   | CHGRD2                          |
|                 | CC main CB panels                      | CHGRD3                          |

#### Neutral Bar Accessories

| Description   | Catalog Number <sup>⑤</sup> |
|---|-----------------------------|
| Replacement neutral for all B and C type boxes          | CHN125C                     |
| Replacement neutral for all D type boxes                | CHN125D                     |
| Replacement neutral for all E, G, J, K and L type boxes | CHN225L                     |
| Isolated Neutral Assembly (computer circuits)           | BINA                        |

#### Notes


- ① Must be purchased in multiples of ordering quantities indicated.
- ② Distance between mounting holes is 1-3/4 inches (44.5 mm).
- ③ For single- and three-phase 400 A loadcenters.
- ④ Distance between mounting holes is 2-13/32 inches.
- ⑤ Cannot be used in Safety Breaker Panels. Classic Plus Panels only.

### Decorator Cover Accessory

- For easy use with CH loadcenters mounted in living space
- Easily wallpapered or painted to match any decor
- Loadcenter accessory—exclusively from Eaton



*Now you see it ...*



*... Now you don't.*

### Decorator Cover Accessory

#### Catalog Number

#### Corresponding Cover

#### Existing CH Loadcenter Cover

| Catalog Number | Existing CH Loadcenter Cover |
|----------------|------------------------------|
| CH8BF          | CH8KDNB                      |
| CH8CF          | CH8KDNC                      |
| CH8DF/EF       | CH8KDND                      |
| CH8GF/JF       | CH8KDNJ                      |
| CH8KF          | CH8KDNK                      |

### Loadcenter Goof Collars

Don't let an ugly drywall problem ruin a beautiful electrical installation.

Eaton's Goof Collar is designed to cover gaps between the finished drywall and loadcenter enclosure. This is often necessary when upgrading the electrical service and the drywall surrounding the panel is damaged. The collar allows 2 inches of overhang beyond the standard flush trim.



*Before*



*After*

### CH Goof Collars

| Inches (mm)    |               | Catalog Number   |             |
|----------------|---------------|------------------|-------------|
| Height         | Width         | Loadcenter Cover | Goof Collar |
| 21.00 (533.4)  | 19.00 (482.6) | CH8BF            | CH8BFC1921  |
| 26.00 (660.4)  | 19.00 (482.6) | CH8CF            | CH8CFC1926  |
| 34.00 (863.6)  | 19.00 (482.6) | CH8DF            | CH8DFC1934  |
|                |               | CH8EF            |             |
|                |               | CHSUR8EF         |             |
| 39.00 (990.6)  | 19.00 (482.6) | CH8GF            | CH8JFC1939  |
|                |               | CH8JF            |             |
| 42.00 (1066.8) | 19.00 (482.6) | CH8KF            | CH8KFC1942  |
|                |               | CHSUR8KF         |             |
| 44.00 (1117.6) | 19.00 (482.6) | CH8LF            | CH8LFC1944  |
|                |               | CHSUR8LF         |             |

**Technical Data and Specifications****General**

- A. The Contractor shall furnish and install loadcenters incorporating circuit breakers of the number, rating and type as specified herein and as shown on the contract drawings.
- B. The loadcenter and all components shall be designed, manufactured and tested in accordance with the latest applicable standards of UL and NEMA including:
  1. UL 67—standards for panelboards
  2. UL 50—standards for cabinets and boxes
  3. UL 489—standards for molded case circuit breakers
  4. Federal Spec Classification W-C 375
  5. UL 1699—all fault interrupting

**Qualifications**

- A. The manufacturer of the loadcenter shall be the manufacturer of the circuit breaker within the load center. All breakers shall be full size.
- B. For the equipment specified herein, the manufacturer shall be ISO® 9000 certified.
- C. The manufacturer of this equipment shall have produced similar electrical equipment for a minimum period of seven (7) years.

**Manufacturers**

- A. Eaton

**Ratings**

- A. Loadcenters shall be rated for 240 Vac and shall have short-circuit ratings as shown on the drawings or as herein scheduled, but not less than 10,000 amperes rms symmetrical.
- B. Breakers shall be full size and a minimum of 125 A frame. Breakers 10 –125 A trip size shall take up the same pole spacing.
- C. Loadcenters shall be labeled with a UL short-circuit rating. When series ratings are applied with integral or remote devices, a label shall be provided. Series ratings shall cover all trip ratings of installed frames. It shall state the conditions of the UL series ratings including:
  1. Size and type of upstream device.
  2. Branch devices that can be used.
  3. UL series short-circuit rating.

**Construction**

- A. All interiors, with the exception of the branch circuit breakers shall be completely factory assembled with main breakers, main lugs or no main device.
- B. Interiors shall be so designed that circuit breakers can be replaced without disturbing adjacent units and without removing the main bus connectors and shall be so designed that circuits may be changed without machining, drilling or tapping.
- C. Physical means must be provided to prevent the installation of more overcurrent devices than that number for which the enclosure was designed. Full size breakers are required.

**Bus**

- A. Busbars for the main and cross connectors shall be of silver flash plated copper construction in accordance with UL standards. Bussing shall be braced to 65 kAIC.
- B. Neutral bussing shall have a suitable lug for each outgoing feeder requiring a neutral connection of same ampacity as branch.

**Wiring/Termination**

- A. All wire connectors and terminals shall be of the anti-turn solderless type and suitable for copper or aluminum wire of the sizes indicated. All connectors shall meet the "Requirements for Wire Connectors and Soldering Lugs" UL 486B.
- B. All loadcenters where marked shall be suitable for use with 60/75 °C rated wire.



**Circuit Breakers**

- A. Circuit breakers shall be molded case type, 3/4-inch (19.1 mm) wide per pole. Multipole circuit breakers shall be of a stack pole design to provide electrical phase isolation and have an internal common trip.
- B. Each pole of the circuit breaker will have inverse time delay overload and instantaneous short-circuit protection by means of both thermal and magnetic sensors. Circuit breakers shall be quick-make/quick-break.
- C. The circuit breaker calibration shall not be affected by environmental changes in relative humidity. Breakers shall be calibrated after assembly.
- D. All circuit breakers shall be operated by a toggle-type handle and multipole circuit breakers shall have an internal common trip mechanism. The circuit breakers shall incorporate trip mechanisms that are mechanically trip-free from the handle. The handle position shall provide good visual trip indication.
- E. Contacts shall be of non-welding silver alloy.
- F. All branch breaker handles shall be of a different color than the case of the breaker.
- G. All terminals shall be listed for use with copper or aluminum conductors. Terminals shall be of the box lug design. The terminals shall meet UL 486B requirements and shall be suitable for use with either 60 °C or 75 °C wire.
- H. Breakers shall be SWD rated and/or HACR rated as required.
- I. Arc fault interrupting circuit breakers, (AFC), shall be provided on all 15 and 20 A single-phase 120/240 Vac circuits except those indicated as remote controlled breakers. AFI breakers shall be "Classified for mitigating the effects of arcing faults," or conforming to UL Standard 1699 and as defined by per Article 210.12 Section A of the NEC Code.

**Enclosures**

- A. Loadcenters shall have NEMA 1 general purpose or NEMA 3R rainproof enclosures as indicated on the drawings and shall be surface or flush mounted except where noted.
- B. For indoor applications, enclosures shall be rated NEMA 1. Enclosures shall be manufactured from cold-rolled code-gauge sheet steel having multiple knockouts and painted per paint specification. For outdoor applications, enclosures shall be rated NEMA 3R. Enclosures shall be manufactured from galvanized steel which shall be painted per the painted as specified. Enclosures shall be of sufficient size to meet or exceed NEC wire bending space.
- C. The cover shall have an easy adjustment feature for flush applications.
- D. Boxes shall be factory assembled into a single rigid structure.
- E. Provide circuit breaker marking labels and directories.

**Finish**

- A. Boxes and trims shall be finished with a high scratch-resistant aesthetically pleasing finish. The finish shall be polyurethane coating electrostatically applied to a thickness of 1.8 to 2 mils.

All loadcenters shall be provided with provisions for accepting a paintable or wall paperable decorator accessory cover. Where loadcenters are installed in living areas, provide manufacturer designed and tested decorator cover kits.

**CH Loadcenters****Description****Service**

Single-phase, three-wire, 120/240 Vac

Three-phase, four-wire, 208Y/120 Vac

Three-phase, three-wire, 240 V corner grounded delta

Three-phase, three-wire, 240 Vac delta

**Short-Circuit Current Rating**

10 kAIC: All single- and three-phase loadcenters 40–400 A, 2–42 circuits except when series ratings are applied

35 kAIC available on convertible units using CSH main breaker

25 kAIC: All factory-installed main breakers single-phase loadcenters rated 150–225 A using Type CSR main breakers

42 and 100 kAIC are available on some styles: single-phase and three-phase

**Main Breaker/Main Lug Loadcenters**

Single-phase

Three-phase

Main breaker: 100, 125, 150, 200, 225, 400 A

Main breaker: 150, 200, 225, 300, 400 A

Main lugs: 40, 70, 125, 150, 200, 225, 400 A

Main lugs: 125, 150, 200, 225, 400 A

**Convertible Loadcenters**

Main breaker or main lugs: single-phase up to 225 A

**Branch Breakers**

Type CH: 10–150 A. Single-, two- and three-pole. Selected amperages available in shunt trip, HACR and switching duty

Type CH-AFCI arc fault circuit interrupter

Ground fault circuit interrupters: 15–60 A

Type CHP: 10–125 A. Single-, two- and three-pole, three-position commercial trip

Type CH-HID: 15–30 A. Single-, two- and three-pole

Selected amperages available in HACR switching duty

CH-HM high magnetic

Type CHP-HID: 15–30 A. Single-, two- and three-pole

CH-M50 high ambient

Type CHP-GFCI: 15–30 A. Single-pole ground fault breakers

**Enclosures**

NEMA® Type 1 indoor

NEMA Type 3R outdoor

**Loadcenter and Breaker Accessories**

Branch circuit breaker:

Complete line of ground bar kits 5, 10, 14 and 21 circuits, some with additional #2/0 lugs

Auxiliary components

Each terminal will accommodate: (3) #14–#10 Cu/Al or (1) #14–#4 Cu/Al

Hold-down kits

Sub-feed lugs 125, 150 A—two- and three-pole

Handle ties

Shunt trips

Lockoffs

Universal rainproof conduit hubs Group One: 3/4, 1, 1-1/4, 1-1/2, 2 inches (19.1, 25.4, 31.8, 38.1, 50.8 mm)

Lockdogs

Group Two: 2, 2-1/2, 3 inches (50.8, 63.5, 76.2 mm)

Adapter plate

**Bussing**

Silver flash plated copper bus is a standard feature

### Dimensions

Approximate Dimensions in Inches (mm)

#### Residential/Commercial/Unit Enclosure—Box Sizes

**Note:** Box sizes do not include covers/fronts.

#### Residential Loadcenters

| Box Size                  | Height         | Width         | Depth       |
|---------------------------|----------------|---------------|-------------|
| <b>NEMA Type 1 Indoor</b> |                |               |             |
| 5                         | 9.50 (241.3)   | 4.50 (114.3)  | 3.13 (79.4) |
| 6                         | 11.38 (288.9)  | 6.88 (174.6)  | 3.39 (86.1) |
| 7                         | 13.00 (330.2)  | 11.00 (279.4) | 3.69 (93.7) |
| B                         | 16.75 (425.5)  | 14.31 (363.5) | 3.88 (98.4) |
| C                         | 21.00 (533.4)  | 14.31 (363.5) | 3.88 (98.4) |
| D                         | 29.13 (739.8)  | 14.31 (363.5) | 3.88 (98.4) |
| E                         | 29.13 (739.8)  | 14.31 (363.5) | 3.88 (98.4) |
| G                         | 34.13 (866.8)  | 14.31 (363.5) | 3.88 (98.4) |
| J                         | 34.13 (866.8)  | 14.31 (363.5) | 3.88 (98.4) |
| K                         | 37.00 (939.8)  | 14.31 (363.5) | 3.88 (98.4) |
| L                         | 39.00 (990.6)  | 14.31 (363.5) | 3.88 (98.4) |
| N                         | 45.00 (1143.0) | 14.31 (363.5) | 3.88 (98.4) |

| Box Size                    | Height        | Width         | Depth        |
|-----------------------------|---------------|---------------|--------------|
| <b>NEMA Type 3R Outdoor</b> |               |               |              |
| 5R                          | 9.50 (241.3)  | 4.50 (114.3)  | 3.13 (79.4)  |
| 6R                          | 11.75 (298.5) | 6.50 (165.1)  | 4.50 (114.3) |
| 7R                          | 13.00 (330.2) | 11.00 (279.4) | 3.69 (93.7)  |
| B                           | 16.75 (425.5) | 14.31 (363.5) | 5.19 (131.8) |
| C                           | 21.00 (533.4) | 14.31 (363.5) | 5.19 (131.8) |
| D                           | 29.13 (739.8) | 14.31 (363.5) | 5.19 (131.8) |
| E                           | 29.13 (739.8) | 14.31 (363.5) | 5.19 (131.8) |
| G                           | 34.13 (866.8) | 14.31 (363.5) | 5.19 (131.8) |
| J                           | 34.13 (866.8) | 14.31 (363.5) | 5.19 (131.8) |
| K                           | 37.00 (939.8) | 14.31 (363.5) | 5.19 (131.8) |
| L                           | 39.00 (990.6) | 14.31 (363.5) | 5.19 (131.8) |

#### Commercial Loadcenters

| Box Size                  | Height         | Width         | Depth        |
|---------------------------|----------------|---------------|--------------|
| <b>NEMA Type 1 Indoor</b> |                |               |              |
| P                         | 54.38 (1381.1) | 21.00 (533.4) | 6.00 (152.4) |
| PM                        | 62.63 (1590.7) | 21.00 (533.4) | 6.00 (152.4) |

#### Types ECB and ECC Unit Enclosures

| Height                      | Width        | Depth        |
|-----------------------------|--------------|--------------|
| <b>NEMA Type 1 Indoor</b>   |              |              |
| 23.25 (590.6)               | 8.88 (225.4) | 4.50 (114.3) |
| <b>NEMA Type 3R Outdoor</b> |              |              |
| 23.69 (601.7)               | 9.31 (236.5) | 5.44 (138.1) |


#### Residential Loadcenter Knockout

Residential NEMA Type 1 Indoor and NEMA Type 3R Outdoor Enclosures.

#### Knockouts for Box Sizes 5, 6, 7, 5R, 6R, 7R

| Code | Diameter    |             |             |             |
|------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | —           | —           | —           |
| B    | 0.50 (12.7) | 0.75 (19.1) | —           | —           |
| C    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           |
| D    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) |
| E    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | —           |
| F    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| G    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           |
| H    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) |
| I    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           |

#### Knockout Positions

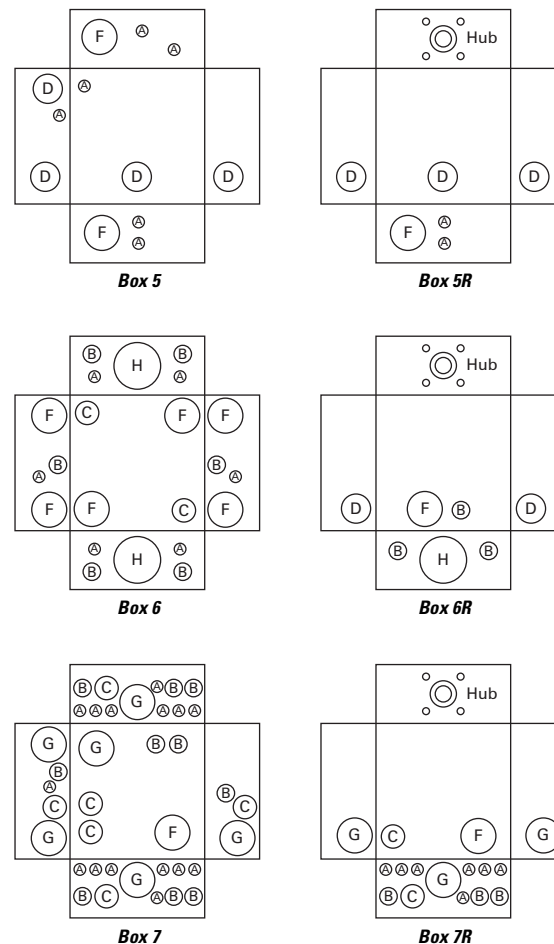

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

Approximate Dimensions in Inches (mm)


#### Residential and Commercial Loadcenter Knockout

Residential NEMA Type 1 indoor and NEMA Type 3R outdoor enclosures.

#### Knockouts for Box Sizes 8, 8R, P, PM, B, C, D, E, G, J, K, L, N and Outdoor Boxes 12–60 Circuits

| Code | Diameter    |             |             |             |             |
|------|-------------|-------------|-------------|-------------|-------------|
| a    | 0.75 (19.1) | —           | —           | —           | —           |
| b    | 0.50 (12.7) | 0.75 (19.1) | —           | —           | —           |
| c    | 0.50 (12.7) | —           | —           | —           | —           |
| d    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| e    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) | —           |
| f    | 0.75 (19.1) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           |
| g    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           | —           |
| h    | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) | —           | —           |
| i    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| j    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           | —           |
| k    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           | —           |
| m    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) |
| n    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           |
| p    | 2.00 (50.8) | 2.50 (63.5) | —           | —           | —           |


#### Knockout Diagram

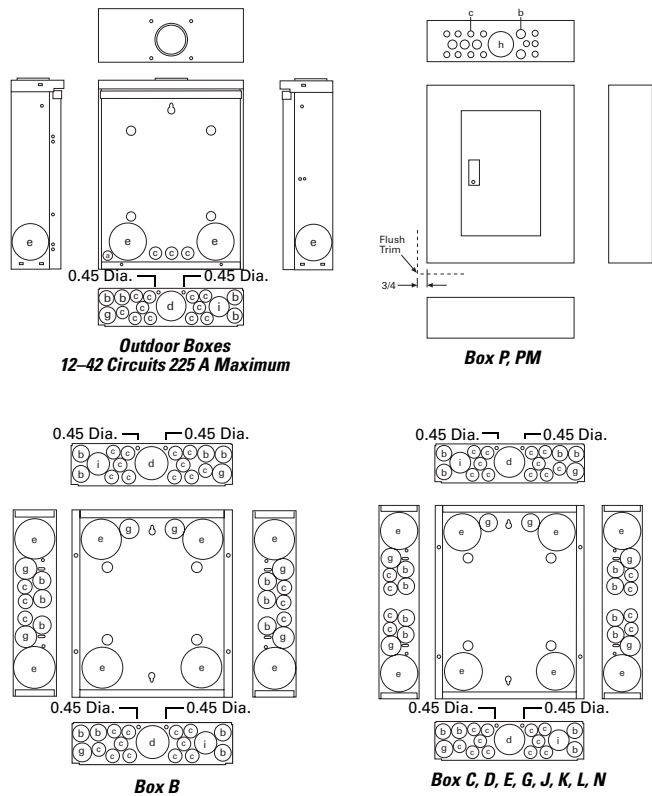


#### Type ECB and ECC Unit Enclosure Knockout

| Code  | Diameter    |             |             |             |             |
|---|-------------|-------------|-------------|-------------|-------------|
| <b>NEMA Type 1 Indoor (Flush and Surface Trims)</b> |             |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) | 2.50 (63.5) |
| <b>NEMA Type 3R Outdoor</b>                         |             |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) | 2.50 (63.5) |

#### NEMA Type 1—Indoor



#### NEMA Type 3R—Outdoor



### Plug-On Circuit Breakers



## CH Circuit Breakers

### Product Description

Quick-make, quick-break switch mechanism combined with inverse time element tripping operation and trip-free handle design. Type CH circuit breakers trip to the OFF position, eliminating nuisance callbacks. The CHF family also includes a trip flag to differentiate between a trip and the breaker being turned off. The thermal-magnetic trip curve avoids nuisance tripping on mild overloads while reacting almost instantaneously to severe short-circuit conditions. Multipole breakers have internal common trip connection to operate all poles simultaneously. Handles are marked with ON-OFF indication and ampere rating of the breaker.

### Special Application Plug-On Circuit Breakers—Type CH 10 kAIC 120 Vac and 120/240 Vac

#### Branch Feeder Type Arc Fault Circuit Breakers

A branch feeder type arc fault circuit interrupter is a device intended to mitigate high current arcing faults in the complete circuit, including connected cords. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults.

The branch feeder type AFCI is required in the 1999 and 2002 National Electrical Code.

The Combination Type AFCI is required in all subsequent editions of the National Electrical Code.

#### Combination Type Arc Fault Circuit Breakers

A combination type arc fault circuit interrupter is a device that offers mitigation of high current arcing faults in the complete circuit, including connected cords. In addition it provides direct detection of persistent low current arcing faults down to 5 amps with associated mitigation of fire hazards in the cords connected to the outlets. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults. The current level of low current arcing faults is limited by the load.

#### Ground Fault Circuit Breakers—Ground Fault Application Notes

Single-pole Type CHGFIs are designed for use in two-wire, 120 Vac circuits. The diagram on **Page V1-T1-40** shows a typical wiring configuration.

## Contents

### Description

|   | <i>Page</i>     |
|---|-----------------|
| Overview .....                              | <b>V1-T1-2</b>  |
| CH Specialty Products .....                 | <b>V1-T1-13</b> |
| CH Loadcenter Options and Accessories ..... | <b>V1-T1-21</b> |
| CH Circuit Breakers                         |                 |
| Product Selection .....                     | <b>V1-T1-32</b> |
| Options and Accessories .....               | <b>V1-T1-38</b> |
| Technical Data and Specifications .....     | <b>V1-T1-40</b> |
| Wiring Diagrams .....                       | <b>V1-T1-40</b> |

Two-pole Type CHGFIs are designed for use in three-wire, 120/240 Vac circuits, 120 Vac multiwire circuits employing common, neutral and two-wire, 240 Vac circuits obtained from a 120/240 Vac source.


Diagrams on **Page V1-T1-40** illustrate typical wiring configurations for 120/240 Vac multiwire circuits.

The diagram on **Page V1-T1-40** depicts a 240 Vac, two-wire circuit. Note the “panel neutral” conductor connects to the neutral bar,

even though the neutral is not included in the load circuit. This connection is necessary to supply a 120 Vac power source to the ground fault sensing circuit.

The figures are shown with a 120/240 Vac, single-phase, three-wire power source, but are also applicable to a 120/208 Vac, three-phase, four-wire power supply. For all figures, the electrical operation of the Type CHGFIs is not affected by the equipment ground.

### Features

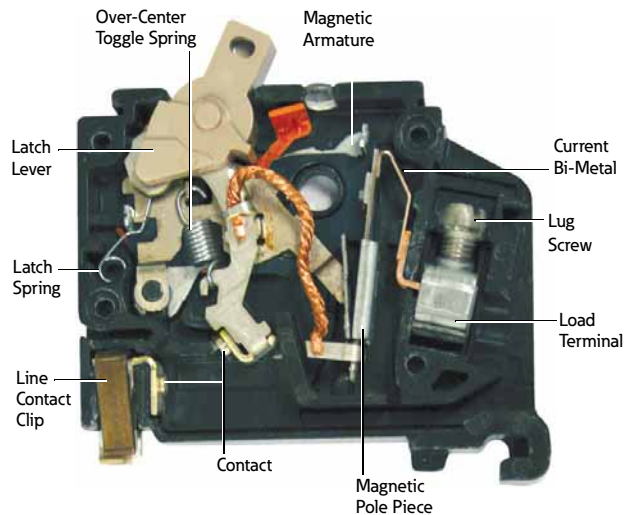

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1




#### Product Selection

10 kAIC, 120 Vac, 120/240 Vac and 240 Vac

##### Type CH Plug-On Circuit Breakers





#### Type CH Breakers, 3/4-Inch (19.1 mm) per Pole 120, 120/240 or 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Catalog Number   |   |   |
|---------------|---|--|---|---|
|               |   | Single-Pole 120/240 Vac<br>Requires One<br>3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton     | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton | Three-Pole 240 Vac<br>Common Trip Requires Three<br>3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton |
| 10            | (1) #14–8 ①                             |  <b>CH110</b> |  <b>CH210</b>      |  <b>CH310</b>    |
| 15            | (2) #14–10 ①②<br>(1) #14–6 ③            | <b>CH115</b> ⑥⑦  | <b>CH215</b> ⑦  | <b>CH315</b> ⑦  |
| 20            |   | <b>CH120</b> ⑥⑦  | <b>CH220</b> ⑦  | <b>CH320</b> ⑦  |
| 25            |   | <b>CH125</b> ⑦   | <b>CH225</b> ⑦  | <b>CH325</b> ⑦  |
| 30            |   | <b>CH130</b> ⑦   | <b>CH230</b> ⑦  | <b>CH330</b> ⑦  |
| 35            | #14–2 ①<br>#14–6 ③                      | <b>CH135</b> ⑦   | <b>CH235</b> ⑦  | <b>CH335</b> ⑦  |
| 40            | #10–1/0 ④                               | <b>CH140</b> ⑦   | <b>CH240</b> ⑦  | <b>CH340</b> ⑦  |
| 45            | #14–2<br>#3/0                           | <b>CH145</b> ⑦   | <b>CH245</b> ⑦  | <b>CH345</b> ⑦  |
| 50            |   | <b>CH150</b> ⑦   | <b>CH250</b> ⑦  | <b>CH350</b> ⑦  |
| 60            |   | <b>CH160</b>   | <b>CH260</b>  | <b>CH360</b>  |
| 70            |   | <b>CH170</b>   | <b>CH270</b>  | <b>CH370</b>  |
| 80            |   | —  | <b>CH280</b>  | <b>CH3080</b>   |
| 90            |   | —  | <b>CH290</b>  | <b>CH3090</b>   |
| 100           |   | —  | <b>CH2100</b>   | <b>CH3100</b>   |
| 110           |   | —  | <b>CH2110</b>   | —   |
| 125           |   | —  | <b>CH2125</b>   | —   |

##### Type CH Plug-On Circuit Breakers



#### CHF Breakers with Mechanical Trip Flag

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Catalog Number  |   |
|---------------|---|---|---|
|               |   | Single-Pole 120/240 Vac<br>Requires One<br>3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton        | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton |
| 10            | (1) #14–8 ①                             |  <b>CHF110</b> |  <b>CHF210</b>   |
| 15            | (2) #14–10 ①②                           | <b>CHF115</b> ⑥⑦  | <b>CHF215</b> ⑦   |
| 20            |   | <b>CHF120</b> ⑥⑦  | <b>CHF220</b> ⑦   |
| 25            |   | <b>CHF125</b> ⑦   | <b>CHF225</b> ⑦   |
| 30            |   | <b>CHF130</b> ⑦   | <b>CHF230</b> ⑦   |
| 35            | #14–2 ①                                 | <b>CHF135</b> ⑦   | <b>CHF235</b> ⑦   |
| 40            | #14–4 ④                                 | <b>CHF140</b> ⑦   | <b>CHF240</b> ⑦   |
| 45            |   | <b>CHF145</b> ⑦   | <b>CHF245</b> ⑦   |
| 50            |   | <b>CHF150</b> ⑦   | <b>CHF250</b> ⑦   |

##### Notes

- ① For single- and two-pole breakers.
- ② Solid and stranded wire can be used together.
- ③ For three-pole breakers.
- ④ Single-pole and two-pole 40–50 A.
- ⑥ Two-pole 150 A.
- ⑦ Switching duty rated.
- ⑦ HACR rated.

For factory-installed options, refer to **Page V1-T1-39**.

### Type CH AF/GF Single-Pole Circuit Breaker

Type CH AFCI Single-Pole Circuit Breaker



### Dual Purpose Arc Fault/Ground Fault 3/4-Inch (19.1 mm) Wide Circuit Breakers, Type CH, 120 Vac— 10 kAIC <sup>①②</sup>

| Poles                                   | Ampere Rating | Configuration         | Catalog Number          |
|---|---------------|-----------------------|-------------------------|
| Single-pole<br>10 kAIC                  | 15            | Combination AFCI GFCI | CHFAFGF115 <sup>③</sup> |
|   | 20            | Combination AFCI GFCI | CHFAFGF120 <sup>③</sup> |
| Single-pole, plug-on neutral<br>10 kAIC | 15            | Combination AFCI GFCI | CHFAFGF115PN            |
|   | 20            | Combination AFCI GFCI | CHFAFGF120PN            |

### Plug-On Branch Feeder Type Arc Fault Circuit Breakers, Type CH 10 kAIC, 120 Vac and 120/240 Vac

Type CH AFCI Single-Pole Circuit Breaker



### Combination Type CH AFCI 3/4-Inch (19.1 mm) Wide Circuit Breakers

| Poles                   | Ampere Rating | Catalog Number |
|-------------------------|---------------|----------------|
| <b>Standard Pigtail</b> |               |                |
| Single-pole<br>10 kAIC  | 15            | CHFCAF115      |
|                         | 20            | CHFCAF120      |
| Two-pole<br>10 kAIC     | 15            | CH215CAF       |
|                         | 20            | CH220CAF       |

Type CH AFCI Single-Pole Circuit Breaker



### Branch Type CH AFCI 3/4-Inch (19.1 mm) Wide FIRE-GUARD<sup>®</sup> Circuit Breakers

| Poles                             | Ampere Rating | Configuration    | Catalog Number       |
|-----------------------------------|---------------|------------------|----------------------|
| Single-pole<br>10 kAIC            | 15            | AFCI             | CH115AF <sup>③</sup> |
|                                   | 20            | AFCI             | CH120AF <sup>③</sup> |
| Two-pole<br>10 kAIC <sup>④⑤</sup> | 15            | AFCI common trip | CH215AF              |
|                                   | 20            | AFCI common trip | CH220AF              |

### Plug-On Combination Type Arc Fault Circuit Breakers and Ground Fault, Type CH 10 kAIC, 120 Vac and 120/240 Vac <sup>⑥</sup>

Type CH AFCI Single-Pole PON Combo Circuit Breaker



### Combination Type CH AFCI 3/4-Inch (19.1 mm) and CHGFCI Circuit Breakers

| Poles                  | Ampere Rating | Configuration        | Catalog Number |
|------------------------|---------------|----------------------|----------------|
| Single-pole<br>10 kAIC | 15            | AFCI plug-on neutral | CHFCAF115PN    |
|                        | 20            | AFCI plug-on neutral | CHFCAF120PN    |
|                        | 15            | GFCI plug-on neutral | CHFGFT115PN    |
|                        | 20            |                      | CHFGFT120PN    |
|                        | 25            |                      | CHFGFT125PN    |
|                        | 30            |                      | CHFGFT130PN    |

**Notes**

- ① Breaker qualifies as combination arc fault, per UL 1699.
- ② Breaker qualifies as personnel protection ground fault, (5 mA) per UL 943.
- ③ Clamshell packaging available with CS modification code on the end of catalog number.
- ④ Common trip refers to two-pole 240 V load application sourced by 120/240 Vac (see diagram on **Page V1-T1-40**).
- ⑤ Independent trip refers to two-pole multi-wire, home run or shared neutral circuits (see diagrams on **Page V1-T1-40**).
- ⑥ Requires plug-on neutral loadcenter.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Plug-On Ground Fault Circuit Breakers, Type CH 10 kAIC, 120 Vac and 120/240 Vac

##### Type CH Single-Pole



#### Type CH Ground Fault Circuit Breakers (5 Milliampere) 3/4-Inch (19.1 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C ① | Catalog Number—1 per Shelf Carton                            |  |
|---------------|---|--|--|
|               |   | Single-Pole 120 Vac Requires<br>One 3/4-Inch (19.1 mm) Space | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces |
| 15            | #14–6                                     | CHFGFT115  | CH215GFT   |
| 20            | #14–6                                     | CHFGFT120  | CH220GFT   |
| 25            | #14–6                                     | CHFGFT125  | CH225GFT   |
| 30            | #14–6                                     | CHFGFT130  | CH230GFT   |
| 35            | #14–6                                     | —  | CH235GFT   |
| 40            | #14–6                                     | —  | CH240GFT   |
| 45            | #14–6                                     | —  | CH245GFT   |
| 50            | #14–6                                     | —  | CH250GFT   |
| 60            | #14–6 ①                                   | —  | CH260GFT   |

##### Type CH Two-Pole



#### Type CH Ground Fault Equipment Protectors (30 Milliampere) 3/4-Inch (19.1 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C ① | Catalog Number—1 per Shelf Carton                            |  |
|---------------|---|--|--|
|               |   | Single-Pole 120 Vac Requires<br>One 3/4-Inch (19.1 mm) Space | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces |
| 15            | #14–6                                     | CHFEP115   | CH215EPD   |
| 20            | #14–6                                     | CHFEP120   | CH220EPD   |
| 25            | #14–6                                     | CHFEP125   | —  |
| 30            | #14–6                                     | CHFEP130   | CH230EPD   |
| 40            | #14–6                                     | —  | CH240EPD   |
| 50            | #14–6                                     | —  | CH250EPD   |
| 60            | #14–6 ①                                   | —  | CH260EPD   |

#### Type CH Switching Neutral Breakers—10 kAIC, 120 Vac and 120/240 Vac

Used to open the neutral along power line(s) for applications of gas pumps.

##### CH220SW



#### 3/4-Inch (19.1 mm) per Pole 120/240 or 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Catalog Number—1 per Shelf Carton   |   |
|---------------|---|---|---|
|               |   | Two-Pole 120 Vac<br>Common Trip Requires<br>Two 3/4-Inch (19.1 mm) Spaces | Three-Pole 120/240 Vac<br>Common Trip Requires<br>Three 3/4-Inch (19.1 mm) Spaces |
| 15            | #14–8                                   | CH215SW ②   | CH315SW ③   |
| 20            | #14–8                                   | CH220SW ②   | CH320SW ③   |
| 30            | #14–8                                   | CH230SW ②   | CH330SW ③   |
| 40            | #14–8                                   | CH240SW ②   | CH340SW ③   |
| 50            | #14–8                                   | CH250SW ②   | CH350SW ③   |

#### Notes




- ① 60 A breaker listed for 75 °C Cu wire only.
- ② For circuit breakers with shunt trip, add ST suffix. Shunt trip requires one additional pole space.
- ③ Switching duty rated.



### Type CH-HID Circuit Breakers—10 kAIC, 120 Vac, 120/240 and 240 Vac

Suitable for use in circuits for fluorescent and high intensity discharge lighting. Also suitable for HACR applications.


#### 3/4-Inch (19.1 mm) per Pole 120 Vac, 120/240 and 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One<br>3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 240 Vac<br>Common Trip Requires<br>Two 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number | Three-Pole 240 Vac<br>Common Trip Requires<br>Three 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|---|---|
|               |   |                             |                                 |                                    |
| 15            | #14–8                                   | CH115HID   | CH215HID ①  | CH315HID  |
| 20            | #14–8                                   | CH120HID   | CH220HID  | CH320HID  |
| 30            | #14–8                                   | CH130HID   | CH230HID  | CH330HID  |


### Type CHT Twin 10 kAIC, 120/240 Vac, Universal CTL and Non-CTL Plug-On Circuit Breakers

Suitable for CTL and Non-CTL loadcenters.

Type CH and CHT  
Circuit Breakers  
Mounted in Twin  
Breaker Panel



#### Twin (CTL) 3/4-Inch (19.1 mm) per Pole 120 Vac Class CTL 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole Requires<br>One 3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number |
|---------------|---|---|
|               |   |              |
| 15–15         | #14–8                                   | CHT1515 ②③  |
| 15–20         | #14–8                                   | CHT1520 ②③  |
| 20–20         | #14–8                                   | CHT2020 ②③  |

#### Notes

- ① CH215HID is rated for 120/240 V.
- ② Switching duty rated.
- ③ HACR rated.

# 1.1

## Loadcenters and Circuit Breakers




### Type CH Loadcenters and Circuit Breakers

1

#### Type CHP Commercial Breakers—10 kAIC, 120 Vac, 120/240 Vac and 240 Vac

Note: CHP breakers feature on-off and trip positions for commercial applications.

#### 3/4-Inch (19.1 mm) per Pole 120, 120/240 or 240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 3/4-Inch<br>(19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac<br>Common Trip<br>Requires Two 3/4-Inch<br>(19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number | Three-Pole 240 Vac<br>Common Trip<br>Requires Three 3/4-Inch<br>(19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|--|--|
|               |   |                             |   |                                       |
| 10            | (1) #14–8 ①                             | <b>CHP110</b>  | <b>CHP210</b>  | <b>CHP310</b>  |
| 15            | (2) #14–10 ①②<br>(1) #14–6 ③            | <b>CHP115</b> ⑥⑦   | <b>CHP215</b> ⑦  | <b>CHP315</b> ⑦  |
| 20            |   | <b>CHP120</b> ⑥⑦   | <b>CHP220</b> ⑦  | <b>CHP320</b> ⑦  |
| 25            |   | <b>CHP125</b> ⑦  | <b>CHP225</b> ⑦  | <b>CHP325</b> ⑦  |
| 30            |   | <b>CHP130</b> ⑦  | <b>CHP230</b> ⑦  | <b>CHP330</b> ⑦  |
| 35            | #14–2 ①<br>#14–6 ③                      | <b>CHP135</b> ⑦  | <b>CHP235</b> ⑦  | <b>CHP335</b> ⑦  |
| 40            | #10–1/0 ④                               | <b>CHP140</b> ⑦  | <b>CHP240</b> ⑦  | <b>CHP340</b> ⑦  |
| 45            | #14–2 ⑤                                 | <b>CHP145</b> ⑦  | <b>CHP245</b> ⑦  | <b>CHP345</b> ⑦  |
| 50            |   | <b>CHP150</b> ⑦  | <b>CHP250</b> ⑦  | <b>CHP350</b> ⑦  |
| 60            |   | <b>CHP160</b> ⑦  | <b>CHP260</b> ⑦  | <b>CHP360</b> ⑦  |
| 70            |   | <b>CHP170</b>  | <b>CHP270</b>  | <b>CHP370</b>  |
| 80            |   | —  | <b>CHP280</b>  | —  |
| 90            |   | —  | <b>CHP290</b>  | —  |
| 100           |   | —  | <b>CHP2100</b>   | <b>CHP3100</b>   |
| 110           |   | —  | <b>CHP2110</b>   | —  |
| 125           |   | —  | <b>CHP2125</b>   | —  |

#### Notes



- ① For single- and two-pole breakers.
- ② Solid and stranded wire can be used together.
- ③ For three-pole breakers.
- ④ Single-pole 60–70 A, two-pole 80–125 A, three-pole 40–100 A.
- ⑤ Single-pole 40–50 A, two-pole 40–70 A.
- ⑥ Switching duty rated.
- ⑦ HACR rated.

CHP breakers offer on-off and trip positions for commercial applications.

### Type CHP Neutral Switching Breakers—10 kAIC, 120 Vac and 120/240 Vac



Used to open the neutral along power line(s) for applications of gas pumps.

#### 3/4-Inch (19.1 mm) per Pole 120 or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Two-Pole 120 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number | Three-Pole 120/240 Vac Common Trip<br>Requires Three 3/4-Inch (19.1 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|--|--|
|               |   |                               |                                       |
| 15            | #14–8                                   | CHP215SW <sup>①</sup>  | CHP315SW <sup>①</sup>  |
| 20            | #14–8                                   | CHP220SW <sup>①</sup>  | CHP320SW <sup>①</sup>  |



### Type CH-M50 High Ambient Breaker

#### 3/4-Inch (19.1 mm) per Pole 120 or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|---|--|
|               |   |                          |                                   |
| 15            | (1) #14–8                               | CH115M50  | CH215M50   |
| 20            | (2) #14–10                              | CH120M50  | CH220M50   |
| 25            |   | CH125M50  | CH225M50   |
| 30            |   | CH130M50  | CH230M50   |
| 35            |   | CH135M50  | CH235M50   |
| 40            |   | CH140M50  | CH240M50   |
| 45            |   | CH145M50  | CH245M50   |
| 50            |   | CH150M50  | CH250M50   |
| 60            |   | —   | CH260M50   |
| 70            |   | —   | CH270M50   |

### Type CH-HM and CHP-HM High Magnetic Breakers

#### 3/4-Inch (19.1 mm) per Pole 120 or 120/240 Vac, 10 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 3/4-Inch (19.1 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac Common Trip<br>Requires Two 3/4-Inch (19.1 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|---|--|
|               |   |                        |                                 |
| 15            | (1) #14–8                               | CH115HM   | CH215HM  |
| 20            | (2) #14–10                              | CH120HM   | CH220HM  |
| 15            | (1) #14–8                               | CHP115HM  | CHP215HM   |
| 20            | (2) #14–10                              | CHP120HM  | CHP220HM   |

#### Note

<sup>①</sup> For circuit breakers with shunt trip, add ST suffix. Shunt trip requires one additional pole space, obtain pricing from [Page V1-T1-39](#).

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1

#### Options and Accessories

CHHT

#### Field Installation Kits and Parts



CHPL



CHPLGF



MCBPL



CHLO



CH125RB



CH9MB270



CHML



#### Description

Ordering Quantity <sup>①</sup>

Catalog Number

#### Handle Ties <sup>②</sup>

Handle tie bar for physically joining the handles of two adjacent single-pole Type CH circuit breakers (molded plastic handle cover)

25

CHHT

Padlockable device for locking the handle of CH AFGF, CAF and GFT breakers into the ON or OFF position.

CHFAFGFLOFF

#### Handle Lockoffs <sup>③④</sup>

Padlockable device for locking the handle of single-, two- or three-pole Type CH circuit breakers (escutcheon mounted) <sup>⑤</sup>

1

CHPL

Padlockable device for locking the handle of a single-pole Type CHGFI circuit breaker (escutcheon mounted) <sup>⑤</sup>

1

CHPLGF

Padlockable bracket for locking the handle of two-, three- and four-pole Type CH circuit breakers

10

CHPLOFF

Padlockable device for locking the handle of main circuit breaker Types CC and CCH into the ON or OFF position.(screw mounted) <sup>⑥</sup>

1

CCPL

Padlockable device for locking the handle of main breaker Types BW and CSR into the ON or OFF position (escutcheon mounted) <sup>⑤</sup>

1

MCBPL

#### Handle Lockdogs <sup>④⑦</sup>

Device used to secure handle in ON or OFF position for single-pole Type CH circuit breakers (handle mounted) <sup>⑧</sup>

10

CHLO

#### Hold-Down Kits <sup>⑨</sup>

Hold-down retainer kit for single-, two-, three-pole Type CH circuit breakers. For 6–24 circuit 125 A single- and three-phase, 12–42 circuit single-phase 225 A and 24–42 circuit three-phase 225 A MLO Type CH loadcenters

1

CH125RB

Hold-down retainer kit for single-, two-, three-pole Type CH circuit breakers for 2–4 circuit MLO CH loadcenters.

1

CH125RB24

#### Mounting Bases

Mounting base for two-pole Type CH circuit breaker—70 A maximum

1

CH9MB270

#### Main Breaker Lug Kits

Types CC and CCH main breaker lug kit (2) 300 kcmil

1

CCL300

Type CSR main breaker lug kit (2) 300 kcmil

1

MCBL300

#### Mechanical Interlock

Type CH for two-, three- and four-pole breakers

10

CHML <sup>Ⓢ</sup>

#### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Handle ties: typically used to join two similar independent single-pole breakers to form a two-pole noncommon trip breaker.
- ③ Handle lockoffs: devices that use a padlock to lock the circuit breaker's handle in the ON or OFF position.
- ④ Requires one additional pole space.
- ⑤ Escutcheon mounted: device mounted semipermanently to the face of the circuit breaker and secured by the loadcenter deadfront.
- ⑥ Screw mounted: device permanently mounted to the face of the circuit breaker by the use of a non-removable screw.
- ⑦ Handle lockdogs: devices that are used to secure a circuit breaker's handle in the ON or OFF position. Handle lockdogs are not padlockable devices.
- ⑧ Handle mounted: device mounted above or below handle using spring pressure.
- ⑨ Hold-down kits: devices used to secure the circuit breaker to the loadcenter for back-feed main application. See NEC Article 408.36(D).
- Ⓢ CHML not suitable to transfer emergency power.

### Shunt Trip Options

| Description<br>Type | Volts  | Catalog Number<br>Suffix Adder <sup>①</sup> |
|---------------------|--------|---|
| CSR                 | 12 DC  | <b>SR12</b>                                 |
| CSR                 | 24 DC  | <b>SR24</b>                                 |
| CSR                 | 120 AC | <b>SR01</b>                                 |
| CH                  | 120 AC | <b>ST <sup>②</sup></b>                      |
| CC                  | 12 DC  | <b>SR12</b>                                 |
| CC                  | 24 DC  | <b>SR24</b>                                 |
| CC                  | 120 AC | <b>SR01</b>                                 |
| CC                  | 208 AC | <b>SR08</b>                                 |
| CC                  | 240 AC | <b>SR02</b>                                 |

### Handle Position Changeability Chart

| Handle Lockoff and<br>Lockdog Types | To Change Handle Position from<br>ON to OFF or OFF to ON You Must... |                  |                                |
|-------------------------------------|--|------------------|--------------------------------|
|                                     | Remove<br>Padlock  | Remove<br>Device | Remove Loadcenter<br>Deadfront |
| Lockoff escutcheon mounted          | Remove   | —                | —                              |
| Lockoff screw mounted               | Remove   | —                | —                              |
| Lockdog handle mounted              | N/A  | Remove           | —                              |

#### Notes

- ① Add suffix indicated to end of breaker catalog number.
- ② Requires one additional pole space.

# 1.1

## Loadcenters and Circuit Breakers

### Type CH Loadcenters and Circuit Breakers

1


#### Technical Data and Specifications

##### Ratings


Single- and two-pole CH breakers rated 15 and 20 A have low instantaneous magnetic trip levels. The 15 and 20 A breakers with “HM” suffix have high magnetic trip settings recommended for circuits with inherently high inrush currents. All Type CH breakers are marked for heating, air conditioning and refrigeration (HACR) equipment application. Single-pole 15–20 A breakers are also suitable for switching duty (SWD). Shunt trip coils operate on 120 Vac and require one additional pole space per breaker.

##### Wiring Diagrams


###### Typical Single-Pole

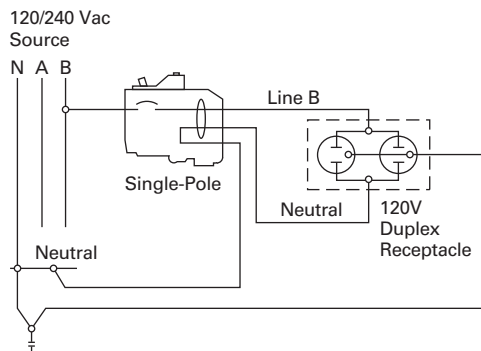


###### Two-Pole 240 V Load Application Sourced by 120/240 Vac

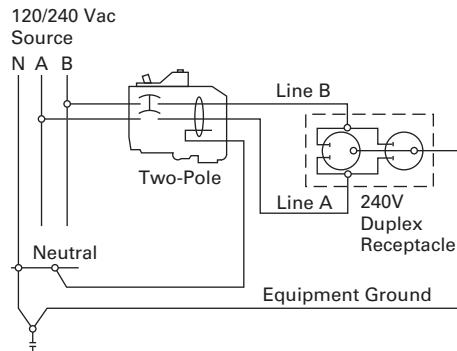


###### Single-Pole 120 V Load Application Sourced by 120/240 Vac

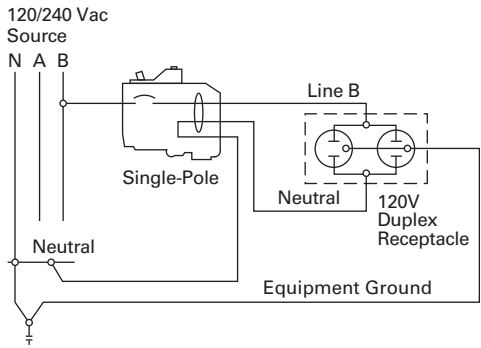


###### Two-Pole Shared Neutral with Duplex Receptacle Application

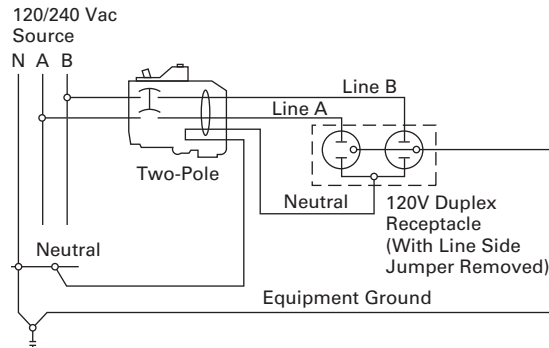


###### Two-Pole Shared Neutral with Multi-Duplex Receptacle Application

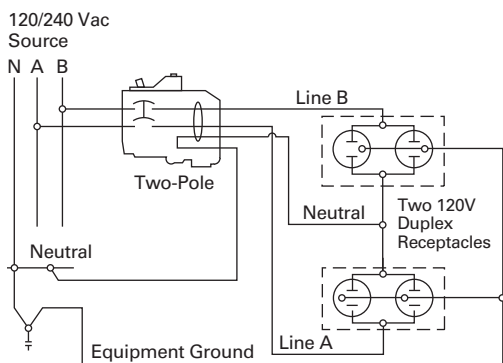


###### Single-Pole 120 V Duplex Receptacle Application

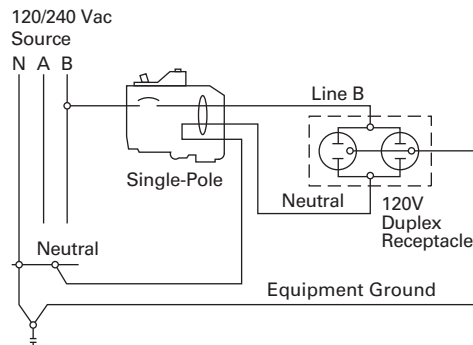


### Two-Pole 120 V Multi-Duplex Receptacle Application

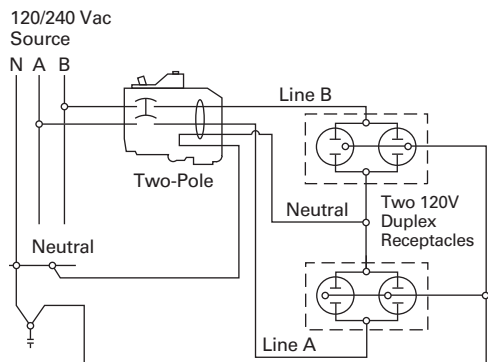

### Two-Pole 120 V Duplex Receptacle Application

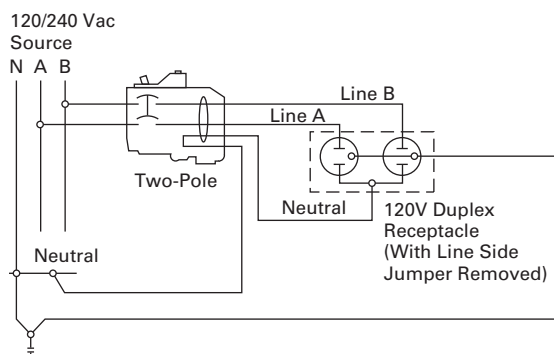

### Two-Pole 240 V Duplex Receptacle Application

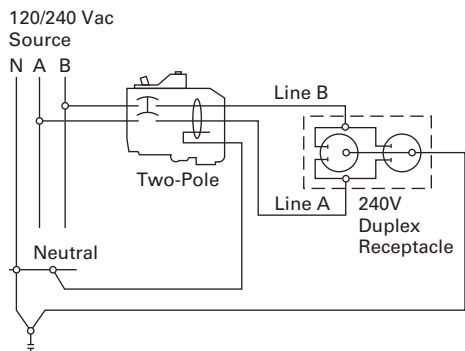

Type BR Loadcenters and Circuit Breakers



### Contents

| <i>Description</i>                              | <i>Page</i>     |
|---|-----------------|
| Overview  |                 |
| Standards and Certifications . . . . .          | <b>V1-T1-43</b> |
| Catalog Number Selection . . . . .              | <b>V1-T1-45</b> |
| Product Selection . . . . .                     | <b>V1-T1-46</b> |
| BR Specialty Products                           |                 |
| BR Quick Connect Neutral Loadcenters . . . . .  | <b>V1-T1-57</b> |
| Spa Panels . . . . .                            | <b>V1-T1-58</b> |
| Riser Panel . . . . .                           | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter . . . . .         | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories . . . . . | <b>V1-T1-63</b> |
| BR Circuit Breakers . . . . .                   | <b>V1-T1-77</b> |

### Overview

#### Product Description

Loadcenters are enclosures specifically designed to house the branch circuit breakers and wiring required to distribute power to individual circuits. They contain either a main breaker when used at the service entrance point or a main lug when used as a sub-panel to add circuits to existing service. The main breaker protects the main entire panel and can be used as a service disconnect. The branch breakers protect the wires leading to individual electrical loads such as fixtures and outlets.

#### Features, Benefits and Functions

##### Loadcenter Construction

Eaton's Type BR loadcenters have standard tin-plated aluminum bus with a limited availability of copper bus. The sum of the handle ratings connected to any stab is limited to 150 A maximum on the 100 and 125 A loadcenters, and 200 A on loadcenters with 150 A or higher main bus. NEMA Type 1 boxes or enclosures are manufactured from galvanized steel. Raintight boxes are manufactured from galvanized steel, then finished using an electrostatic powder coat, baked urethane paint process.

##### Neutrals

Eaton Type CH loadcenters feature two types of neutrals:

##### Insulated/Bondable Split Neutral

Panels are supplied with split insulated neutrals with an insulated cross strap. For service entrance applications, the neutral must be bonded by using the bonding strap supplied with the panel. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.

##### Insulated/Bondable Single Neutral

Panels are supplied with a single insulated neutral. For service entrance applications, all that is required to bond the neutral is to loosen the bonding screw and the neutral screw directly beside it, insert the bonding strap into the neutral bar, and re-tighten both connections. The single neutral can be moved by the contractor to the other side of the panel, if desired. When used as a service entrance panel, unused neutral connections may be used for the termination of equipment grounds. For non-service entrance (sub-panel) applications, the panel may be installed with the bonding strap not connected to the neutral. Separate ground bars must be used on non-service entrance panels.



**Grounds**

In service entrance applications where the neutral is bonded, unused neutral holes may be used for terminating ground conductors. In sub-feed panels, the neutral must be isolated (non-bonded), and ground wires must be terminated on a separate ground bar.

The insulated/bondable single/split neutral panels have sufficient terminations for both ground and neutral conductors. The insulated/bondable single split neutral panels are supplied with a separate factory-installed ground bar if the catalog number contains a "G." If not, a separate ground bar should be installed. Insulated/Bondable Single Neutral panels are supplied without a ground bar (unless otherwise noted), and ground bar kits if needed must be purchased separately.

**Neutral and Ground Terminals**

The standard terminals on grounds and neutrals are rated to accept (3) #14–#10 Cu/Al or (1) #14–4, provided the cables terminated are of the same material. For larger cables, add-on neutral lugs may be ordered from the accessories on **Page V1-T1-68**.

**Note:** NEC allows only one current-carrying conductor per hole on neutrals unless otherwise noted.

**Bottom Fed Loadcenters**

For single-phase 225 A and below loadcenters that are bottom fed, a standard panel can be rotated 180 degrees to allow straight-in wiring of power cables to the main terminals. Because the main circuit breaker handle operates horizontally, the orientation of the main circuit breaker handle is consistent with the requirements of NEC 2008 Article 240.81.

**Gutter Splicing**

Loadcenters are not UL listed as wiring troughs. Therefore, gutter splicing of riser cables to tap off to the main device is not permitted. Refer to NEC 2008 Article 312.8.

**Fire Rating**

Due to the numerous openings in both loadcenter boxes and trims, they should not be mounted in firewalls. There is no approved method for sealing the enclosures for this application.

**Date Code**

The date of manufacture of each loadcenter is printed on the outside of the carton as well as inside the loadcenter. On the carton, the date code is printed on the end carton label. In the loadcenter, the date code is located on the small white label located on the right side wall (with the main device on top).

The date code is in the following format: F # # # &. The "F" is the numeric code for the Lincoln, IL plant, and the three numbers are the year and week of manufacturing, e.g., 023. The "!" sign at the end signifies the decade of the 2010. Therefore, the date code F023! would indicate that the product was manufactured in the 23rd week of 2010. The 1980s are represented by the "+" sign and the 1990s are represented by a "=" at the end of the code.

**Surge Protectors**

Complete home surge protection is available in multiple options, including a factory-installed option that provides the highest level of surge protection in a residential design. See Tab 3 for more details.

**Circuit Breaker Case Interrupting Capacity**

- 10 kAIC
- 22 kAIC
- 25 kAIC

**Warranty Information**

- 10-year limited loadcenter warranty
- 10-year limited branch breaker warranty

**Standards and Certifications****UL Listings**

All Eaton Type BR loadcenters are listed under UL File E52977 except the 2–8 circuit loadcenters, up through and including 125 A, which are listed under UL File E8741.



# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Type BR Loadcenter

Extra 1.5 inch Knockout (38.1 mm)

- Larger knockout provides easier installation and time savings

Top or Bottom Feed

- Straight-in wiring saves labor and material
- One panel for either top or bottom applications

2/0 Lug

- Easily removable and can be installed in any location on the neutral bar

Type BR AFCI Breakers

- Compact design for easier wiring and improved wireway access
- Optional LED indicates one of six trip codes for circuit diagnostics
- Provides a clean gutter space

Standard Tin-Plated Aluminum Bus

- Excellent conductivity and corrosion resistance
- Copper bus options available for select catalog numbers

Drywall Marking on Enclosure

- Indicates proper mounting depth for flush applications

"Tangential" Center Knockout

- Easier installation for conduit applications

Commercial Grade Main Breaker

- 25 kAIC series rated main breaker for superior protection

Neutral Bus (Strap)

- Is easily removable for sub-panel applications

Bonding Z-Strap

- Provides easy field conversion for service entrance applications

Twin Neutral Bars


- Minimum 150% neutral capacity

Steel Backpan

- Provides solid and reliable breaker mounting—single piece design for stability and durability

Single Keyhole Mounting

- One keyhole at the top and bottom provides easier mounting and leveling

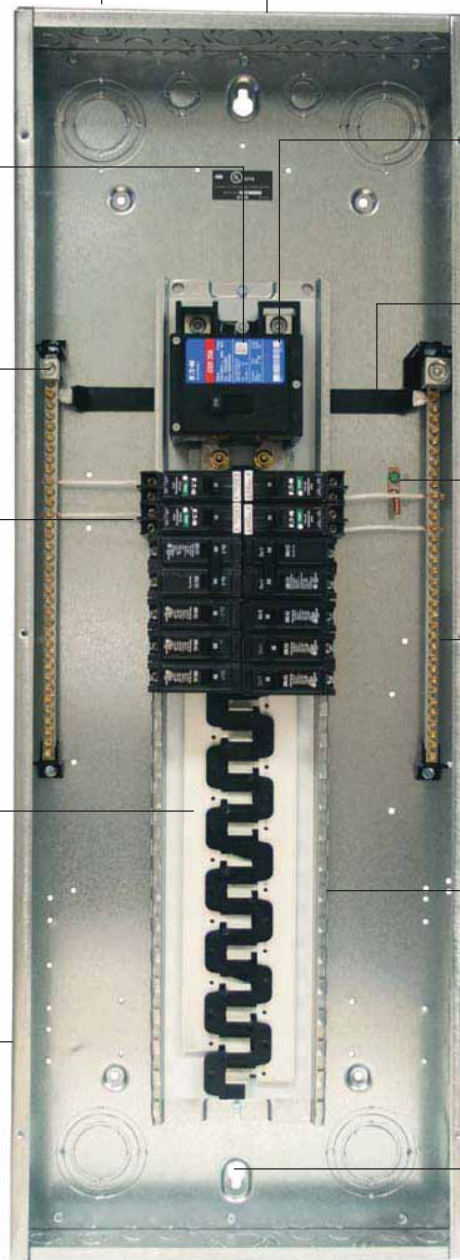


#### Warranty

10-year warranty on all Type BR loadcenters and circuit breakers.

### Catalog Number Selection

#### Single- and Three-Phase Through 600 A

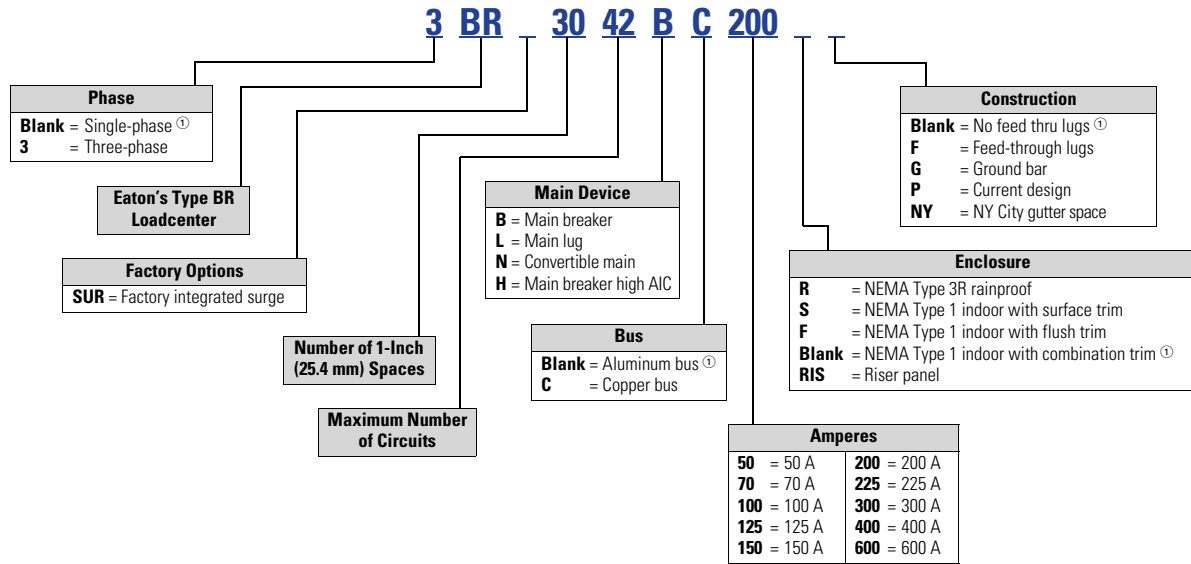

**Note**

① No character space used.

#### 1

#### Product Selection

#### Single-Phase—Main Circuit Breaker Loadcenters—10/25 kAIC

BR4040B200



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type           | Main Ampere Rating          | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type           | Box Size                 | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number with Combination <sup>①</sup> or NEMA Type 3R Cover |                         |                           |
|-----------------------------|-----------------------------|---------------------------------|----------|--------------------------|--------------------------|---|---|-------------------------|---------------------------|
|                             |                             | Spaces                          | Circuits |                          |                          |   |   |                         |                           |
| BR<br>10 kAIC               | 100                         | 8                               | 16       | Indoor                   | B1                       | #4–1/0 <sup>②</sup>                                   | BR816B100   |                         |                           |
|                             |                             | 10                              | 20       | Indoor                   | A1                       |   | BR1020B100S11   |                         |                           |
|                             |                             | 10                              | 20       | Indoor                   | A1                       |   | BR1020B100F11   |                         |                           |
|                             |                             | 10                              | 20       | Outdoor                  | B2R                      |   | BR1020B100RF <sup>③④</sup>  |                         |                           |
|                             |                             | 12                              | 12       | Indoor                   | B2                       |   | BR1212B100  |                         |                           |
|                             |                             | 12                              | 20       | Indoor                   | B2                       |   | BR1220B100  |                         |                           |
|                             |                             | 12                              | 24       | Outdoor                  | B2R                      |   | BR1224B100R <sup>④</sup>  |                         |                           |
|                             |                             | 16                              | 16       | Indoor                   | C1                       |   | BR1616B100  |                         |                           |
|                             |                             | 16                              | 20       | Indoor                   | C1                       |   | BR1620B100  |                         |                           |
|                             |                             | 16                              | 24       | Outdoor                  | C1R                      |   | BR1624B100R <sup>④</sup>  |                         |                           |
|                             |                             | 20                              | 24       | Outdoor                  | C3R                      |   | BR2024B100R <sup>④</sup>  |                         |                           |
|                             |                             | 20                              | 20       | Indoor                   | C2                       |   | BR2020B100  |                         |                           |
|                             | 16                          | 24                              | Indoor   | C1                       | BR1624B100               |   |   |                         |                           |
|                             | 30                          | 30                              | Indoor   | D1                       | BR3030B100               |   |   |                         |                           |
|                             | 125                         | 16                              | 24       | Indoor                   | C1                       | #4–2/0  | BR1624B125  |                         |                           |
|                             | 20                          | 24                              | Indoor   | C1                       | BR2024B125               |   |   |                         |                           |
|                             | 20                          | 24                              | Outdoor  | C3R                      | BR2024B125R <sup>④</sup> |   |   |                         |                           |
|                             | 30                          | 30                              | Indoor   | D1                       | BR3030B125               |   |   |                         |                           |
|                             | BRH <sup>⑤</sup><br>22 kAIC | 100                             | 20       | 24                       | Indoor                   | C2  | #4–1/0  | BR2024H100 <sup>⑤</sup> |                           |
| CSR <sup>⑥</sup><br>25 kAIC | 150                         | 8                               | 16       | Outdoor                  | C3R                      | #2–300 kcmil  | BR816B150RF <sup>③④</sup>   |                         |                           |
|                             |                             | 16                              | 30       | Indoor                   | C4                       |   | BR1630B150  |                         |                           |
|                             |                             | 20                              | 30       | Indoor                   | C4                       |   | BR2030B150  |                         |                           |
|                             |                             | 20                              | 30       | Outdoor                  | D1R                      |   | BR2030B150R <sup>④</sup>  |                         |                           |
|                             |                             | 20                              | 40       | Indoor                   | D1                       |   | BR2040B150  |                         |                           |
|                             |                             | 20                              | 40       | Outdoor                  | D1R                      |   | BR2040B150R <sup>④</sup>  |                         |                           |
|                             |                             | 24                              | 30       | Indoor                   | G1                       |   | BR2430B150  |                         |                           |
|                             |                             | 30                              | 30       | Outdoor                  | G1R                      |   | BR3030B150R <sup>④</sup>  |                         |                           |
|                             |                             | 30                              | 30       | Indoor                   | G1                       |   | BR3030B150  |                         |                           |
|                             |                             | 30                              | 40       | Indoor                   | G1                       |   | BR3040B150  |                         |                           |
|                             |                             | 200                             | 4        | 8                        | Outdoor                  |   | 8R  | #2–300 kcmil            | BR48B200RF <sup>③⑦⑧</sup> |
|                             |                             | 8                               | 16       | Outdoor                  | C3R                      |   | BR816B200RF <sup>③④</sup>   |                         |                           |
|                             | 16                          | 32                              | Indoor   | C4                       | BR1632B200               |   |   |                         |                           |
|                             | 20                          | 40                              | Outdoor  | D1R                      | BR2040B200R <sup>④</sup> |   |   |                         |                           |
|                             | 20                          | 40                              | Indoor   | D1                       | BR2040B200               |   |   |                         |                           |
|                             | 24                          | 40                              | Indoor   | G1                       | BR2440B200               |   |   |                         |                           |
|                             | 30                          | 40                              | Outdoor  | G1R                      | BR3040B200R <sup>④</sup> |   |   |                         |                           |
|                             | 30                          | 40                              | Indoor   | G1                       | BR3040B200 <sup>⑨</sup>  |   |   |                         |                           |
|                             | 40                          | 40                              | Outdoor  | L1R                      | BR4040B200R <sup>④</sup> |   |   |                         |                           |
| 40                          | 40                          | Indoor                          | L1       | BR4040B200               |                          |   |   |                         |                           |
| 40                          | 50                          | Indoor                          | L1       | BR4050B200               |                          |   |   |                         |                           |
| 60                          | 120                         | Indoor                          | L3       | BR60120B200              |                          |   |   |                         |                           |
| 60                          | 120                         | Outdoor                         | L3R      | BR60120B200R             |                          |   |   |                         |                           |
| 225                         | 42                          | 42                              | Indoor   | L2                       | #1–250 kcmil             | BR4242B225  |   |                         |                           |
| 42                          | 42                          | Outdoor                         | L2R      | BR4242B225R <sup>④</sup> |                          |   |   |                         |                           |

#### Notes

- ① Combination style covers may be used in surface or flush applications.
- ② Wire range size for BR1020B100SP is #6–#1 Cu/Al.
- ③ Includes through-feed lugs for both phase and neutral conductors.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ 22 kAIC series combination rating is obtained when Types BD, BR, BQ, BQC and GFTCB 10 kAIC branch breakers are used in series with Type BRH main breaker.
- ⑥ 25 kAIC series combination rating is obtained when Types BD, BR, BQ, BQC and GFTCB 10 kAIC branch circuit breakers are used in series with Type CSR main breaker.
- ⑦ Supplied with adapter plate to use DS Group1 hubs on **Page V1-T1-68**. If 2.50-inch (63.5 mm) hub is needed, remove adapter and use ARP00007CH25 hub.
- ⑧ Neutral is bonded—suitable for service entrance only—cannot be converted for sub-feed application.
- ⑨ Add G to the end of the catalog number for factory-installed GBK2120 ground bar.

All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with neutral bonding strap preattached. The maximum rating of the panel is the main circuit breaker rating when used as service entrance equipment. Ground bar kits priced separately. See **Page V1-T1-68**.

### Main Circuit Breaker Loadcenters—10/22 kAIC

B4242DFN



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Commercial Loadcenter Catalog Number <sup>①②③</sup> |                    |
|-------------------|--------------------|---------------------------------|----------|----------------|----------|---|---|--------------------|
|                   |                    | Spaces                          | Circuits |                |          |   | With Flush or NEMA Type 3R Cover                    | With Surface Cover |
| DK <sup>④</sup>   | 300                | 42                              | 42       | Indoor         | 24       | (2) #3/0–250 kcmil                                    | BR4242B300F   | BR4242B300S        |
|                   | 400                | 42                              | 42       | Indoor         | 24       | (2) #3/0–250 kcmil                                    | BR4242B400F   | BR4242B400S        |
|                   |                    | 42                              | 42       | Outdoor        | 47       | (2) #3/0–250 kcmil                                    | BR4242B400R <sup>⑤</sup>                            | —                  |
| HLD <sup>⑥</sup>  | 600                | 42                              | 42       | Indoor         | 24       | (2) #3/0–500 kcmil                                    | —   | BR4242B600S        |

#### Notes

- ① Ground bar kits priced separately. See **Page V1-T1-68**.
- ② The maximum rating of the panel is the main circuit breaker rating when used as service entrance equipment.
- ③ Door lock and key included with loadcenter.
- ④ Type DK main circuit breaker is rated 65 kAIC at 240 Vac and allows a 22 kAIC series rating on the panel when Types BR, BD and BJ branch circuit breakers are used.
- ⑤ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑥ Type HLD main circuit breaker is rated 65 kAIC at 240 Vac. Type HLD circuit breaker **is not** series rated with Types BR, BD and BJ branch circuit breakers.

Box sizes **Pages V1-T1-73 through V1-T1-76**.

Please contact the Lincoln Flex Center for any configurations not listed.

#### Single-Phase—Main Lug Loadcenters

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |                     | Enclosure Type      | Trim Type                   | Box Size                     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number    |                           |                             |
|--------------------|---------------------------------|---------------------|---------------------|-----------------------------|------------------------------|--|------------------------------|---------------------------|-----------------------------|
|                    | Spaces                          | Circuits            |                     |                             |                              |  |                              |                           |                             |
| 70                 | Surface                         | Outdoor             | Indoor              | Surface (no door)           | 5                            | #8-#2  | BR24L70SP <sup>①②</sup>      |                           |                             |
|                    |                                 |                     | Indoor              | Surface (no door)           | 5                            |  | BR24L70SGP <sup>②③</sup>     |                           |                             |
|                    | Outdoor                         | —                   | 5R                  | BR24L70RP <sup>①②④</sup>    |                              |  |                              |                           |                             |
|                    | Indoor                          | Flush (no door)     | 5                   | BR24L70FP <sup>①②</sup>     |                              |  |                              |                           |                             |
|                    | Indoor                          | Flush (no door)     | 5                   | BR24L70FGP <sup>②⑤</sup>    |                              |  |                              |                           |                             |
| 125                | Flush                           | Outdoor             | Indoor              | Surface (no door)           | 6                            | #14-1/0  | BR24L125SP <sup>①②</sup>     |                           |                             |
|                    |                                 |                     | Outdoor             | —                           | 6R                           |  | BR24L125RP <sup>①②④</sup>    |                           |                             |
|                    | Surface (No Door)               | Outdoor             | Indoor              | —                           | 6R                           | #14-1/0  | BR24L125RSEP <sup>②⑦⑧</sup>  |                           |                             |
|                    |                                 |                     | Indoor              | —                           | 6R                           |  | BR24L125RSEP <sup>②⑥⑦</sup>  |                           |                             |
|                    | Flush (No Door)                 | Outdoor             | Indoor              | Flush (no door)             | 6                            | #14-1/0  | BR24L125FP <sup>①②</sup>     |                           |                             |
|                    |                                 |                     | Indoor              | Surface (no door)           | 7                            |  | BR48L125SP <sup>①⑨</sup>     |                           |                             |
|                    |                                 |                     | Indoor              | Surface (no door)           | 7                            |  | BR48L125SGP <sup>③⑨</sup>    |                           |                             |
|                    |                                 |                     | Outdoor             | —                           | 7R                           |  | BR48L125RP <sup>①④⑨</sup>    |                           |                             |
|                    |                                 |                     | Indoor              | Flush (no door)             | 7                            |  | BR48L125FP <sup>①⑨</sup>     |                           |                             |
|                    |                                 |                     | Indoor              | Flush (with door)           | 7                            |  | BR48L125FDP <sup>①⑨</sup>    |                           |                             |
|                    |                                 |                     | Indoor              | Flush (no door)             | 7                            |  | BR48L125FGP <sup>③⑨</sup>    |                           |                             |
|                    |                                 |                     | Indoor              | Surface (no door)           | 7                            |  | #14-#1                       | BR612L125SP <sup>①⑩</sup> |                             |
|                    | Indoor                          | Surface (no door)   | 7                   | BR612L125SGP <sup>⑩⑪</sup>  |                              |  |                              |                           |                             |
|                    | Indoor                          | Surface (with door) | 7                   | BR612L125SDP <sup>①⑩</sup>  |                              |  |                              |                           |                             |
|                    | Indoor                          | Surface (with door) | 7                   | BR612L125SDGP <sup>⑩⑪</sup> |                              |  |                              |                           |                             |
|                    | Outdoor                         | Outdoor             | Indoor              | —                           | 7R                           | #14-#1   | BR612L125RP <sup>①④⑩</sup>   |                           |                             |
|                    |                                 |                     | Indoor              | Flush (no door)             | 7                            |  | BR612L125FP <sup>①⑩</sup>    |                           |                             |
|                    |                                 |                     | Indoor              | Flush (no door)             | 7                            |  | BR612L125FGP <sup>⑤⑩⑪</sup>  |                           |                             |
|                    |                                 |                     | Indoor              | Flush (with door)           | 7                            |  | BR612L125FDP <sup>⑩</sup>    |                           |                             |
|                    |                                 |                     | Indoor              | Flush (with door)           | 7                            |  | BR612L125FDGP <sup>⑤⑩⑪</sup> |                           |                             |
| Indoor             |                                 |                     | Surface (no door)   | 7                           | #14-#1                       |  | BR816L125SP <sup>①⑩</sup>    |                           |                             |
| Indoor             |                                 |                     | Surface (no door)   | 7                           |                              |  | BR816L125SGP <sup>⑩⑫</sup>   |                           |                             |
| Indoor             |                                 |                     | Surface (with door) | 7                           |                              |  | BR816L125SDP <sup>①⑩</sup>   |                           |                             |
| Indoor             |                                 |                     | Surface (with door) | 7                           |                              |  | BR816L125SDGP <sup>⑩⑫</sup>  |                           |                             |
| Outdoor            |                                 |                     | Outdoor             | Outdoor                     | —                            |  | 7R                           | #14-#1                    | BR816L125RP <sup>①④⑩</sup>  |
|                    |                                 |                     |                     | Indoor                      | Flush (no door)              |  | 7                            |                           | BR816L125FP <sup>①⑩</sup>   |
|                    |                                 |                     |                     | Indoor                      | Flush (no door)              |  | 7                            |                           | BR816L125FGP <sup>⑤⑩⑫</sup> |
|                    | Indoor                          | Flush (with door)   |                     | 7                           | BR816L125FDP <sup>①⑩</sup>   |  |                              |                           |                             |
|                    | Indoor                          | Flush (with door)   |                     | 7                           | BR816L125FDGP <sup>⑤⑩⑪</sup> |  |                              |                           |                             |



#### Notes

- ① Ground bar kits priced separately. See **Page V1-T1-68**.
  - For 2/4 circuit loadcenters, use GBK5 or GBK520 ground bar.
  - For 4/8, 6/12 and 8/16 circuit loadcenters, use GBK10 ground bar.
  - Ground bars mount to the left side wall of the enclosure for the 4/8, 6/12 and 8/16 circuit loadcenters.
- ② Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not used as a lighting and appliance panelboard.
- ③ Ground bar GBK5 is installed.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ CSA and UL approved.
- ⑥ Neutral/ground holes (6) #14-6 and (3) #14-2/0 AWG Cu/Al.
- ⑦ For use as service entrance applications only.
- ⑧ Neutral/ground holes (6) #14-6 and (3) #14-1/0 AWG Cu/Al.
- ⑨ Suitable for use as service equipment when not more than two service disconnecting mains are provided or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.
- ⑩ Suitable for use as service equipment when a main breaker is used or when not more than six service disconnecting mains are provided and when not used as a lighting and appliance panelboard.
- ⑪ Ground bar GBK10 is installed.
- ⑫ Ground bar GBK14 is installed.

Box sizes **Pages V1-T1-73** through **V1-T1-76**.

### Single-Phase—Main Lug Loadcenters

#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral, continued

| Main Ampere Rating   | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number with Combination or NEMA Type 3R Cover ① |                                      |
|--|---------------------------------|----------|----------------|----------|--|--|--------------------------------------|
|  | Spaces                          | Circuits |                |          |  |  |                                      |
| <b>BR1224L125</b><br>   | 125                             | 12       | 12             | Indoor   | B1   | #6–2/0<br><b>BR1212L125</b> ②③④⑤                                   |                                      |
|  |                                 | 12       | 24             | Indoor   | B1   | <b>BR1224L125</b> ②④⑤  |                                      |
|  |                                 | 12       | 24             | Indoor   | B1   | <b>BR1224L125G</b> ②④⑤   |                                      |
|  |                                 | 12       | 24             | Indoor   | B1   | <b>BR1224L125DG</b> ②④⑤⑥   |                                      |
|  |                                 | 12       | 24             | Outdoor  | B1R  | <b>BR1224L125R</b> ②⑤⑦   |                                      |
|  |                                 | 16       | 16             | Indoor   | B2   | <b>BR1616L125</b> ②④⑤  |                                      |
|  |                                 | 16       | 24             | Indoor   | B2   | <b>BR1624L125</b> ②④   |                                      |
|  |                                 | 16       | 24             | Indoor   | B2   | <b>BR1624L125G</b> ②④  |                                      |
|  |                                 | 16       | 24             | Outdoor  | B2R  | <b>BR1624L125R</b> ②⑦  |                                      |
|  |                                 | 20       | 20             | Indoor   | C1   | <b>BR2020L125</b> ②④⑤  |                                      |
|  |                                 | 20       | 24             | Indoor   | C1   | <b>BR2024L125</b> ②④   |                                      |
|  |                                 | 20       | 24             | Indoor   | C1   | <b>BR2024L125G</b> ②④⑧   |                                      |
|  |                                 | 20       | 24             | Outdoor  | C1R  | <b>BR2024L125R</b> ②⑦  |                                      |
|  |                                 | 24       | 24             | Indoor   | C2   | <b>BR2424L125</b> ②④   |                                      |
|  |                                 | 24       | 24             | Indoor   | C2   | <b>BR2424L125G</b> ②④⑧   |                                      |
|  |                                 | 30       | 42             | Indoor   | D1   | <b>BR3042L125</b> ②④   |                                      |
|  |                                 | 150      | 16             | 30       | Indoor   | C2   | #1–300 kcmil<br><b>BR1630L150</b> ④⑨ |
|  |                                 |          | 20             | 30       | Indoor   | C2   | <b>BR2030L150</b> ④⑨                 |
| <b>BR1224L200</b><br> | 200                             | 8        | 16             | Outdoor  | B2R  | #1–300 kcmil<br><b>BR816L200RF</b> ⑤⑦⑩                             |                                      |
|  |                                 | 12       | 24             | Indoor   | B2   | <b>BR1224L200</b> ④⑤⑨  |                                      |
|  |                                 | 12       | 24             | Outdoor  | B2R  | <b>BR1224L200R</b> ⑤⑦⑨   |                                      |
|  |                                 | 20       | 40             | Indoor   | C2   | <b>BR2040L200</b> ④⑨   |                                      |
|  |                                 | 20       | 40             | Indoor   | C2   | <b>BR2040L200G</b> ④⑧⑨   |                                      |
|  |                                 | 20       | 40             | Outdoor  | C3R  | <b>BR2040L200R</b> ⑦⑨  |                                      |
|  |                                 | 24       | 40             | Indoor   | C4   | <b>BR2440L200</b> ④⑨   |                                      |
|  |                                 | 30       | 40             | Indoor   | D1   | <b>BR3040L200</b> ④⑨   |                                      |
|  |                                 | 30       | 40             | Indoor   | D1   | <b>BR3040L200G</b> ④⑧⑨   |                                      |
|  |                                 | 30       | 40             | Outdoor  | D1R  | <b>BR3040L200R</b> ⑦⑨  |                                      |
|  |                                 | 40       | 40             | Indoor   | G1   | <b>BR4040L200</b> ④⑨   |                                      |
|  |                                 | 40       | 40             | Indoor   | G1   | <b>BR4040L200G</b> ④⑨  |                                      |
|  |                                 | 40       | 40             | Outdoor  | G1R  | <b>BR4040L200R</b> ⑦⑨  |                                      |
|  |                                 | 60       | 120            | Indoor   | L3   | <b>BR60120L200</b> ⑩   |                                      |
|  |                                 | 225      | 42             | 42       | Indoor   | L1   | #1–300 kcmil<br><b>BR4242L225</b> ④  |
| 42   | 42                              |          | Outdoor        | L1R      | <b>BR4242L225R</b> ⑦                               |  |                                      |

#### Notes

- ① Ground bar kits priced separately unless otherwise noted. See **Page V1-T1-68**.
- ② Has notch for BREQS125 hold-down kit.
- ③ Single, movable neutral is provided.
- ④ Combination cover style.
- ⑤ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑥ Ground bars GBK5 and GBK520 installed.
- ⑦ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑧ Ground bar GBK1220 installed.
- ⑨ Has notch for BRHDK125 hold-down kit.
- ⑩ Includes through-feed lugs for both phase and neutral conductors.
- ⑪ Includes main lugs. Loadcenters can convert to main breaker using kit.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Single-Phase—Main Lug Loadcenters—400 and 600 A

4242DFN



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Commercial Loadcenter Catalog Number <sup>①②③</sup> |                    |
|--------------------|---------------------------------|----------|----------------|----------|--|---|--------------------|
|                    | Spaces                          | Circuits |                |          |  | With Flush or NEMA Type 3R Cover                    | With Surface Cover |
| 400                | 12                              | 24       | Outdoor        | 42       | (2) #3/0–400 kcmil                                 | BR1224L400R <sup>④⑤</sup>                           | —                  |
|                    | 42                              | 42       | Indoor         | 22       |  | BR4242L400F   | BR4242L400S        |
|                    | 42                              | 42       | Outdoor        | 46       |  | BR4242L400R <sup>④</sup>                            | —                  |
| 600                | 42                              | 42       | Indoor         | 22       | (2) #2–500 kcmil                                   | —   | BR4242L600S        |

#### Notes

- ① Ground bar kits priced separately unless otherwise noted. See **Page V1-T1-68**.
- ② Has notch for BRHDK125 hold-down kit.
- ③ Ground bar GBK8 installed.
- ④ Rainproof panels are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.



**Convertible Loadcenters MCB or MLO—Base Units and Main Devices 10/22/25 kAIC, Complete Assembly Consists of: Loadcenter and Either Main Breaker Kit or Main Lug Kit**

**Note:** Interrupting rating depends on main circuit breaker selected.

**BR3040N200**



**Base Units—Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral (Unless Otherwise Noted)**

| Main Ampere Rating ① | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size           | Wire Size Range Cu/Al 60 °C or 75 °C for Main                  | Loadcenter Catalog Number With Combination or NEMA Type 3R Cover ②③ |
|----------------------|---------------------------------|----------|----------------|--------------------|--|---|
|                      | Spaces                          | Circuits |                |                    |  |   |
| 125 ④                | 12                              | 24       | Indoor         | B2                 | See main breaker and main lug kit tables <b>Page V1-T1-54.</b> | <b>BR1224N125</b> ⑤⑥  |
|                      | 12                              | 24       | Outdoor        | B2R                |  | <b>BR1224N125R</b> ⑤⑥⑦  |
|                      | 16                              | 24       | Indoor         | C1                 |  | <b>BR1624N125</b> ⑤   |
|                      | 16                              | 24       | Outdoor        | C1R                |  | <b>BR1624N125R</b> ⑤⑦   |
|                      | 20                              | 24       | Indoor         | C2                 |  | <b>BR2024N125</b> ⑤   |
|                      | 20                              | 24       | Outdoor        | C3R                |  | <b>BR2024N125R</b> ⑤⑦   |
| 200 ⑧                | 8                               | 16       | Outdoor        | C3R                | <b>BR816N200RF</b> ⑦⑧⑩⑪  |   |
|                      | 12                              | 24       | Indoor         | C4                 | <b>BR1224N200</b> ⑩  |   |
|                      | 12                              | 24       | Outdoor        | C3R                | <b>BR1224N200R</b> ⑦⑩  |   |
|                      | 16                              | 32       | Indoor         | C4                 | <b>BR1632N200</b> ⑩  |   |
|                      | 20                              | 40       | Indoor         | D1                 | <b>BR2040N200</b> ⑩  |   |
|                      | 20                              | 40       | Indoor         | D1                 | <b>BR2040N200G</b> ⑫   |   |
|                      | 20                              | 40       | Outdoor        | D1R                | <b>BR2040N200R</b> ⑦⑩  |   |
|                      | 20                              | 40       | Outdoor        | D1R                | <b>BR2040N200RG</b> ⑫  |   |
|                      | 24                              | 40       | Indoor         | G1                 | <b>BR2440N200</b> ⑦⑩   |   |
|                      | 30                              | 40       | Indoor         | G1                 | <b>BR3040N200</b> ⑩  |   |
|                      | 30                              | 40       | Indoor         | G1                 | <b>BR3040N200G</b> ⑫   |   |
|                      | 30                              | 40       | Outdoor        | G1R                | <b>BR3040N200R</b> ⑦⑩  |   |
|                      | 30                              | 40       | Outdoor        | G1R                | <b>BR3040N200RG</b> ⑫  |   |
|                      | 40                              | 40       | Indoor         | L1                 | <b>BR4040N200</b> ⑩  |   |
|                      | 40                              | 40       | Indoor         | L1                 | <b>BR4040N200G</b> ⑫   |   |
|                      | 40                              | 40       | Outdoor        | L1R                | <b>BR4040N200R</b> ⑦⑩  |   |
|                      | 40                              | 40       | Outdoor        | L1R                | <b>BR4040N200RG</b> ⑫  |   |
|                      | 40                              | 50       | Indoor         | L1                 | <b>BR4050N200</b>  |   |
| 40                   | 50                              | Outdoor  | L1R            | <b>BR4050N200R</b> |  |   |

**Notes**

- ① The maximum rating of the loadcenter is the main circuit breaker rating when used as service entrance equipment.
- ② 100, 125 and 200 A convertible base unit catalog numbers include interior, box and cover only. Main devices and accessories must be ordered separately for field installation. All convertible base units are listed as suitable for use as service entrance equipment when used per Article 408 of the NEC.
- ③ Ground bar kits priced separately except as noted, refer to **Page V1-T1-68.**
- ④ For main breaker, use Type BR. For main lug use Type BRSF.
- ⑤ BREQS125 hold-down screw comes with loadcenter for back-fed Types BR and BRH main circuit breakers.
- ⑥ Convertible to maximum of 100 A main circuit breaker and 125 A main lug.
- ⑦ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68.**
- ⑧ For main breaker, use Type BW or CSR. For main lug, use Type BRL.
- ⑨ Includes through-feed lugs for both phase and neutral conductors.
- ⑩ No hold-down provisions for back-fed Types BR and BRH main circuit breakers.
- ⑪ Insulated/bondable single neutral.
- ⑫ Includes GBK2120 ground bar.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Convertible Loadcenters MCB or MLO—Base Units and Main Devices 10/22/25 kAIC, Complete Assembly Consists of: Loadcenter and Either Main Breaker Kit or Main Lug Kit

**Note:** Interrupting rating depends on main circuit breaker selected.

#### BW2200



#### Main Devices—Two- and Three-Pole Main Circuit Breakers—120/240 Vac or 208Y/120 Vac or 240 Vac

| Ampere Rating     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | 10 kAIC Catalog Number | 22/25 kAIC Catalog Number ① |
|-------------------|---|------------------------|-----------------------------|
| <b>Two-Pole</b>   |   |                        |                             |
| 100               | #4–1/0  | BR2100                 | BRH2100                     |
| 110               | #4–1/0  | BR2110                 | BRH2110                     |
| 125               | #4–2/0  | BR2125                 | BRH2125                     |
| 125               | #2–300 kcmil  | BW2125                 | CSR2125N                    |
| 150               | #2–300 kcmil  | BW2150                 | CSR2150N                    |
| 175               | #2–300 kcmil  | BW2175                 | CSR2175N                    |
| 200               | #2–300 kcmil  | BW2200                 | CSR2200N                    |
| <b>Three-Pole</b> |   |                        |                             |
| 100               | #1  | BR3100                 | BRH3100                     |

#### BRL200



#### Main Devices—Two- and Three-Pole Main Lug Kits—120/240 Vac or 208Y/120 Vac or 240 Vac

| Ampere Rating     | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number |
|-------------------|--|----------------|
| <b>Two-Pole</b>   |  |                |
| 125               | #6–2/0   | BRSF125        |
| 150               | #1–300 kcmil                                       | BRL200         |
| 175               | #1–300 kcmil                                       | BRL200         |
| 200               | #1–300 kcmil                                       | BRL200         |
| <b>Three-Pole</b> |  |                |
| 150               | #6–3/0   | 3BRSF150       |

#### Main Circuit Breaker with Accessory

Example: BW22005R01 (Put description with catalog number on order. See **Page V1-T1-87.**)

#### Main Circuit Breaker Loadcenters—Copper Bus 10/22/25 kAIC

#### BR3030BC100



#### Main Circuit Breaker Loadcenters—With Copper Bus—Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number with Combination Cover ②③ |
|-------------------|--------------------|---------------------------------|----------|----------------|----------|---|---|
|                   |                    | Spaces                          | Circuits |                |          |   |   |
| BR<br>10 kAIC     | 100                | 20                              | 20       | Indoor         | C2       | #4–1/0  | BR2020BC100   |
|                   |                    | 30                              | 30       | Indoor         | D1       | #4–1/0  | BR3030BC100   |
| BRH<br>22 kAIC ④  | 100                | 30                              | 30       | Indoor         | D1       | #4–1/0  | BR3030HC100   |
|                   |                    | 150                             |          | 30             | 30       | Indoor  | G1  |
| CSR<br>25 kAIC    | 200                | 20                              | 40       | Indoor         | D1       | #2–300 kcmil  | BR2040BC200   |
|                   |                    | 30                              | 40       | Indoor         | G1       | #2–300 kcmil  | BR3040BC200   |
|                   |                    | 40                              | 40       | Indoor         | L1       | #2–300 kcmil  | BR4040BC200   |

#### Main Lug Only Loadcenters—Copper Bus

#### BR816LC125FDP



#### Single-Phase Three-Wire—120/240 Vac—Insulated/Bondable Single Neutral with Copper Bus

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Trim Type           | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number |
|--------------------|---------------------------------|----------|----------------|---------------------|----------|--|---------------------------|
|                    | Spaces                          | Circuits |                |                     |          |  |                           |
| 125                | 8                               | 16       | Indoor         | Surface (with door) | 7        | #14–1  | BR816LC125SDP             |
|                    | 8                               | 16       | Indoor         | Flush (with door)   | 7        |  | BR816LC125FDP             |

#### Notes

- ① Series combination rating with Types BD, BR, BQ, BQC and GFTCB is 22 kAIC with BRH main and 25 kAIC with CSR main.
  - ② All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with neutral bonding strap preattached. The maximum rating of the panel is the main circuit breaker rating when used as service entrance equipment.
  - ③ Ground bar kits priced separately. See **Page V1-T1-68.**
  - ④ 22 kAIC series combination rating is obtained when Types BD, BR, BQ, BQC and GFTCB 10 kAIC branch breakers are used in series with Type BRH main breaker.
- Box sizes **Pages V1-T1-73** through **V1-T1-76.**

### Convertible Loadcenters—Copper Bus 10/22/25 kAIC

BR3040NC200



### Convertible—Single-Phase, Three-Wire—120/240 Vac—Insulated/Bondable Split Neutral

| Main Ampere Rating   | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main                      | Loadcenter Catalog Number (With Combination or NEMA Type 3R Cover) ①②③ |
|----------------------|---------------------------------|----------|----------------|----------|--|--|
|                      | Spaces                          | Circuits |                |          |  |  |
| 125<br>10/22 kAIC ④⑤ | 12                              | 24       | Indoor         | B2       | See main breaker and main lug kit tables on <b>Page V1-T1-54</b> . | <b>BR1224NC125</b> ⑥⑦  |
|                      | 12                              | 24       | Outdoor        | B2R      |  | <b>BR1224NC125R</b> ⑥⑦⑧  |
|                      | 20                              | 24       | Indoor         | C2       |  | <b>BR2024NC125</b> ⑦   |
|                      | 20                              | 24       | Outdoor        | C3R      |  | <b>BR2024NC125R</b> ⑦⑧   |
| 200<br>10/25 kAIC ④⑤ | 20                              | 40       | Indoor         | D1       | <b>BR2040NC200</b>   |  |
|                      | 20                              | 40       | Outdoor        | D1R      | <b>BR2040NC200R</b> ⑧  |  |
|                      | 30                              | 40       | Indoor         | G1       | <b>BR3040NC200</b>   |  |
|                      | 30                              | 40       | Outdoor        | G1R      | <b>BR3040NC200R</b> ⑧  |  |
|                      | 40                              | 40       | Indoor         | L1       | <b>BR4040NC200</b>   |  |
|                      | 40                              | 40       | Outdoor        | L1R      | <b>BR4040NC200R</b> ⑧  |  |

#### Notes

- ① 100, 125 and 200 A convertible base unit catalog numbers include interior, box and cover only. Main devices and accessories must be ordered separately for field installation. All convertible base units are listed as suitable for use as service entrance equipment when used per Article 384 of the NEC.
- ② Ground bar kits priced separately, refer to **Page V1-T1-68**.
- ③ All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with a neutral bonding strap preattached. The maximum main rating of the loadcenter is the main breaker rating when used as service entrance equipment.
- ④ Interrupting rating depends on main circuit breaker selected. See **Page V1-T1-68** for mains.
- ⑤ For main breaker, use Type BW or CSR. For main lug, use Type BRL.
- ⑥ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑦ Hold-down screw BREQS125 comes with loadcenter for back-fed Types BR and BRH main circuit breakers.
- ⑧ For main breaker, use Type BR. For main lug, use Type BRSF.
- ⑨ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.

#### 1 Three-Phase—Type BR Main Circuit Breaker Loadcenters

#### Three-Phase, Four-Wire—Main Lug Loadcenters—Copper Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main | Loadcenter Catalog Number (With Combination or NEMA Type 3R Cover) |
|--------------------|---------------------------------|----------|----------------|----------|---|--|
|                    | Spaces                          | Circuits |                |          |   |  |
| 125                | 12                              | 24       | Indoor         | C1       | #6–3/0  | 3BR1224LC125   |
| 125                | 12                              | 24       | Outdoor        | C1R      | #6–3/0  | 3BR1224LC125R  |
| 150                | 24                              | 42       | Indoor         | D1       | #4–300 kcmil                                  | 3BR2442LC150   |
| 150                | 24                              | 42       | Outdoor        | D1R      | #4–300 kcmil                                  | 3BR2442LC150R  |
| 200                | 12                              | 24       | Indoor         | C4       | #4–300 kcmil                                  | 3BR1224LC200   |
| 200                | 12                              | 24       | Outdoor        | C3R      | #4–300 kcmil                                  | 3BR1224LC200R  |
| 200                | 30                              | 42       | Indoor         | G1       | #4–300 kcmil                                  | 3BR3042LC200   |
| 200                | 30                              | 42       | Outdoor        | G1R      | #4–300 kcmil                                  | 3BR3042LC200R  |
| 200                | 42                              | 42       | Indoor         | L1       | #4–300 kcmil                                  | 3BR4242LC200   |
| 200                | 42                              | 42       | Outdoor        | L1R      | #4–300 kcmil                                  | 3BR4242LC200R  |
| 225                | 30                              | 42       | Indoor         | L1       | #4–300 kcmil                                  | 3BR3042LC225   |
| 225                | 30                              | 42       | Outdoor        | L1R      | #4–300 kcmil                                  | 3BR3042LC225R  |
| 400                | 42                              | 42       | Indoor         | 24       | (2) 3/0–250 kcmil                             | 3BR4242LC400S  |
|                    | 42                              | 42       | Outdoor        | 47       |   | 3BR4242BC400R  |
| 600                | 42                              | 42       | Indoor         | 24       | (2) 3/0–500 kcmil                             | 3BR4242LC600S  |

#### Three-Phase, Four-Wire—Main Circuit Breaker Loadcenters—Copper Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Breaker Type | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number (With Combination or NEMA Type 3R Cover) |
|-------------------|--------------------|---------------------------------|----------|----------------|----------|---|--|
|                   |                    | Spaces                          | Circuits |                |          |   |  |
| BR 10 kAIC        | 100                | 12                              | 24       | Indoor         | C1       | #14–1/0   | 3BR1224BC100   |
|                   | 100                | 12                              | 24       | Outdoor        | C1R      | #14–1/0   | 3BR1224BC100R  |
| CC 10 kAIC        | 150                | 30                              | 42       | Indoor         | L1       | #6–4/0  | 3BR3042BC150   |
|                   | 150                | 30                              | 42       | Outdoor        | L1R      | #6–4/0  | 3BR3042BC150R  |
|                   | 200                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242BC200   |
|                   | 200                | 42                              | 42       | Outdoor        | L2R      | 2/0–300 kcmil   | 3BR4242BC200R  |
|                   | 225                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242BC225   |
|                   | 225                | 42                              | 42       | Outdoor        | L2R      | 2/0–300 kcmil   | 3BR4242BC225R  |
| DK 22 kAIC        | 400                | 42                              | 42       | Indoor         | 24       | (2) 3/0–250 kcmil                                     | 3BR4242BC400S  |
|                   |                    | 42                              | 42       | Outdoor        | 47       |   | 3BR4242BC400R  |
| HLD 10 kAIC       | 600                | 42                              | 42       | Indoor         | 24       | (2) 3/0–500 kcmil                                     | 3BR4242BC600S  |

3BR4242B200



#### Three-Phase, Four-Wire—Main Circuit Breaker Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac Insulated/Bondable Split Neutral

| Main Breaker Type         | Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Breaker | Loadcenter Catalog Number <sup>(1)(2)</sup> (With Combination or NEMA Type 3R Cover) |                             |
|---------------------------|--------------------|---------------------------------|----------|----------------|----------|---|--|-----------------------------|
|                           |                    | Spaces                          | Circuits |                |          |   |  |                             |
| BR 10 kAIC                | 100                | 12                              | 24       | Indoor         | C1       | #14–1/0   | 3BR1224B100  |                             |
|                           |                    |                                 | 12       | 24             | Outdoor  | C1R   |  | 3BR1224B100R <sup>(3)</sup> |
| CC 10 kAIC                | 125                | 30                              | 42       | Indoor         | L1       | #6–4/0  | 3BR3042B125  |                             |
|                           | 150                | 30                              | 42       | Indoor         | L1       | #6–4/0  | 3BR3042B150  |                             |
|                           |                    | 30                              | 42       | Outdoor        | L1R      |   |  | 3BR3042B150R <sup>(3)</sup> |
|                           | 200                | 30                              | 42       | Indoor         | L1       | #1–250 kcmil  | 3BR3042B200  |                             |
|                           |                    | 30                              | 42       | Outdoor        | L1R      |   |  | 3BR3042B200R <sup>(3)</sup> |
|                           |                    | 42                              | 42       | Indoor         | L2       |   |  | 3BR4242B200                 |
|                           | 42                 | 42                              | Outdoor  | L2R            |          |   | 3BR4242B200R <sup>(3)</sup>  |                             |
| CHH 100 kAIC              | 200                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242H200 <sup>(6)</sup>   |                             |
| CC 10 kAIC                | 225                | 42                              | 42       | Indoor         | L2       | 2/0–300 kcmil   | 3BR4242B225  |                             |
|                           |                    | 42                              | 42       | Outdoor        | L2R      |   |  | 3BR4242B225R <sup>(3)</sup> |
| DK <sup>(4)</sup> 22 kAIC | 400                | 42                              | 42       | Indoor         | 24       | (2) #3/0–250 kcmil                                    | 3BR4242B400S <sup>(7)</sup>  |                             |
|                           |                    | 42                              | 42       | Indoor         | 24       |   | 3BR4242B400F   |                             |
|                           |                    | 42                              | 42       | Outdoor        | 47       |   |  | 3BR4242B400R <sup>(3)</sup> |
| LD <sup>(5)</sup>         | 600                | 42                              | 42       | Indoor         | 24       | (2) #3/0–500 kcmil                                    | 3BR4242B600F   |                             |

#### Notes

- <sup>(1)</sup> All main circuit breaker loadcenters are listed for use as service entrance equipment and are shipped with a neutral bonding strap pre-attached (commercial loadcenters do not have a pre-attached bonding strip). The maximum main rating of the panel is the main circuit breaker rating when used as service entrance equipment.
- <sup>(2)</sup> Ground bar kits priced separately. See **Page V1-T1-68**.
- <sup>(3)</sup> Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- <sup>(4)</sup> Type DK main circuit breaker is rated 65 kAIC at 240 Vac and allows a 22 kAIC series rating on the loadcenter when Types BR, BD and BJ branch circuit breakers are used.
- <sup>(5)</sup> The LD main circuit breaker is rated 65 kAIC at 240 Vac. Type LD circuit breaker **is not** series rated with Types BR, BD and BJ branch circuit breakers.
- <sup>(6)</sup> Includes CHH 100 kAIC rated MCB. 100 kAIC series rating combination is obtained when types BD, BR, BQ, BQC and GFGB branch breakers are used with CHH main.
- <sup>(7)</sup> With surface cover.

### 3BR1224L125



### Three-Phase, Four-Wire—Main Lug Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable (Unless Otherwise Noted)

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Loadcenter Catalog Number <sup>①</sup><br>(With Combination or NEMA Type 3R Cover) |
|--------------------|---------------------------------|----------|----------------|----------|--|--|
|                    | Spaces                          | Circuits |                |          |  |  |
| 100                | 3                               | 3        | Indoor         | 6        | #6-1/0   | <b>3BR3L100S</b> <sup>②③</sup>   |
|                    | 3                               | 3        | Outdoor        | 6R       |  | <b>3BR3L100R</b> <sup>③④</sup>   |
| 125                | 12                              | 24       | Indoor         | C1       | #6-3/0   | <b>3BR1224L125</b> <sup>⑤⑥</sup>   |
|                    | 12                              | 24       | Outdoor        | C1R      |  | <b>3BR1224L125R</b> <sup>④⑤⑥</sup>   |
| 150                | 18                              | 36       | Indoor         | C2       | #6-4/0   | <b>3BR1836L150</b>   |
|                    | 18                              | 36       | Outdoor        | C3R      |  | <b>3BR1836L150R</b>  |
|                    | 24                              | 42       | Indoor         | D1       | #4-300 kcmil                                       | <b>3BR2442L150</b>   |
|                    | 24                              | 42       | Outdoor        | D1R      |  | <b>3BR2442L150R</b> <sup>④</sup>   |
| 200                | 12                              | 24       | Indoor         | C4       | #4-300 kcmil                                       | <b>3BR1224L200</b> <sup>⑥</sup>  |
|                    | 12                              | 24       | Outdoor        | C3R      |  | <b>3BR1224L200R</b> <sup>④⑥</sup>  |
|                    | 18                              | 36       | Indoor         | C4       | #4-300 kcmil                                       | <b>3BR1836L200</b>   |
|                    | 18                              | 36       | Outdoor        | C3R      |  | <b>3BR1836L200R</b>  |
|                    | 30                              | 42       | Indoor         | G1       | #4-300 kcmil                                       | <b>3BR3042L200</b>   |
|                    | 30                              | 42       | Outdoor        | G1R      |  | <b>3BR3042L200R</b> <sup>④</sup>   |
|                    | 42                              | 42       | Indoor         | L1       | #4-300 kcmil                                       | <b>3BR4242L200</b>   |
|                    | 42                              | 42       | Outdoor        | L1R      |  | <b>3BR4242L200R</b> <sup>④</sup>   |
| 225                | 42                              | 42       | Indoor         | L1       | #4-300 kcmil                                       | <b>3BR4242L225</b>   |
|                    | 42                              | 42       | Outdoor        | L1R      |  | <b>3BR4242L225R</b> <sup>④</sup>   |

### 3BR4242L400F



### Three-Phase, Four-Wire—Main Lug Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Commercial Loadcenter Catalog Number <sup>⑦</sup> |                     |
|--------------------|---------------------------------|----------|----------------|----------|--|---|---------------------|
|                    | Spaces                          | Circuits |                |          |  | With Flush or NEMA Type 3R Cover                  | With Surface Cover  |
| 400                | 42                              | 42       | Indoor         | 22       | (1) 250-750 kcmil                                  | <b>3BR4242L400F</b>                               | <b>3BR4242L400S</b> |
|                    | 42                              | 42       | Outdoor        | 46       | or<br>(2) #3/0-250 kcmil                           | <b>3BR4242L400R</b> <sup>④</sup>                  | —                   |
| 600                | 42                              | 42       | Indoor         | 22       | (2) #2-500 kcmil                                   | —   | <b>3BR4242L600S</b> |

#### Notes

- ① Ground bar kits priced separately. See **Page V1-T1-68**.
- ② Surface cover only.
- ③ Insulated/bondable single neutral.
- ④ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ Has notch for BREQS125 hold-down kit.
- ⑥ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑦ Door lock and key included with loadcenter.

Box sizes **Pages V1-T1-73** through **V1-T1-76**.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

3BR3030N100



3BR4242N225NY



### Three-Phase, Four-Wire—Convertible Loadcenters—Aluminum Bus—208Y/120 Vac or 240 Vac, Insulated/Bondable Split Neutral

| Main Ampere Rating <sup>①</sup> | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main   | Loadcenter Catalog Number <sup>②③</sup> (With Combination or NEMA Type 3R Cover) |
|---------------------------------|---------------------------------|----------|----------------|----------|---|--|
|                                 | Spaces                          | Circuits |                |          |   |  |
| 100 <sup>④</sup>                | 30                              | 30       | Indoor         | D1       | See main breaker and main lug kit tables below. | 3BR3030N100 <sup>⑤</sup>   |
|                                 | 30                              | 30       | Outdoor        | D1R      |   | 3BR3030N100R <sup>⑥⑦</sup>   |
| 125 <sup>④</sup>                | 12                              | 24       | Indoor         | C1       |   | 3BR1224N125 <sup>⑤⑥⑦</sup>   |
|                                 | 12                              | 24       | Outdoor        | C1R      |   | 3BR1224N125R <sup>⑤⑥⑦⑧</sup>   |
| 200                             | 30                              | 42       | Indoor         | L1       |   | 3BR3042N200  |
| 225                             | 42                              | 42       | Indoor         | L2       |   | 3BR4242N225  |
|                                 | 42                              | 42       | Indoor         | B        |   | 3BR4242B225NY <sup>⑨</sup>   |

#### Notes

- ① The maximum rating of the loadcenter is the main circuit breaker rating when used as service entrance equipment.
- ② 100, 125 and 200 A convertible base unit catalog numbers include interior, box and cover only. Main devices and accessories must be ordered separately for field installation.  
All convertible base units are listed as suitable for use as service entrance equipment when used per Article 384 of the NEC.
- ③ Ground bar kits priced separately. See **Page V1-T1-68**.
- ④ For main breaker, use Type BR. For main lug, use Type BRSF.
- ⑤ BREQS125 hold-down screw comes with loadcenter for back-fed Types BR and BRH main circuit breakers.
- ⑥ Rainproof loadcenters are furnished with hub closure plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑦ Convertible to maximum of 100 A main circuit breaker and 125 A main lug.
- ⑧ Suitable for use as service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance panelboard.
- ⑨ Order 3BR42FTNY or 3BR42STNY cover separately.

Box sizes **Pages V1-T1-73 through V1-T1-76**.

### BR Quick Connect Neutral Loadcenters



### Contents

| <i>Description</i>                          | <i>Page</i> |
|---|-------------|
| Overview .....                              | V1-T1-42    |
| BR Specialty Products                       |             |
| BR Quick Connect Neutral Loadcenters        |             |
| Spa Panels .....                            | V1-T1-58    |
| Riser Panel .....                           | V1-T1-59    |
| Type BR Renovation Loadcenter .....         | V1-T1-60    |
| BR Loadcenter Options and Accessories ..... | V1-T1-63    |
| BR Circuit Breakers .....                   | V1-T1-77    |

## BR Specialty Products

### BR Quick Connect Neutral Loadcenters

#### Product Description

The Type BR Quick Connect Neutral loadcenters coupled with Type BR Quick Connect Neutral electronic breakers provide a clean, quick connection for an installer looking to save time while providing a professional look.

#### Features and Benefits

- Full-length neutral bars provide over 300% neutral capacity while enhancing installation flexibility for the installer
- Backed-out neutral screws allow an installer to make a quick connection when terminating neutral and ground wires
- Extended circuits (30/60, 40/80) provide maximum flexibility to a contractor on every space possible
- Standard LED diagnostics on AFCI and AF/GF breakers provides installers best-in-class troubleshooting technology
- Cut-to-length neutral wires provides a clean, professional look versus traditional pigtail circuit breakers
- Solid-tip, stranded neutral wires provide a quick connection to the full length neutral bar

## Product Selection

### BR Quick Connect Neutral Loadcenters ①

| Main Device   | Ampere Rating | Spaces | Circuits ② | Incoming Lug Size | Enclosure Type ③ | Box Size | Ground Bar      | Number of Neutral Terminations | Catalog Number |
|---------------|---------------|--------|------------|-------------------|------------------|----------|-----------------|--------------------------------|----------------|
| BR 10 kAIC    | 100           | 30     | 60         | #4-1/0            | Indoor           | D1       | ④               | 96                             | BR3060BQN100   |
| CSR 25 kAIC   | 150           | 30     | 60         | #2-300 kcmil      | Indoor           | G1       | ④               | 102                            | BR3060BQN150   |
| CSR 25 kAIC   | 200           | 30     | 60         | #2-300 kcmil      | Indoor           | G1       | ④               | 102                            | BR3060BQN200   |
| CSR 25 kAIC   | 200           | 40     | 80         | #2-300 kcmil      | Indoor           | L1       | ④               | 128                            | BR4080BQN200   |
| CSR 25 kAIC   | 200           | 30     | 60         | #2-300 kcmil      | Outdoor          | L1R      | ④               | 94                             | BR3060BQN200R  |
| CSR 25 kAIC   | 200           | 40     | 80         | #2-300 kcmil      | Outdoor          | G1R      | ④               | 128                            | BR4080BQN200R  |
| Main lug only | 125           | 24     | 48         | #6-2/0            | Indoor           | C2       | GBK14           | 80                             | BR2448LQN125G  |
| Main lug only | 125           | 30     | 60         | #6-2/0            | Indoor           | D1       | GBK10           | 96                             | BR3060LQN125G  |
| Main lug only | 200           | 30     | 60         | #1-300 kcmil      | Indoor           | D1       | GBK1020 + GBK10 | 96                             | BR3060LQN200G  |
| Main lug only | 200           | 40     | 80         | #1-300 kcmil      | Indoor           | G1       | GBK1020 + GBK10 | 122                            | BR4080LQN200G  |
| Main lug only | 125           | 20     | 40         | #6-2/0            | Outdoor          | C1R      | GBK14           | 68                             | BR2040LQN125RG |
| Main lug only | 200           | 30     | 60         | #1-300 kcmil      | Outdoor          | D1R      | GBK1420         | 94                             | BR3060LQN200RG |
| Convertible   | 200           | 30     | 60         | —                 | Indoor           | G1       | ④               | 102                            | BR3060NQN200   |
| Convertible   | 200           | 40     | 80         | —                 | Indoor           | L1       | ④               | 128                            | BR4080NQN200   |
| Convertible   | 200           | 30     | 60         | —                 | Outdoor          | G1R      | ④               | 94                             | BR3060NQN200R  |
| Convertible   | 200           | 40     | 80         | —                 | Outdoor          | L1R      | ④               | 128                            | BR4080NQN200R  |

### BR Quick Connect Neutral Electronic Breakers

| Ampere Rating | Poles               | Wire Size | Breaker Type           | LED Diagnostics Included | Catalog Number |
|---------------|---------------------|-----------|------------------------|--------------------------|----------------|
| 15            | Single-pole 10 kAIC | #14-4     | Combination AFCI       | Yes                      | BRCAF115QN     |
| 20            | Single-pole 10 kAIC | #14-4     | Combination AFCI       | Yes                      | BRCAF120QN     |
| 15            | Single-pole 10 kAIC | #14-4     | Arc fault/ground fault | Yes                      | BRLAFGF115QN   |
| 20            | Single-pole 10 kAIC | #14-4     | Arc fault/ground fault | Yes                      | BRLAFGF120QN   |

#### Notes

- ① BR Quick Connect Neutral loadcenters accept both standard and Quick Connect Neutral breakers.
- ② Loadcenters accept Type BR twin breakers.
- ③ Combination cover included with every indoor loadcenter.
- ④ Ground bar kit not included. Purchase separately.

Spa Panels



### Contents

| <i>Description</i>                              | <i>Page</i> |
|---|-------------|
| Overview . . . . .                              | V1-T1-42    |
| BR Specialty Products                           |             |
| BR Quick Connect Neutral Loadcenters . . . . .  | V1-T1-57    |
| Spa Panels                                      |             |
| Riser Panel . . . . .                           | V1-T1-59    |
| Type BR Renovation Loadcenter . . . . .         | V1-T1-60    |
| BR Loadcenter Options and Accessories . . . . . | V1-T1-63    |
| BR Circuit Breakers . . . . .                   | V1-T1-77    |

### Spa Panels

#### Product Description

Eaton’s BR Spa Panels distribute power to outdoor loads and provide protection for people from electric shock. Save time and money with streamlined installation procedures and easy-access features. Spa panels meet NEC requirements by providing a ground fault circuit interruption device and a disconnect switch in a single simple device. Ships assembled prewired, factory tested and ready to install.

#### Features

- 10-year warranty
- UL Listed
- Factory-installed two-pole ground fault circuit interrupter (GFCI)

#### Product Selection

BR Spa Panel



#### Spa Panel—Meets NEC Article 680.40 Through 680.43—Requirements for GFCI Protection

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) Space Poles |   | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number |
|--------------------|---|---|----------------|----------|--|----------------|
| 40                 | —   | — | Outdoor        | 5R       | #8-#2  | BR40SPAST ①    |
| 50                 | —   | — | Outdoor        | 5R       | #8-#2  | BR50SPAST ②    |

#### Notes

- ① Includes a GFTCB240 breaker, factory installed.
- ② Includes a GFTCB250 breaker, factory installed.



### Riser Panel



### Contents

| <i>Description</i>                          | <i>Page</i>     |
|---|-----------------|
| Overview .....                              | <b>V1-T1-42</b> |
| BR Specialty Products                       |                 |
| BR Quick Connect Neutral Loadcenters .....  | <b>V1-T1-57</b> |
| Spa Panels .....                            | <b>V1-T1-58</b> |
| Riser Panel                                 |                 |
| Type BR Renovation Loadcenter .....         | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories ..... | <b>V1-T1-63</b> |
| BR Circuit Breakers .....                   | <b>V1-T1-77</b> |

## Riser Panel

### Product Description

Eaton's Riser Panel is a loadcenter with an offset interior to allow riser cables to pass through the enlarged gutter. By using lay-in tap lugs, the contractor is able to simply strip off a length of the riser cable's insulation, and tap off to the riser panel's main lugs. These panels are used in the construction of assisted living homes, dormitories, public housing complexes and apartments.

### Product Selection

#### BR1224L125RIS



#### Riser Panel

| Main Ampere Rating | Maximum Number 1-Inch (25.4 mm) |          | Enclosure Type | Box Size | Wire Size Range Cu/Al 60 °C or 75 °C for Main Lugs | Catalog Number           |
|--------------------|---------------------------------|----------|----------------|----------|--|--------------------------|
|                    | Space                           | Circuits |                |          |  |                          |
| 125                | 12                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR1224L125RIS</b>     |
| 125                | 12                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR1224L125RISBP</b> ① |
| 125                | 20                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR2024L125RIS</b>     |
| 125                | 20                              | 24       | Indoor         | C4       | #6-2/0   | <b>BR2024L125RISBP</b> ① |
| 125                | 20                              | 30       | Indoor         | C2       | #6-2/0   | <b>BR2030L125RIS</b>     |
| 200                | 30                              | 40       | Indoor         | D1       | #1-300   | <b>BR3040L200RIS</b>     |

#### BRGUTTER (Shown with Loadcenter)



#### Riser Panel Accessories

##### Catalog Number

**BRGUTTER** ②

**GTAP250**


#### Notes

- ① Bulk-packaged loadcenter without carton. Must be ordered in multiples of 16.
- ② Refer to **Page V1-T1-74** for dimensions. BRGUTTER is box size C2.

### Accessories

For riser panels not shown, contact the Flex Center at 1-800-330-6479 for both CH and BR riser panels.

#### BR Renovation Loadcenters

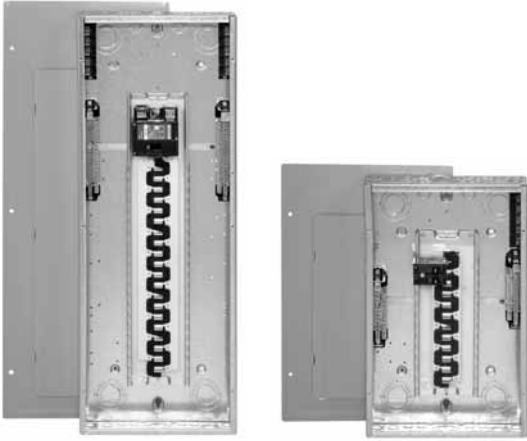

#### Contents

| <i>Description</i>                         | <i>Page</i> |
|--|-------------|
| Overview .....                             | V1-T1-42    |
| BR Specialty Products                      |             |
| BR Quick Connect Neutral Loadcenters ..... | V1-T1-57    |
| Spa Panels .....                           | V1-T1-58    |
| Riser Panel .....                          | V1-T1-59    |
| Type BR Renovation Loadcenter              |             |
| BR Loadcenter Options and Accessories..... | V1-T1-63    |
| BR Circuit Breakers .....                  | V1-T1-77    |

### Type BR Renovation Loadcenter

#### Product Description

- Available in 10, 20, 30 and 40 circuit main breaker styles
- Designed to replace existing loadcenters and fuse boxes
- Type BR loadcenter packaged with circuit breakers
- Factory-installed 5-circuit terminal block(s)
- Twin-stacked neutral design

#### Features, Benefits and Functions

- Factory-installed terminal block(s) allows installer to terminate existing short wires without using wire nuts or junction boxes
- Twin-stacked neutrals are mounted up high in the loadcenter, which allows for all neutral and ground wires to be terminated in the top half of the loadcenter
- Specifically designed for the service contractor—this is the ONLY renovation line in the industry
- Single-pole and two-pole breakers included
- 10-year warranty on loadcenter and breakers

#### Product Selection

##### BR2020B100RN



#### BR Value Packs ①

| Main Breaker Type | Description   | Wire Size Range | Number of 5-Circuit Terminal Blocks | Single-Pole Breakers | Two-Pole Breakers | Catalog Number        |
|-------------------|---|-----------------|-------------------------------------|----------------------|-------------------|-----------------------|
| BR<br>10 kAIC     | Single-phase 100 A 10k main breaker 10/20 circuit surface-mount box is 11.75" wide x 13" tall | #6-1/0          | 0                                   | (2) BR115            | (1) BR230         | <b>BR1020B100SRNV</b> |
|                   | Single-phase 100 A 10k main breaker 10/20 circuit flush-mount box is 11.75" wide x 13" tall   |                 | 0                                   | (2) BR115            | (1) BR230         | <b>BR1020B100FRNV</b> |

#### Note

① Indoor enclosure type.

Type BR Retrofit Interior



Type BR Retrofit Adjustable Interior



Type BR Retrofit Interior Collar and Assembly with Trim

### Contents

| <b>Description</b>                         | <b>Page</b> |
|--|-------------|
| Overview .....                             | V1-T1-42    |
| BR Specialty Products                      |             |
| BR Quick Connect Neutral Loadcenters ..... | V1-T1-57    |
| Spa Panels .....                           | V1-T1-58    |
| Riser Panel .....                          | V1-T1-59    |
| Type BR Renovation Loadcenter .....        | V1-T1-60    |
| BR Loadcenter Options and Accessories      |             |
| Type BR Retrofit Interior Kits             |             |
| BR Specialty Product Selection .....       | V1-T1-62    |
| Type BR Mechanical Interlock Kits .....    | V1-T1-65    |
| Technical Data and Specifications .....    | V1-T1-70    |
| Dimensions .....                           | V1-T1-73    |
| BR Circuit Breakers .....                  | V1-T1-77    |

## Type BR Retrofit Interior Kits

### Product Description

Eaton's unique Retrofit Interior allows the customer to cost-effectively and safely upgrade an electrical service without removing the existing enclosure from the wall.

### Application Description

The Retrofit Interior is designed and tested specifically for renovating an outdated electrical panel in an apartment, a condominium or a single family home. These outdated panels are being recognized by local inspectors and other authorities as a possible hazard.

### Opportunities to Retrofit

- Single- or three-phase
- Main lug only or main breaker
- Up to 42 circuits
- Up to 225 A interiors, 400 A available upon request
- Available with CH breakers (3/4-inch) with copper bus or BR breakers (1-inch) with aluminum bus
- The minimum lifetime warranty for residential breakers shall be as follows:
  - 10-year warranty on all BR branch breakers and loadcenters
  - Refer to Eaton for complete warranty details

### Features and Benefits

#### Upgrading Existing Electrical Infrastructure Is Simple

- Replaces vintage brands that have hard to find, expensive replacement breakers
- Safety upgrade to arc fault and ground fault breakers to meet current electrical codes
- Maximizes number of circuits available with compact design
- Eco-friendly in asbestos-filled environments
- Exclusive design

#### Save Time and Money Throughout the Installation

- Uses existing panel box and wires
- Eliminates expensive and time-consuming drywall/paint repair
- Saves 2–3 hours of installation time compared to a complete panel changeout
- Eliminates precise measurements with field-adjustable kit

### Standards and Certifications

- Meets 2017 NEC wire bending requirements
- UL 67 Listed (for UL listings for specific part numbers, see the table on the following page.



# 1

### BR Specialty Product Selection

To select the retrofit kit:

1. From the existing box size determine which retrofit groups are suitable (may be more than one).
2. Use type of interior, number of phases, and type of main to find the selection chart.
3. Select part number from chart (if main breaker, replace XXX with specific amp rating).

#### How to Order:

1. Measure the existing panel enclosure to determine appropriate kits for your project.
2. Match the existing dimensions with the table below to obtain the correct catalog number.
3. Order your retrofit kit from a local Eaton authorized distributor.

Need assistance or can't find retrofit to fit existing enclosure?

Call Eaton's Residential Flex Center at 1-800-330-6479 or email for all your retrofit needs. Go to [www.eaton.com/eccn](http://www.eaton.com/eccn) to locate an Eaton Certified Contractor.

### Retrofit Interior Kit Specifications

Five recommended groups: existing box height determines retro group size. Approximate Dimensions in Inches (mm).

| Catalog Number ①                        | Cover ②       | Existing Enclosure Parameters—Inches (mm) |               |               |                | Phase  | Main | Bus | Amperes ③ | Spaces / Circuits | UL 67 Listed |
|---|---------------|---|---------------|---------------|----------------|--------|------|-----|-----------|-------------------|--------------|
|   |               | Minimum Depth                             | Maximum Depth | Minimum Width | Minimum Height |        |      |     |           |                   |              |
| <b>BR Retrofit Interiors and Covers</b> |               |   |               |               |                |        |      |     |           |                   |              |
| RTBR8L100P                              | CRTBR8ML****  | 3.13 (79.5)                               | 3.63 (92.2)   | 10.50 (266.7) | 13.00 (330.2)  | Single | MLO  | BR  | 100       | 8/16              | Yes          |
| RUBR8L100_                              | CRUBR8ML****  | 3.75 (95.3)                               | 6.00 (152.4)  | 10.50 (266.7) | 13.00 (330.2)  | Single | MLO  | BR  | 100       | 8/16              | Yes          |
| RTBR12L100P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 10.50 (266.7) | 14.50 (368.3)  | Single | MLO  | BR  | 100       | 12/24             | Yes          |
| RTBR10B100P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 10.50 (266.7) | 14.50 (368.3)  | Single | MLO  | BR  | 100       | 10/20             | Yes          |
| RUBR12L100_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 10.50 (266.7) | 14.50 (368.3)  | Single | MLO  | BR  | 100       | 12/24             | Yes          |
| RUBR10B100_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 10.50 (266.7) | 14.50 (368.3)  | Single | MB   | BR  | 100       | 10/20             | Yes          |
| RTBR12L125P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 11.00 (279.4) | 17.00 (431.8)  | Single | MLO  | BR  | 125       | 12/24             | Yes          |
| RTBR10B125P                             | CRTBR12ML**** | 3.13 (79.5)                               | 3.63 (92.2)   | 11.00 (279.4) | 17.00 (431.8)  | Single | MB   | BR  | 125       | 10/20             | Yes          |
| RUBR12L125_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 11.00 (279.4) | 17.00 (431.8)  | Single | MLO  | BR  | 125       | 12/24             | Yes          |
| RUBR10B125_                             | CRUBR12ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 11.00 (279.4) | 17.00 (431.8)  | Single | MB   | BR  | 125       | 10/20             | Yes          |
| RABR20B125_                             | CRABR20ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MCB  | BR  | 125       | 20/24             | No           |
| RABR20L125_                             | CRABR20ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 21.00 (533.4)  | Single | MLO  | BR  | 125       | 20/24             | No           |
| RBBR20B200_                             | CRBBR20BW**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 29.00 (736.6)  | Single | MLO  | BR  | 200       | 20/40             | No           |
| RCBR40L200_                             | CRCBR40ML**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 34.00 (863.6)  | Single | MLO  | BR  | 200       | 30/40             | No           |
| RDBR40B200_                             | CRDBR40BW**** | 3.75 (95.3)                               | 6.00 (152.4)  | 13.00 (330.2) | 37.00 (939.8)  | Single | MLO  | BR  | 200       | 40/40             | No           |

### Complete Assembly

**Note:** For complete assembly, interior and cover need to be ordered separately.

#### Adjustable Interior

- Factory installed ground and neutral bars positioned to accept existing wires
- Field adjustable depth matches existing panel box
- Adjustable height enables optional placement of the interior
- Field bondable for service entrance options



Adjustable Interior

#### Standard Trim and Collar

- Standard trim matches new interior
- New circuit directory for updated labeling
- Oversized collar eliminates expensive wall/paint repair



Collar and Assembly with Trim

#### Notes

- ① Catalog numbers shown with "\_" at the end need one of the following suffixes to denote depth:  
J = 3.75–4.25  
K = 4.25–5.00  
L = 5.00–6.00  
Example: RUBR12L125J would signify an interior set with a depth range of 3.75 to 4.25 inches.
- ② \*\*\*\* Denotes characters in the catalog number that relate to overall cover size.  
Example: CRTBR12ML2620 would signify a cover 26.00 inches H x 20.00 inches W.
- ③ Amperes for MB panels is maximum; catalog number will reflect actual amperage of breaker included.

For UL applications, maximum cover sizes may apply.

### Options and Accessories—Mechanical Interlocks



### Contents

| Description                           | Page     |
|---------------------------------------|----------|
| Overview                              | V1-T1-42 |
| BR Specialty Products                 |          |
| BR Quick Connect Neutral Loadcenters  | V1-T1-57 |
| Spa Panels                            | V1-T1-58 |
| Riser Panel                           | V1-T1-59 |
| Type BR Renovation Loadcenter         | V1-T1-60 |
| BR Loadcenter Options and Accessories |          |
| Type BR Retrofit Interior Kits        | V1-T1-61 |
| Type BR Mechanical Interlock Kits     | V1-T1-65 |
| Technical Data and Specifications     | V1-T1-70 |
| Dimensions                            | V1-T1-73 |
| BR Circuit Breakers                   | V1-T1-77 |

## BR Loadcenter Options and Accessories

### Product Selection

#### BRSF125



#### 3BRS225



#### BRL200



#### TDL



### Field Installation Kits and Parts

| Number of Poles   | Ampere Rating | Number of 1-Inch (25.4 mm) Spaces Needed | Wire Size Range Cu/Al 60 °C or 75 °C | Ordering Quantity <sup>①</sup> | Catalog Number               |
|---|---------------|--|--------------------------------------|--------------------------------|------------------------------|
| <b>Main and Sub-Feed Lug Blocks</b>                                     |               |  |                                      |                                |                              |
| 2   | 125           | 2  | #8–2/0                               | 1                              | <b>BRSF125</b>               |
|   | 150           | 2  | #8–2/0                               | 1                              | <b>BRSF150</b> <sup>②</sup>  |
|   | 225           | 4  | #2–300 kcmil                         | 1                              | <b>BRS225</b>                |
| 3   | 150           | 3  | #8–2/0                               | 1                              | <b>3BRSF150</b> <sup>②</sup> |
|   | 225           | 6  | #2–300 kcmil                         | 1                              | <b>3BRS225</b>               |
| <b>Main Lugs</b>  |               |  |                                      |                                |                              |
| Two-pole, 200 A stud mounted (includes deadfront filler plate)          |               |  | #1–300 kcmil                         | 1                              | <b>BRL200</b>                |
| Neutral/ground lug<br>Add-on neutral or ground lug                      |               |  | #2/0 maximum                         | 1                              | <b>NL20</b>                  |
|   |               |  | #3/0 maximum                         | 1                              | <b>NL30</b>                  |
|   |               |  | 300 kcmil maximum                    | 1                              | <b>NL300</b>                 |
| <b>Filler Plates</b>  |               |  |                                      |                                |                              |
| 1-inch (25.4 mm) circuit breaker space                                  |               |  |                                      | 25                             | <b>BRFP</b>                  |
| BW main circuit breaker space (with hardware)                           |               |  |                                      | 1                              | <b>BWFP</b>                  |
| Door lock—12–42 circuits, and 100–225 A                                 |               |  |                                      | 1                              | <b>TDL</b>                   |
| Door lock—4–8 circuits, 125 A   |               |  |                                      | 1                              | <b>CH9FL</b>                 |
| ANSI-61 light gray touchup paint for current loadcenters                |               |  |                                      | 1                              | <b>SPC61</b>                 |
| Isolated neutral assembly (computer circuits)                           |               |  |                                      | 1                              | <b>BINA</b>                  |
| Circuit directory—adhesive backed                                       |               |  |                                      | 10                             | <b>TCD</b>                   |
| Cover screws  |               |  |                                      | 25                             | <b>LCCS</b>                  |
| Cover replacement latch (gray) 14-5/16 (363.5 mm) wide loadcenters only |               |  |                                      | 1                              | <b>BRRL</b>                  |
| Circuit marking strip (next to breaker)                                 |               |  |                                      | 10                             | <b>BRMS</b>                  |
| Circuit identification label (preprinted breaker labels)                |               |  |                                      | 25                             | <b>CHBL</b>                  |
| Series rated caution label  |               |  |                                      | 25                             | <b>SRL</b>                   |
| Bonding strip with screw  |               |  |                                      | 1                              | <b>BSSUSE</b>                |

#### Notes

- <sup>①</sup> Must be purchased in multiples of ordering quantities indicated.
- <sup>②</sup> #8–2/0 wire size range is 75 °C rated only.

**Three-Phase Accessories****Three-Phase Main Breaker Kits— 10 kAIC**

| <b>Ampere Rating</b> | <b>Wire Size Range<br/>Cu/Al 60 °C or 75 °C</b> | <b>Catalog Number</b> |
|----------------------|---|-----------------------|
| 100                  | #6–4/0  | <b>CC3100N</b>        |
| 125                  | #6–4/0  | <b>CC3125N</b>        |
| 150                  | #6–4/0  | <b>CC3150N</b>        |
| 175                  | #2/0–300 kcmil                                  | <b>CC3175N</b>        |
| 200                  | #2/0–300 kcmil                                  | <b>CC3200N</b>        |
| 225                  | #2/0–300 kcmil                                  | <b>CC3225N</b>        |

**Three-Phase Main Lugs Kit for Convertible Loadcenters**

| <b>Ampere Rating</b> | <b>Wire Size Range<br/>Cu/Al 60 °C or 75 °C</b> | <b>Catalog Number</b> |
|----------------------|---|-----------------------|
| 225                  | #1–300 kcmil                                    | <b>3BRL225</b>        |
| 225                  | #1–300 kcmil                                    | <b>3BRS225</b> ①      |

**Note**

① For subfeed.

Box sizes **Pages V1-T1-73 through V1-T1-76.**

### Type BR Mechanical Interlock Kits



**Type BR Loadcenter with Mechanical Interlock Kit**

### Type BR Mechanical Interlock Kits

#### Product Description

With the aging electrical infrastructure and frequent severe storms, power outages are becoming more and more frequent, affecting thousands of people nationwide. Eaton mechanical interlock kit provides an easy and cost-effective solution when using backup emergency power.

This solution expands the robust line of emergency power products and accessories.

#### Features and Benefits

- Prevents utility and generator supplies from being on at the same time
- Protects utility linemen from dangerous generator backfeed
- Robust interlock design
- Offered in two unique styles for almost any BR loadcenter, which can reduce inventory levels
- Quick and easy installation—drill points or fixtures for pilot holes are provided on all applicable BR loadcenters; no additional assembly is required

### Contents

#### Description

|  | <i>Page</i>     |
|--|-----------------|
| Overview .....                             | <b>V1-T1-42</b> |
| BR Specialty Products                      |                 |
| BR Quick Connect Neutral Loadcenters ..... | <b>V1-T1-57</b> |
| Spa Panels .....                           | <b>V1-T1-58</b> |
| Riser Panel .....                          | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter .....        | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories      |                 |
| Type BR Retrofit Interior Kits .....       | <b>V1-T1-61</b> |
| Type BR Mechanical Interlock Kits .....    | <b>V1-T1-65</b> |
| Technical Data and Specifications .....    | <b>V1-T1-70</b> |
| Dimensions .....                           | <b>V1-T1-73</b> |
| BR Circuit Breakers .....                  | <b>V1-T1-77</b> |

#### Standards and Certifications

- UL 67 Listed—For use with BR loadcenters
- Meets NEC® Article 702



#### Product Selection



Each mechanical interlock kit includes:

- Interlock assembly
- Hold down kit ①
- New labels
- Necessary screws

Warranty information:

- 10-year warranty on all Type BR circuit breakers and loadcenters
- Refer to Eaton for complete warranty details

#### Mechanical Interlock Kits ②

|  | Description | Catalog Number    |
|--|-------------|-------------------|
|  | Single      | <b>BRMIKBR</b>    |
|  | Bulk pack ③ | <b>BRMIKBRBP</b>  |
|  | Single      | <b>BRMIKCSR</b>   |
|  | Bulk pack ③ | <b>BRMIKCSRBP</b> |

#### Notes

- ① For breakers under 70 A used in backfed applications, add "B" to the end of the catalog string to get the appropriate "hold-down" version.
- ② Clamshell packaged.
- ③ Bulk pack contains 10 units, individually packaged.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Mechanical Interlock Cover

Covers mechanically interlock two breakers—Type BW or CSR main breaker with a Type BR branch breaker.

BR816B100



#### Mechanical Interlock Cover

| Fits Loadcenter Catalog Numbers                    | Mechanical Interlock Trim/Deadfront Catalog Numbers | Mechanical Interlock Kit Catalog Numbers                                |
|--|---|---|
| <b>Indoor</b>                                      |   |   |
| BR816B100  | BRCOVC10M   | BRMIKBR   |
| BR816N100  |   |   |
| BR1212B100   | BRCOVC12M   |   |
| BR1220B100   |   |   |
| BR1220H100   |   |   |
| BR1224N125   | BRCOVC13M   |   |
| BR1616B100   | BRCOVC16M   |   |
| BR1620B100   |   |   |
| BR1624B100   |   |   |
| BR1624B125   | BRCOVC17M   |   |
| BR1624N125   |   |   |
| BR2020B100, BR2020BC100<br>BR2020H100, BR2020HC100 | BRCOVC22M   |   |
| BR2024H100   |   |   |
| BR2020HC100  |   |   |
| BR2030B100   |   |   |
| BR2040B100   |   |   |
| BR2024B125   | BRCOVC23M   |   |
| BR2024N125, BR2024NC125                            |   |   |
| BR3030B100, BR3030BC100                            | BRCOVC59M   |   |
| BR3030H100, BR3030HC100                            |   |   |
| <b>Raintight</b>                                   |   |   |
| BR1020B100R  | BR3RDF1M  | Field-installed interlock kits not available for these catalog numbers. |
| BR1224B100R  |   |   |
| BR1224N125R, BR1224NC125R                          |   |   |
| BR1624B100R  | BR3RDF2M  |   |
| BR1624N125R  |   |   |
| BR2024B100R, BR2024B125R                           | BR3RDF4M  |   |
| BR2024N125R, BR2024NC125R                          |   |   |



BR4040B200



### Mechanical Interlock Cover, continued

| Fits Loadcenter Catalog Numbers                             | Mechanical Interlock Trim/Deadfront Catalog Numbers | Mechanical Interlock Kit Catalog Numbers                                |
|---|---|---|
| <b>Indoor</b>   |   |   |
| BR1630B150  | BRCOV16C4FM   | BRMIKCSR  |
| BR1224N200  |   |   |
| BR1632B200  |   |   |
| BR1632N200  |   |   |
| BR2030B150  | BRCOV20C4FM   |   |
| BR2030H150  |   |   |
| BR2040B150  |   |   |
| BR2040B200, BR2040BC200                                     | BRCOV20D1FM   |   |
| BR2040H200  |   |   |
| BR2040N200, BR2040NC200                                     |   |   |
| BR2430B150, BR2430BC150                                     | BRCOV30G1FM   |   |
| BR3030B150  |   |   |
| BR3030H150  |   |   |
| BR3040B150  |   |   |
| BR2440B200  |   |   |
| BR2440N200  |   |   |
| BR3040B200, BR3040BC200                                     |   |   |
| BR3040N200, BR3040NC200                                     |   |   |
| BR3040H200  |   |   |
| BR4040B200, BR4040BC200                                     | BRCOV40L1FM   |   |
| BR4040H200  |   |   |
| BR4040N200, BR4040NC200                                     |   |   |
| BR4242B225  | BRCOV42L2FM   |   |
| <b>Raintight</b>  |   |   |
| BR816B150RF   | BR3RDF5M ①  |   |
| BR816B200RF   |   |   |
| BR816N200RF   |   |   |
| BR1224N200R   |   |   |
| BR2030B150R   | BR3RDF11M ①   |   |
| BR2040B150R   |   |   |
| BR2040B200R   |   |   |
| BR2040B225R   |   |   |
| BR2040N200R   |   |   |
| BR3030B150R   | BR3RDF12M ①   |   |
| BR3040B200R   |   |   |
| BR3040N200R   |   |   |
| BR4040B200R   | BR3RDF13M ①   |   |
| BR4040N200R   |   |   |
| BR48B200RF  | BR3RDF14M   |   |
| BR4242B225R   | BR3RDF15M ①   |   |
| <b>Mechanical Interlock Loadcenter Replacement Covers ②</b> |   |   |
| BR2020B100M, BR2020BC100M                                   | BRCOV20C2FM   | Field-installed interlock kits not available for these catalog numbers. |
| BR2024H100M   |   |   |
| BR3030BC100M  | BRCOV30D1FM   |   |

**Notes**

- ① Deadfront only.
- ② Can only be provided as replacement covers for factory-installed mechanically interlock loadcenters.

#### DS300H2



#### Field Installation Rainproof Conduit Hubs

| Description  | Conduit Size Inches (mm) | Ordering Quantity <sup>①</sup> | Catalog Number  |
|--|--------------------------|--------------------------------|-----------------|
| Group 1—for use with 70, 100 and 125 A MLO and MCB loadcenters and circuit breaker enclosures and the following 150 and 200 A panels: BR48B200RF   | 0.75 (19.1)              | 1                              | <b>DS075H1</b>  |
|  | 1.00 (25.4)              | 1                              | <b>DS100H1</b>  |
|  | 1.25 (31.8)              | 1                              | <b>DS125H1</b>  |
|  | 1.50 (38.1)              | 1                              | <b>DS150H1</b>  |
|  | 2.00 (50.8)              | 1                              | <b>DS200H1</b>  |
| Group 2—for use with 150, 200 and 225 A MLO and MCB loadcenters and circuit breaker enclosures except for the following 200 A loadcenters: BR48B200RF. Also for use with 400 and 600 A loadcenters and New York City loadcenters manufactured after November 1, 2005 | 2.00 (50.8)              | 1                              | <b>DS200H2</b>  |
|  | 2.50 (63.5)              | 1                              | <b>DS250H2</b>  |
|  | 3.00 (76.2)              | 1                              | <b>DS300H2</b>  |
| Type H conduit hubs for loadcenters PL0724R and S3100RN  | 0.75 (19.1)              | 1                              | <b>RH75P</b>    |
|  | 1.00 (25.4)              | 1                              | <b>RH100P</b>   |
|  | 1.25 (31.8)              | 1                              | <b>RH125P</b>   |
|  | 1.50 (38.1)              | 1                              | <b>RH150P</b>   |
| Adapter kit—Allows installing a Group 1 hub on devices arranged for Group 2 hubs   | —                        | 1                              | <b>DS900AP</b>  |
| Group 1 small blank hub plate with bump  | —                        | 1                              | <b>DS900CP1</b> |
| Group 2 Large blank hub plate with bump  | —                        | 1                              | <b>DS900CP2</b> |

#### GBK14



#### BRGBK39512



#### Ground Bar Kits

| Description (See Legend) | Length Inches (mm) | Ordering Quantity <sup>①</sup> | Catalog Number                  |
|--------------------------|--------------------|--------------------------------|---------------------------------|
| ●○○○○●                   | 2.54 (64.5)        | 1                              | <b>GBK5</b> <sup>②</sup>        |
| ●○○○○●■                  | 3.59 (91.2)        | 1                              | <b>GBK520</b> <sup>②</sup>      |
| ●○○○○●○○○○               | 4.29 (109.0)       | 1                              | <b>GBK10</b> <sup>②</sup>       |
| ●○○○○●○○○○■              | 5.34 (135.6)       | 1                              | <b>GBK1020</b> <sup>②</sup>     |
| ●○○○○■○○○○               | 4.61 (117.1)       | 1                              | <b>GBK13</b> <sup>②</sup>       |
| ●○○○○●○○○○○○○○           | 5.69 (144.5)       | 1                              | <b>GBK14</b> <sup>②</sup>       |
| ●○○○○●○○○○○○○○■          | 6.74 (171.2)       | 1                              | <b>GBK1420</b> <sup>②</sup>     |
| ●○○○○●○○○○○○○○○○○○       | 8.14 (206.8)       | 1                              | <b>GBK21</b> <sup>②</sup>       |
| ●○○○○●○○○○○○○○○○○○■      | 9.19 (233.4)       | 1                              | <b>GBK2120</b> <sup>②</sup>     |
| ○□□□●○○○○○□□□○○○○○□      | 5.78 (146.8)       | 1                              | <b>BRGBK39512</b> <sup>③④</sup> |
| ○○○○                     | 1.84 (46.7)        | 1                              | <b>GB4NM</b> <sup>⑤</sup>       |

#### Ground Bar Legend

- (3) #14–10 Cu/Al or (1) #14–4 Cu/Al
- (1) #6–2/0 Cu/Al
- (1) #14–1/0 Cu/Al or (3) #14–10 Cu/Al
- ◐ (1) #14–6 Cu/Al or (2) #14–12 Cu/Al
- Mounting Hole

#### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Distance between mounting holes is 1.75 inches (44.5 mm).
- ③ For single- and three-phase 400 and 600 A applications.
- ④ Distance between mounting holes is 2.34 inches (59.5 mm).
- ⑤ For non-metallic enclosures. Snaps into molded base.

### Loadcenter Goof Collars

Don't let an ugly drywall problem ruin a beautiful electrical installation.

Eaton's Goof Collar is designed to cover gaps between the finished drywall and loadcenter enclosure.

This is often necessary when upgrading the electrical service and the drywall surrounding the panel is damaged. The collar allows 2 inches of overhang beyond the standard flush trim.



*Before*



*After*

### BR Goof Collars

| Inches (mm)    |               | Catalog Number |                   |
|----------------|---------------|----------------|-------------------|
| Height         | Width         | BR Box Size    | Goof Collar       |
| 21.00 (533.4)  | 19.00 (482.6) | <b>B1</b>      | <b>BRB1GC2119</b> |
| 23.00 (584.2)  | 19.00 (482.6) | <b>B2</b>      | <b>BRB2GC2319</b> |
| 25.00 (635.0)  | 19.00 (482.6) | <b>C1</b>      | <b>BRC1GC2519</b> |
| 27.00 (685.8)  | 19.00 (482.6) | <b>C2</b>      | <b>BRC2GC2719</b> |
| 31.00 (787.4)  | 19.00 (482.6) | <b>C4</b>      | <b>BRC4GC3119</b> |
| 34.00 (863.6)  | 19.00 (482.6) | <b>D1</b>      | <b>BRD1GC3419</b> |
| 38.00 (965.2)  | 19.00 (482.6) | <b>G1</b>      | <b>BRG1GC3819</b> |
| 43.00 (1092.2) | 19.00 (482.6) | <b>L1</b>      | <b>BRL1G4319</b>  |
| 48.00 (1219.2) | 19.00 (482.6) | <b>L2</b>      | <b>BRL2GC4819</b> |

#### Note

Type BD Duplex, BQ and BQC Quadplex circuit breakers can be installed in Circuit Limiting (CTL) listed BR loadcenters. Type BR twin breakers can be installed in Non-CTL BR loadcenters.

**Technical Data and Specifications****General**

- A. The Contractor shall furnish and install deadfront loadcenters incorporating circuit breakers of the number, rating and type as specified herein and as shown on the contract drawings.
- B. The loadcenter and all components shall be designed, manufactured and tested in accordance with the latest applicable standards of UL, NEMA and NEC including:
  1. UL 67—Standards for Panelboards.
  2. UL 50—Standards for Cabinets and Boxes.
  3. UL 489—Standards for Molded Case Circuit Breakers.
  4. UL 869—Standards for Service Equipment.
  5. Federal Specification W-C 375B—Circuit Breakers.
  6. Federal Specification W-C P115b—Panel Power Distribution Type 1, Class 2.

**Qualifications**

- A. The manufacturer of the loadcenter shall be the manufacturer of the circuit breaker within the loadcenter.
- B. For the equipment specified herein, the manufacturer shall be ISO 9000 certified.
- C. The manufacturer of this equipment shall have produced similar electrical equipment for a minimum period of seven (7) years.

**Manufacturers**

- A. Eaton.

**Ratings**

- A. Loadcenters shall be rated for 120/240 Vac and shall have short-circuit ratings as shown on the drawings or as herein scheduled, but not less than 10,000 amperes rms symmetrical.
- B. Circuit breakers shall be a minimum of 125 A frame. Circuit breakers 15 through 125 A trip size shall take up the same pole spacing.
- C. Loadcenters shall be labeled with a UL short-circuit rating. When series combination ratings are applied with integral or remote upstream devices, a label shall be provided. Series combination ratings shall cover all trip ratings of installed frames. It shall state the conditions of the UL series ratings including:
  1. Size and type of upstream device.
  2. Branch devices that can be used.
  3. UL series short circuit rating.

**Construction**

- A. All interiors, with the exception of the branch circuit breakers, shall be completely factory assembled with main breakers, main lugs, or no main device.
- B. Interiors shall be designed so that circuit breakers can be replaced without disturbing adjacent units and without removing the main bus connectors and shall be designed so that circuits may be changed without machining, drilling, or tapping.
- C. Physical means shall be provided to prevent the installation of more overcurrent devices than that number for which the enclosure was designed, rated and approved. Half-size breakers shall have a UL listed rejection tab over the line terminals. Loadcenter interiors must have notched stabs to accept these rejection tab class CTL breakers, if required and approved.

**Bus**

- A. Busbars for the main and cross connectors shall be [tin-plated aluminum] [copper] in accordance with Underwriters Laboratories standards. Busing shall be braced throughout to conform to industry standard practice governing short-circuit stresses in loadcenters.

**Note:** Note to spec writer—select one (copper available in limited ratings).

- B. Neutral busing shall have a suitable lug for each outgoing feeder requiring a neutral connection of same ampacity as branch.

**Wiring/Termination**

- A. All wire connectors and terminals shall be of the anti-turn solderless type and shall be suitable for copper or aluminum wire of the sizes indicated. All connectors must meet the "Requirements for Wire Connectors and Soldering Lugs" as stated in UL 486B.
- B. All loadcenters where marked shall be suitable for use with 60 °C or 75 °C rated wire.

**Circuit Breakers**

- A. Circuit breakers shall be molded case type. Circuit breakers shall have four-rivet construction (GFI Type—5 rivets). Multipole circuit breakers shall be of a stack pole design to provide electrical phase isolation.
- B. Each pole of the circuit breaker will provide inverse time delay overload and instantaneous short-circuit protection by means of both thermal and magnetic sensors.
- C. The circuit breaker calibration shall not be affected by environmental changes in relative humidity. The thermal bimetal element shall be welded to the steel frame and calibration shall be set independent of the molded case by computer controlled equipment.
- D. All circuit breakers shall be operated by a toggle-type handle and multipole circuit breakers shall have an internal common trip mechanism. The circuit breakers shall incorporate trip mechanisms that are mechanically trip-free from the handle. The handle position shall provide visual trip indication.
- E. Contacts shall be of non-welding silver alloy.
- F. All circuit breakers shall have the trip rating inscribed on the handle on each circuit breaker pole. Also, unique color-coded cases that indicate the UL listed 10 kA or 22 kA interrupting ratings. Breakers shall be able to be used as main or branch disconnect devices.
- G. Branch circuit breakers may also be used in the 1/2-inch (12.7 mm) per pole ratings that include two-pole 1-inch (25.4 mm) wide modules and four-pole 2-inch (50.8 mm) wide modules. Two-pole circuit breakers must incorporate a common trip mechanism.
- H. Circuit breakers shall be completely enclosed in a molded case of thermoset material. No internal aluminum parts shall be used. All internal ferrous parts shall be plated to prevent corrosion.
- I. All terminals shall be listed for use with copper or aluminum conductors. Terminals shall be of the box lug or clamp type design. The terminals shall meet UL 486B requirements and shall be suitable for use with either 60 °C or 75 °C wire.
- J. The calibrated bimetal assembly shall be mechanically isolated from the load terminal using a flexible braided copper shunt wire, such that movement of the terminals due to twisting and overtorquing does not affect breaker calibration.
- K. Breakers shall be SWD rated and/or HACR rated as required.
- L. Arc Fault Interrupting circuit breakers, (AFI), shall be provided on all 15 and 20 A single-phase 120/240 Vac circuits except those indicated as remote controlled breakers. AFI breakers shall be “Classified for mitigating the effects of arcing faults,” or conforming to UL Standard 1699 and as defined by Article 210.12 Section A of the 1999 NEC Code.

**Surge Protection Devices**

See Volume 1, Tab 2 for complete details on surge protection.

**Enclosures**

- A. Loadcenter shall have NEMA Type 1 general purpose or NEMA Type 3R rainproof enclosures as indicated on the drawings and shall be surface or combination flush/surface mounted except where noted.
- B. Boxes shall be made from galvanized sheet steel having multiple knockouts. Rainproof boxes shall use galvanized steel or an approved coating system which meets or exceeds standards for outdoor NEMA Type 3R enclosures. Boxes shall be of sufficient size to provide at least a minimum code gutter space on all sides.
- C. The deadfront shall have an easy adjustment feature for flush applications.
- D. Boxes shall be factory assembled into a single rigid structure.
- E. Unless otherwise noted on drawings, hinged doors covering all circuit breaker handles shall be included in all trims. Trim doors shall not uncover any live parts in making the circuit breaker handles accessible. If key locks are required, all locks shall be keyed alike.
- F. Combination trims for flush and surface panels shall be flat and shall overlap the box by at least 5/8-inch (15.9 mm) all around. Trims shall be mounted by a screwdriver without the need for special tools.

**Finish**

- A. Trims shall be bonderized and finished with a light gray ANSI-61 enamel. The paint finish shall be of a type to which field applied paint will adhere.

**Factory Testing**

- A. The standard factory tests shall be performed on the equipment provided under this section. All tests shall be in accordance with the latest version of UL and NEMA.

**BR Loadcenters****Description****Service**

Single-phase, three-wire, 120/240 Vac

Three-phase, four-wire, 208Y/120 Vac  
Three-phase, three-wire, 240 Vac delta**Short-Circuit Current Rating**

10 kAIC: All single- and three-phase loadcenters 70–225 A, 8 to 42 circuits

25 kAIC: All convertible and factory-installed single-phase loadcenters rated 150 and 200 A using Type CSR main breakers

22 kAIC: All convertible loadcenters using 125 A rated Type BRH main breakers or selected factory installed 125 A rated Type BRH main breaker

**Main Breaker/Main Lug Loadcenters**

Single-phase

Three-phase

Main breaker: 100, 125, 150, 200, 225, 400, 600 A

Main breaker: 100, 125, 150, 200, 225, 400, 600 A

Main lugs: 70, 125, 150, 200, 225, 400, 600 A

Main lugs: 100, 125, 150, 200, 225, 400, 600 A

**Convertible Loadcenters**

Main breaker: single-phase up to 200 A and three-phase up to 225 A

Main lugs: single-phase up to 200 A and three-phase up to 150 A

**Branch Breakers**

Types BR, BRH and BRHH: 10–150 A, single-, two- and three-pole; selected amperage available in switching duty, HACR, shunt trip and high magnetic setting

Type BQ and BQC Multibreaker: 15–30 A. Two of two-pole or one two-pole and two one-pole; takes two 1-inch (25.4 mm) spaces

Type GFTCB: 15–60 A

Type BRW: 15–30 A; two-pole water heater breakers

Types BJ and BJH: 125–225 A; two- and three-pole

Type BRSN: 15–30 A; two-pole switching neutral breakers

Type BD Twin: 10–50 A; two of one-pole; take one 1-inch (25.4 mm) space

Type BR 15–100 A; two-pole, 240 Vac delta breakers

BR-AFCI arc fault circuit interrupter

**Enclosures**

NEMA Type 1 indoor

NEMA 4X

NEMA Type 3R outdoor

Meets or exceeds UL requirements for indoor or outdoor applications

**Loadcenter and Breaker Accessories**

Branch circuit breaker:

Surge protection:

Auxiliary components    Hold-down kits    Handle ties  
Lockoffs                      LockdogsSingle-phase plug-on surge protector    Single-phase bottle type surge protector  
Three-phase bottle type surge protector    Single-phase whole home surge protector

Complete line of ground bar kits 5, 10, 14 and 21 circuit, some with additional #2/0 lugs; each terminal will accommodate: (3) #14–#10 Cu/Al or (1) #14–#4 Cu/Al

Universal rainproof conduit hubs

Main and sub-feed lugs 125, 150, 225 A—two- and three-pole

Group One: 3/4, 1, 1-1/4, 1-1/2, 2 inches (19.1, 25.4, 31.8, 38.1, 50.8 mm)

Shunt trips

Group Two: 2, 2-1/2, 3 inches (50.8, 63.5, 76.2 mm)

Adapter plate

**Bussing**

Tin-plated aluminum as standard

Limited copper bus panels available

### Dimensions

Approximate Dimensions in Inches (mm)

#### Residential/Commercial/New York City Loadcenters, Unit Enclosures—Box Sizes

**Note:** Box sizes do not include covers/fronts.

#### Residential Loadcenters—NEMA Type 1 Indoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| A1       | 15.00 (381.0)  | 11.25 (285.8) | 3.75 (95.3)  |
| B1       | 16.75 (425.5)  | 14.31 (363.5) | 3.88 (98.4)  |
| B2       | 18.75 (476.3)  | 14.31 (363.5) | 3.88 (98.4)  |
| C1       | 21.00 (533.4)  | 14.31 (363.5) | 3.88 (98.4)  |
| C2       | 23.00 (584.2)  | 14.31 (363.5) | 3.88 (98.4)  |
| C4       | 27.00 (685.8)  | 14.31 (363.5) | 3.88 (98.4)  |
| D1       | 29.13 (739.8)  | 14.31 (363.5) | 3.88 (98.4)  |
| G1       | 34.13 (866.8)  | 14.31 (363.5) | 3.88 (98.4)  |
| L1       | 39.00 (990.6)  | 14.31 (363.5) | 3.88 (98.4)  |
| L2       | 45.00 (1143.0) | 14.31 (363.5) | 3.88 (98.4)  |
| L3       | 48.38 (1228.3) | 14.31 (363.5) | 3.88 (98.4)  |
| 2        | 8.63 (219.1)   | 5.00 (127.0)  | 3.50 (88.9)  |
| 3        | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 4        | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 5        | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 6        | 12.00 (304.8)  | 6.88 (174.6)  | 4.50 (114.3) |
| 7        | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 9        | 14.50 (368.3)  | 6.50 (165.1)  | 3.50 (88.9)  |

#### Residential Loadcenters—NEMA Type 3R Outdoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| B1R      | 16.75 (425.5)  | 14.31 (363.5) | 5.19 (131.8) |
| B2R      | 18.75 (476.3)  | 14.31 (363.5) | 5.19 (131.8) |
| C3R      | 25.00 (635.0)  | 14.31 (363.5) | 5.19 (131.8) |
| D1R      | 29.13 (739.8)  | 14.31 (363.5) | 5.19 (131.8) |
| G1R      | 34.13 (866.8)  | 14.31 (363.5) | 5.19 (131.8) |
| L1R      | 39.00 (990.6)  | 14.31 (363.5) | 5.19 (131.8) |
| L2R      | 45.00 (1143.0) | 14.31 (363.5) | 5.19 (131.8) |
| L3R      | 48.75 (1238.2) | 14.31 (363.5) | 5.19 (131.8) |
| 2R       | 8.63 (219.1)   | 5.00 (127.0)  | 3.50 (88.9)  |
| 3R       | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 4R       | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 5R       | 9.44 (239.7)   | 4.50 (114.3)  | 3.00 (76.2)  |
| 6R       | 11.75 (298.5)  | 6.50 (165.1)  | 4.50 (114.3) |
| 7R       | 13.00 (330.2)  | 11.00 (279.4) | 3.56 (90.5)  |
| 8R       | 27.00 (685.8)  | 10.50 (266.7) | 4.75 (120.7) |
| 9R       | 14.25 (362.0)  | 6.50 (165.1)  | 4.00 (101.6) |
| C1R      | 21.00 (533.4)  | 14.31 (363.5) | 5.19 (131.8) |

#### Commercial Loadcenters—NEMA Type 1 Indoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| 19       | 44.00 (1117.6) | 16.16 (410.4) | 6.25 (158.8) |
| 20       | 44.00 (1117.6) | 16.16 (410.4) | 6.25 (158.8) |
| 22       | 54.00 (1371.6) | 16.22 (412.0) | 6.31 (160.3) |
| 24       | 66.50 (1689.1) | 16.22 (412.0) | 6.31 (160.3) |

#### Commercial Loadcenters—NEMA Type 3R Outdoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| 42       | 38.00 (965.2)  | 16.31 (414.3) | 6.38 (161.9) |
| 43       | 44.00 (1117.6) | 16.31 (414.3) | 6.38 (161.9) |
| 46       | 54.00 (1371.6) | 16.31 (414.3) | 6.38 (161.9) |
| 47       | 66.56 (1690.7) | 16.31 (414.3) | 6.38 (161.9) |

#### New York City Loadcenters—NEMA Type 1 Indoor

| Box Size | Height         | Width         | Depth        |
|----------|----------------|---------------|--------------|
| A        | 38.00 (965.2)  | 18.13 (460.4) | 5.00 (127.0) |
| B        | 44.00 (1117.6) | 18.13 (460.4) | 5.00 (127.0) |
| C        | 66.50 (1689.1) | 18.13 (460.4) | 6.25 (158.8) |

#### ECC Unit Enclosures—NEMA Type 1 Indoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.25 (590.6) | 8.88 (225.4) | 4.50 (114.3) |

#### ECC Unit Enclosures—NEMA Type 3R Outdoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.68 (601.7) | 9.31 (236.5) | 5.44 (138.1) |

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1


Approximate Dimensions in Inches (mm)

#### Residential Loadcenter Knockouts




#### Knockouts for Box Sizes A1, B1, B2, C1, C2, C4, D1, G1, L1, L2, B1R, B2R, C1R, C3R, D1R, G1R, L1R, L2R

| Code | Diameter    |             |             |             |             |
|------|-------------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | 0.75 (19.1) | —           | —           | —           |
| B    | 0.50 (12.7) | —           | —           | —           | —           |
| C    | 0.50 (12.7) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| D    | 1.25 (31.8) | 1.25 (31.8) | 2.00 (50.8) | 2.50 (63.5) | —           |
| E    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           | —           |
| F    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.50 (38.1) | 2.00 (50.8) |
| G    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           | —           |
| H    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| I    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| J    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           | —           |




#### Residential NEMA Type 1 Indoor and NEMA Type 3R Outdoor Enclosures






#### Outdoor Boxes B1R, B2R, C1R, C3R, D1R, G1R, L1R, L2R



#### Indoor Boxes A1



#### Indoor Boxes B1, B2



#### Indoor Boxes C1, C2, C4, D1, G1, L1, L2




Approximate Dimensions in Inches (mm)

### Knockouts for Box Sizes 3, 4, 5, 6, 7, 9, 2R, 3R, 4R, 5R, 6R, 7R, 8R, 9R

| Code | Diameter    |             |             |             |
|------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | —           | —           | —           |
| B    | 0.50 (12.7) | 0.75 (19.1) | —           | —           |
| C    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | —           |
| D    | 0.50 (12.7) | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) |
| E    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | —           |
| F    | 0.75 (19.1) | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) |
| G    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | —           |
| H    | 1.00 (25.4) | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) |
| I    | 1.25 (31.8) | 1.50 (38.1) | 2.00 (50.8) | —           |

### Residential NEMA Type 1 Indoor and NEMA Type 3R Outdoor Enclosures

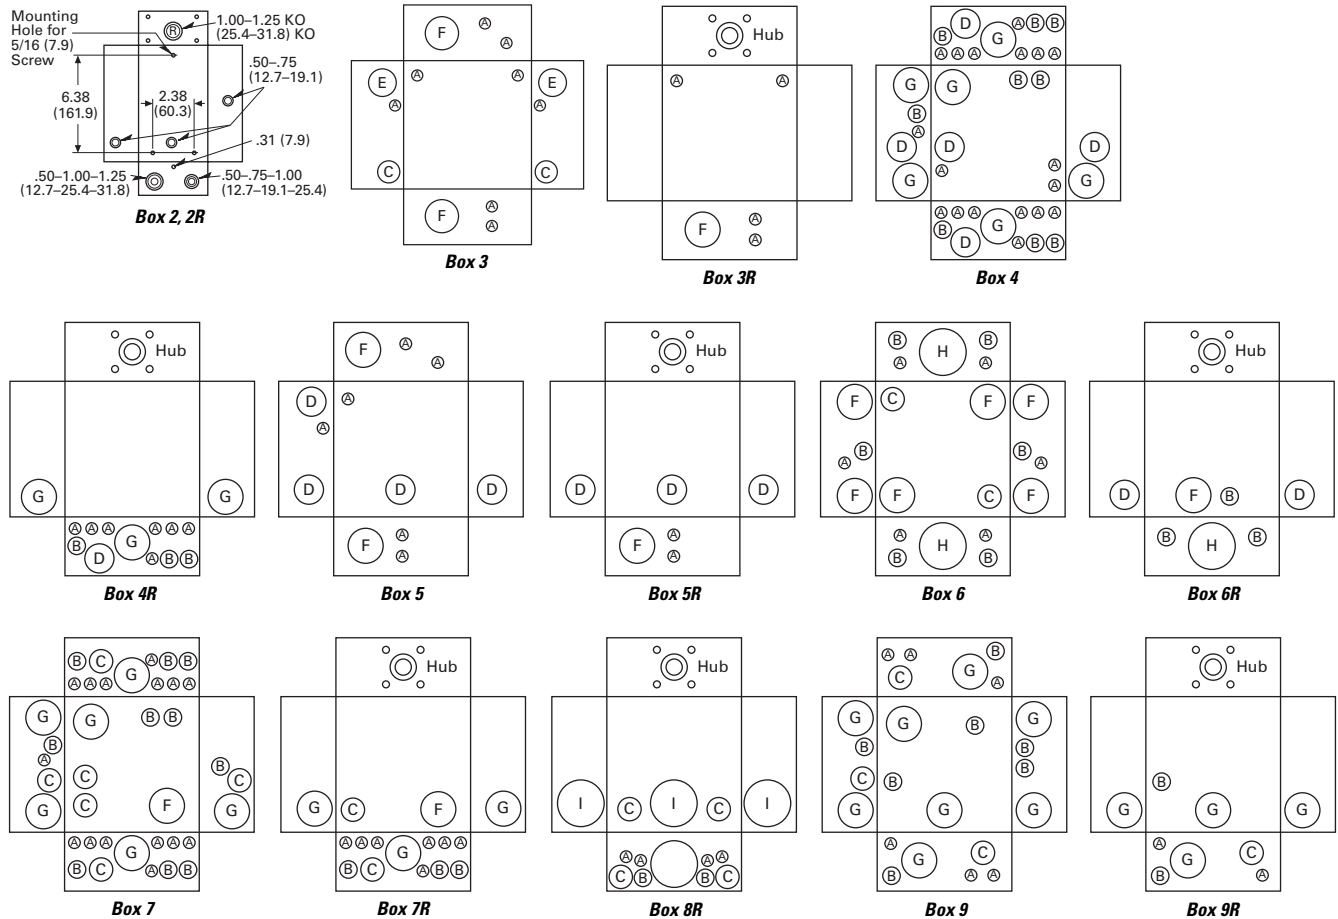

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

Approximate Dimensions in Inches (mm)

#### Commercial Loadcenter Knockouts

##### NEMA Type 1 Indoor Commercial Enclosures Knockouts for Box Sizes 19, 20, 22, 24

| Code | Diameter    |             |             |             |
|------|-------------|-------------|-------------|-------------|
| A    | 0.50 (12.7) | —           | —           | —           |
| B    | 0.50 (12.7) | 0.75 (19.1) | —           | —           |
| C    | 0.75 (19.1) | 1.00 (25.4) | 1.50 (38.1) | —           |
| D    | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) | 3.00 (76.2) |
| E    | 2.00 (50.8) | 2.50 (63.5) | 3.00 (76.2) | —           |
| F    | 2.50 (63.5) | 3.00 (76.2) | 3.50 (88.9) | —           |


##### NEMA Type 3R Outdoor Commercial Enclosures Knockouts for Box Sizes 42, 43, 46, 47

| Code | Diameter        |             |             |             |
|------|-----------------|-------------|-------------|-------------|
| A    | 0.50 (12.7)     | —           | —           | —           |
| B    | 0.50 (12.7)     | 0.75 (19.1) | —           | —           |
| C    | 0.75 (19.1)     | 1.00 (25.4) | 1.25 (31.8) | —           |
| D    | 1.50 (38.1)     | 2.00 (50.8) | 2.50 (63.5) | —           |
| E    | 2.00 (50.8)     | 2.50 (63.5) | 3.00 (76.2) | —           |
| F    | 2.50 (63.5)     | 3.00 (76.2) | 3.50 (88.9) | —           |
| G    | 1.25 (31.8)     | 1.50 (38.1) | 2.00 (50.8) | 2.50 (63.5) |
| H    | 3.25 (82.6) Sq. | —           | —           | —           |


#### Unit Enclosure Knockouts, Types ECB and ECC Knockouts

| Code  | Diameter    |             |             |             |
|---|-------------|-------------|-------------|-------------|
| <b>NEMA Type 1 Indoor (Flush and Surface Trims)</b> |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) |
| <b>NEMA Type 3R Outdoor</b>                         |             |             |             |             |
| A   | 0.50 (12.7) | —           | —           | —           |
| B   | 1.25 (31.8) | 1.50 (38.1) | 1.75 (44.5) | 2.00 (50.8) |


#### Indoor Commercial Enclosures

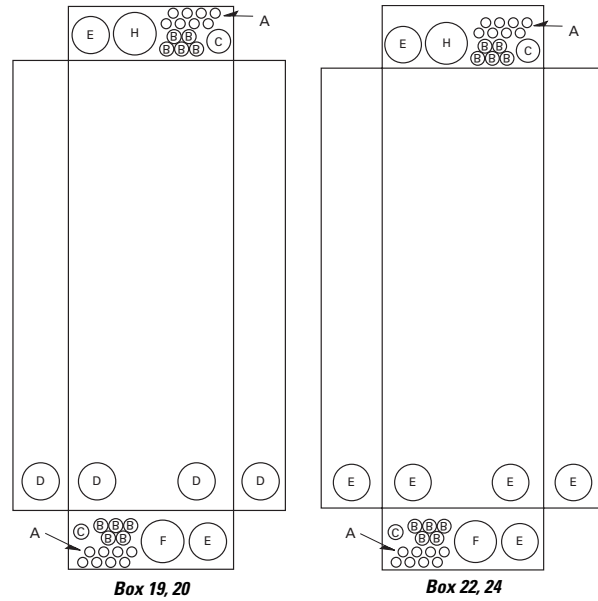

#### Outdoor Commercial Enclosures

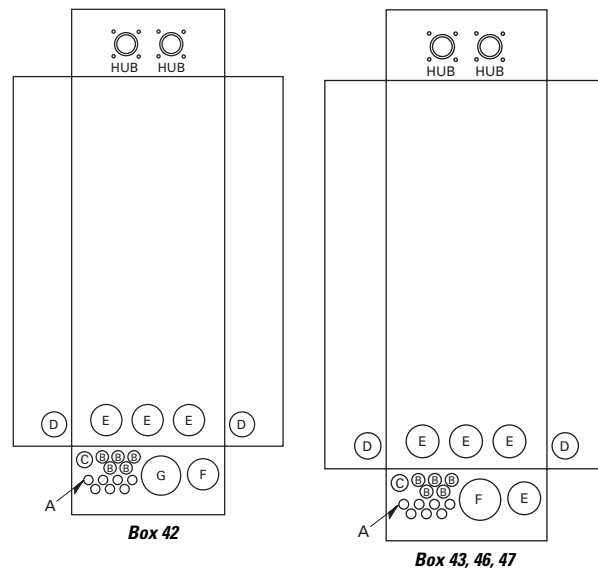

#### Unit Enclosure Knockouts

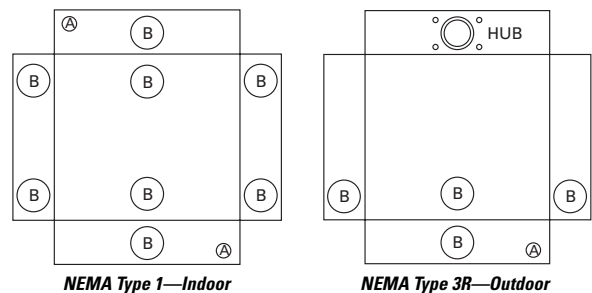

### BR Circuit Breakers



### Contents

| <i>Description</i>                         | <i>Page</i>     |
|--|-----------------|
| Overview .....                             | <b>V1-T1-42</b> |
| BR Specialty Products                      |                 |
| BR Quick Connect Neutral Loadcenters ..... | <b>V1-T1-57</b> |
| Spa Panels .....                           | <b>V1-T1-58</b> |
| Riser Panel .....                          | <b>V1-T1-59</b> |
| Type BR Renovation Loadcenter .....        | <b>V1-T1-60</b> |
| BR Loadcenter Options and Accessories      |                 |
| Type BR Retrofit Interior Kits .....       | <b>V1-T1-61</b> |
| Type BR Mechanical Interlock Kits .....    | <b>V1-T1-65</b> |
| BR Circuit Breakers                        |                 |
| Product Selection .....                    | <b>V1-T1-78</b> |
| Options and Accessories .....              | <b>V1-T1-85</b> |
| Wiring Diagrams .....                      | <b>V1-T1-87</b> |

## BR Circuit Breakers

### Product Description

#### **Plug-On Branch Feeder Type Arc Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac and 120/240 Vac**

A branch feeder type arc fault circuit interrupter is a device intended to mitigate high current arcing faults in the complete circuit, including connected cords. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults.

The branch feeder type AFCI is required in the 1999 and 2002 National Electrical Code.

The Combination Type AFCI is required in the 2005, 2008, and 2011 National Electrical Code.

#### **Plug-On Combination Type Arc Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac and 120/240 Vac**

A combination type arc fault circuit interrupter is a device that includes all of the protection offered by the branch feeder AFCI (mitigation of high current arcing faults in the complete circuit, including connected cords). In addition it provides direct detection of persistent low current arcing faults down to 5 amps with associated mitigation of fire hazards in the cords connected to the outlets. High current arcing faults can occur from line to neutral or line to ground. These arcing faults are in parallel with the load and produce the most energy of all arcing faults. The current level of low current arcing faults is limited by the load.

#### **Plug-On Ground Fault Circuit Breakers, Type GFTCB and GFEP—10/22 kAIC, 120 Vac and 120/240 Vac**

##### **Ground Fault Application Notes**

Single-pole GFTCBs are designed for use in two-wire, 120 Vac circuits. See **Page V1-T1-87** for a typical wiring configuration.

Two-pole GFTCBs are designed for use in three-wire, 120/240 Vac circuits, 120 Vac multiwire circuits employing common, neutral and two-wire, 240 Vac circuits obtained from a 120/240 Vac source.

**Page V1-T1-87** shows typical wiring configurations for a 120/240 Vac multiwire circuits, and a 240 Vac, two-wire circuit. Note the "panel neutral" conductor connects to the neutral bar, even though the neutral is not included in the load circuit. This connection is necessary to supply a 120 Vac power source to the ground fault sensing circuit.

The figures are shown with a 120/240 Vac, single-phase, three-wire power source, but are also applicable to a 120/208 Vac, three-phase, four-wire power supply. For all figures, the electrical operation of the GFTCB is not affected by the equipment ground.

#### **Non-CTL Plug-On Replacement—Circuit Breakers, Type BRD—10 kAIC, 120/240 Vac**

##### **Non-CTL 10 kAIC for Replacement Purposes Only**

For replacement in enclosures manufactured prior to 1968 with unnotched stabs. Circuit breakers do not have rejection tab.

#### Product Selection

Plug-On Circuit Breakers, Types BR—10/22/42 kAIC, 120 Vac, 120/240 Vac and 240 Vac

#### BR120



#### BR215



#### BR320



#### BRH2100



#### BRX2125



#### Type BR Breakers, 1-Inch (25.4 mm) per Pole 120/240, 10, 22 and 42 kAIC

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120/240 Vac<br>Requires One 1-Inch (25.4 mm) Space<br>10 per Shelf Carton |                              | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>5 per Shelf Carton |                              | 42 kAIC<br>Catalog<br>Number | 65 kAIC<br>Catalog<br>Number |
|---------------|---|---|------------------------------|---|------------------------------|------------------------------|------------------------------|
|               |   | 10 kAIC<br>Catalog<br>Number  | 22 kAIC<br>Catalog<br>Number | 10 kAIC<br>Catalog<br>Number  | 22 kAIC<br>Catalog<br>Number |                              |                              |
| 10            | #14–4                                   | BR110   | —                            | BR210   | —                            | —                            | —                            |
| 15            | #14–4                                   | BR115 <sup>①②</sup>   | BRH115                       | BR215 <sup>③</sup>  | BRH215                       | —                            | —                            |
| 20            | #14–4                                   | BR120 <sup>①②</sup>   | BRH120                       | BR220 <sup>③</sup>  | BRH220                       | —                            | —                            |
| 25            | #14–4                                   | BR125   | BRH125                       | BR225 <sup>③</sup>  | BRH225                       | —                            | —                            |
| 30            | #14–4                                   | BR130   | BRH130                       | BR230 <sup>③</sup>  | BRH230                       | —                            | —                            |
| 35            | #14–4                                   | BR135   | BRH135                       | BR235 <sup>③</sup>  | BRH235                       | —                            | —                            |
| 40            | #14–4                                   | BR140   | BRH140                       | BR240 <sup>③</sup>  | BRH240 <sup>③</sup>          | —                            | —                            |
| 45            | #14–4                                   | —   | BRH145                       | BR245 <sup>③</sup>  | BRH245                       | —                            | —                            |
| 50            | #14–4                                   | BR150   | BRH150                       | BR250 <sup>③</sup>  | BRH250 <sup>③</sup>          | —                            | —                            |
| 55            | #14–3                                   | BR150   | BRH155                       | BR255   | BRH255                       | —                            | —                            |
| 60            | #8–1/0                                  | BR160   | BRH160                       | BR260   | BRH260                       | BRHH260                      | BRX260                       |
| 70            | #8–1/0                                  | BR170   | BRH170                       | BR270   | BRH270                       | BRHH270                      | BRX270                       |
| 80            | #8–1/0                                  | —   | —                            | BR280   | BRH280                       | BRHH280                      | BRX280                       |
| 90            | #8–1/0                                  | —   | —                            | BR290   | BRH290                       | BRHH290                      | BRX290                       |
| 100           | #8–1/0                                  | —   | —                            | BR2100  | BRH2100                      | BRHH2100                     | BRX2100                      |
| 110           | #8–1/0                                  | —   | —                            | BR2110  | BRH2110                      | BRHH2110                     | BRX2110                      |
| 125           | #4–2/0                                  | —   | —                            | BR2125  | BRH2125                      | BRHH2125                     | BRX2125                      |
| 150           | #4–2/0                                  | —   | —                            | BR2150 <sup>④</sup>   | —                            | —                            | —                            |



#### Notes

- ① One pole, 1-inch (25.4 mm) per pole circuit breakers are available with high magnetic setting for switching large tungsten lamp loads. Add suffix H to catalog number.
- ② Switching duty rated.
- ③ On the black handle breaker, add suffix “B” to the catalog number to obtain a tapped molded opening for proper use with hold-down kits.
- ④ For use as a branch circuit breaker in 400 and 600 ampere panels only.

All Type BR single-, two- and three-pole circuit breakers carry listing for HACR application. For circuit breakers with a shunt trip, add ST suffix.

### BR Breakers

### Type BR Breakers, 1-Inch (25.4 mm) per Pole 240 Vac, 10, 22 and 42 kAIC



Three-Pole 240 Vac  
Common Trip Requires Three  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton



| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | 10 kAIC<br>Catalog Number | 22 kAIC<br>Catalog Number |
|---------------|---|---------------------------|---------------------------|
| 10            | #14–4                                   | BR310                     | —                         |
| 15            | #14–4                                   | BR315 ①                   | BRH315                    |
| 20            | #14–4                                   | BR320 ①                   | BRH320                    |
| 25            | #14–4                                   | BR325                     | BRH325                    |
| 30            | #14–4                                   | BR330                     | BRH330                    |
| 35            | #14–4                                   | BR335                     | BRH335                    |
| 40            | #14–4                                   | BR340                     | BRH340                    |
| 45            | #14–4                                   | BR345                     | BRH345                    |
| 50            | #14–4                                   | BR350                     | BRH350                    |
| 55            | #14–3                                   | BR355                     | BRH355                    |
| 60            | #4–1/0                                  | BR360                     | BRH360                    |
| 70            | #4–1/0                                  | BR370                     | BRH370                    |
| 80            | #4–1/0                                  | BR380                     | BRH380                    |
| 90            | #4–1/0                                  | BR390                     | BRH390                    |
| 100           | #4–1/0                                  | BR3100                    | BRH3100                   |

### Plug-On, Dual Purpose Arc Fault / Ground Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac

#### BRLAFGF115



### Type BR, 1-Inch (25.4 mm) wide Dual Purpose AF/GF Circuit Breakers ②③

| Poles                  | Ampere Rating | Configuration           | Catalog Number |
|------------------------|---------------|-------------------------|----------------|
| Single-pole<br>10 kAIC | 15            | Combination AFGI / GFCI | BRLAFGF115 ④   |
|                        |               |                         | BRAFGF115 ⑤    |
|                        | 20            | Combination AFGI / GFCI | BRLAFGF120 ④   |
|                        |               |                         | BRAFGF120 ⑤    |
| Single-pole<br>22 kAIC | 15            | Combination AFGI / GFCI | BRHAFGF115 ⑤   |
|                        |               |                         | BRHAFGF120 ⑤   |

### Plug-On Combination Type Arc Fault Circuit Breakers, Type BR—10 kAIC, 120 Vac and 120/240 Vac

#### BRCAF115



### Type BR, 1-Inch (25.4 mm) wide Combination Type AFCI Circuit Breakers

| Poles                  | Ampere Rating | Configuration | Catalog Number |
|------------------------|---------------|---------------|----------------|
| Single-pole<br>10 kAIC | 15            | AFCI          | BRCAF115 ⑥     |
|                        | 20            | AFCI          | BRCAF120 ⑥     |
| Single-pole<br>22 kAIC | 15            | AFCI          | BRHCAF115 ⑥    |
|                        | 20            | AFCI          | BRHCAF120 ⑥    |
| Two-pole<br>10 kAIC    | 15            | AFCI          | BRL215CAF      |
|                        | 20            | AFCI          | BRL220CAF      |

#### Notes

- ① One pole, 1-inch (25.4 mm) per pole circuit breakers are available with high magnetic setting for switching large tungsten lamp loads. Add suffix H to catalog number.
- ② Breaker qualifies as combination arc fault, per UL 1699.
- ③ Breaker qualifies as personnel protection ground fault, (5 mA) per UL 943.
- ④ These catalog numbers will be obsoleted in Q3, 2018 and replaced with BRAFGF short body breakers.
- ⑤ Short body replacing BRLAFGF breakers.
- ⑥ Clamshell packaging available with CS modification code on the end of catalog number.

All Type BR single-, two- and three-pole circuit breakers carry listing for HACR application. For circuit breakers with a shunt trip, add ST suffix. See **Volume 4** for bolt-on AF/GF breakers; QB1015AFGF, QB1020AFGF, QBH1015AFGF and QBH1020AFGF.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1

#### Plug-On Ground Fault Circuit Breakers, Type GFTCB and GFEP—10/22 kAIC, 120 Vac and 120/240 Vac


Type GFTCB Single-Pole



Type GFTCB Two-Pole



#### Type GFTCB Ground Fault Circuit Breakers—5 Milliamperere—1-Inch (25.4 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC




Single-Pole 120 Vac  
Requires One  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number ①



Two-Pole 120/240 Vac  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
1 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120 Vac<br>Requires One<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number ① | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|---|---|
| 15            | #14–4                                   | GFTCB115  | GFTCB215  |
| 20            | #14–4                                   | GFTCB120  | GFTCB220  |
| 25            | #14–4                                   | GFTCB125  | GFTCB225  |
| 30            | #14–4                                   | GFTCB130  | GFTCB230  |
| 40            | #14–4                                   | GFTCB140  | GFTCB240  |
| 50            | #14–4                                   | —   | GFTCB250 ②  |
| 60            | #14–6                                   | —   | GFTCB260  |

#### Type GFTCBH Ground Fault Breakers—5 Milliamperere—1-Inch (25.4 mm) per Pole 120 Vac or 120/240 Vac, 22 kAIC




Single-Pole 120 Vac  
Requires One  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number



Two-Pole 120/240 Vac  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
1 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120 Vac<br>Requires One<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|---|---|
| 15            | #14–4                                   | GFTCBH115   | GFTCBH215   |
| 20            | #14–4                                   | GFTCBH120   | GFTCBH220   |
| 25            | #14–4                                   | GFTCBH125   | GFTCBH225   |
| 30            | #14–4                                   | GFTCBH130   | GFTCBH230   |

#### Type GFEP Ground Fault Equipment Protectors—30 Milliamperere—1-Inch (25.4 mm) per Pole 120 Vac or 120/240 Vac, 10 kAIC



Single-Pole 120 Vac  
Requires One  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number



Two-Pole 120/240 Vac  
Common Trip Requires Two  
1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number


| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Single-Pole 120 Vac<br>Requires One<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 Vac<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number |
|---------------|---|---|--|
| 15            | #14–4                                   | GFEP115   | GFEP215  |
| 20            | #14–4                                   | GFEP120   | GFEP220  |
| 25            | #14–4                                   | GFEP125   | GFEP225  |
| 30            | #14–4                                   | GFEP130   | GFEP230  |
| 40            | #14–4                                   | —   | GFEP240  |
| 50            | #14–4                                   | —   | GFEP250 ②  |

#### Notes

- ① Available with bell alarm or auxiliary switch. See circuit breaker accessories on [Page V1-T1-85](#).
- ② For use with copper wire only.


### CTL Plug-On Circuit Breakers, Type BD Duplex, BQ and BQC Quadplex—10 kAIC, 120/240 Vac

BD2020




#### Class CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—All Circuit Breakers Have Rejection Tab Feature

Type BD Duplex  
(UL Type BRD)




Single-Pole ①  
Requires One 1-Inch  
(25.4 mm) Space  
10 per Shelf Carton

Type BQ Quadplex Independent Trip  
(UL Type BRD)




Two-Pole ② and Single-Pole ①  
Requires Two 1-Inch  
(25.4 mm) Spaces  
5 per Shelf Carton

Type BQ Quadplex Independent Trip  
(UL Type BRD)




Two-Pole  
Requires Two 1-Inch  
(25.4 mm) Spaces  
5 per Shelf Carton

BQ2302115



BQ230230



| Ampere Rating | Catalog Number | Wire Size Range<br>Cu/Al<br>65 °C or 75 °C | Ampere Rating             |                                     |                            | Catalog Number | Ampere Rating                      |                                     |                |
|---------------|----------------|--|---------------------------|-------------------------------------|----------------------------|----------------|------------------------------------|-------------------------------------|----------------|
|               |                |  | Outer Left<br>Single-Pole | Center Two-Pole<br>Independent Trip | Outer Right<br>Single-Pole |                | Outer Two-Pole<br>Independent Trip | Center Two-Pole<br>Independent Trip | Catalog Number |
| 10–10         | BD1010         | #14–4                                      | 15                        | 20                                  | 15                         | BQ2202115      | 15                                 | 15                                  | BQ215215       |
| 15–15         | BD1515         | #14–4                                      | 20                        | 20                                  | 20                         | BQ2202120      | 15                                 | 20                                  | BQ215220       |
| 15–20         | BD1520         | #14–4                                      | 15                        | 30                                  | 15                         | BQ2302115      | 15                                 | 30                                  | BQ215230       |
| 15–30         | BD1530         | #14–4                                      | 20                        | 30                                  | 20                         | BQ2302120      | 15                                 | 40                                  | BQ215240       |
| 20–15         | BD2015         | #14–4                                      | 15                        | 40                                  | 15                         | BQ2402115      | 15                                 | 50                                  | BQ215250       |
| 20–20         | BD2020         | #14–4                                      | 20                        | 40                                  | 20                         | BQ2402120      | 20                                 | 20                                  | BQ220220       |
| 20–30         | BD2030         | #14–4                                      | 15                        | 50                                  | 15                         | BQ2502115      | 20                                 | 30                                  | BQ220230       |
| 25–25         | BD2525         | #14–4                                      | 20                        | 50                                  | 20                         | BQ2502120      | 20                                 | 40                                  | BQ220240       |
| 30–15         | BD3015         | #14–4                                      | —                         | —                                   | —                          | —              | 20                                 | 50                                  | BQ220250       |
| 30–20         | BD3020         | #14–4                                      | —                         | —                                   | —                          | —              | 25                                 | 25                                  | BQ225225       |
| 30–30         | BD3030         | #14–4                                      | —                         | —                                   | —                          | —              | 30                                 | 30                                  | BQ230230       |
| 30–40         | BD3040         | #14–4                                      | —                         | —                                   | —                          | —              | 30                                 | 40                                  | BQ230240       |
| 30–50         | BD3050         | #14–4                                      | —                         | —                                   | —                          | —              | 30                                 | 50                                  | BQ230250       |
| 50–30         | BD5030         | #14–4                                      | —                         | —                                   | —                          | —              | 40                                 | 40                                  | BQ240240       |
| 50–50         | BD5050         | #14–4                                      | —                         | —                                   | —                          | —              | 40                                 | 50                                  | BQ240250       |
| —             | —              | —  | —                         | —                                   | —                          | —              | 50                                 | 50                                  | BQ250250       |

#### Notes

- ① All 15 and 20 A single poles are switch-duty rated.
- ② All Type BD duplex and BQ quadplex circuit breakers carry listing for HACR applications.
- ③ Available with bell alarm or auxiliary switch. See circuit breaker accessories on [Page V1-T1-85](#).
- ④ For use with copper wire only.

# 1.2

## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers

1


#### Non-CTL Plug-On Replacement—Circuit Breakers, Type BRD—10 kAIC, 120/240 Vac

BR2020




#### Class Non-CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—Breakers Do Not Have Rejection Tab Feature

##### Type BR Duplex




Single-Pole Requires One 1-Inch (25.4 mm) Space 10 per Shelf Carton

##### Type Brand BRD Quadplex Independent Trip



Two-Pole Requires Two 1-Inch (25.4 mm) Spaces 5 per Shelf Carton


##### Type BRD Quadplex Common Trip Center and Outer Poles



Two-Pole Requires Two 1-Inch (25.4 mm) Spaces 5 per Shelf Carton

| Ampere Rating | 120 Vac        |                                      | 120/240 Vac                                   |  | 120/240 Vac    |  | 120/240 Vac                               |                |
|---------------|----------------|--------------------------------------|---|--|----------------|--|---|----------------|
|               | Catalog Number | Wire Size Range Cu/Al 65 °C or 75 °C | Ampere Rating Outer Two-Pole Independent Trip | Ampere Rating Center Two-Pole Independent Trip | Catalog Number | Ampere Rating Outer Two-Pole Common Trip | Ampere Rating Center Two-Pole Common Trip | Catalog Number |
| 15–15         | BR1515         | #14–4                                | 15  | 15   | BR415          | 15                                       | 15  | BRDC215215     |
| 15–20         | BR1520         | #14–4                                | 20  | 20   | BR420          | 30                                       | 30  | BRDC230230     |
| 20–15         | BR2015         | #14–4                                | 30  | 30   | BR430          | 30                                       | 40  | BRDC230240     |
| 20–20         | BR2020         | #14–4                                | 20  | 30   | BRD220230      | 30                                       | 50  | BRDC230250     |
| 30–30         | BR3030         | #14–4                                | 30  | 40   | BRD230240      | —  | —   | —              |
| 30–50         | BR3050         | #14–4                                | 30  | 50   | BRD230250      | —  | —   | —              |


#### CTL and Non-CTL Breakers

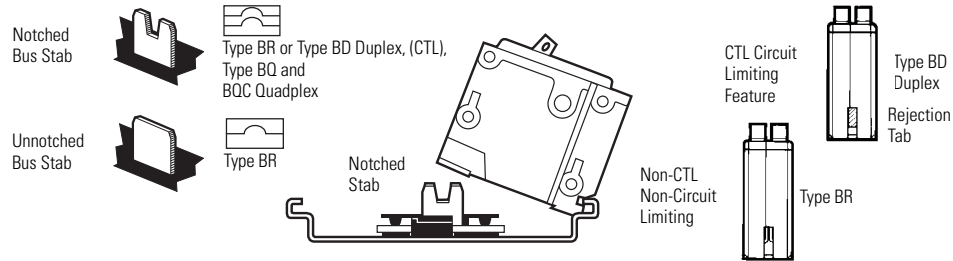




### Common Trip Quadplex Breakers

BQC2302115



#### Class CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—All Circuit Breakers Have Rejection Tab Feature

Type BQC Quadplex Common Trip Center Poles (UL Type BRD)



Two-Pole ① and Single-Pole ②  
Requires Two 1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

120 Vac      120/240 Vac      120 Vac


Type BQC Quadplex Common Trip Center and Outer Poles (UL Type BRD)



Two-Pole ①  
Requires Two 1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

120/240 Vac

BQC2302115



| Ampere Rating             |                                |                            | Catalog Number | Wire Size Range<br>Cu/Al 65 °C<br>or 75 °C | Ampere Rating                 |                                |                   |
|---------------------------|--------------------------------|----------------------------|----------------|--|-------------------------------|--------------------------------|-------------------|
| Outer Left<br>Single-Pole | Center Two-Pole<br>Common Trip | Outer Right<br>Single-Pole |                |  | Outer Two-Pole<br>Common Trip | Center Two-Pole<br>Common Trip | Catalog<br>Number |
| 15                        | 20                             | 15                         | BQC2202115     | #14–4                                      | 15                            | 15                             | BQC215215         |
| 15                        | 25                             | 15                         | BQC2252115     | #14–4                                      | 15                            | 20                             | BQC215220         |
| 15                        | 30                             | 15                         | BQC2302115     | #14–4                                      | 15                            | 30                             | BQC215230         |
| 15                        | 40                             | 15                         | BQC2402115     | #14–4                                      | 20                            | 15                             | BQC220215         |
| 15                        | 50                             | 15                         | BQC2502115     | #14–4                                      | 20                            | 20                             | BQC220220         |
| —                         | —                              | —                          | —              | #14–4                                      | 20                            | 30                             | BQC220230         |
| —                         | —                              | —                          | —              | #14–4                                      | 20                            | 40                             | BQC220240         |
| —                         | —                              | —                          | —              | #14–4                                      | 20                            | 50                             | BQC220250         |
| 20                        | 15                             | 20                         | BQC2152120     | #14–4                                      | 25                            | 25                             | BQC225225         |
| 20                        | 20                             | 20                         | BQC2202120     | #14–4                                      | 25                            | 30                             | BQC225230         |
| 20                        | 25                             | 20                         | BQC2252120     | #14–4                                      | 30                            | 15                             | BQC230215         |
| 20                        | 30                             | 20                         | BQC2302120     | #14–4                                      | 30                            | 30                             | BQC230230         |
| 20                        | 40                             | 20                         | BQC2402120     | #14–4                                      | 30                            | 40                             | BQC230240         |
| 20                        | 50                             | 20                         | BQC2502120     | #14–4                                      | 30                            | 50                             | BQC230250         |
| 30                        | 50                             | 20                         | BQC2502030     | #14–4                                      | 40                            | 30                             | BQC240230         |
| —                         | —                              | —                          | —              | #14–4                                      | 40                            | 40                             | BQC240240         |
| —                         | —                              | —                          | —              | #14–4                                      | 40                            | 50                             | BQC240250         |
| —                         | —                              | —                          | —              | #14–4                                      | 50                            | 20                             | BQC250220         |
| —                         | —                              | —                          | —              | #14–4                                      | 50                            | 50                             | BQC250250         |

#### Notes

- ① All Type BQC quadplex circuit breakers carry listing for HACR applications.
- ② All 15 and 20 ampere single poles are switch-duty rated.

# 1.2

## Loadcenters and Circuit Breakers


### Type BR Loadcenters and Circuit Breakers

1

#### Plug-On Circuit Breakers, Types BJ and BJH—10/22 kAIC, 120/240 Vac and 240 Vac

For Use in Single-Phase and Three-Phase Loadcenters—150 Amperes and Above

##### Type BJ



#### Types BJ and BJH Breakers, 1-Inch (25.4 mm) per Pole, 120/240 or 240 Vac, 10, 22 kAIC



**Two-Pole 120/240 Vac**  
Common Trip Requires Four  
1-Inch (25.4 mm) Spaces <sup>①</sup>  
10 per Shelf Carton



**Three-Pole 240 Vac**  
Common Trip Requires Six  
1-Inch (25.4 mm) Spaces <sup>②</sup>  
5 per Shelf Carton

| Ampere Rating | 10 kAIC        |                | Wire Size Range<br>Cu/Al 60 °C or 75 °C | 22 kAIC        |                |
|---------------|----------------|----------------|---|----------------|----------------|
|               | Catalog Number | Catalog Number |   | Catalog Number | Catalog Number |
| 125           | BJ2125         | BJH2125        | #2–300 kcmil                            | BJ3125         | BJH3125        |
| 150           | BJ2150         | BJH2150        | #2–300 kcmil                            | BJ3150         | BJH3150        |
| 175           | BJ2175         | BJH2175        | #2–300 kcmil                            | BJ3175         | BJH3175        |
| 200           | BJ2200         | BJH2200        | #2–300 kcmil                            | BJ3200         | BJH3200        |
| 225           | BJ2225         | BJH2225        | #2–300 kcmil                            | BJ3225         | BJH3225        |

#### Plug-On Special Application Circuit Breakers—10 kAIC, 120 Vac, 120/240 Vac and 240 Vac

##### BRWH215

Water Heater Breaker



##### BRSN220

Switching Neutral Breaker



#### Special Application Circuit Breakers, 1-Inch (25.4 mm) per Pole

##### Water Heater Breakers



**Two-Pole 120/240 Vac**  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces

With Isolated Line Terminals  
for Separately Metered  
Water Heaters

5 per Shelf Carton

10 kAIC

Ampere Rating Catalog Number

##### Switching Neutral Breakers



**Two-Pole 120 Vac**  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces

With Switching Neutral Pole  
for Gasoline Pump Applications

5 per Shelf Carton

10 kAIC

Ampere Rating Catalog Number

##### 240 V Breakers



**Two-Pole 240 Vac**  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces

Where Voltage to  
Ground is 240 Vac

5 per Shelf Carton

10 kAIC

Ampere Rating Catalog Number

##### Non-Automatic Molded Case Switches



**Two-Pole 240 Vac**  
Requires Two  
1-Inch (25.4 mm) Spaces

For Use as Disconnect Contains No  
Magnetic or Thermal Trip Properties

5 per Shelf Carton

5 kAIC

Ampere Rating Catalog Number

| Ampere Rating | Catalog Number | Ampere Rating | Catalog Number | Wire Size Range<br>Cu/Al<br>60 °C or<br>75 °C | Ampere Rating | Catalog Number | Ampere Rating | Catalog Number |
|---------------|----------------|---------------|----------------|---|---------------|----------------|---------------|----------------|
| 15            | BRWH215        | 15            | BRSN215        | #14–4   | 10            | BR210H         | —             | —              |
| 20            | BRWH220        | 20            | BRSN220        | #14–4   | 15            | BR215H         | —             | —              |
| 30            | BRWH230        | 25            | BRSN225        | #14–4   | 20            | BR220H         | —             | —              |
| —             | —              | 30            | BRSN230        | #14–4   | 25            | BR225H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 30            | BR230H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 35            | BR235H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 40            | BR240H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 45            | BR245H         | —             | —              |
| —             | —              | —             | —              | #14–4   | 50            | BR250H         | 50            | BR250NA        |
| —             | —              | —             | —              | #14–4   | 55            | BR255H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 60            | BR260H         | 60            | BR260NA        |
| —             | —              | —             | —              | #4–1/0  | 70            | BR270H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 80            | BR280H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 90            | BR290H         | —             | —              |
| —             | —              | —             | —              | #4–1/0  | 100           | BR2100H        | 100           | BR2100NA       |

##### Notes


① Breaker uses two 1-inch (25.4 mm) pole spaces on left side and two 1-inch (25.4 mm) pole spaces on right side of loadcenter.

② Breaker uses three 1-inch (25.4 mm) pole spaces on left side and three 1-inch (25.4 mm) pole spaces on right side of loadcenter.

If BJ or BJH breakers are used as a main or a back feed device, a hold-down kit is required. See **Page V1-T1-85**.

### Options and Accessories

THS1



BHLW2



BRQLW



MCBPL (Installed)



BHLW



BRLW2



### Field Installation Kits and Parts

| Description  | Ordering Quantity <sup>①</sup> | Catalog Number     |
|--|--------------------------------|--------------------|
| <b>New Products</b>  |                                |                    |
| Padlockable device for locking the handle of BR long body AF/GF breaker into the ON or OFF position  |                                | <b>BRLAFGFLOFF</b> |
| Padlockable device for locking the handle of BR short body BRCAF, BRAFGF, QBCAF, QBAFGF breakers into the ON or OFF position   |                                | <b>BRCAFLOFF</b>   |
| <b>Handle Ties <sup>②</sup></b>  |                                |                    |
| Handle tie bar for physically joining the handles of two adjacent single-pole Type BR circuit breakers (metal cylinder pin type)   | 10                             | <b>BHT</b>         |
| Handle tie bar for joining two independent outside poles of Types BQ and BQC Quadplex and outside poles of two Type BD duplex circuit breakers   | 10                             | <b>THOW</b>        |
| Handle tie bar for joining two adjacent outside poles of Types BQ and BQC Quadplex and outside poles of two Type BD duplex circuit breakers  | 10                             | <b>THS1</b>        |
| <b>Handle Lockoffs <sup>③④</sup></b>   |                                |                    |
| Padlockable device for locking the handle of single-, two- or three-pole Type BR Circuit Breakers and single-pole of a Type BD Duplex or one independent outside pole of a Type BQ or BQC Quadplex circuit breakers (escutcheon mounted) <sup>⑤</sup>        | 10                             | <b>BRLW</b>        |
| Padlockable device for locking the handle of a single-pole Type BR circuit breaker (handle mounted) <sup>⑥</sup>   | 10                             | <b>BRLW1</b>       |
| Padlockable device for locking the handle of a two- and three-pole Type BR circuit breaker (handle mounted) <sup>⑥</sup>   | 10                             | <b>BRLW2</b>       |
| Padlockable device for locking the handle of a single-pole Type BD Duplex, BQ or BQC Quadplex breaker (handle mounted) <sup>⑥</sup>  | 10                             | <b>BRDL1</b>       |
| Padlockable device for locking the handle of the two center poles and the two outer poles of a two-pole Types BQ and BQC quadplex circuit breakers (escutcheon mounted) <sup>⑤</sup>   | 10                             | <b>BRQLW</b>       |
| Padlockable device for locking the handle of main circuit breaker Types CC and CHH into the ON or OFF position (screw mounted) <sup>⑦</sup>  | 1                              | <b>CCPL</b>        |
| Padlockable device for locking the handle of main breaker Types BW and CSR into the ON or OFF position (escutcheon mounted) <sup>⑤</sup>   | 1                              | <b>MCBPL</b>       |
| Device used to secure handle in ON or OFF position for single-, two- or three-pole Type BR circuit breakers and single-pole of Type BD duplex and one independent outside pole of Type BQ or BQC Quadplex circuit breakers (escutcheon mounted) <sup>⑤</sup> | 10                             | <b>BHLW</b>        |
| Device used to secure handle in ON or OFF position for single-pole Type BR circuit breakers (handle mounted) <sup>⑥</sup>  | 10                             | <b>BHLW1</b>       |
| Device used to secure handle in ON or OFF position for two- and three-pole Type BR circuit breakers (handle mounted) <sup>⑥</sup>  | 10                             | <b>BHLW2</b>       |
| Device used to secure handle in ON or OFF position for single-pole Type GFTCB ground fault circuit breakers (handle mounted) <sup>⑥</sup>  | 10                             | <b>BHGW</b>        |
| Device used to secure handle in ON or OFF position for one independent outside pole of Types BQ and BQC Quadplex or single-pole Type BD duplex circuit breakers (handle mounted) <sup>⑥</sup>  | 10                             | <b>HLW1</b>        |

### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Handle ties: typically used to join two similar independent single-pole breakers to form a two-pole noncommon trip breaker.
- ③ Handle lockoffs: devices that use a padlock to lock the circuit breaker's handle in the ON or OFF position.
- ④ See table on **Page V1-T1-86** for handle position changeability chart.
- ⑤ Escutcheon mounted: device mounted semipermanently to the face of the circuit breaker and secured by the loadcenter deadfront.
- ⑥ Handle mounted: device mounted directly to the handle by the use of a set screw.
- ⑦ Screw mounted: device permanently mounted to the face of the circuit breaker by the use of a non-removable screw.
- ⑧ Hold-down kits: devices used to secure the circuit breaker to the loadcenter for back-feed main application. See NEC Article 408.36(D). Add "B" suffix to two-pole breaker for tapped hole for hold-down kit (ex. BR230B) for BR breakers below 60 A.

1

BREQS125



BRHDK125



BRML



#### Field Installation Kits and Parts, continued

| Description  | Ordering Quantity <sup>①</sup> | Catalog Number   |
|--|--------------------------------|------------------|
| <b>Hold-Down Kits <sup>②</sup></b>   |                                |                  |
| Hold-down retainer kit for three-pole Type BR circuit breakers in S3100 and 3100R loadcenters only                     | 1                              | <b>BRHDB</b>     |
| Hold-down screw kit for two- and three-pole Type BR circuit breakers in single-phase MLO loadcenters through 100–125 A | 1                              | <b>BREQS125</b>  |
| Hold-down screw kit for two- and three-pole Type BR circuit breakers in MLO loadcenters 150–225 A                      | 1                              | <b>BRHDK125</b>  |
| Hold-down screw kit for two-pole Types BJ and BJH circuit breakers in MLO loadcenters 125–225 A                        | 1                              | <b>BJHDS</b>     |
| Hold-down screw kit for three-pole Types BJ and BJH circuit breakers in MLO loadcenters 125–225 A                      | 1                              | <b>BJHDS3P</b>   |
| <b>Main Breaker Lug Kits</b>   |                                |                  |
| Types CC and CHH main breaker lug kit (2) 300 kcmil  | 1                              | <b>CCL300</b>    |
| Types BW/CSR main breaker lug kit (2) 300 kcmil  | 1                              | <b>MCBL300</b>   |
| <b>Mechanical Interlocks</b>   |                                |                  |
| Types BR for two-, three- and four-pole breakers   | 10                             | <b>BRML</b>      |
| <b>Padlock Brackets</b>  |                                |                  |
| BR padlock mounting bracket  | 10                             | <b>BRPLOFF</b>   |
| BR three-pole lock-off bracket   | 10                             | <b>BRPLOFF3P</b> |
| BJ two-pole lock-off bracket   | 10                             | <b>BJL2P</b>     |
| BJ three-pole lock-off bracket   | 10                             | <b>BJL3P</b>     |

#### Shunt Trips, Auxiliary and Alarm Contacts

| Description  | Catalog Number <sup>②</sup><br>Suffix Adder |
|--|---|
| <b>Shunt Trip for Types BW/CSR</b>                 |   |
| 12 Volts   | <b>SR12</b>                                 |
| 24 Volts   | <b>SR24</b>                                 |
| 120 Volts  | <b>SR01</b>                                 |
| <b>Shunt Trip for Types BR</b>                     |   |
| 120 Volts  | <b>ST</b>                                   |
| <b>Auxiliary Contact for Types BW/CSR</b>          |   |
| 1NO and 1NC  | <b>AL1</b>                                  |
| 2NO and 2NC  | <b>AL2</b>                                  |
| <b>Alarm Contacts for Types BW/CSR</b>             |   |
| Types BW/CSR                                       | <b>CR1</b>                                  |
| <b>Alarm Contacts for Type GFTCB (Single-Pole)</b> |   |
| Alarm contact for GFTCB (single-pole)              | <b>W1</b>                                   |
| 1NO and 1NC  | <b>W2</b>                                   |

#### Handle Position Changeability Chart


| Handle Lockoff and Lockdog Types | To Change Handle Position from ON to OFF, or OFF to ON You Must... |               |                             |
|----------------------------------|--|---------------|-----------------------------|
|                                  | Remove Padlock   | Remove Device | Remove Loadcenter Deadfront |
| Lockoff escutcheon mounted       | Remove   | —             | —                           |
| Lockoff handle mounted           | Remove   | Remove        | —                           |
| Lockoff screw mounted            | Remove   | —             | —                           |
| Lockdog escutcheon mounted       | N/A  | Remove        | Remove                      |
| Lockdog handle mounted           | N/A  | Remove        | —                           |

#### Notes


- ① Must be purchased in multiples of ordering quantities indicated.
- ② Add suffix indicated to end of breaker catalog number.

### Wiring Diagrams


**Single-Pole 120 V Load Application Sourced by 120/240 Vac**

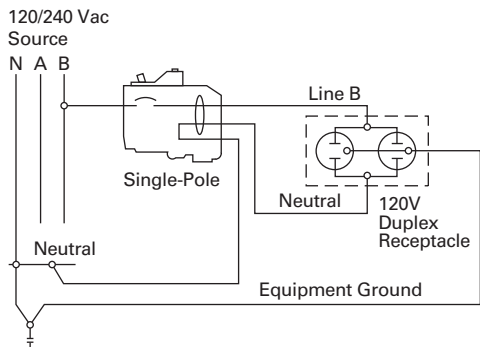


**Two-Pole Shared Neutral with Duplex Receptacle Application**

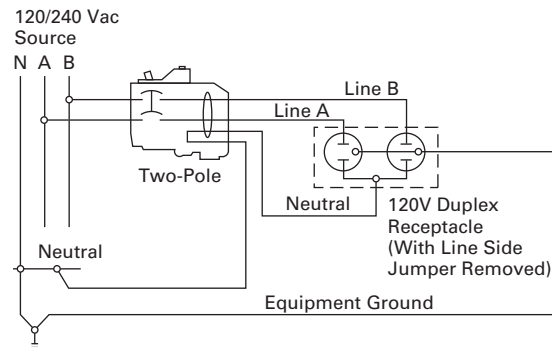


**Two-Pole Shared Neutral with Multi-Duplex Receptacle Application**

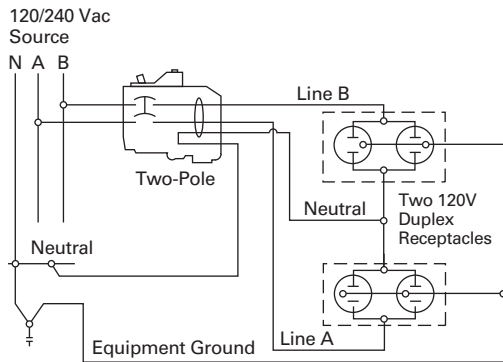


**Single-Pole 120 V Load Application Sourced by 120/240 Vac**

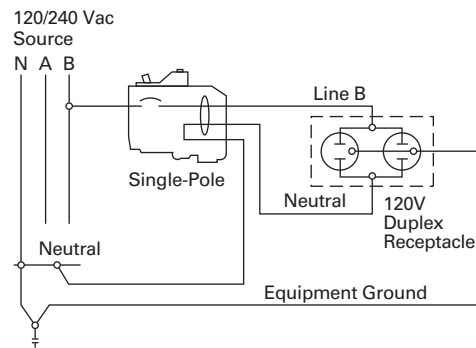

**Two-Pole 240 V Load Application Sourced by 120/240 Vac**

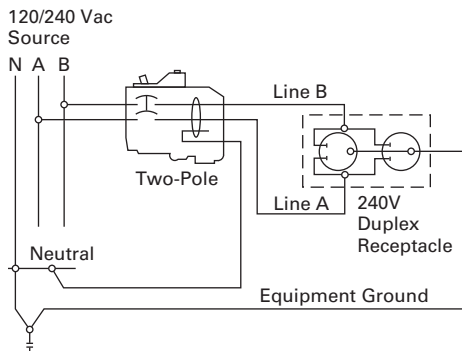

**Single-Pole 120 V Duplex Receptacle Application**

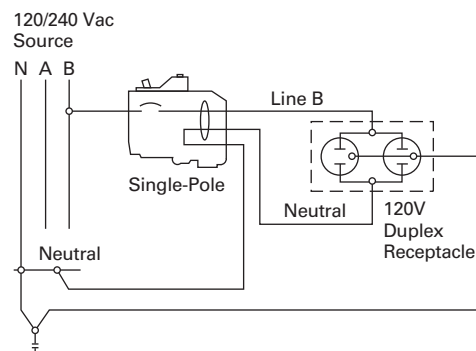


# 1.2


## Loadcenters and Circuit Breakers

### Type BR Loadcenters and Circuit Breakers


#### 1 Two-Pole 120 V Multi-Duplex Receptacle Application

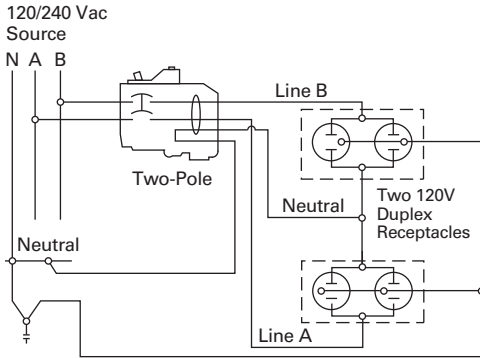

#### Two-Pole 120 V Duplex Receptacle Application

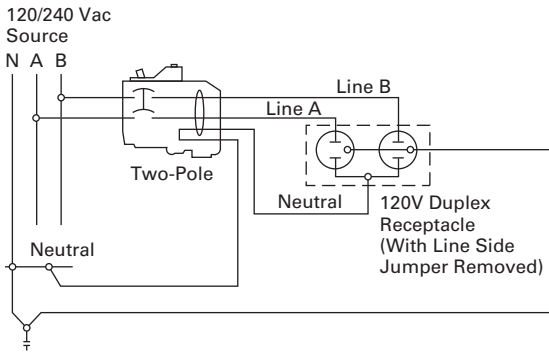

#### Two-Pole 240 V Duplex Receptacle Application

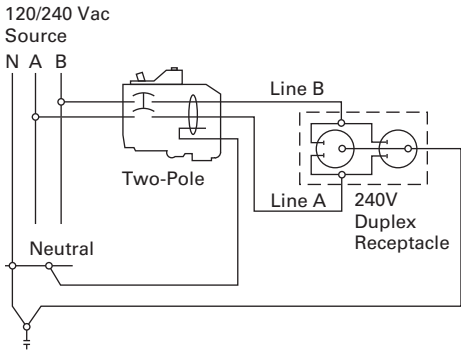

### OEM Loadcenters



### Contents

| <i>Description</i>                     | <i>Page</i> |
|--|-------------|
| Standards and Certifications . . . . . | V1-T1-90    |
| Product Selection . . . . .            | V1-T1-90    |

### Product Description

As a leader in the electrical distribution equipment business, Eaton has a unique product offering for equipment manufacturers, panel builders and virtually any OEM that has a need for power distribution within their equipment. The OEM interior offering consists of a wide variety of power distribution options utilizing components from Eaton's CH and BR loadcenter product lines. With high-volume, standardized products, OEMs can expect to receive high-quality products covering configurations meeting virtually any power distribution need.

Coupled with Eaton's expertise in circuit breaker design and manufacturing, OEM interiors provide solid power distribution and circuit protection in a compact, easy-to-install package. Interiors are offered from 2 to 42 circuits and from 70 to 225 A.

### Quality

Built in ISO 9002 certified manufacturing facilities, customers can be assured of the process quality in place for the manufacture of these products. Utilizing the latest in computer-controlled plating, painting, molding, stamping and welding processes, Eaton's customers have come to expect consistent high-quality from shipment to shipment.

### Two Products Offer Design Flexibility

As a manufacturer of two lines of loadcenters, Eaton is in a unique position to offer the broadest range of interiors in the market. Each line has its own unique characteristics that appeal to various segments of the market. OEM interiors are UL recognized components and are listed in either of the following UL files: E8741 or E52977.

The CH interiors feature 100% copper bus and use the CH 3/4-inch (19.1 mm) wide circuit breaker, which minimizes panel space. Recognized by contractors for its sturdy design, the CH interior will appeal to those customers seeking an industrial quality bolted busbar and the space saving of 3/4-inch (19.1 mm) per bus stab. With a typical 12 circuit CH interior, this space savings amounts to an inch and a half savings over its 1-inch (25.4 mm) counterparts. The stab rating of the CH interiors is 140 A maximum meaning that the handle rating of breakers mounted across from one another may not exceed 140 A.

The BR interiors are manufactured of formed, plated aluminum or copper, and use Eaton's Type BR 1-inch (25.4 mm) wide circuit breaker. This design affords customers the most circuit flexibility as many of these interiors allow the installation of standard single- and two-pole breakers as well as duplex (two poles in a 1-inch (25.4 mm) space) or quadplex (four poles in a 2-inch (50.8 mm) space) breakers.

The stab rating of the BR interiors is 200 A maximum, meaning that the handle rating of the breakers that are mounted across from one another may not exceed 200 A.

The interiors are designed for either horizontal (single-row breaker mounting), or vertical (double-row breaker mounting). To comply with National Electrical Code (NEC) requirements, if mounted horizontally, when the breaker is ON, the handle should be in the UP position. When mounted vertically, the handle toggles from left to right, so this is not a concern.

#### 1

### Standards and Certifications

#### Class CTL

National Electrical Code Paragraph 384.15 requires branch circuit panelboards to be provided with physical means to prevent the installation of more overcurrent devices than that number of which the enclosure was designed, rated and approved. Class CTL Duplex, Quadplex and twin breakers (identified by a catalog number prefix BD, BQ, BQC and CHT) are equipped with a UL listed rejection tab over the line terminal. All OEM interiors have appropriately notched stabs to accept these rejection tab Class CTL breakers.

Duplex, Quadplex and twin breakers manufactured without the rejection tab (identified by a catalog number prefix BR, BRD and CHT) are available for replacement purposes in older interiors.

#### Federal Specifications

All loadcenter enclosures meet Federal Specifications W-P-115b, Type 1, Class 2 requirements.

All 120/240 V breakers, both 1-inch (25.4 mm), 1/2-inch (12.7 mm) and 3/4-inch (19.1 mm) per pole meet the requirement of Federal Specifications W-C 375B/Gen Type 1.

#### Canadian Standards Association Listing

All single-pole and two-pole, 120/240 V breakers, both 1-inch (25.4 mm), 1/2-inch (12.7 mm) and 3/4-inch (19.1 mm) per pole, 225 A maximum, are listed as Certified by the Canadian Standards Association, Guide No. 69-11.19, Class 1432, File 18328.

#### Underwriters Laboratories Listing

All grounding bars manufactured comply with Underwriters Laboratories standards and are listed under Guide No. DHJR, File E31424, Volume W, Section 17.

All circuit breakers 10 A and larger comply with the Underwriters Laboratories "Standard for Branch Circuit and Service Circuit-Breakers" UL 489; Guide No. 60 10.2 File E31424, and "Requirements for Wire Connectors and Soldering Lugs," UL 486B, Guide No. 461 10-C File E7830.

All Eaton breakers where marked, are suitable for use with 60/75 °C rated wire, unless otherwise specified.

All devices comply with the 22 kAIC–10 kAIC UL series connected components File DKSY2 of the Recognized Components Index.

#### Lighting and Appliance Panelboards

Lighting and appliance branch circuit panelboards are defined in NEC (Article 408) as "One having more than 10 percent of its overcurrent devices rated 30 A or less for which neutral connections are provided." Article 408 also limits the number of overcurrent devices (branch circuit poles) to a maximum of 42 in any one cabinet. When the 42 poles are exceeded, two or more separate panels are required.

For more details and engineering drawings, see BR.31.02.S.E.



### Product Selection

#### Type CH Loadcenter Interior Assemblies—Copper Bus

| Ampere Rating   | Maximum Number 1-Inch (24.5 mm) Spaces |    | UL File Reference | Main Terminal Size (Per Phase) | Standard Package Quantity | Catalog Number |
|---|--|----|-------------------|--------------------------------|---------------------------|----------------|
|   | Single Poles                           |    |                   |                                |                           |                |
| <b>Single-Phase Single Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |    |                   |                                |                           |                |
| 70  | 2                                      | 2  | E8741             | (1) #8–#2 AWG Cu/Al            | 1                         | CH9MB270       |
| 125   | 2                                      | 2  | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH2L125INT     |
| <b>Single-Phase Double Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |    |                   |                                |                           |                |
| 125   | 4                                      | 4  | E8741             | (1) 2/0–#14 AWG Cu/Al          | 20                        | CH4L125INT     |
| 125   | 8                                      | 8  | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH8L125INT     |
| 125   | 12                                     | 12 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH12L125INT    |
| 125   | 16                                     | 16 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 20                        | CH16L125INT    |
| 200   | 12                                     | 12 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 20                        | CH12L200INT    |
| 200   | 16                                     | 16 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH16L200INT    |
| 225   | 24                                     | 24 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH24L225INT    |
| 225   | 32                                     | 32 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH32L225INT    |
| 225   | 42                                     | 42 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH42L225INT    |
| <b>Three-Phase Double Row Breaker Mounting—208Y/120 Vac, Four-Wire—240 Vac, Three-Wire—120/240 Vac, Four-Wire Delta</b> |  |    |                   |                                |                           |                |
| 125   | 12                                     | 12 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 10                        | CH12L3125INT   |
| 125   | 18                                     | 18 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 10                        | CH18L3125INT   |
| 125   | 24                                     | 24 | E8741             | (1) 2/0–#6 AWG Cu/Al           | 10                        | CH24L3125INT   |
| 225   | 24                                     | 24 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH24L3225INT   |
| 225   | 30                                     | 30 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH30L3225INT   |
| 225   | 42                                     | 42 | E8741             | (1) 300 kcmil–#4 AWG Cu/Al     | 10                        | CH42L3225INT   |



BR Loadcenter Interior Assembly



### Type BR Loadcenter Interior Assemblies—Aluminum Bus

| Ampere Rating   | Maximum Number 1-Inch (24.5 mm) Spaces | Single Poles | UL File Reference | Main Terminal Size (Per Phase)      | Standard Package Quantity | Catalog Number |
|---|--|--------------|-------------------|-------------------------------------|---------------------------|----------------|
| <b>Single-Phase Single Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |              |                   |                                     |                           |                |
| 70  | 2                                      | 4            | E8741             | (1) #8-#2 AWG Cu/Al                 | 20                        | 24INT70B       |
| 125   | 2                                      | 4            | E8741             | (1) 1/0-#14 AWG Cu<br>2/0-12 AWG Al | 20                        | 24INT125B      |
| 125   | 6                                      | 12           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 612INT125SRB   |
| <b>Single-Phase Double Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |              |                   |                                     |                           |                |
| 125   | 4                                      | 8            | E8741             | (1) 2/0-#14 AWG Cu/Al               | 20                        | 48INT125B      |
| 125   | 6                                      | 12           | E8741             | (1) 2/0-#14 AWG Cu/Al               | 20                        | 612INT125B     |
| 125   | 8                                      | 16           | E8741             | (1) 2/0-#14 AWG Cu/Al               | 20                        | 816INT125B     |
| 125   | 12                                     | 12           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 1212INT125B    |
| 125   | 12                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 1224INT125B    |
| 125   | 16                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 20                        | 1624INT125B    |
| 125   | 20                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 10                        | 2024INT125B    |
| 125   | 24                                     | 24           | E52977            | (1) 2/0-#14 AWG Cu/Al               | 10                        | 2424INT125B    |
| 200   | 8                                      | 16           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 20                        | 816INT200B     |
| 200   | 12                                     | 24           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 20                        | 1224INT200B    |
| 200   | 30                                     | 40           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 10                        | 3040INT200B    |
| 225   | 42                                     | 42           | E52977            | (1) 300 kcmil-#1 AWG Cu/Al          | 10                        | 4242INT225B    |
| <b>Three-Phase Double Row Breaker Mounting—208Y/120 Vac, Four-Wire—240 Vac, Three-Wire—120/240 Vac, Four-Wire Delta</b> |  |              |                   |                                     |                           |                |
| 125   | 12                                     | 24           | E52977            | (1) 2/0-#8 AWG Cu/Al                | 10                        | 1224INT3125B   |
| 150   | 18                                     | 36           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 1836INT3150B   |
| 150   | 24                                     | 42           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 2442INT3150B   |
| 200   | 30                                     | 42           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 3042INT3200B   |
| 225   | 42                                     | 42           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al          | 10                        | 4242INT3225B   |

### Type BR Loadcenter Interior Assemblies—Copper Bus

| Ampere Rating   | Maximum Number 1-Inch (24.5 mm) Spaces | Single Poles | UL File Reference | Main Terminal Size (Per Phase) | Standard Package Quantity | Catalog Number |
|---|--|--------------|-------------------|--------------------------------|---------------------------|----------------|
| <b>Single-Phase Double Row Breaker Mounting—120/240 Vac, Three-Wire</b>   |  |              |                   |                                |                           |                |
| 125   | 8                                      | 16           | E5297             | (1) 2/0-#14 AWG Cu/Al          | 20                        | 816INT125BC    |
| 125   | 12                                     | 12           | E5297             | (1) 2/0-#14 AWG Cu/Al          | 20                        | 1212INT125BC   |
| 200   | 12                                     | 24           | E5297             | (1) 300 kcmil-#1 AWG Cu/Al     | 20                        | 1224INT200BC   |
| <b>Three-Phase Double Row Breaker Mounting—208Y/120 Vac, Four-Wire—240 Vac, Three-Wire—120/240 Vac, Four-Wire Delta</b> |  |              |                   |                                |                           |                |
| 125   | 12                                     | 24           | E52977            | (1) 2/0-#8 AWG Cu/Al           | 10                        | 1224INT3125BC  |
| 200   | 12                                     | 24           | E52977            | (1) 300 kcmil-#2 AWG Cu/Al     | 10                        | 1224INT3200BC  |

# 1.3

## Loadcenters and Circuit Breakers

### Loadcenter Interiors/OEM Loadcenters

#### 1

#### Neutral Assemblies

| Ampere Rating | UL File Rating | Main Incoming Terminal Wire Size Range 60 °C or 75 °C | Number of Terminals |                             | Standard Package Quantity | Figure | Dimensions—Inches (mm) |                 | Catalog Number |
|---------------|----------------|---|---------------------|-----------------------------|---------------------------|--------|------------------------|-----------------|----------------|
|               |                |   | #14–4 AWG Cu/Al     | #6–1/0 AWG Cu #6–2/0 AWG Al |                           |        | Overall Length A       | Mounting B      |                |
| 125           | E52977         | #6–1/0 AWG Cu #6–2/0 AWG Al                           | 10                  | —                           | 20                        | 1      | 5.938 (150.83)         | 5.400 (137.16)  | 10NEU125B      |
| 125           | E52977         | #6–1/0 AWG Cu #6–2/0 AWG Al                           | 17                  | —                           | 20                        | 1      | 8.388 (213.06)         | 7.850 (199.40)  | 17NEU125B      |
| 125           | E52977         | #6–1/0 AWG Cu #6–2/0 AWG Al                           | 20                  | —                           | 20                        | 1      | 9.438 (239.73)         | 8.900 (226.06)  | 20NEU125B      |
| 225           | E52977         | #1–300 kcmil Cu/Al                                    | 24                  | 1                           | 20                        | 2      | 10.913 (277.19)        | 10.300 (261.62) | 24NEU225B      |
| 225           | E52977         | #1–300 kcmil Cu/Al                                    | 35                  | 1                           | 20                        | 2      | 15.813 (401.65)        | 15.200 (386.08) | 35NEU225B      |
| 125           | —              | —   | 4                   | 2                           | 1                         | 3      | 2.266 (57.56)          | 0.594 (15.09)   | BINA           |

Figure 1

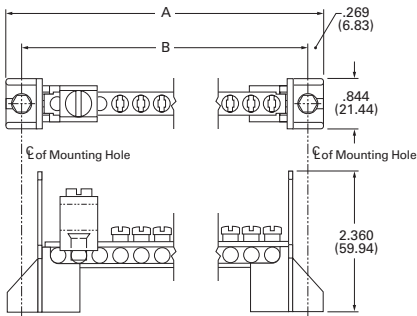


Figure 2


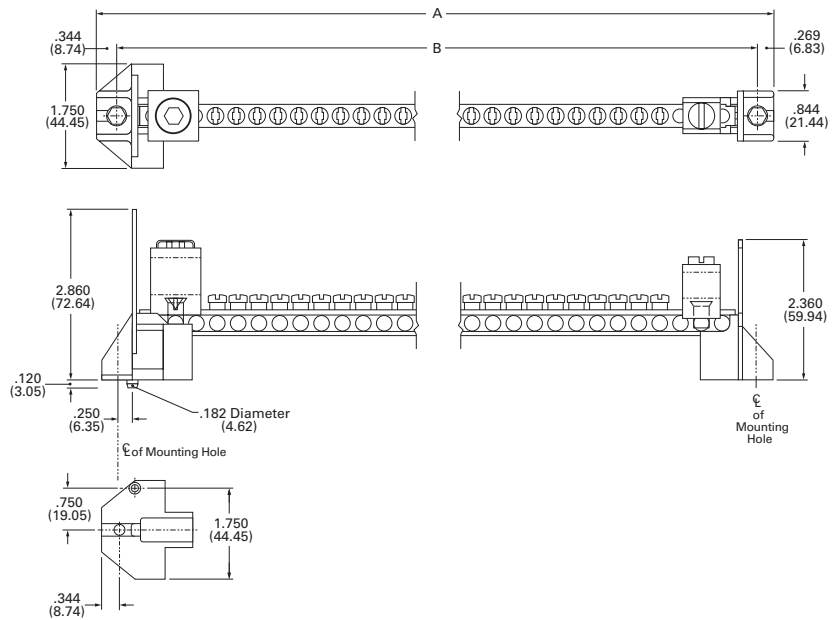


Figure 3



### Add-on Lugs for Neutral Assemblies

| Description                  | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Ordering<br>Quantity <sup>①</sup> | Catalog<br>Number |
|------------------------------|---|-----------------------------------|-------------------|
| Neutral/ground lug           | #2/0 maximum                            | 1                                 | NL20              |
| Add-on neutral or ground lug | #3/0 maximum                            | 1                                 | NL30              |
|                              | 300 kcmil maximum                       | 1                                 | NL300             |

GBK14



BRGBK39512



### Ground Bar Kits

| Description<br>(See Legend) | Length<br>Inches (mm) | Ordering<br>Quantity <sup>①</sup> | Catalog<br>Number        |
|-----------------------------|-----------------------|-----------------------------------|--------------------------|
| ●○○○○●○                     | 2.54 (64.5)           | 1                                 | GBK5 <sup>②</sup>        |
| ●○○○○●○■                    | 3.59 (91.2)           | 1                                 | GBK520 <sup>②</sup>      |
| ●○○○○●○○○○○                 | 4.29 (109.0)          | 1                                 | GBK10 <sup>②</sup>       |
| ●○○○○●○○○○○■                | 5.34 (135.6)          | 1                                 | GBK1020 <sup>②</sup>     |
| ○●○○○○○■●○○○○○              | 4.61 (117.1)          | 1                                 | GBK13 <sup>②</sup>       |
| ●○○○○●○○○○○○○○○             | 5.69 (144.5)          | 1                                 | GBK14 <sup>②</sup>       |
| ●○○○○●○○○○○○○○○■            | 6.74 (171.2)          | 1                                 | GBK1420 <sup>②</sup>     |
| ●○○○○●○○○○○○○○○○○○○         | 8.14 (206.8)          | 1                                 | GBK21 <sup>②</sup>       |
| ●○○○○●○○○○○○○○○○○○○■        | 9.19 (233.4)          | 1                                 | GBK2120 <sup>②</sup>     |
| ○■●●●○■○○○○○■●●●○■          | 5.78 (146.8)          | 1                                 | BRGBK39512 <sup>③④</sup> |

#### Ground Bar Legend

- (3) #14–10 Cu/Al or (1) #14–4 Cu/Al
- (1) #6–2/0 Cu/Al
- (1) #14–1/0 Cu/Al or (3) #14–10 Cu/Al
- (1) #14–6 Cu/Al or (2) #14–12 Cu/Al
- Mounting Hole

#### Notes

- ① Must be purchased in multiples of ordering quantities indicated.
- ② Distance between mounting holes is 1.75 inches (44.5 mm).
- ③ For single- and three-phase 400 and 600 A applications.
- ④ Distance between mounting holes is 2.34 inches (59.5 mm).

#### Enclosed Breakers



#### Contents

##### Description

|                         |          |
|-------------------------|----------|
| Product Selection ..... | V1-T1-95 |
| Dimensions .....        | V1-T1-95 |

##### Page

|          |
|----------|
| V1-T1-95 |
| V1-T1-95 |

#### Product Overview

Eaton enclosed breakers offer all the advantages of circuit breakers packed in an enclosure for 240 Vac applications and include a wide range of accessories.

#### Product Description

- 100–225 A, 240 Vac maximum
- NEMA 1 general purpose—surface or flush mounting
- NEMA 3R rainproof surface mounting

#### Standards and Certifications

- UL 489
- CSA 22.2
- NEMA 250



### Product Selection

#### Single-Phase and Three-Phase Circuit Breaker Enclosures—10/25 kAIC

##### ECC225R



#### Type ECC Circuit Breaker Enclosure—Order Type CC Circuit Breaker Separately

| Main Ampere Rating                             | Unit Enclosure Type | Mounting Type | Circuit Breaker Type             | Wire Size Range Cu/Al 60 °C or 75 °C | Catalog Number       |
|--|---------------------|---------------|----------------------------------|--------------------------------------|----------------------|
| <b>Single- and Three-Phase—240 Vac Maximum</b> |                     |               |                                  |                                      |                      |
| 100  | Indoor              | Surface       | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH100S</b> ①②③ |
| 150  | Indoor              | Surface       | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH150S</b> ①②③ |
| 200  | Indoor              | Surface       | CCVH factory installed (25 kAIC) | #2/0–300 kcmil                       | <b>ECCVH200S</b> ①②③ |
| 100  | Outdoor             | —             | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH100R</b> ①②④ |
| 150  | Outdoor             | —             | CCVH factory installed (25 kAIC) | #4–4/0                               | <b>ECCVH150R</b> ①②④ |
| 200  | Outdoor             | —             | CCVH factory installed (25 kAIC) | #2/0–300 kcmil                       | <b>ECCVH200R</b> ①②④ |
| 225  | Indoor              | Flush         | CC/CCV/CCH                       | ⑥                                    | <b>ECC225F</b> ②③⑥   |
| 225  | Indoor              | Surface       | CC/CCV/CCH                       | ⑥                                    | <b>ECC225S</b> ②③⑤   |
| 225  | Outdoor             | —             | CC/CCV/CCH                       | ⑥                                    | <b>ECC225R</b> ②③④⑤  |

##### CCV2200



#### Circuit Breaker 240 Vac for Use in Type ECC Enclosures

| Ampere Rating     | Wire Size Range Cu/Al 60 °C or 75 °C for Line Terminals | Type CCV and CC 10 kAIC Catalog Number | Type CCVH/CCH 25 kAIC Catalog Number |
|-------------------|---|--|--------------------------------------|
| <b>Two-Pole</b>   |   |  |                                      |
| 60                | #4–4/0  | <b>CCV2060</b>                         | <b>CCVH2060</b>                      |
| 70                |   | <b>CCV2070</b>                         | <b>CCVH2070</b>                      |
| 80                |   | <b>CCV2080</b>                         | <b>CCVH2080</b>                      |
| 90                |   | <b>CCV2090</b>                         | <b>CCVH2090</b>                      |
| 100               |   | <b>CCV2100</b>                         | <b>CCVH2100</b>                      |
| 125               |   | <b>CCV2125</b>                         | <b>CCVH2125</b>                      |
| 150               |   | <b>CCV2150</b>                         | <b>CCVH2150</b>                      |
| 175               | #2/0–300 kcmil  | <b>CCV2175</b>                         | <b>CCVH2175</b>                      |
| 200               |   | <b>CCV2200</b>                         | <b>CCVH2200</b>                      |
| 225               |   | <b>CCV2225</b>                         | <b>CCVH2225</b>                      |
| <b>Three-Pole</b> |   |  |                                      |
| 100               | #4–4/0  | <b>CC3100</b>                          | <b>CCH3100</b>                       |
| 125               |   | <b>CC3125</b>                          | <b>CCH3125</b>                       |
| 150               |   | <b>CC3150</b>                          | <b>CCH3150</b>                       |
| 175               | #2/0–300 kcmil  | <b>CC3175</b>                          | <b>CCH3175</b>                       |
| 200               |   | <b>CC3200</b>                          | <b>CCH3200</b>                       |
| 225               |   | <b>CC3225</b>                          | <b>CCH3225</b>                       |

#### Shunt Trips and Auxiliary Contacts

| Description Type         | Volts                 | Catalog Number Suffix Adder ⑦ |
|--------------------------|-----------------------|-------------------------------|
| <b>Shunt Trip</b>        |                       |                               |
| CC                       | 12 DC                 | <b>SR12</b>                   |
| CC                       | 24 DC                 | <b>SR24</b>                   |
| CC                       | 120 AC                | <b>SR01</b>                   |
| CC                       | 208 AC                | <b>SR08</b>                   |
| CC                       | 240 AC                | <b>SR02</b>                   |
| CCV                      | 48–127 AC/48–60 DC    | <b>SR01</b>                   |
| CCV                      | 9–24 AC/12–24 DC      | <b>SR02</b>                   |
| CCV                      | 208–380 AC/100–127 DC | <b>SR04</b>                   |
| <b>Auxiliary Contact</b> |                       |                               |
| CC 1NO and 1NC           | —                     | <b>AL1</b>                    |

#### Dimensions

Approximate Dimensions in Inches (mm)

##### ECC Unit Enclosures—NEMA Type 1 Indoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.25 (590.6) | 8.88 (225.4) | 4.50 (114.3) |

##### ECC Unit Enclosures—NEMA Type 3R Outdoor

| Height        | Width        | Depth        |
|---------------|--------------|--------------|
| 23.68 (601.7) | 9.31 (236.5) | 5.44 (138.1) |

#### Notes

- ① Factory installed CCVH breaker.
- ② Approved for service entrance.
- ③ One ground lug accepting (1) #14–#2 is factory installed. Also, there are pre-drilled holes to accept a GBK5 ground bar.
- ④ Rainproof panels are furnished with hub closures plates. For rainproof hubs, refer to **Page V1-T1-68**.
- ⑤ Order circuit breaker separately.
- ⑥ Wire size is determined by the circuit breaker installed in enclosure.
- ⑦ Add suffix indicated to end of breaker catalog number.



### Product Description

Eaton UL classified Replacement Circuit Breakers are available in both 3/4-inch Type CHQ and 1-inch Type CL, single- and two-pole configurations. These breakers are classified as direct replacements by Underwriters Laboratories. In addition to a UL listing, they also come with a 15-year warranty.

### Specified vs. UL Classified

Specified breakers are listed by the manufacturer of the panelboard for use in a particular panel. This doesn't mean that the panelboard manufacturer produced the specified breaker; it merely means that the panelboard manufacturer has tested the breaker in the panel. In fact, through the years, Eaton has manufactured thousands of breakers for other panelboard manufacturers.

UL classified breakers are produced by one manufacturer for use in place of the breakers specified on the panelboard. Like specified breakers, UL classified breakers have been tested in the panels for which they are approved.

### Contents

| <i>Description</i>          | <i>Page</i> |
|-----------------------------|-------------|
| Product Selection . . . . . | V1-T1-97    |
| Accessories . . . . .       | V1-T1-99    |
| Technical Data . . . . .    | V1-T1-99    |
| Wiring Diagrams . . . . .   | V1-T1-100   |

### Testing

Classified breakers are tested extensively in numerous General Electric®, Siemens®, Murray®, Thomas & Betts®, Square D®, and Crouse-Hinds® panels. The tests are conducted with witnesses from Underwriters Laboratories Inc. and involve short-circuit, temperature, and insertion/withdrawal applications. This level of testing ensures that the breakers meet identified standards and have been found suitable by UL for the specified purpose.

### Understanding Classified Breaker Terminology

#### Definitions

**Specified circuit breaker**—each manufacturer lists the brands of circuit breakers that can be used in their panelboards. Often, manufacturers will not list competitors as specified, even though they are suitable replacements.

**Classified circuit breaker**—a breaker that is considered suitable, by a qualified third-party organization, for use in another manufacturer's panelboard.

**Listed breaker**—the listing of a circuit breaker is by an independent third party. Eaton classified breakers are listed by UL.

**Labeled breaker**—a breaker with a label affixed by an independent third party.

**Product Selection**

**Type CHQ Replacement Breakers for Square D Type QO Loadcenters**

10 kAIC, 120 and 120/240 Vac

CHQ120 CHQ230



**Type CHQ Classified Breakers 3/4-Inch (19.1 mm) per Pole  
120 or 120/240 Vac, 10 kAIC**



**Single-Pole 120/240 Vac**  
Requires One  
3/4-Inch (19.1 mm) Space  
10 per Shelf Carton  
Catalog Number



**Two-Pole 120/240 Vac**  
Common Trip Requires Two  
3/4-Inch (19.1 mm) Spaces  
5 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range<br>Cu/Al 60 °C or 75 °C | Catalog Number | Catalog Number |
|---------------|---|----------------|----------------|
| 15            | (1) #14–8                               | CHQ115         | CHQ215         |
| 20            | (2) #14–10                              | CHQ120         | CHQ220         |
| 25            |   | CHQ125         | CHQ225         |
| 30            |   | CHQ130         | CHQ230         |
| 35            |   | CHQ135         | CHQ235         |
| 40            |   | CHQ140         | CHQ240         |
| 45            |   | CHQ145         | CHQ245         |
| 50            |   | CHQ150         | CHQ250         |
| 60            |   | —              | CHQ260         |

**Type CHQ Surge Arrester**

Catalog Number

CHQSA

# 1.5

## Loadcenters and Circuit Breakers

### Classified Circuit Breakers

1

#### Type CL Replacement Breakers for Square D HOMELINE, General Electric, Crouse-Hinds, Thomas & Betts, Murray and ITE®/Siemens Loadcenters

CL\_

##### Type CL Breakers, 1-Inch (25.4 mm) per Pole, 10 kAIC



Single-Pole 120/240 V  
Requires One  
1-Inch (25.4 mm) Space  
10 per Shelf Carton  
Catalog Number




Two-Pole 120/240 V  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Single-Pole 120/240 V<br>Requires One<br>1-Inch (25.4 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 V<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|---|
| 15            | #14-4                                   | CL115  | CL215   |
| 20            | #14-4                                   | CL120  | CL220   |
| 25            | #14-4                                   | CL125  | CL225   |
| 30            | #14-4                                   | CL130  | CL230   |
| 35            | #14-4                                   | CL135  | CL235   |
| 40            | #14-4                                   | CL140  | CL240   |
| 45            | #14-4                                   | CL145  | CL245   |
| 50            | #14-4                                   | CL150  | CL250   |

CL\_AF

##### Type CL Classified Arc and Ground Fault Breakers (5 Milliampere), 1-Inch (25.4 mm) per Pole, 10 kAIC



Single-Pole 120/240 V  
Requires One 1-Inch (25.4 mm) Space  
1 per Shelf Carton  
Catalog Number

| Ampere Rating                | Wire Size Range Cu/Al<br>60 °C or 75 °C | Single-Pole 120/240 V<br>Requires One 1-Inch (25.4 mm) Space<br>1 per Shelf Carton<br>Catalog Number |
|------------------------------|---|--|
| <b>Arc Fault Breakers</b>    |   |  |
| 15                           | #14-4                                   | CL115AF  |
| 20                           | #14-4                                   | CL115CAF   |
| 20                           | #14-4                                   | CL120AF  |
| 20                           | #14-4                                   | CL120CAF   |
| <b>Ground Fault Breakers</b> |   |  |
| 15                           | #14-4                                   | CL115GFT   |
| 20                           | #14-4                                   | CL120GFT   |
| 30                           | #14-4                                   | CL130GFT   |

CLR\_

##### Type CL Classified Latching Remote Control Smart Breakers™, 1-Inch (25.4 mm) per Pole, 10 kAIC



Single-Pole 120 V  
Requires One  
1-Inch (25.4 mm) Space  
10 per Shelf Carton  
Catalog Number



Two-Pole 120/240 V  
Common Trip Requires Two  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton  
Catalog Number

| Ampere Rating | Wire Size Range Cu/Al<br>60 °C or 75 °C | Single-Pole 120 V<br>Requires One<br>1-Inch (25.4 mm) Space<br>10 per Shelf Carton<br>Catalog Number | Two-Pole 120/240 V<br>Common Trip Requires Two<br>1-Inch (25.4 mm) Spaces<br>5 per Shelf Carton<br>Catalog Number |
|---------------|---|--|---|
| 15            | (2) #14-10                              | CLRP115  | CLRP215   |
| 20            | (2) #14-10                              | CLRP120  | CLRP220   |
| 25            | (1) #8-6                                | CLRP125  | CLRP225   |
| 30            | (1) #8-6                                | CLRP130  | CLRP230   |



## Accessories

### CHQ Breaker Accessories

| Description         | Catalog Number |
|---------------------|----------------|
| Breaker handle lock | CHLO           |

## Technical Data

### Arc Fault Application Notes

An arc fault circuit interrupter is a device intended to provide protection from the effects of arc faults by recognizing characteristics unique to arcing and by functioning to de-energize the circuit when the arc fault is detected. As of January 1, 2002, the National Electrical Code (NEC) requires all branch circuits that supply 125 V, single-phase, 15 and 20 A receptacle outlets installed in dwelling unit bedrooms shall be protected by an arc fault circuit interrupter(s). This includes ceiling lighting (recessed, ceiling fans, etc.) as well as smoke detectors and all other bedroom outlets. The 2005 NEC introduced the application of the Combination Type AFCI for bedroom circuits required as of January 1, 2008. The 2008 NEC expands this application to other living areas.

### Ground Fault Application Notes

Single-pole GFTCBs are designed for use in two-wire, 120 Vac circuits. Drawing on **Page V1-T1-100** shows a typical wiring configuration.

Two-pole GFTCBs are designed for use in three-wire, 120/240 Vac circuits, 120 Vac multiwire circuits employing common, neutral and two-wire, 240 Vac circuits obtained from a 120/240 Vac source.

Drawings on **Page V1-T1-100** illustrate typical wiring configurations for 120/240 Vac multiwire circuits.

Drawing on **Page V1-T1-100** depicts a 240 Vac, two-wire circuit. Note the “panel neutral” conductor connects to the neutral bar, even though the neutral is not included in the load circuit. This connection is necessary to supply a 120 Vac power source to the ground fault sensing circuit.


The figures are shown with a 120/240 Vac, single-phase, three-wire power source, but are also applicable to a 120/208 Vac, three-phase, four-wire power supply. For all figures, the electrical operation of the GFTCB is not affected by the equipment ground.

# 1.5


## Loadcenters and Circuit Breakers

### Classified Circuit Breakers


#### 1 Wiring Diagrams Single-Pole 120 V Load Application Sourced by 120/240 Vac

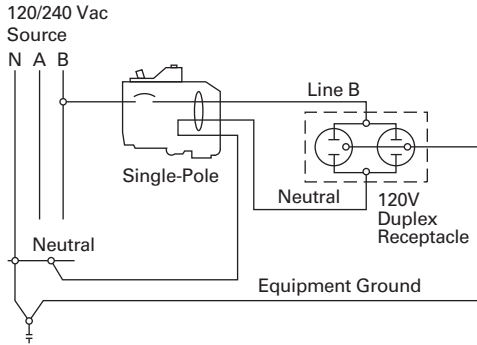


#### Two-Pole 240 V Load Application Sourced by 120/240 Vac

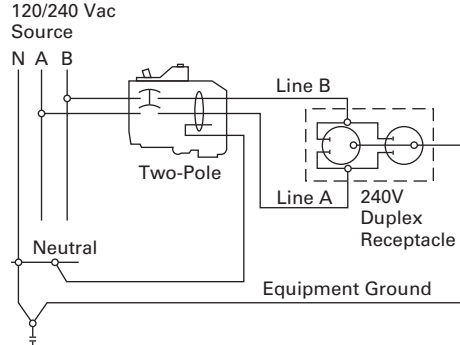


#### Two-Pole Shared Neutral with Multi-Duplex Receptacle Application

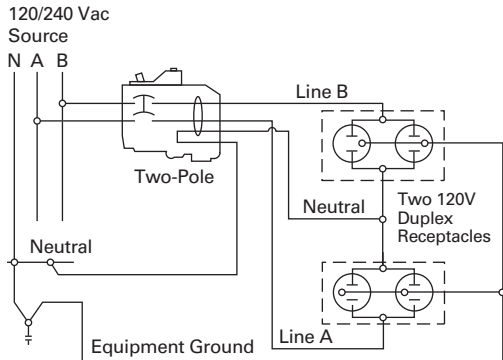


#### Two-Pole Shared Neutral with Duplex Receptacle Application

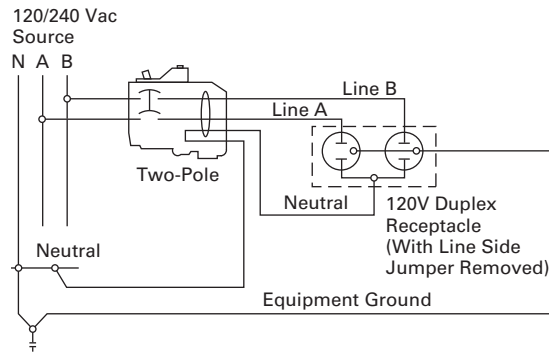


#### Single-Pole 120 V Duplex Receptacle Application

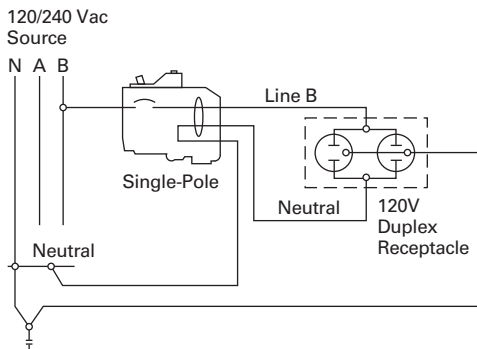

#### Two-Pole 120 V Duplex Receptacle Application

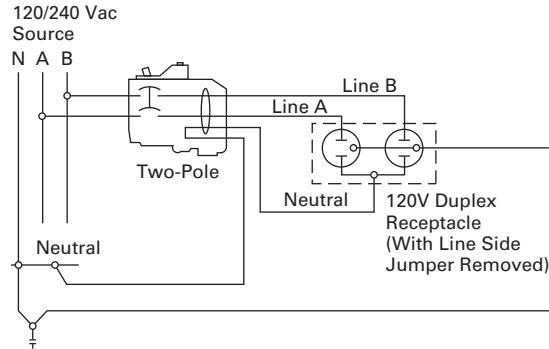

#### Two-Pole 120 V Multi-Duplex Receptacle Application

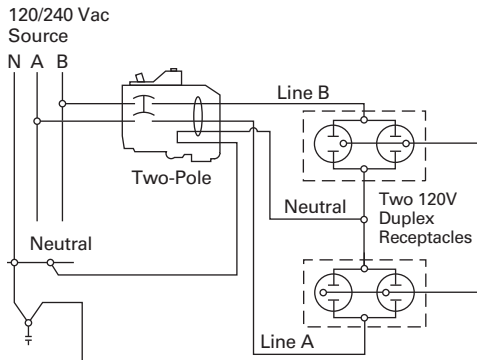

#### Two-Pole 240 V Duplex Receptacle Application

