

**NEW!**  
more on  
reverse

# Grounding Bridges in Zinc and Bronze

## Meets 2014 NEC Ground Requirements



Arlington's heavy-duty Grounding Bridges provide reliable intersystem bonding between power and communication grounding systems.

They have **four** termination points; *one more than required* by 250.94 of the 2014 NEC.

Available in zinc and bronze, our Grounding Bridges have the capacity to handle multiple hookups of communications systems; telephone, CATV or satellite dish.

- For indoor or outdoor use
- **Intersystem Bonding and Grounding Conductors:**  
All accommodate #14 to #4 copper or aluminum, solid or stranded
- **Grounding Electrode Conductor or Equipment Grounding Conductor:**  
GB5 and GBB5 accept #6 to #2.  
GBB50 accepts #6 to #1/0.  
GBB5250 accepts #6 to 250 MCM.  
All can be used with copper or aluminum, solid or stranded.
- Fast, simple installation
- Easy access for inspections
- For good looks use the textured, paintable plastic cover  
*Our zinc GB5NC – without a cover and screw...and bulk-packaged – costs less.*

Also available; zinc and bronze grounding bridge with adapter for use with PVC conduit.




1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
**www.aifittings.com**



# Grounding Bridges in Zinc and Bronze

## Intersystem Bonding Between Power & Communication Grounding Systems

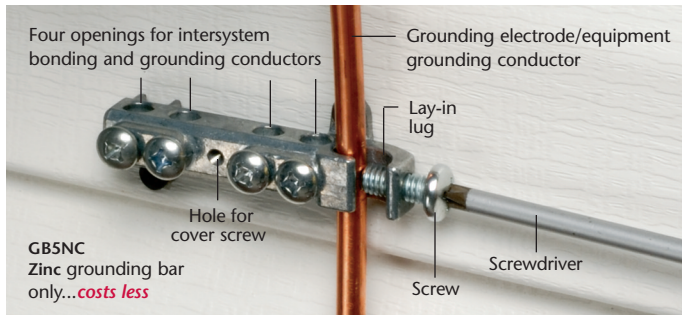


| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description             | Grounding Electrode or Equipment Grounding Conductor | Unit Pkg | Std Pkg |
|----------------|---------------------------|-------------------------|------------------------------------------------------|----------|---------|
| GB5            | 76095                     | Zinc, w/ cover          | #6 to #2 CU/AL                                       | 1        | 10      |
| GB5NC          | 76094                     | Zinc bar only, NO cover | #6 to #2 CU/AL                                       | 10       | 10      |
| GBB5           | 76096                     | Bronze, w/ cover        | #6 to #2 CU/AL                                       | 1        | 10      |
| GBB50          | 09725                     | Bronze (only), w/ cover | #6 to #1/0 CU/AL                                     | 1        | 10      |
| GBB5250        | 09756                     | Bronze (only), w/ cover | #6 to 250 MCM                                        | 1        | 10      |

All handle #14 to #4 intersystem bonding/grounding conductors

### GB5, GBB5, GBB50, GBB5250 Installation

- 1 Attach Grounding Bridge to surface (screws not provided).
- 2 Insert grounding electrode conductor or equipment grounding conductor into the lay-in lug. Tighten screw.
- 3 Attach textured, paintable cover with the screw provided.
- 4 Remove cover for intersystem utilities (CATV, phone, etc). Add bonding/grounding conductors. Reinstall cover.

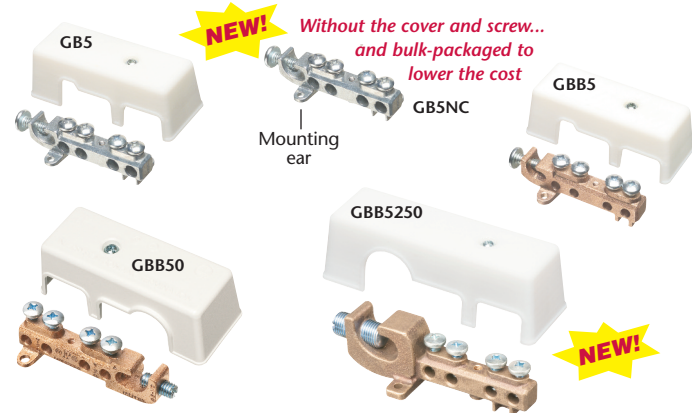


### Grounding Bridges with Conduit Adapter

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description               | Grounding Electrode or Equipment Grounding Conductor | Unit Pkg | Std Pkg |
|----------------|---------------------------|---------------------------|------------------------------------------------------|----------|---------|
| GB5P           | 09720                     | Zinc w/ conduit adapter   | #6 to #2 CU/AL                                       | 1        | 10      |
| GBB5P          | 09721                     | Bronze w/ conduit adapter | #6 to #2 CU/AL                                       | 1        | 10      |
| GBB50P         | 09726                     | Bronze w/ conduit adapter | #6 to #1/0 CU/AL                                     | 1        | 10      |

All handle #14 to #4 intersystem bonding/grounding conductors

### GB5P, GBB5P, GBB50P Installation

- 1 Mount conduit adapter plate (screws not provided). Leave hole in lower left open for #2. Install PVC conduit with PVC glue (not supplied). Install grounding electrode conductor.
- 2 Install grounding bridge onto grounding electrode/equipment grounding conductor using lay-in lug. Tighten screw. Using two screws (not provided), attach grounding bridge to structure through holes in adapter plate.
- 3 Install paintable cover. Remove cover for CATV, phone, etc. Add bonding/grounding conductors. Reinstall cover.

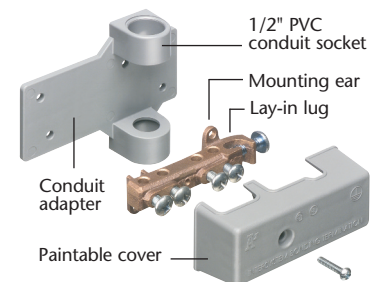

All Meet NEC 2014 Ground Requirements



**Arlington®**

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com



Patents pending  
GBs 0114/25M

Distributed by

View Video



NEW!  
more on  
reverse

# Grounding Bridges in Zinc and Bronze

## Meets 2014 NEC Ground Requirements



Grounding Electrode or  
Equipment Grounding Conductor

All Meet NEC 2014  
Ground Requirements

GBB5  
Bronze

Intersystem  
Bonding  
and  
Grounding  
Conductors

GB5 Zinc w/ cover  
GB5NC Zinc bar only...  
*costs less!*



View Video

Arlington's heavy-duty Grounding Bridges provide reliable intersystem bonding between power and communication grounding systems.

They have **four** termination points; *one more than required* by 250.94 of the 2014 NEC.

Available in zinc and bronze, our Grounding Bridges have the capacity to handle multiple hookups of communications systems; telephone, CATV or satellite dish.

- For indoor or outdoor use
- **Intersystem Bonding and Grounding Conductors:**  
All accommodate #14 to #4 copper or aluminum, solid or stranded
- **Grounding Electrode Conductor or Equipment Grounding Conductor:**  
GB5 and GBB5 accept #6 to #2.  
GBB50 accepts #6 to #1/0.  
GBB5250 accepts #6 to 250 MCM.  
All can be used with copper or aluminum, solid or stranded.
- Fast, simple installation
- Easy access for inspections
- For good looks use the textured, paintable plastic cover  
***Our zinc GB5NC – without a cover and screw...and bulk-packaged – costs less.***

Also available; zinc and bronze grounding bridge with adapter for use with PVC conduit.



GBB50  
(bronze only)

Accepts  
up to a #1/0  
grounding  
conductor



GBB5250  
(bronze only)


Accepts  
#6 to 250 MCM  
grounding  
conductor

**A<sup>®</sup>**  
**Arlington<sup>®</sup>**

1 Stauffer Industrial Park  
Scranton, PA 18517  
**800/233.4717**  
**Fax 570/562.0646**  
**www.aifittings.com**

# Grounding Bridges in Zinc and Bronze

## Intersystem Bonding Between Power & Communication Grounding Systems

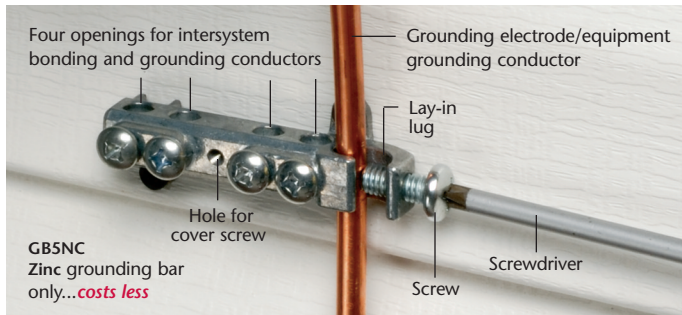


| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description             | Grounding Electrode or Equipment Grounding Conductor | Unit Pkg | Std Pkg |
|----------------|---------------------------|-------------------------|------------------------------------------------------|----------|---------|
| GB5            | 76095                     | Zinc, w/ cover          | #6 to #2 CU/AL                                       | 1        | 10      |
| GB5NC          | 76094                     | Zinc bar only, NO cover | #6 to #2 CU/AL                                       | 10       | 10      |
| GBB5           | 76096                     | Bronze, w/ cover        | #6 to #2 CU/AL                                       | 1        | 10      |
| GBB50          | 09725                     | Bronze (only), w/ cover | #6 to #1/0 CU/AL                                     | 1        | 10      |
| GBB5250        | 09756                     | Bronze (only), w/ cover | #6 to 250 MCM                                        | 1        | 10      |

All handle #14 to #4 intersystem bonding/grounding conductors

### GB5, GBB5, GBB50, GBB5250 Installation

- 1 Attach Grounding Bridge to surface (screws not provided).
- 2 Insert grounding electrode conductor or equipment grounding conductor into the lay-in lug. Tighten screw.
- 3 Attach textured, paintable cover with the screw provided.
- 4 Remove cover for intersystem utilities (CATV, phone, etc). Add bonding/grounding conductors. Reinstall cover.

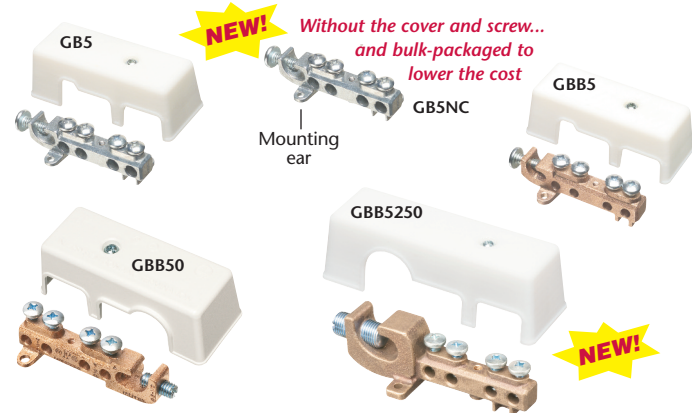


### Grounding Bridges with Conduit Adapter

| Catalog Number | UPC/DEI/NAED Mfg. #018997 | Description               | Grounding Electrode or Equipment Grounding Conductor | Unit Pkg | Std Pkg |
|----------------|---------------------------|---------------------------|------------------------------------------------------|----------|---------|
| GB5P           | 09720                     | Zinc w/ conduit adapter   | #6 to #2 CU/AL                                       | 1        | 10      |
| GBB5P          | 09721                     | Bronze w/ conduit adapter | #6 to #2 CU/AL                                       | 1        | 10      |
| GBB50P         | 09726                     | Bronze w/ conduit adapter | #6 to #1/0 CU/AL                                     | 1        | 10      |

All handle #14 to #4 intersystem bonding/grounding conductors

### GB5P, GBB5P, GBB50P Installation

- 1 Mount conduit adapter plate (screws not provided). Leave hole in lower left open for #2. Install PVC conduit with PVC glue (not supplied). Install grounding electrode conductor.
- 2 Install grounding bridge onto grounding electrode/equipment grounding conductor using lay-in lug. Tighten screw. Using two screws (not provided), attach grounding bridge to structure through holes in adapter plate.
- 3 Install paintable cover. Remove cover for CATV, phone, etc. Add bonding/grounding conductors. Reinstall cover.

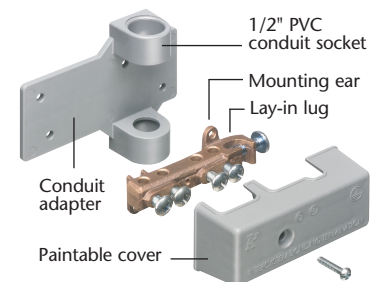

All Meet NEC 2014 Ground Requirements



**Arlington®**

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com



Patents pending  
GBs 0114/25M

Distributed by

View Video

