




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Lock Washer Silicon Bronze

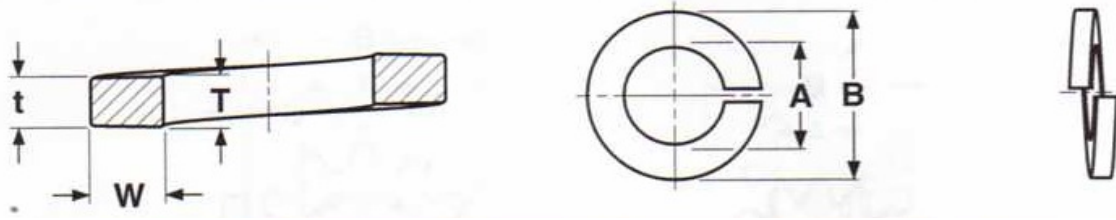

| Peco Catalog# | Washer Size | A Inside Diameter | | B Outside Diameter | (T+t)/2 Mean Section Thickness | W Section Width | BW Bearing Width | |
|--|-------------|----------------------|--------|-----------------------|-----------------------------------|--------------------|---------------------|-------|
| | | Min | Max | Max | Min | Min | Min | |
| See Section Five of Our Catalog | #4 | 0.1120 | 0.114 | 0.1200 | 0.209 | 0.025 | 0.040 | 0.028 |
| | #5 | 0.1250 | .1270 | 0.1330 | 0.236 | 0.031 | 0.047 | 0.033 |
| | #6 | 0.1380 | 0.141 | 0.1480 | 0.250 | 0.031 | 0.047 | 0.033 |
| | #8 | 0.1640 | 0.167 | 0.1740 | 0.293 | 0.040 | 0.055 | 0.038 |
| | #10 | 0.1900 | 0.193 | 0.2000 | 0.334 | 0.047 | 0.062 | 0.043 |
| | #12 | 0.2160 | 0.220 | 0.2270 | 0.377 | 0.056 | 0.070 | 0.049 |
| | 1/4 | 0.2500 | 0.252 | 0.2600 | 0.487 | 0.062 | 0.109 | 0.076 |
| | 5/16 | 0.3120 | 0.314 | 0.3220 | 0.583 | 0.078 | 0.125 | 0.087 |
| | 3/8 | 0.3750 | 0.377 | 0.3850 | 0.680 | 0.094 | 0.141 | 0.099 |
| | 7/16 | 0.4380 | 0.440 | 0.4500 | 0.776 | 0.109 | 0.156 | 0.109 |
| | 1/2 | 0.5000 | 0.502 | 0.5120 | 0.869 | 0.125 | 0.171 | 0.120 |
| | 9/16 | 0.5620 | 0.564 | 0.5740 | 0.965 | 0.141 | 0.188 | 0.132 |
| | 5/8 | 0.6250 | 0.628 | 0.6410 | 1.073 | 0.156 | 0.203 | 0.142 |
| | 3/4 | 0.7500 | 0.753 | 0.7660 | 1.265 | 0.188 | 0.234 | 0.164 |
| | 7/8 | 0.8750 | 0.878 | 0.8940 | 1.459 | 0.219 | 0.266 | 0.186 |
| | 1 | 1.0000 | 1.003 | 1.0240 | 1.656 | 0.250 | 0.297 | 0.208 |
| | 1-1/8 | 1.1250 | 1.129 | 1.1530 | 1.847 | 0.281 | 0.328 | 0.230 |
| | 1-1/4 | 1.2500 | 1.254 | 1.2800 | 2.036 | 0.312 | 0.359 | 0.251 |
| | 1-3/8 | 1.3750 | 1.379 | 1.4080 | 2.219 | 0.344 | 0.391 | 0.274 |
| | 1-1/2 | 1.5000 | 1.504 | 1.5340 | 2.419 | 0.375 | 0.422 | 0.295 |
| 2 | 2.0000 | 2.008 | 2.0390 | 2.936 | 0.422 | 0.427 | 0.299 | |

ASME B18.21.1

| | Regular | Silicon Bronze | 18-8 Stainless | 316 Stainless |
|-----------------|-------------------------------|---|------------------------|-------------------|
| Material | SAE 1055-1065 Carbon Steel | Copper Alloy 651 or 655 per ASTM B99 | SAE 302 -305 Stainless | SAE 316 Stainless |
| Hardness | Rockwell C38 - 46 | Mechanical: 90 HRB (min.) Twist: 45° | Rockwell C35 - 43 | Rockwell C35 - 43 |

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Lock Washer Silicon Bronze

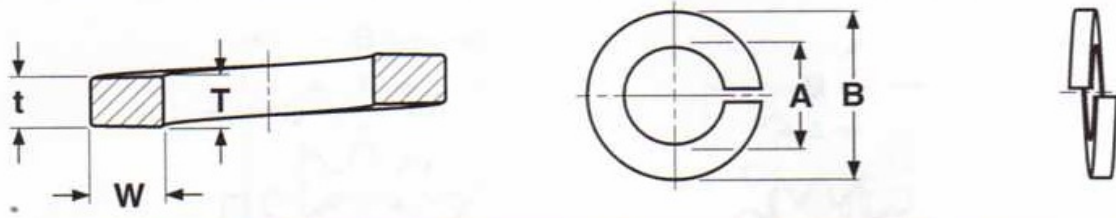

| Peco Catalog# | Washer Size | A Inside Diameter | | B Outside Diameter | (T+t)/2 Mean Section Thickness | W Section Width | BW Bearing Width | |
|--|-------------|----------------------|--------|-----------------------|-----------------------------------|--------------------|---------------------|-------|
| | | Min | Max | Max | Min | Min | Min | |
| See Section Five of Our Catalog | #4 | 0.1120 | 0.114 | 0.1200 | 0.209 | 0.025 | 0.040 | 0.028 |
| | #5 | 0.1250 | .1270 | 0.1330 | 0.236 | 0.031 | 0.047 | 0.033 |
| | #6 | 0.1380 | 0.141 | 0.1480 | 0.250 | 0.031 | 0.047 | 0.033 |
| | #8 | 0.1640 | 0.167 | 0.1740 | 0.293 | 0.040 | 0.055 | 0.038 |
| | #10 | 0.1900 | 0.193 | 0.2000 | 0.334 | 0.047 | 0.062 | 0.043 |
| | #12 | 0.2160 | 0.220 | 0.2270 | 0.377 | 0.056 | 0.070 | 0.049 |
| | 1/4 | 0.2500 | 0.252 | 0.2600 | 0.487 | 0.062 | 0.109 | 0.076 |
| | 5/16 | 0.3120 | 0.314 | 0.3220 | 0.583 | 0.078 | 0.125 | 0.087 |
| | 3/8 | 0.3750 | 0.377 | 0.3850 | 0.680 | 0.094 | 0.141 | 0.099 |
| | 7/16 | 0.4380 | 0.440 | 0.4500 | 0.776 | 0.109 | 0.156 | 0.109 |
| | 1/2 | 0.5000 | 0.502 | 0.5120 | 0.869 | 0.125 | 0.171 | 0.120 |
| | 9/16 | 0.5620 | 0.564 | 0.5740 | 0.965 | 0.141 | 0.188 | 0.132 |
| | 5/8 | 0.6250 | 0.628 | 0.6410 | 1.073 | 0.156 | 0.203 | 0.142 |
| | 3/4 | 0.7500 | 0.753 | 0.7660 | 1.265 | 0.188 | 0.234 | 0.164 |
| | 7/8 | 0.8750 | 0.878 | 0.8940 | 1.459 | 0.219 | 0.266 | 0.186 |
| | 1 | 1.0000 | 1.003 | 1.0240 | 1.656 | 0.250 | 0.297 | 0.208 |
| | 1-1/8 | 1.1250 | 1.129 | 1.1530 | 1.847 | 0.281 | 0.328 | 0.230 |
| | 1-1/4 | 1.2500 | 1.254 | 1.2800 | 2.036 | 0.312 | 0.359 | 0.251 |
| | 1-3/8 | 1.3750 | 1.379 | 1.4080 | 2.219 | 0.344 | 0.391 | 0.274 |
| | 1-1/2 | 1.5000 | 1.504 | 1.5340 | 2.419 | 0.375 | 0.422 | 0.295 |
| 2 | 2.0000 | 2.008 | 2.0390 | 2.936 | 0.422 | 0.427 | 0.299 | |

ASME B18.21.1

| | Regular | Silicon Bronze | 18-8 Stainless | 316 Stainless |
|-----------------|-------------------------------|---|------------------------|-------------------|
| Material | SAE 1055-1065 Carbon Steel | Copper Alloy 651 or 655 per ASTM B99 | SAE 302 -305 Stainless | SAE 316 Stainless |
| Hardness | Rockwell C38 - 46 | Mechanical: 90 HRB (min.) Twist: 45° | Rockwell C35 - 43 | Rockwell C35 - 43 |

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.