



CFL

we know light™

TCP® CFLs

A COMPREHENSIVE OFFERING

Pro SERIES

T3 & T2 Full Spring

Dimmable Full Spring

Dimmable Covered

TruDim®

TruStart™

InstaBright™ with
Armor Coat™

SpringLamp® SERIES

E26 and Mogul Bases

Reflectors

A-Lamps

Decoratives

Globes

T-Capsules

SpringLight™ SERIES

SpringLamps

Reflectors

Globes

A-Lamps

And

GU24 Base

PLs

Circlines

tcp.com





TCP[®] is a world leader in the innovation and manufacturing of CFLs. We insure our customers have the best selection of **QUALITY, PERFORMANCE** and **FUNCTION** in CFL technology.

CFLs can be used anywhere because applications are endless!

we know light.™

PRO Series

TCP's Pro Series offers a wide range of CFL options to meet all your lighting needs. Choose from our Ultra Compact T3 CFLs to our InstaBright™ Series (see below). CFLs reach FULL BRIGHTNESS in SECONDS!

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------|----------------------------|---------------------------------------|-------|-------------------|
| 48909 | Full SpringLamp, E26 | 40W | 9W | 600 |
| 48909C | Full SpringLamp, E12 | 40W | 9W | 600 |
| 48913 | Full SpringLamp, E26 | 60W | 13W | 925 |
| 48913C | Full SpringLamp, E12 | 60W | 13W | 925 |
| 48918 | Full SpringLamp, E26 | 75W | 18W | 1300 |
| 48923 | Full SpringLamp, E26 | 100W | 23W | 1650 |
| 48942 | Full SpringLamp, E26 | 150W | 42W | 2850 |
| 4T209 | T2 Full SpringLamp, E26 | 40W | 9W | 550 |
| 4T213 | T2 Full SpringLamp, E26 | 60W | 13W | 825 |
| 4T223 | T2 Full SpringLamp, E26 | 100W | 23W | 1625 |
| 2R3016DIM | Dimmable R30, E26 | 65W | 16W | 650 |
| 41314A | A-Lamp InstaBright G2, E26 | 60W | 14W | 700 |
| 4G2514A | G25 InstaBright G2, E26 | 60W | 14W | 800 |
| 4R2014A | R20 InstaBright G2, E26 | 50W | 14W | 410 |
| 4R3014A | R30 InstaBright G2, E26 | 65W | 14W | 650 |



GREAT FEATURES & BENEFITS


- Long life: 10,000 to 12,000 hours
- Excellent lumen maintenance over the life of the product
- Compact size; fits more applications
- InstaBright with Armor Coat lamps' durable coating keeps glass and bulb content contained
- RoHS compliant

InstaBright™ with Armor Coat™

Instantly light a room with strong, warm light (2700K) with TCP's InstaBright lamps. Ideal for use in homes, hotels, offices, retail spaces and residential communities. Try these lamps in ceiling fixtures, wall sconces, closets and vanity strips.

Starts up 2 times faster than average covered CFLs.

Color Temperatures



Visit www.tpci.com for more information!



PRO Series

TruDim®

Technology by TCP

TruDim® CFLs combine powerful performance with intelligent design.

Full dimming performance all the way down to 2% with no annoying flicker.

THE ONLY FULLY DIMMABLE CFL!



| Dimmable, 2700K | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------------|----------------------|---------------------------------|-------|----------------|
| 50114 | Full Spring, E26 | 60W | 14W | 850 |
| 50123 | Full Spring, E26 | 100W | 23W | 1500 |
| 50123SP | Full Spring, GU Base | 100W | 23W | 1500 |
| 4R2014TD | R20, E26 | 50W | 14W | 410 |
| 4R3016TD | R30, E26 | 65W | 16W | 650 |
| 4R4016TD | R40, E26 | 75W | 16W | 750 |
| 4R4020TD | R40, E26 | 85W | 20W | 950 |
| 41315TD | A-lamp, E26 | 60W | 15W | 750 |
| 41316TD | A-lamp, E26 | 60W | 16W | 850 |
| 4G2515TD | G25 Globe, E26 | 60W | 15W | 800 |



GREAT FEATURES & BENEFITS

- Uniform, smooth dimming performance from 100% to 2%
- Long life: 12,000 hours
- Optimized electronics maximizes lamp life
- Low dim level starting capability
- Digital technology for faster run-up time

Designed specifically for use with standard, non-illuminated, 60 watt incandescent slide or rotary dimmer. Also, it works well with the new CFL and LED dimmers.

Consult TCP Technical Support or a dimmer manufacturer for compatibility with other dimmer types.

Dimming Curve

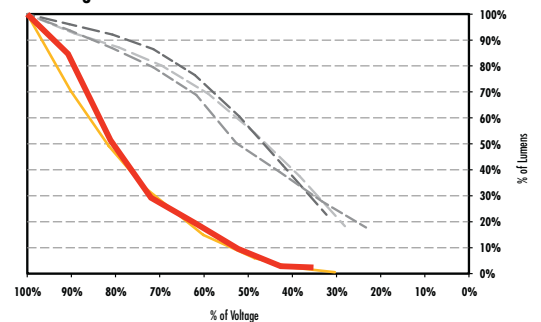



Perfect for any general lighting applications, such as table lamps, wall sconces, recessed cans, chandeliers and ceiling fixtures.

PRO Series




Our TruStart™ CFLs have a long life of 20,000 hours, while achieving full brightness in record time.

FULL BRIGHTNESS IN A SNAP!



TruStart 58023 Run-up Analysis

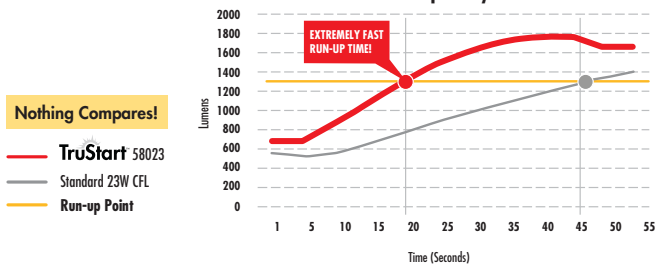

| | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|------------------------|---------------------------------|-------|----------------|
| 2700K | | | |
| 58009 Full Spring, E26 | 40W | 9W | 600 |
| 58014 Full Spring, E26 | 60W | 14W | 900 |
| 58018 Full Spring, E26 | 75W | 18W | 1200 |
| 58023 Full Spring, E26 | 100W | 23W | 1600 |
| 58027 Full Spring, E26 | 100W | 27W | 1850 |
| 58032 Full Spring, E26 | 125W | 32W | 2100 |
| 58042 Full Spring, E26 | 150W | 42W | 2800 |

GREAT FEATURES & BENEFITS

- Programmed start for longer life 20,000 hours
- TCP exclusive and advanced IC chip control
- 15 - 20 seconds run-up time
- 100% improvement over standard 23W CFL



TCP's SpringLamps® provide more lighting surface area in a compact space for better light output.

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS | |
|--------------------------|-----------|---------------------------------------|--------------------|-------------------|---------------------|
| HIGH POWER FACTOR | 18209 | SpringLamp, E26 | 40W | 9W | 500 |
| | 18214 | Mini-SpringLamp, E26 | 60W | 14W | 800 |
| | 18220 | SpringLamp, E26 | 75W | 20W | 1100 |
| | 18223 | SpringLamp, E26 | 90W | 23W | 1400 |
| | 18227 | SpringLamp, E26 | 100W | 27W | 1600 |
| 3-WAY | 19027 | 3-Way SpringLamp, E26 | 25W 60W 100W | 11W 15W 27W | 400 800 1850 |
| | 19032 | 3-Way SpringLamp w/LED, E26 | 40W 75W 150W | 14W 19W 32W | 750 1400 2150 |
| HIGH WATTAGE | 28927277 | SpringLamp, E26, 277V | 100W | 27W | 1850 |
| | 28932277 | SpringLamp, E26, 277V | 125W | 32W | 2200 |
| | 28942277 | SpringLamp, E26, 277V | 150W | 42W | 2800 |
| | 28968277 | SpringLamp, E26, 277V | 300W | 68W | 4200 |
| | 28927H277 | SpringLamp, Mogul Base, 277V | 100W | 27W | 1850 |
| | 28942H277 | SpringLamp, Mogul Base, 277V | 150W | 42W | 2800 |
| | 28968H277 | SpringLamp, Mogul Base, 277V | 300W | 68W | 4200 |
| | 28968 | SpringLamp, E26 | 300W | 68W | 4200 |
| | 28942H | SpringLamp, Mogul Base | 150W | 42W | 2800 |
| | 28968H | SpringLamp, Mogul Base | 300W | 68W | 4200 |
| FLOODLIGHT | 1R2004 | R20 Reflector, Floodlight, E26 | 15W | 4W | 180 |
| | 1R2009 | R20 Reflector, Floodlight, E26 | 25W | 9W | 400 |
| | 1R2014 | R20 Reflector, Floodlight, E26 | 50W | 14W | 500 |
| | 2R3014 | R30 Reflector, Floodlight, E26 | 65W | 14W | 650 |
| | 2R3016 | R30 Reflector, Floodlight, E26 | 75W | 16W | 750 |
| | 1R4016 | R40 Reflector, Floodlight, E26 | 75W | 16W | 750 |
| | 1R4019 | R40 Reflector, Floodlight, E26 | 85W | 19W | 950 |
| | 1R4023 | R40 Reflector, Floodlight, E26 | 120W | 23W | 1150 |
| PAR LAMP | 1P3016 | PAR30 Reflector, Floodlight, E26 | 75W | 16W | 750 |
| | 1P3816 | PAR38 Reflector, Floodlight, E26 | 75W | 16W | 850 |
| | 2P3819 | PAR38 Reflector, Floodlight, E26 | 85W | 19W | 1000 |
| | 2P3823 | PAR38 Reflector, Floodlight, E26 | 90W | 23W | 1200 |

GREAT FEATURES & BENEFITS

- Compact size fits more applications
- Long life: 8,000 to 10,000 hours
- Excellent lumen maintenance over the life of the product
- RoHS compliant

SpringLamp® Series

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS | |
|------------|----------------|---------------------------------------|-------|-------------------|------|
| FLAT PAR | PF2014 | PAR20 Flat Reflector, Floodlight, E26 | 30W | 14W | 350 |
| | PF3016 | PAR30 Flat Reflector, Floodlight, E26 | 65W | 16W | 750 |
| | PF3823 | PAR38 Flat Reflector, Floodlight, E26 | 75W | 23W | 1000 |
| A-LAMP | 11304 | A-Lamp, E26 | 25W | 4W | 225 |
| | 11309 | A-Lamp, E26 | 40W | 9W | 475 |
| | 21314 | A-Lamp, E26 | 60W | 14W | 800 |
| | 11316 | A-Lamp, E26 | 60W | 16W | 900 |
| | 11319 | A-Lamp, E26 | 60W | 19W | 1100 |
| | 11323 | A-Lamp, E26 | 100W | 23W | 1200 |
| DECORATIVE | 10704 | Torpedo, E26 | 15W | 4W | 195 |
| | 10709 | Torpedo, E26 | 40W | 9W | 425 |
| | 10709C | Torpedo, E12 | 40W | 9W | 425 |
| | 10714 | Torpedo, E26 | 60W | 14W | 720 |
| GLOBE | 1G2004 | G20 Globe, E26 | 25W | 4W | 250 |
| | 1G2504 | G25 Globe, E26 | 25W | 4W | 250 |
| | 1G2504C | G25 Globe, Candelabra, E12 | 40W | 4W | 250 |
| | 1G2509 | G25 Globe, E26 | 40W | 9W | 520 |
| | 1G2514 | G25 Globe, E26 | 60W | 14W | 800 |
| | 1G3009 | G30 Globe, E26 | 40W | 9W | 520 |
| | 1G3014 | G30 Globe, E26 | 60W | 14W | 800 |
| | 1G3019 | G30 Globe, E26 | 75W | 19W | 1100 |
| | 1G3023 | G30 Globe, E26 | 100W | 23W | 1200 |
| | 1G4014 | G40 Globe, E26 | 60W | 14W | 800 |
| 1G4019 | G40 Globe, E26 | 75W | 19W | 1100 | |
| 1G4023 | G40 Globe, E26 | 100W | 23W | 1300 | |
| T-CAPSULE | 1T2014 | T20 Capsule, E26 | 60W | 14W | 800 |
| | 1T2414 | T24 Capsule, E26 | 60W | 14W | 900 |
| | 1T2419 | T24 Capsule, E26 | 75W | 19W | 1100 |
| | 1T2423 | T24 Capsule, E26 | 100W | 23W | 1200 |



Color Temperatures

2700K 3000K 3500K 4100K 5000K 6500K



Visit www.tpci.com for more information!

SpringLight™ Series

SpringLight™ includes half SpringLamps® and floods. These high quality lamps are reasonably priced and designed to fit your budget.



801009 801014 801019 801023 801027



802014 803014 804023 805023




806009 806014 807009 807014

| TCP CFL - 2700K | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------------|----------------------------------|---------------------------------------|-------|-------------------|
| 801009 | SpringLamp, E26 | 40W | 9W | 550 |
| 801014 | SpringLamp, E26 | 60W | 14W | 900 |
| 801019 | SpringLamp, E26 | 75W | 19W | 1225 |
| 801023 | SpringLamp, E26 | 100W | 23W | 1600 |
| 801027 | SpringLamp, E26 | 100W | 27W | 1750 |
| 801032 | SpringLamp, E26 | 125W | 32W | 2100 |
| 801042 | SpringLamp, E26 | 150W | 42W | 2750 |
| 802014 | R20 Flood SpringLamp, E26 | 50W | 14W | 495 |
| 803014 | R30 Flood SpringLamp, E26 | 65W | 14W | 650 |
| 8030142 | R30 Flood SpringLamp, E26, 2PK | 65W | 14W | 650 |
| 804023 | R40 Flood SpringLamp, E26 | 120W | 23W | 1150 |
| 805023 | PAR38 Flood SpringLamp, E26 | 90W | 23W | 1200 |
| 8050232 | PAR38 Flood SpringLamp, E26, 2PK | 90W | 23W | 1200 |
| 8060092 | G25 Globe SpringLamp, E26, 2PK | 40W | 9W | 525 |
| 8060142 | G25 Globe SpringLamp, E26, 2PK | 60W | 14W | 800 |
| 8070092 | A-Lamp SpringLamp, E26, 2PK | 40W | 9W | 450 |
| 8070142 | A-Lamp SpringLamp, E26, 2PK | 60W | 14W | 800 |
| 8011412 | SpringLamp, E26, 12PK | 60W | 14W | 900 |
| 8012312 | SpringLamp, E26, 12PK | 100W | 23W | 1600 |
| 801R30146 | R30 Flood SpringLamp, E26, 6PK | 65W | 14W | 645 |

GREAT FEATURES & BENEFITS

- Average rated life is 10,000 hours
- Less frequency of replacement, making them ideal for hard to reach places
- Saves up to 75% in energy costs compared to similar light output incandescent lamps
- Quick run-up time

Color Temperatures



SpringLight SpringLamps are available in a variety of pack sizes from 1-packs to contractor packs and pallet programs.

Visit www.tpi.com for more information!



GU24 Base

ONE BASE FITS ALL!

With just one base and a lot of options, lamp replacement couldn't be easier.

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------|-----------------------------|---------------------------------------|-------|-------------------|
| 33213SSP | GU24 Low Profile SpringLamp | 60W | 13W | 900 |
| 33109SP | GU24 SpringLamp | 45W | 9W | 550 |
| 33113SP | GU24 SpringLamp | 60W | 13W | 900 |
| 33118SP | GU24 SpringLamp | 75W | 18W | 1200 |
| 33123SP | GU24 SpringLamp | 100W | 23W | 1600 |
| 33127SP | GU24 SpringLamp | 100W | 27W | 1850 |
| 33132SP | GU24 SpringLamp | 120W | 32W | 2200 |
| 33142SP | GU24 SpringLamp | 150W | 42W | 2800 |
| 33109Q | GU24 PL Lamp, Quad Tube | 45W | 9W | 500 |
| 33113Q | GU24 PL Lamp, Quad Tube | 60W | 13W | 750 |
| 33118Q | GU24 PL Lamp, Quad Tube | 75W | 18W | 1150 |
| 33126Q | GU24 PL Lamp, Quad Tube | 100W | 26W | 1700 |
| 33109A19 | GU24 A-Lamp | 40W | 9W | 450 |
| 33114A19 | GU24 A-Lamp | 60W | 14W | 800 |
| 33109G25 | GU24 G25 Globe | 40W | 9W | 450 |
| 33114G25 | GU24 G25 Globe | 60W | 14W | 800 |
| 33114G30 | GU24 G30 Globe | 60W | 14W | 800 |
| 33114R20 | GU24 R20 Floodlight | 50W | 14W | 500 |
| 33116R30 | GU24 R30 Floodlight | 75W | 16W | 700 |
| 33114PF20 | GU24 PAR Flat 20 Floodlight | 65W | 14W | 350 |
| 33116PF30 | GU24 PAR Flat 30 Floodlight | 65W | 16W | 750 |



33213SSP
Low Profile Lamp

33118SP

33132SP

32013Q

33126Q



33109A19



33114A19



33109G25



33114G25



33114R20



33116R30



33114PF20




33116PF30



GREAT FEATURES & BENEFITS

- Long life: 8,000 to 10,000 hours
- Perfect for hard-to-reach places
- Low maintenance and labor costs for lamp replacements
- Use indoors or outdoors with many different applications
- No lead glass for better lumen maintenance

Color Temperatures




Visit www.tpci.com for more information!



PLs

PL lamps can be used in fixtures, recessed cans and wall sconces. Available in twin tube, quad tube and triple tube.

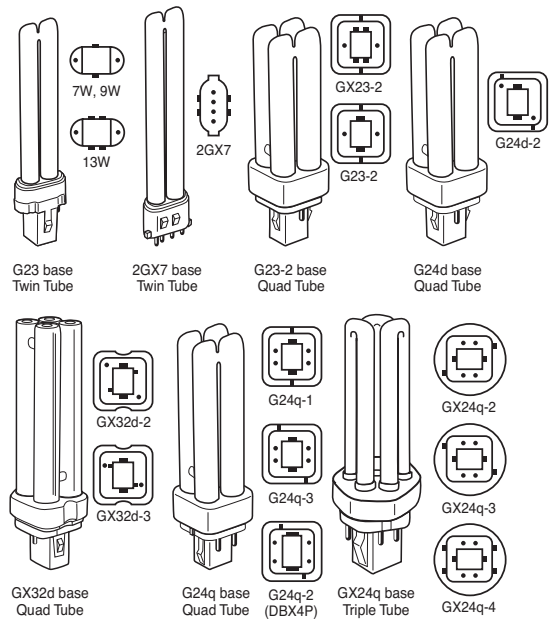

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS | BASE TYPE |
|-----------|-------------------------------|---------------------------------------|-------|-------------------|--------------|
| 32005 | 2-Pin Twin Tube | 25W | 5W | 250 | G23 |
| 32007 | 2-Pin Twin Tube | 25W | 7W | 410 | G23 |
| 32009 | 2-Pin Twin Tube | 45W | 9W | 590 | G23 |
| 32013 | 2-Pin Twin Tube | 60W | 13W | 800 | GX23 |
| 32413IST | 2-Pin Twin Tube Instant Start | 60W | 13W | 800 | GX23 |
| 324132GX7 | 4-Pin Twin Tube | 120W | 32W | 800 | 2GX7 |
| 32009Q | 2-Pin Quad Tube | 45W | 9W | 590 | G23-2 |
| 32013Q | 2-Pin Quad Tube | 60W | 13W | 810 | GX23-2 |
| 32013ISQ | 2-Pin Quad Tube Instant Start | 60W | 13W | 810 | GX23-2 |
| 32018Q | 2-Pin Quad Tube | 75W | 18W | 1150 | G24d-2 |
| 32026Q | 2-Pin Quad Tube | 100W | 26W | 1700 | G24d-3 |
| 32413Q | 4-Pin Quad Tube | 60W | 13W | 875 | G24q-1 |
| 32418Q | 4-Pin Quad Tube | 75W | 18W | 1150 | G24q-2 |
| 32426Q | 4-Pin Quad Tube | 100W | 26W | 1700 | G24q-3 |
| 32020Q | 2-Pin Quad Tube | 60W | 20W | 1250 | GX32D-2 |
| 32027Q | 2-Pin Quad Tube | 100W | 27W | 1700 | GX32D-3 |
| 32413T | 4-Pin Triple Tube | 60W | 13W | 900 | GX24q-1 |
| 32418T | 4-Pin Triple Tube | 75W | 18W | 1150 | GX24q-2 |
| 32426T | 4-Pin Triple Tube | 100W | 26W | 1700 | GX24q-3 |
| 32432T | 4-Pin Triple Tube | 120W | 32W | 2000 | GX24q-3 |
| 32442T | 4-Pin Triple Tube | 150W | 42W | 2600 | GX24q-4 |
| 33013SQ | 4-Pin Low Profile SpringLamp | 60W | 13W | 900 | G24q-1 |

GREAT FEATURES & BENEFITS

- Long life: 10,000 hours
- Perfect for hard-to-reach places
- Low maintenance and labor costs for lamp replacements
- Lamp lasts 10-13 times longer than similar incandescent lamps

Color Temperatures



Visit www.tpci.com for full options and accessories!

Circline

Circline lamps provide consistent and even light in ceilings and closet fixtures, as well as floor and table lamps.



17022LRP



17033L



17040LRP



17058L



32032



32040

Color Temperatures




| | | UNIT/ BALLAST WATTS | INCANDESCENT COMPARISON (WATTS) | LAMP WATTS | AVERAGE LUMENS |
|-------------------------------|-----------------------------------|---------------------------|---------------------------------------|---------------|-------------------|
| T9 LAMPS WITH ADAPTERS | | | | | |
| 17022LRP | T9 Circline Adapter with 22W Lamp | 22W | 90W | 22W | 1400 |
| 17030LRP | T9 Circline Adapter with 30W Lamp | 30W | 120W | 30W | 2000 |
| T6 LAMPS WITH ADAPTERS | | | | | |
| 1703027 | T6 Circline Adapter with 27W Lamp | 30W | 120W | 27W | 2000 |
| 17033L | T6 Circline Adapter with 33W Lamp | 33W | 125W | 33W | 2000 |
| 17040LRP | T6 Circline Adapter with 40W Lamp | 40W | 150W | 40W | 2800 |
| 17058L | T6 Circline Adapter with 58W Lamp | 58W | 200W | 58W | 3700 |
| CIRCLINE ADAPTERS | | | | | |
| 17022 | 22W Circline Adapter | 22W | NA | NA | NA |
| 17030 | 30W Circline Adapter | 30W | NA | NA | NA |
| 17033 | 33W Circline Adapter | 33W | NA | NA | NA |
| 17036 | 36W Circline Adapter | 36W | NA | NA | NA |
| 17040 | 40W Circline Adapter | 40W | NA | NA | NA |
| 17058 | 58W Circline Adapter | 58W | NA | NA | NA |
| CIRCLINE LAMPS | | | | | |
| 32020 | T9 Circline 20W Lamp | NA | 75W | 20W | 1200 |
| 32022 | T9 Circline 22W Lamp | NA | 90W | 22W | 1400 |
| 32030 | T9 Circline 30W Lamp | NA | 120W | 30W | 2000 |
| 32027 | T6 Circline 27W Lamp | NA | 120W | 27W | 2000 |
| 32032 | T6 Circline 32W Lamp | NA | 130W | 32W | 2200 |
| 32033 | T6 Circline 33W Lamp | NA | 125W | 33W | 2150 |
| 32040 | T6 Circline 40W Lamp | NA | 150W | 40W | 2800 |
| 32058 | T6 Circline 58W Lamp | NA | 200W | 58W | 3700 |

GREAT FEATURES & BENEFITS

- Long life: 10,000 hours
- Lamp lasts 10-13 times longer than similar incandescent lamps
- Lower maintenance cost
- Ideal for hard to reach places
- Quick run-up time
- Instant start, flicker free



Visit www.tpci.com for full options and accessories!

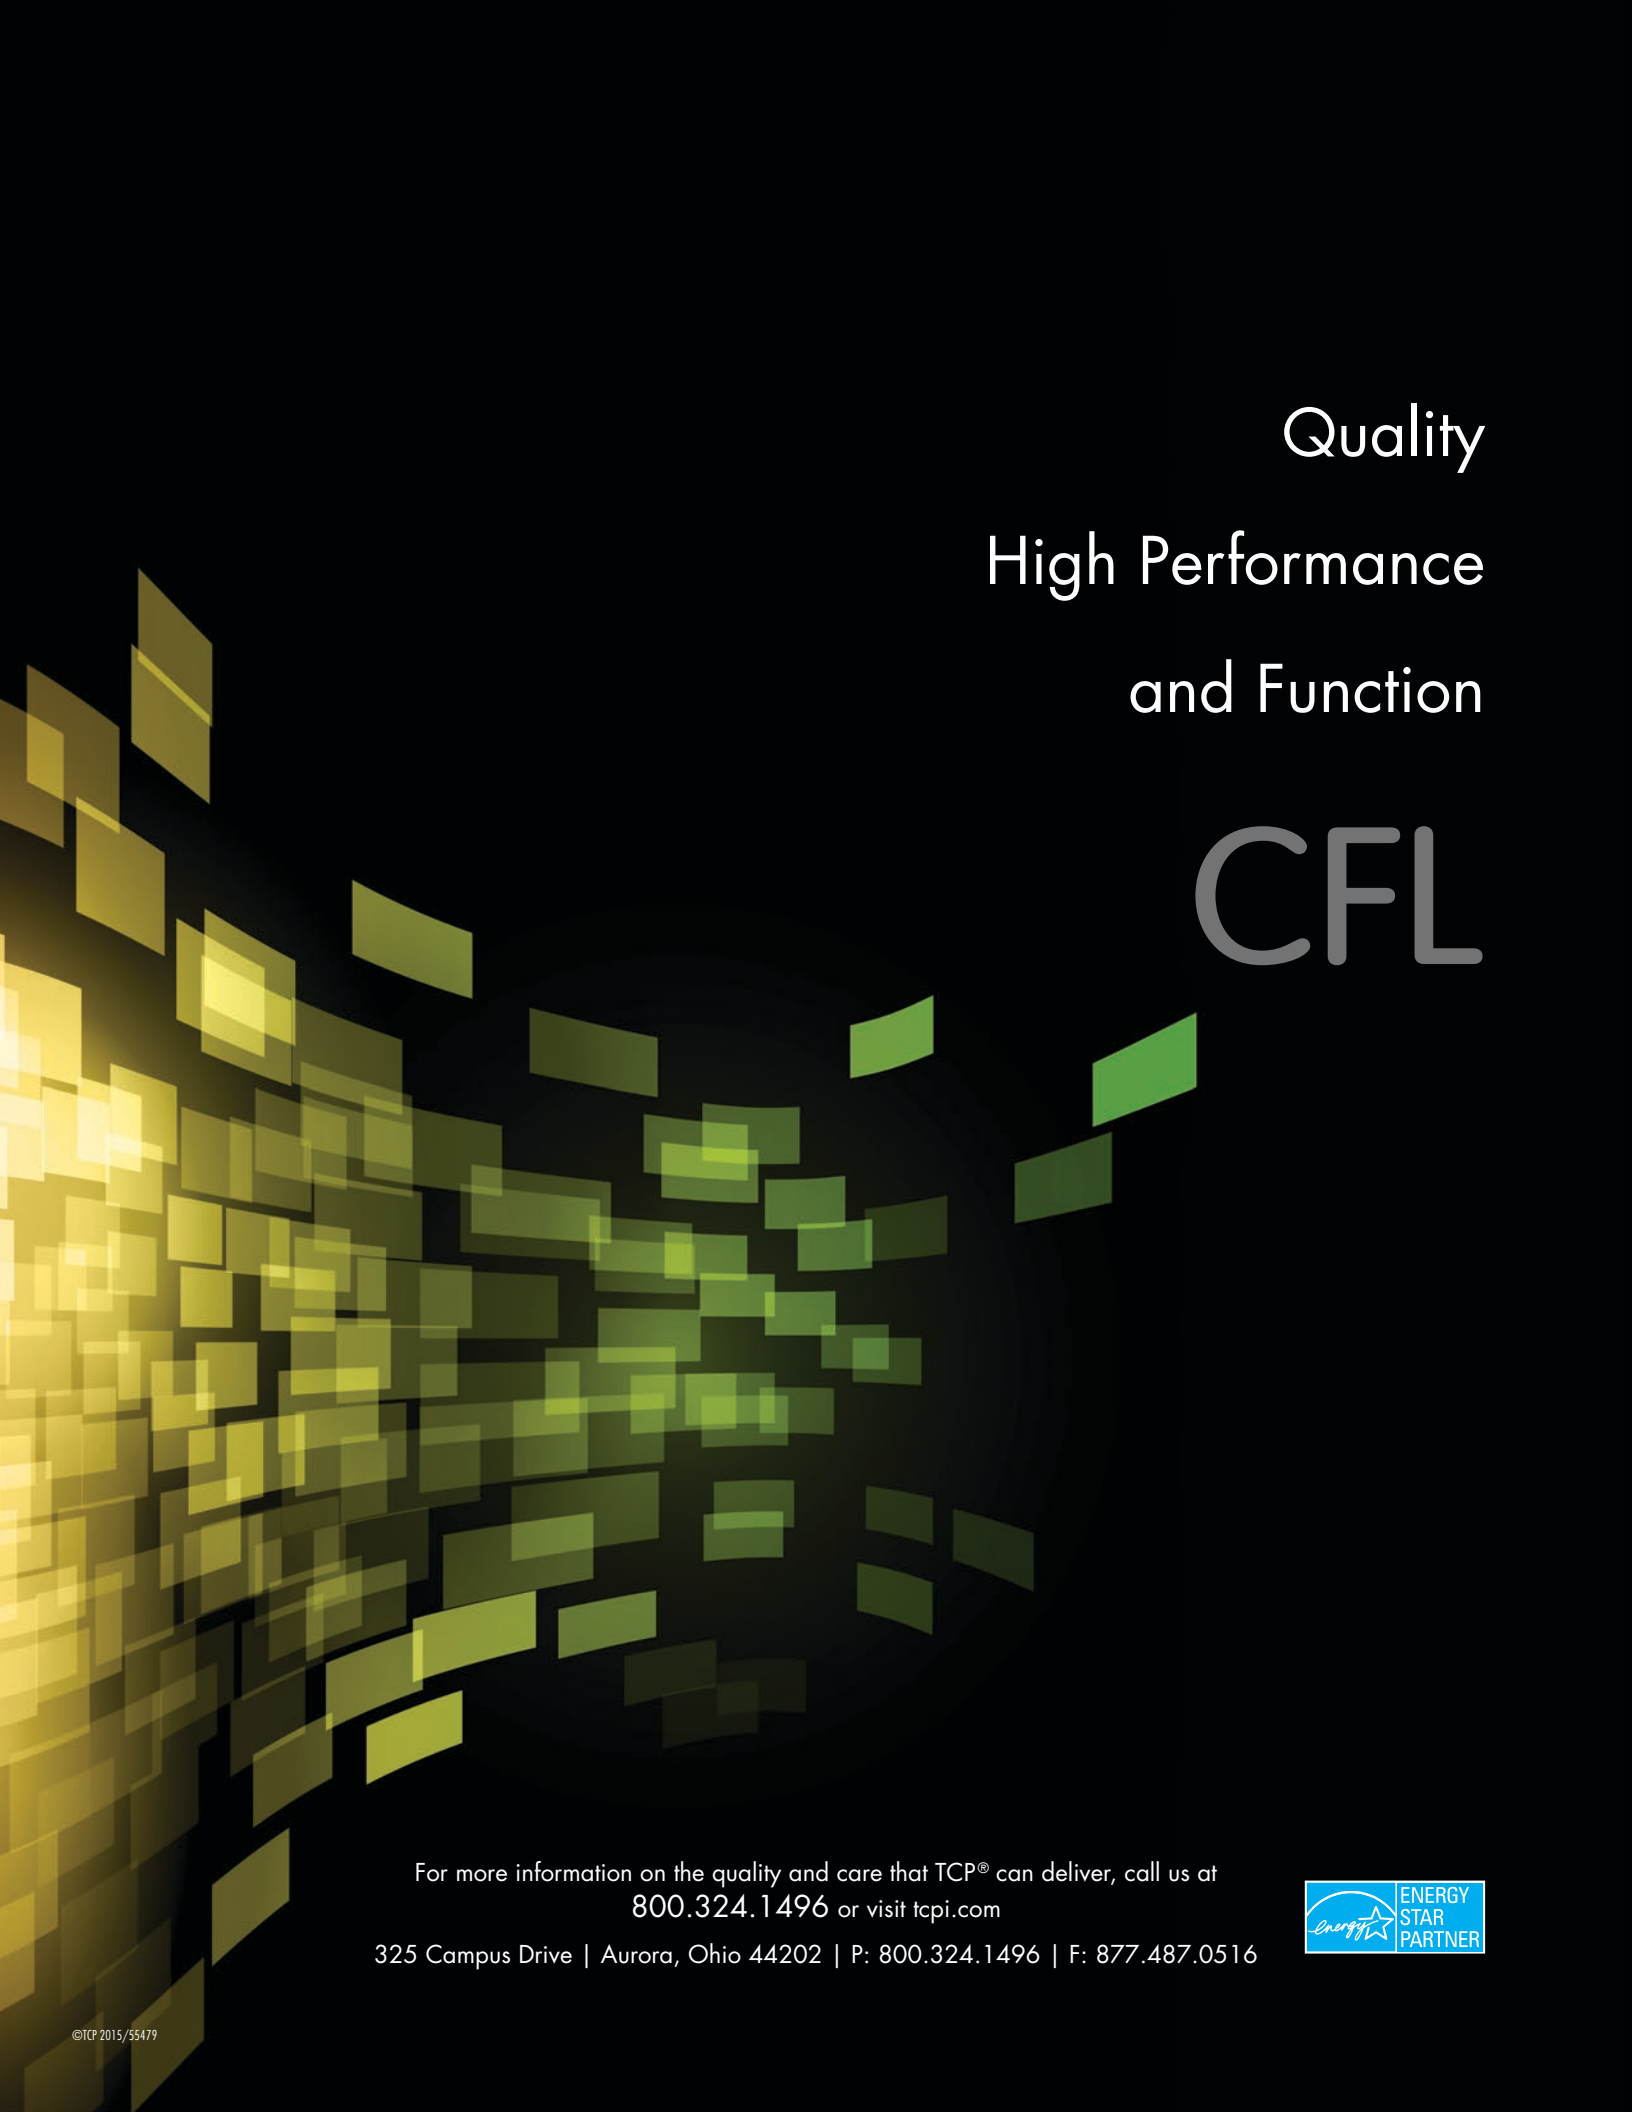

Quality
High Performance
and Function

CFL

For more information on the quality and care that TCP® can deliver, call us at
800.324.1496 or visit tcp.com

325 Campus Drive | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516





CFL

we know light.™

TCP® CFLs

A COMPREHENSIVE OFFERING

Pro SERIES

T3 & T2 Full Spring

Dimmable Full Spring

Dimmable Covered

TruDim®

TruStart™

InstaBright™ with
Armor Coat™

SpringLamp® SERIES

E26 and Mogul Bases

Reflectors

A-Lamps

Decoratives

Globes

T-Capsules

SpringLight™ SERIES

SpringLamps

Reflectors

Globes

A-Lamps

And

GU24 Base

PLs

Circlines

tcp.com





TCP® is a world leader in the innovation and manufacturing of CFLs. We insure our customers have the best selection of **QUALITY, PERFORMANCE** and **FUNCTION** in CFL technology.

CFLs can be used anywhere because applications are endless!

we know light.™

PRO Series

TCP's Pro Series offers a wide range of CFL options to meet all your lighting needs. Choose from our Ultra Compact T3 CFLs to our InstaBright™ Series (see below). CFLs reach FULL BRIGHTNESS in SECONDS!

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------|----------------------------|---------------------------------------|-------|-------------------|
| 48909 | Full SpringLamp, E26 | 40W | 9W | 600 |
| 48909C | Full SpringLamp, E12 | 40W | 9W | 600 |
| 48913 | Full SpringLamp, E26 | 60W | 13W | 925 |
| 48913C | Full SpringLamp, E12 | 60W | 13W | 925 |
| 48918 | Full SpringLamp, E26 | 75W | 18W | 1300 |
| 48923 | Full SpringLamp, E26 | 100W | 23W | 1650 |
| 48942 | Full SpringLamp, E26 | 150W | 42W | 2850 |
| 4T209 | T2 Full SpringLamp, E26 | 40W | 9W | 550 |
| 4T213 | T2 Full SpringLamp, E26 | 60W | 13W | 825 |
| 4T223 | T2 Full SpringLamp, E26 | 100W | 23W | 1625 |
| 2R3016DIM | Dimmable R30, E26 | 65W | 16W | 650 |
| 41314A | A-Lamp InstaBright G2, E26 | 60W | 14W | 700 |
| 4G2514A | G25 InstaBright G2, E26 | 60W | 14W | 800 |
| 4R2014A | R20 InstaBright G2, E26 | 50W | 14W | 410 |
| 4R3014A | R30 InstaBright G2, E26 | 65W | 14W | 650 |



GREAT FEATURES & BENEFITS


- Long life: 10,000 to 12,000 hours
- Excellent lumen maintenance over the life of the product
- Compact size; fits more applications
- InstaBright with Armor Coat lamps' durable coating keeps glass and bulb content contained
- RoHS compliant

InstaBright™ with Armor Coat™

Instantly light a room with strong, warm light (2700K) with TCP's InstaBright lamps. Ideal for use in homes, hotels, offices, retail spaces and residential communities. Try these lamps in ceiling fixtures, wall sconces, closets and vanity strips.

Starts up 2 times faster than average covered CFLs.

Color Temperatures



Visit www.tpci.com for more information!



PRO Series

TruDim®

Technology by TCP

TruDim® CFLs combine powerful performance with intelligent design.

Full dimming performance all the way down to 2% with no annoying flicker.

THE ONLY FULLY DIMMABLE CFL!



| Dimmable, 2700K | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------------|----------------------|---------------------------------|-------|----------------|
| 50114 | Full Spring, E26 | 60W | 14W | 850 |
| 50123 | Full Spring, E26 | 100W | 23W | 1500 |
| 50123SP | Full Spring, GU Base | 100W | 23W | 1500 |
| 4R2014TD | R20, E26 | 50W | 14W | 410 |
| 4R3016TD | R30, E26 | 65W | 16W | 650 |
| 4R4016TD | R40, E26 | 75W | 16W | 750 |
| 4R4020TD | R40, E26 | 85W | 20W | 950 |
| 41315TD | A-lamp, E26 | 60W | 15W | 750 |
| 41316TD | A-lamp, E26 | 60W | 16W | 850 |
| 4G2515TD | G25 Globe, E26 | 60W | 15W | 800 |



GREAT FEATURES & BENEFITS

- Uniform, smooth dimming performance from 100% to 2%
- Long life: 12,000 hours
- Optimized electronics maximizes lamp life
- Low dim level starting capability
- Digital technology for faster run-up time

Designed specifically for use with standard, non-illuminated, 60 watt incandescent slide or rotary dimmer. Also, it works well with the new CFL and LED dimmers.

Consult TCP Technical Support or a dimmer manufacturer for compatibility with other dimmer types.

Dimming Curve

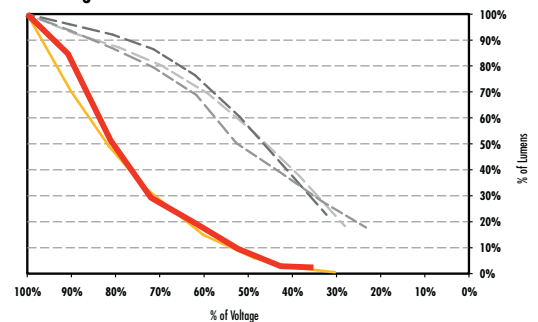



Perfect for any general lighting applications, such as table lamps, wall sconces, recessed cans, chandeliers and ceiling fixtures.

PRO Series




Our TruStart™ CFLs have a long life of 20,000 hours, while achieving full brightness in record time.

FULL BRIGHTNESS IN A SNAP!



TruStart 58023 Run-up Analysis

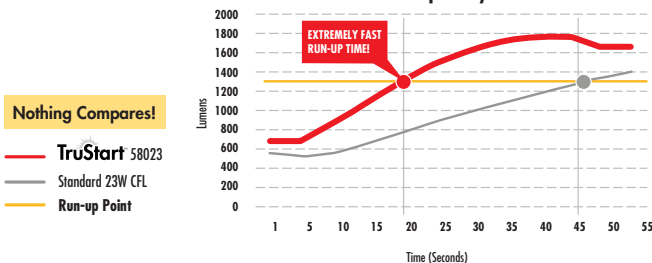

| | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|------------------------|---------------------------------|-------|----------------|
| 2700K | | | |
| 58009 Full Spring, E26 | 40W | 9W | 600 |
| 58014 Full Spring, E26 | 60W | 14W | 900 |
| 58018 Full Spring, E26 | 75W | 18W | 1200 |
| 58023 Full Spring, E26 | 100W | 23W | 1600 |
| 58027 Full Spring, E26 | 100W | 27W | 1850 |
| 58032 Full Spring, E26 | 125W | 32W | 2100 |
| 58042 Full Spring, E26 | 150W | 42W | 2800 |

GREAT FEATURES & BENEFITS

- Programmed start for longer life 20,000 hours
- TCP exclusive and advanced IC chip control
- 15 - 20 seconds run-up time
- 100% improvement over standard 23W CFL



TCP's SpringLamps® provide more lighting surface area in a compact space for better light output.

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS | |
|--------------------------|------------------------|---------------------------------------|--------------------|-------------------|---------------------|
| HIGH POWER FACTOR | 18209 | SpringLamp, E26 | 40W | 9W | 500 |
| | 18214 | Mini-SpringLamp, E26 | 60W | 14W | 800 |
| | 18220 | SpringLamp, E26 | 75W | 20W | 1100 |
| | 18223 | SpringLamp, E26 | 90W | 23W | 1400 |
| | 18227 | SpringLamp, E26 | 100W | 27W | 1600 |
| 3-WAY | 19027 | 3-Way SpringLamp, E26 | 25W 60W 100W | 11W 15W 27W | 400 800 1850 |
| | 19032 | 3-Way SpringLamp w/LED, E26 | 40W 75W 150W | 14W 19W 32W | 750 1400 2150 |
| HIGH WATTAGE | 28927277 | SpringLamp, E26, 277V | 100W | 27W | 1850 |
| | 28932277 | SpringLamp, E26, 277V | 125W | 32W | 2200 |
| | 28942277 | SpringLamp, E26, 277V | 150W | 42W | 2800 |
| | 28968277 | SpringLamp, E26, 277V | 300W | 68W | 4200 |
| | 28927H277 | SpringLamp, Mogul Base, 277V | 100W | 27W | 1850 |
| | 28942H277 | SpringLamp, Mogul Base, 277V | 150W | 42W | 2800 |
| | 28968H277 | SpringLamp, Mogul Base, 277V | 300W | 68W | 4200 |
| | 28968 | SpringLamp, E26 | 300W | 68W | 4200 |
| | 28942H | SpringLamp, Mogul Base | 150W | 42W | 2800 |
| 28968H | SpringLamp, Mogul Base | 300W | 68W | 4200 | |
| FLOODLIGHT | 1R2004 | R20 Reflector, Floodlight, E26 | 15W | 4W | 180 |
| | 1R2009 | R20 Reflector, Floodlight, E26 | 25W | 9W | 400 |
| | 1R2014 | R20 Reflector, Floodlight, E26 | 50W | 14W | 500 |
| | 2R3014 | R30 Reflector, Floodlight, E26 | 65W | 14W | 650 |
| | 2R3016 | R30 Reflector, Floodlight, E26 | 75W | 16W | 750 |
| | 1R4016 | R40 Reflector, Floodlight, E26 | 75W | 16W | 750 |
| | 1R4019 | R40 Reflector, Floodlight, E26 | 85W | 19W | 950 |
| | 1R4023 | R40 Reflector, Floodlight, E26 | 120W | 23W | 1150 |
| PAR LAMP | 1P3016 | PAR30 Reflector, Floodlight, E26 | 75W | 16W | 750 |
| | 1P3816 | PAR38 Reflector, Floodlight, E26 | 75W | 16W | 850 |
| | 2P3819 | PAR38 Reflector, Floodlight, E26 | 85W | 19W | 1000 |
| | 2P3823 | PAR38 Reflector, Floodlight, E26 | 90W | 23W | 1200 |

GREAT FEATURES & BENEFITS

- Compact size fits more applications
- Long life: 8,000 to 10,000 hours
- Excellent lumen maintenance over the life of the product
- RoHS compliant

SpringLamp® Series

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS | |
|------------|----------------|---------------------------------------|--------------|-------------------|------|
| FLAT PAR | PF2014 | PAR20 Flat Reflector, Floodlight, E26 | 30W | 14W | 350 |
| | PF3016 | PAR30 Flat Reflector, Floodlight, E26 | 65W | 16W | 750 |
| | PF3823 | PAR38 Flat Reflector, Floodlight, E26 | 75W | 23W | 1000 |
| A-LAMP | 11304 | A-Lamp, E26 | 25W | 4W | 225 |
| | 11309 | A-Lamp, E26 | 40W | 9W | 475 |
| | 21314 | A-Lamp, E26 | 60W | 14W | 800 |
| | 11316 | A-Lamp, E26 | 60W | 16W | 900 |
| | 11319 | A-Lamp, E26 | 60W | 19W | 1100 |
| | 11323 | A-Lamp, E26 | 100W | 23W | 1200 |
| DECORATIVE | 10704 | Torpedo, E26 | 15W | 4W | 195 |
| | 10709 | Torpedo, E26 | 40W | 9W | 425 |
| | 10709C | Torpedo, E12 | 40W | 9W | 425 |
| | 10714 | Torpedo, E26 | 60W | 14W | 720 |
| GLOBE | 1G2004 | G20 Globe, E26 | 25W | 4W | 250 |
| | 1G2504 | G25 Globe, E26 | 25W | 4W | 250 |
| | 1G2504C | G25 Globe, Candelabra, E12 | 40W | 4W | 250 |
| | 1G2509 | G25 Globe, E26 | 40W | 9W | 520 |
| | 1G2514 | G25 Globe, E26 | 60W | 14W | 800 |
| | 1G3009 | G30 Globe, E26 | 40W | 9W | 520 |
| | 1G3014 | G30 Globe, E26 | 60W | 14W | 800 |
| | 1G3019 | G30 Globe, E26 | 75W | 19W | 1100 |
| | 1G3023 | G30 Globe, E26 | 100W | 23W | 1200 |
| | 1G4014 | G40 Globe, E26 | 60W | 14W | 800 |
| 1G4019 | G40 Globe, E26 | 75W | 19W <td 1100 | | |
| 1G4023 | G40 Globe, E26 | 100W | 23W | 1300 | |
| T-CAPSULE | 1T2014 | T20 Capsule, E26 | 60W | 14W | 800 |
| | 1T2414 | T24 Capsule, E26 | 60W | 14W | 900 |
| | 1T2419 | T24 Capsule, E26 | 75W | 19W | 1100 |
| | 1T2423 | T24 Capsule, E26 | 100W | 23W | 1200 |



Color Temperatures

2700K 3000K 3500K 4100K 5000K 6500K



Visit www.tpci.com for more information!

SpringLight™ Series

SpringLight™ includes half SpringLamps® and floods. These high quality lamps are reasonably priced and designed to fit your budget.



801009 801014 801019 801023 801027



802014 803014 804023 805023




806009 806014 807009 807014

| TCP CFL - 2700K | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------------|----------------------------------|---------------------------------------|-------|-------------------|
| 801009 | SpringLamp, E26 | 40W | 9W | 550 |
| 801014 | SpringLamp, E26 | 60W | 14W | 900 |
| 801019 | SpringLamp, E26 | 75W | 19W | 1225 |
| 801023 | SpringLamp, E26 | 100W | 23W | 1600 |
| 801027 | SpringLamp, E26 | 100W | 27W | 1750 |
| 801032 | SpringLamp, E26 | 125W | 32W | 2100 |
| 801042 | SpringLamp, E26 | 150W | 42W | 2750 |
| 802014 | R20 Flood SpringLamp, E26 | 50W | 14W | 495 |
| 803014 | R30 Flood SpringLamp, E26 | 65W | 14W | 650 |
| 8030142 | R30 Flood SpringLamp, E26, 2PK | 65W | 14W | 650 |
| 804023 | R40 Flood SpringLamp, E26 | 120W | 23W | 1150 |
| 805023 | PAR38 Flood SpringLamp, E26 | 90W | 23W | 1200 |
| 8050232 | PAR38 Flood SpringLamp, E26, 2PK | 90W | 23W | 1200 |
| 8060092 | G25 Globe SpringLamp, E26, 2PK | 40W | 9W | 525 |
| 8060142 | G25 Globe SpringLamp, E26, 2PK | 60W | 14W | 800 |
| 8070092 | A-Lamp SpringLamp, E26, 2PK | 40W | 9W | 450 |
| 8070142 | A-Lamp SpringLamp, E26, 2PK | 60W | 14W | 800 |
| 8011412 | SpringLamp, E26, 12PK | 60W | 14W | 900 |
| 8012312 | SpringLamp, E26, 12PK | 100W | 23W | 1600 |
| 801R30146 | R30 Flood SpringLamp, E26, 6PK | 65W | 14W | 645 |

GREAT FEATURES & BENEFITS

- Average rated life is 10,000 hours
- Less frequency of replacement, making them ideal for hard to reach places
- Saves up to 75% in energy costs compared to similar light output incandescent lamps
- Quick run-up time

Color Temperatures



SpringLight SpringLamps are available in a variety of pack sizes from 1-packs to contractor packs and pallet programs.

Visit www.tpi.com for more information!



GU24 Base

ONE BASE FITS ALL!

With just one base and a lot of options, lamp replacement couldn't be easier.

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS |
|-----------|-----------------------------|---------------------------------------|-------|-------------------|
| 33213SSP | GU24 Low Profile SpringLamp | 60W | 13W | 900 |
| 33109SP | GU24 SpringLamp | 45W | 9W | 550 |
| 33113SP | GU24 SpringLamp | 60W | 13W | 900 |
| 33118SP | GU24 SpringLamp | 75W | 18W | 1200 |
| 33123SP | GU24 SpringLamp | 100W | 23W | 1600 |
| 33127SP | GU24 SpringLamp | 100W | 27W | 1850 |
| 33132SP | GU24 SpringLamp | 120W | 32W | 2200 |
| 33142SP | GU24 SpringLamp | 150W | 42W | 2800 |
| 33109Q | GU24 PL Lamp, Quad Tube | 45W | 9W | 500 |
| 33113Q | GU24 PL Lamp, Quad Tube | 60W | 13W | 750 |
| 33118Q | GU24 PL Lamp, Quad Tube | 75W | 18W | 1150 |
| 33126Q | GU24 PL Lamp, Quad Tube | 100W | 26W | 1700 |
| 33109A19 | GU24 A-Lamp | 40W | 9W | 450 |
| 33114A19 | GU24 A-Lamp | 60W | 14W | 800 |
| 33109G25 | GU24 G25 Globe | 40W | 9W | 450 |
| 33114G25 | GU24 G25 Globe | 60W | 14W | 800 |
| 33114G30 | GU24 G30 Globe | 60W | 14W | 800 |
| 33114R20 | GU24 R20 Floodlight | 50W | 14W | 500 |
| 33116R30 | GU24 R30 Floodlight | 75W | 16W | 700 |
| 33114PF20 | GU24 PAR Flat 20 Floodlight | 65W | 14W | 350 |
| 33116PF30 | GU24 PAR Flat 30 Floodlight | 65W | 16W | 750 |



33213SSP
Low Profile Lamp

33118SP

33132SP

32013Q

33126Q



33109A19

33114A19

33109G25

33114G25



33114R20

33116R30

33114PF20


33116PF30



GREAT FEATURES & BENEFITS

- Long life: 8,000 to 10,000 hours
- Perfect for hard-to-reach places
- Low maintenance and labor costs for lamp replacements
- Use indoors or outdoors with many different applications
- No lead glass for better lumen maintenance

Color Temperatures




Visit www.tpci.com for more information!



PLs

PL lamps can be used in fixtures, recessed cans and wall sconces. Available in twin tube, quad tube and triple tube.

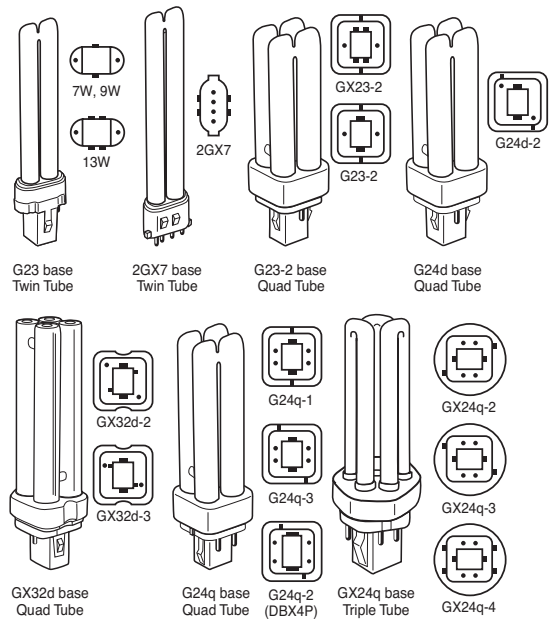

| | | INCANDESCENT COMPARISON (WATTS) | WATTS | AVERAGE LUMENS | BASE TYPE |
|-----------|-------------------------------|---------------------------------------|-------|-------------------|--------------|
| 32005 | 2-Pin Twin Tube | 25W | 5W | 250 | G23 |
| 32007 | 2-Pin Twin Tube | 25W | 7W | 410 | G23 |
| 32009 | 2-Pin Twin Tube | 45W | 9W | 590 | G23 |
| 32013 | 2-Pin Twin Tube | 60W | 13W | 800 | GX23 |
| 32413IST | 2-Pin Twin Tube Instant Start | 60W | 13W | 800 | GX23 |
| 324132GX7 | 4-Pin Twin Tube | 120W | 32W | 800 | 2GX7 |
| 32009Q | 2-Pin Quad Tube | 45W | 9W | 590 | G23-2 |
| 32013Q | 2-Pin Quad Tube | 60W | 13W | 810 | GX23-2 |
| 32013ISQ | 2-Pin Quad Tube Instant Start | 60W | 13W | 810 | GX23-2 |
| 32018Q | 2-Pin Quad Tube | 75W | 18W | 1150 | G24d-2 |
| 32026Q | 2-Pin Quad Tube | 100W | 26W | 1700 | G24d-3 |
| 32413Q | 4-Pin Quad Tube | 60W | 13W | 875 | G24q-1 |
| 32418Q | 4-Pin Quad Tube | 75W | 18W | 1150 | G24q-2 |
| 32426Q | 4-Pin Quad Tube | 100W | 26W | 1700 | G24q-3 |
| 32020Q | 2-Pin Quad Tube | 60W | 20W | 1250 | GX32D-2 |
| 32027Q | 2-Pin Quad Tube | 100W | 27W | 1700 | GX32D-3 |
| 32413T | 4-Pin Triple Tube | 60W | 13W | 900 | GX24q-1 |
| 32418T | 4-Pin Triple Tube | 75W | 18W | 1150 | GX24q-2 |
| 32426T | 4-Pin Triple Tube | 100W | 26W | 1700 | GX24q-3 |
| 32432T | 4-Pin Triple Tube | 120W | 32W | 2000 | GX24q-3 |
| 32442T | 4-Pin Triple Tube | 150W | 42W | 2600 | GX24q-4 |
| 33013SQ | 4-Pin Low Profile SpringLamp | 60W | 13W | 900 | G24q-1 |

GREAT FEATURES & BENEFITS

- Long life: 10,000 hours
- Perfect for hard-to-reach places
- Low maintenance and labor costs for lamp replacements
- Lamp lasts 10-13 times longer than similar incandescent lamps

Color Temperatures



Visit www.tpci.com for full options and accessories!

Circline

Circline lamps provide consistent and even light in ceilings and closet fixtures, as well as floor and table lamps.



17022LRP



17033L



17040LRP



17058L



32032



32040

Color Temperatures




| | | UNIT/ BALLAST WATTS | INCANDESCENT COMPARISON (WATTS) | LAMP WATTS | AVERAGE LUMENS |
|-------------------------------|-----------------------------------|---------------------------|---------------------------------------|---------------|-------------------|
| T9 LAMPS WITH ADAPTERS | | | | | |
| 17022LRP | T9 Circline Adapter with 22W Lamp | 22W | 90W | 22W | 1400 |
| 17030LRP | T9 Circline Adapter with 30W Lamp | 30W | 120W | 30W | 2000 |
| T6 LAMPS WITH ADAPTERS | | | | | |
| 1703027 | T6 Circline Adapter with 27W Lamp | 30W | 120W | 27W | 2000 |
| 17033L | T6 Circline Adapter with 33W Lamp | 33W | 125W | 33W | 2000 |
| 17040LRP | T6 Circline Adapter with 40W Lamp | 40W | 150W | 40W | 2800 |
| 17058L | T6 Circline Adapter with 58W Lamp | 58W | 200W | 58W | 3700 |
| CIRCLINE ADAPTERS | | | | | |
| 17022 | 22W Circline Adapter | 22W | NA | NA | NA |
| 17030 | 30W Circline Adapter | 30W | NA | NA | NA |
| 17033 | 33W Circline Adapter | 33W | NA | NA | NA |
| 17036 | 36W Circline Adapter | 36W | NA | NA | NA |
| 17040 | 40W Circline Adapter | 40W | NA | NA | NA |
| 17058 | 58W Circline Adapter | 58W | NA | NA | NA |
| CIRCLINE LAMPS | | | | | |
| 32020 | T9 Circline 20W Lamp | NA | 75W | 20W | 1200 |
| 32022 | T9 Circline 22W Lamp | NA | 90W | 22W | 1400 |
| 32030 | T9 Circline 30W Lamp | NA | 120W | 30W | 2000 |
| 32027 | T6 Circline 27W Lamp | NA | 120W | 27W | 2000 |
| 32032 | T6 Circline 32W Lamp | NA | 130W | 32W | 2200 |
| 32033 | T6 Circline 33W Lamp | NA | 125W | 33W | 2150 |
| 32040 | T6 Circline 40W Lamp | NA | 150W | 40W | 2800 |
| 32058 | T6 Circline 58W Lamp | NA | 200W | 58W | 3700 |

GREAT FEATURES & BENEFITS

- Long life: 10,000 hours
- Lamp lasts 10-13 times longer than similar incandescent lamps
- Lower maintenance cost
- Ideal for hard to reach places
- Quick run-up time
- Instant start, flicker free



Visit www.tpci.com for full options and accessories!

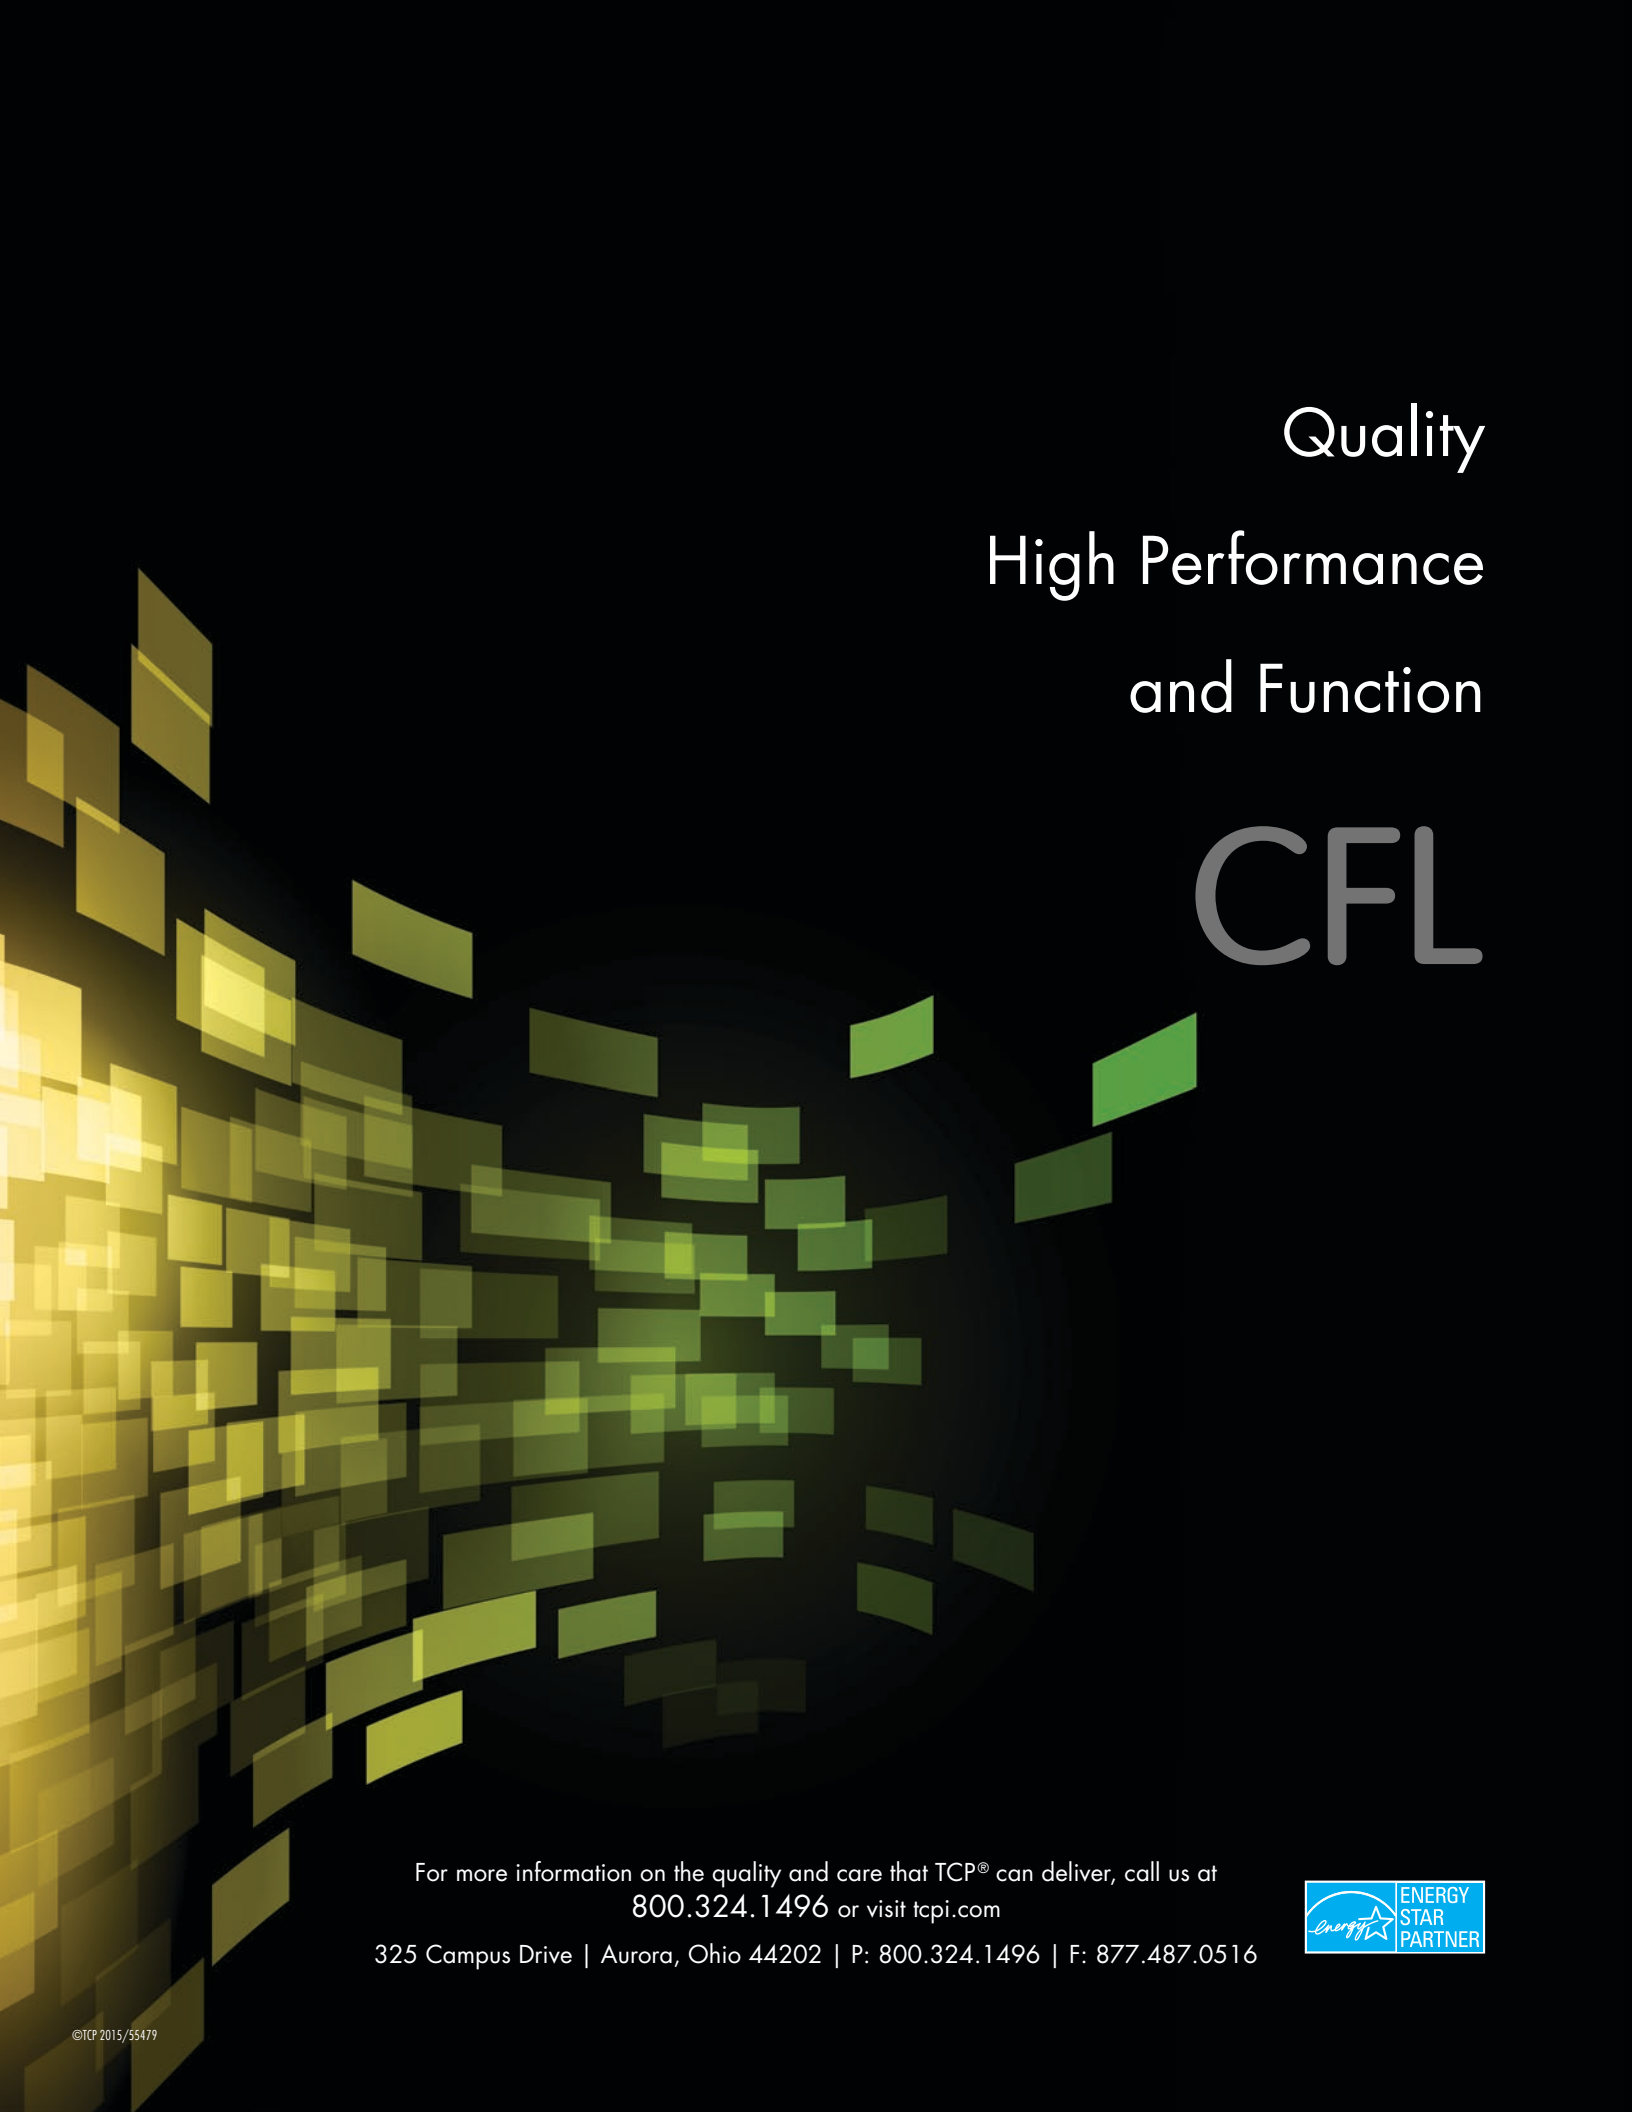

Quality
High Performance
and Function

CFL

For more information on the quality and care that TCP® can deliver, call us at
800.324.1496 or visit tcp.com

325 Campus Drive | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516

