

Pipe Straps, Conduit Clamps and Hangers



Pre-assembled for easy handling and sorting.

Superstrut® Pipe Straps


Superstrut® Pipe Straps are designed to be twist inserted anywhere along the slot side of the channel. Pipes can be placed as closely as pipe couplings permit.

Some unique features of the straps include:

- Bolt head is combination slot and hex head for flexibility of attachment
- Square nut is captivated on the shoulder for easy one-handed tightening
- Straps are interchangeable with 1½" strut for broader application
- Straps are shipped assembled so counting and sorting are easier
- Pipe or conduit sizes are shown on the strap for easy identification
- All Superstrut® Straps are preassembled for easy handling and sorting

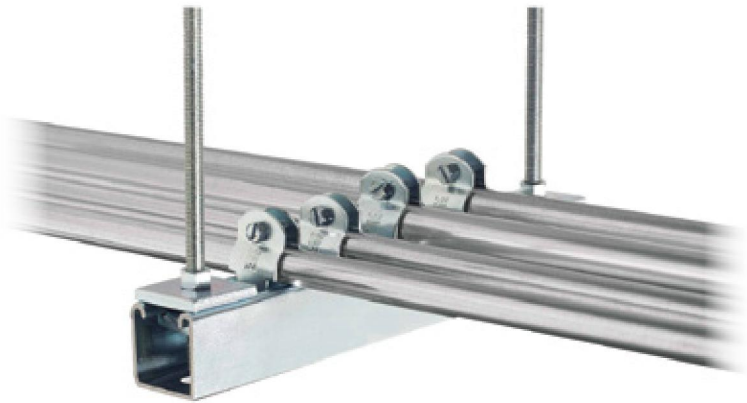

700 — Superstrut® Straps for EMT

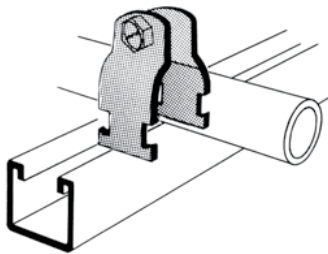

| CAT. NO. | EMT SIZE (IN.) | O.D. SIZE (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|---------------|----------------|-----------------|-----------------------|--------------------|-----------|
| 700 3/8-STR | 3/8 | .577 | 14 ga. | 750 | 100 |
| 700-1/2-STR | 1/2 | .706 | 14 ga. | 750 | 100 |
| 700-3/4-STR | 3/4 | .922 | 14 ga. | 750 | 100 |
| 700-1-STR | 1 | 1.163 | 14 ga. | 750 | 100 |
| 700-1-1/4-STR | 1¼ | 1.510 | 14 ga. | 750 | 50 |
| 700-1-1/2-STR | 1½ | 1.740 | 12 ga. | 800 | 50 |
| 700-2-STR | 2 | 2.197 | 12 ga. | 800 | 50 |

Standard Finish – GoldGalv®


701 — Superstrut® Straps for O.D. Tubing

| CAT. NO. | TUBING O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-------------|-------------------|-----------------------|--------------------|-----------|
| 701-1/4 | ¼ | 14 ga. | 750 | 100 |
| 701-3/8 | 3/8 | 14 ga. | 750 | 100 |
| 701-1/2-STR | ½ | 14 ga. | 750 | 100 |
| 701-5/8 | 5/8 | 14 ga. | 750 | 100 |
| 701-3/4 | ¾ | 14 ga. | 750 | 100 |
| 701-7/8 | 7/8 | 14 ga. | 750 | 100 |
| 701-1-STR | 1 | 14 ga. | 750 | 50 |
| 701-1-1/8 | 1⅛ | 14 ga. | 1,000 | 100 |
| 701-1-1/4 | 1¼ | 14 ga. | 1,000 | 25 |
| 701-1-3/8 | 1⅜ | 14 ga. | 1,000 | 100 |
| 701-1-1/2 | 1½ | 14 ga. | 1,000 | 25 |
| 701-1-5/8 | 1⅝ | 14 ga. | 1,000 | 100 |
| 701-1-3/4 | 1¾ | 12 ga. | 1,000 | 25 |
| 701-1-7/8 | 1⅞ | 12 ga. | 1,000 | 50 |
| 701-2 | 2 | 12 ga. | 1,000 | 50 |
| 701-2-1/8 | 2⅛ | 12 ga. | 1,300 | 50 |
| 701-2-1/4 | 2¼ | 12 ga. | 1,300 | 25 |
| 701-2-3/8 | 2⅜ | 12 ga. | 1,300 | 25 |
| 701-2-1/2 | 2½ | 12 ga. | 1,300 | 25 |
| 701-2-5/8 | 2⅝ | 12 ga. | 1,300 | 50 |

(continued on following page)

Pipe Straps, Conduit Clamps and Hangers

701 — Superstrut® Straps for O.D. Tubing (continued)

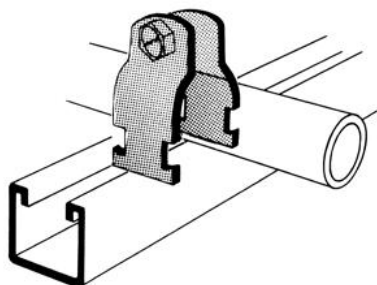

| CAT. NO. | TUBING O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|-------------------|-----------------------|--------------------|-----------|
| 701-2-3/4 | 2¾ | 12 ga. | 1,300 | 25 |
| 701-2-7/8 | 2⅞ | 12 ga. | 1,300 | 25 |
| 701-3 | 3 | 12 ga. | 1,300 | 25 |
| 701-3-1/8 | 3⅛ | 12 ga. | 1,300 | 25 |
| 701-3-1/4 | 3¼ | 12 ga. | 1,300 | 25 |
| 701-3-3/8 | 3⅜ | 12 ga. | 1,300 | 25 |
| 701-3-1/2 | 3½ | 12 ga. | 1,300 | 25 |
| 701-3-5/8 | 3⅝ | 11 ga. | 1,650 | 25 |
| 701-3-3/4 | 3¾ | 11 ga. | 1,650 | 25 |
| 701-3-7/8 | 3⅞ | 11 ga. | 1,650 | 25 |
| 701-4 | 4 | 11 ga. | 1,650 | 25 |
| 701-4-1/8 | 4⅛ | 11 ga. | 1,650 | 25 |
| 701-4-1/4 | 4¼ | 11 ga. | 1,650 | 25 |
| 701-4-3/8 | 4⅜ | 11 ga. | 1,650 | 25 |
| 701-4-1/2 | 4½ | 11 ga. | 1,650 | 10 |
| 701-4-5/8 | 4⅝ | 11 ga. | 1,650 | 10 |
| 701-4-3/4 | 4¾ | 11 ga. | 1,650 | 10 |
| 701-4-7/8 | 4⅞ | 11 ga. | 1,650 | 10 |
| 701-5 | 5 | 11 ga. | 1,650 | 25 |
| 701-5-1/8 | 5⅛ | 11 ga. | 1,650 | 10 |
| 701-5-1/4 | 5¼ | 11 ga. | 1,650 | 10 |
| 701-5-3/8 | 5⅜ | 11 ga. | 1,650 | 10 |
| 701-5-1/2 | 5½ | 11 ga. | 1,650 | 10 |
| 701-5-5/8 | 5⅝ | 10 ga. | 1,650 | 10 |
| 701-5-3/4 | 5¾ | 10 ga. | 1,650 | 10 |
| 701-5-7/8 | 5⅞ | 10 ga. | 1,650 | 10 |
| 701-6 | 6 | 10 ga. | 1,650 | 10 |
| 701-6-1/8 | 6⅛ | 10 ga. | 1,650 | 10 |
| 701-6-1/4 | 6¼ | 10 ga. | 1,650 | 10 |
| 701-6-3/8 | 6⅜ | 10 ga. | 1,650 | 10 |
| 701-6-1/2 | 6½ | 10 ga. | 1,650 | 10 |
| 701-6-5/8 | 6⅝ | 10 ga. | 1,650 | 10 |
| 701-6-3/4 | 6¾ | 10 ga. | 1,650 | 10 |
| 701-6-7/8 | 6⅞ | 10 ga. | 1,650 | 10 |
| 701-8 | 8 | 10 ga. | 1,650 | 10 |


702 — Superstrut® Straps for Rigid Conduit, IMC and Pipe

- For Rigid or IMC Conduit, Pipe and Electric Metal Tubing (EMT)

| CAT. NO. | RIGID CONDUIT OR PIPE SIZE (IN.) | O.D. SIZE (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|----------------------------------|-----------------|-----------------------|--------------------|-----------|
| 702-3/8 | ¾ | .675 | 14 ga. | 750 | 100 |
| 702-1/2 | ½ | .840 | 14 ga. | 750 | 100 |
| 702-3/4 | ¾ | 1.050 | 14 ga. | 750 | 100 |
| 702-1 | 1 | 1.315 | 14 ga. | 750 | 100 |
| 702-1-1/4 | 1¼ | 1.660 | 14 ga. | 800 | 50 |
| 702-1-1/2 | 1½ | 1.900 | 12 ga. | 800 | 50 |
| 702-2-STR | 2 | 2.375 | 12 ga. | 800 | 50 |
| 702-2-1/2 | 2½ | 2.875 | 12 ga. | 1,000 | 50 |
| 702-3 | 3 | 3.500 | 12 ga. | 1,650 | 50 |
| 702-3-1/2 | 3½ | 4.000 | 11 ga. | 1,650 | 25 |
| 702-4 | 4 | 4.500 | 11 ga. | 1,650 | 25 |
| 702-4-1/2 | 4½ | 5.000 | 11 ga. | 1,650 | 25 |
| 702-5 | 5 | 5.563 | 11 ga. | 1,650 | 25 |
| 702-6 | 6 | 6.625 | 11 ga. | 1,650 | 10 |
| 702-8 | 8 | 8.625 | 11 ga. | 1,650 | 10 |
| 702-10 | 10 | 10.750 | 10 ga. | 1,650 | 25 |
| 702-12 | 12 | 12.750 | 10 ga. | 1,650 | 25 |

Standard Finish — GoldGalv® brand. For Electro-Galvanized (Silver), add EG suffix.

703 — Universal Clamp



| CAT. NO. | PIPE O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|-----------------|-----------------------|--------------------|-----------|
| 703-1/2 | .706-.840 | 16 ga. | 400 | 100 |
| 703-3/4 | .932-1.050 | 14 ga. | 550 | 100 |
| 703 1 | 1.163-1.315 | 14 ga. | 550 | 100 |
| 703-1-1/4 | 1.508-1.660 | 14 ga. | 800 | 50 |
| 703-1-1/2 | 1.738-1.900 | 14 ga. | 800 | 50 |
| 703-2 | 2.195-2.375 | 14 ga. | 800 | 50 |

Standard Finish — GoldGalv®

Pipe Straps, Conduit Clamps and Hangers



Pre-assembled for easy handling and sorting.

Superstrut® Pipe Straps


Superstrut® Pipe Straps are designed to be twist inserted anywhere along the slot side of the channel. Pipes can be placed as closely as pipe couplings permit.

Some unique features of the straps include:

- Bolt head is combination slot and hex head for flexibility of attachment
- Square nut is captivated on the shoulder for easy one-handed tightening
- Straps are interchangeable with 1½" strut for broader application
- Straps are shipped assembled so counting and sorting are easier
- Pipe or conduit sizes are shown on the strap for easy identification
- All Superstrut® Straps are preassembled for easy handling and sorting

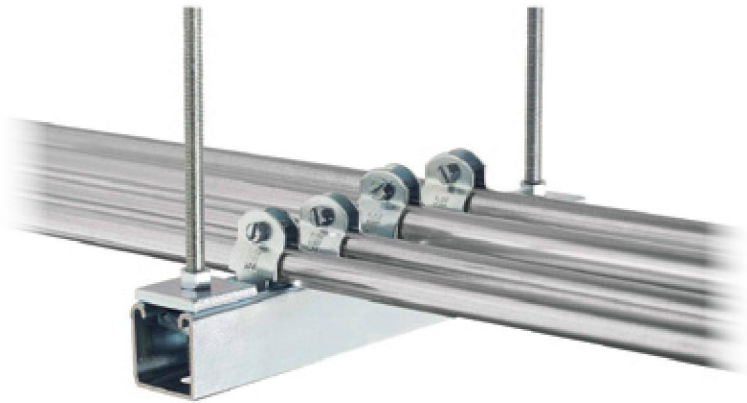

700 — Superstrut® Straps for EMT

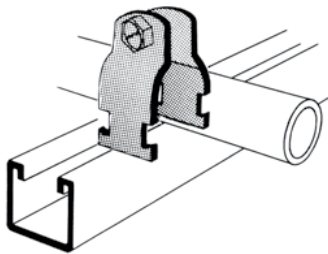

| CAT. NO. | EMT SIZE (IN.) | O.D. SIZE (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|---------------|----------------|-----------------|-----------------------|--------------------|-----------|
| 700 3/8-STR | 3/8 | .577 | 14 ga. | 750 | 100 |
| 700-1/2-STR | 1/2 | .706 | 14 ga. | 750 | 100 |
| 700-3/4-STR | 3/4 | .922 | 14 ga. | 750 | 100 |
| 700-1-STR | 1 | 1.163 | 14 ga. | 750 | 100 |
| 700-1-1/4-STR | 1¼ | 1.510 | 14 ga. | 750 | 50 |
| 700-1-1/2-STR | 1½ | 1.740 | 12 ga. | 800 | 50 |
| 700-2-STR | 2 | 2.197 | 12 ga. | 800 | 50 |

Standard Finish – GoldGalv®


701 — Superstrut® Straps for O.D. Tubing

| CAT. NO. | TUBING O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-------------|-------------------|-----------------------|--------------------|-----------|
| 701-1/4 | ¼ | 14 ga. | 750 | 100 |
| 701-3/8 | 3/8 | 14 ga. | 750 | 100 |
| 701-1/2-STR | 1/2 | 14 ga. | 750 | 100 |
| 701-5/8 | 5/8 | 14 ga. | 750 | 100 |
| 701-3/4 | ¾ | 14 ga. | 750 | 100 |
| 701-7/8 | 7/8 | 14 ga. | 750 | 100 |
| 701-1-STR | 1 | 14 ga. | 750 | 50 |
| 701-1-1/8 | 1⅛ | 14 ga. | 1,000 | 100 |
| 701-1-1/4 | 1¼ | 14 ga. | 1,000 | 25 |
| 701-1-3/8 | 1⅜ | 14 ga. | 1,000 | 100 |
| 701-1-1/2 | 1½ | 14 ga. | 1,000 | 25 |
| 701-1-5/8 | 1⅝ | 14 ga. | 1,000 | 100 |
| 701-1-3/4 | 1¾ | 12 ga. | 1,000 | 25 |
| 701-1-7/8 | 1⅞ | 12 ga. | 1,000 | 50 |
| 701-2 | 2 | 12 ga. | 1,000 | 50 |
| 701-2-1/8 | 2⅛ | 12 ga. | 1,300 | 50 |
| 701-2-1/4 | 2¼ | 12 ga. | 1,300 | 25 |
| 701-2-3/8 | 2⅜ | 12 ga. | 1,300 | 25 |
| 701-2-1/2 | 2½ | 12 ga. | 1,300 | 25 |
| 701-2-5/8 | 2⅝ | 12 ga. | 1,300 | 50 |

(continued on following page)

Pipe Straps, Conduit Clamps and Hangers

701 — Superstrut® Straps for O.D. Tubing (continued)

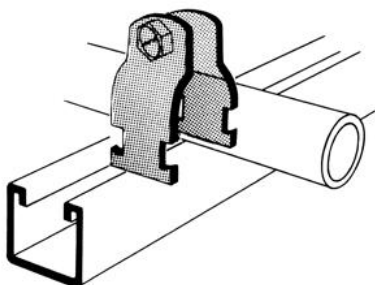

| CAT. NO. | TUBING O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|-------------------|-----------------------|--------------------|-----------|
| 701-2-3/4 | 2¾ | 12 ga. | 1,300 | 25 |
| 701-2-7/8 | 2⅞ | 12 ga. | 1,300 | 25 |
| 701-3 | 3 | 12 ga. | 1,300 | 25 |
| 701-3-1/8 | 3⅛ | 12 ga. | 1,300 | 25 |
| 701-3-1/4 | 3¼ | 12 ga. | 1,300 | 25 |
| 701-3-3/8 | 3⅜ | 12 ga. | 1,300 | 25 |
| 701-3-1/2 | 3½ | 12 ga. | 1,300 | 25 |
| 701-3-5/8 | 3⅝ | 11 ga. | 1,650 | 25 |
| 701-3-3/4 | 3¾ | 11 ga. | 1,650 | 25 |
| 701-3-7/8 | 3⅞ | 11 ga. | 1,650 | 25 |
| 701-4 | 4 | 11 ga. | 1,650 | 25 |
| 701-4-1/8 | 4⅛ | 11 ga. | 1,650 | 25 |
| 701-4-1/4 | 4¼ | 11 ga. | 1,650 | 25 |
| 701-4-3/8 | 4⅜ | 11 ga. | 1,650 | 25 |
| 701-4-1/2 | 4½ | 11 ga. | 1,650 | 10 |
| 701-4-5/8 | 4⅝ | 11 ga. | 1,650 | 10 |
| 701-4-3/4 | 4¾ | 11 ga. | 1,650 | 10 |
| 701-4-7/8 | 4⅞ | 11 ga. | 1,650 | 10 |
| 701-5 | 5 | 11 ga. | 1,650 | 25 |
| 701-5-1/8 | 5⅛ | 11 ga. | 1,650 | 10 |
| 701-5-1/4 | 5¼ | 11 ga. | 1,650 | 10 |
| 701-5-3/8 | 5⅜ | 11 ga. | 1,650 | 10 |
| 701-5-1/2 | 5½ | 11 ga. | 1,650 | 10 |
| 701-5-5/8 | 5⅝ | 10 ga. | 1,650 | 10 |
| 701-5-3/4 | 5¾ | 10 ga. | 1,650 | 10 |
| 701-5-7/8 | 5⅞ | 10 ga. | 1,650 | 10 |
| 701-6 | 6 | 10 ga. | 1,650 | 10 |
| 701-6-1/8 | 6⅛ | 10 ga. | 1,650 | 10 |
| 701-6-1/4 | 6¼ | 10 ga. | 1,650 | 10 |
| 701-6-3/8 | 6⅜ | 10 ga. | 1,650 | 10 |
| 701-6-1/2 | 6½ | 10 ga. | 1,650 | 10 |
| 701-6-5/8 | 6⅝ | 10 ga. | 1,650 | 10 |
| 701-6-3/4 | 6¾ | 10 ga. | 1,650 | 10 |
| 701-6-7/8 | 6⅞ | 10 ga. | 1,650 | 10 |
| 701-8 | 8 | 10 ga. | 1,650 | 10 |


702 — Superstrut® Straps for Rigid Conduit, IMC and Pipe

- For Rigid or IMC Conduit, Pipe and Electric Metal Tubing (EMT)

| CAT. NO. | RIGID CONDUIT OR PIPE SIZE (IN.) | O.D. SIZE (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|----------------------------------|-----------------|-----------------------|--------------------|-----------|
| 702-3/8 | ¾ | .675 | 14 ga. | 750 | 100 |
| 702-1/2 | ½ | .840 | 14 ga. | 750 | 100 |
| 702-3/4 | ¾ | 1.050 | 14 ga. | 750 | 100 |
| 702-1 | 1 | 1.315 | 14 ga. | 750 | 100 |
| 702-1-1/4 | 1¼ | 1.660 | 14 ga. | 800 | 50 |
| 702-1-1/2 | 1½ | 1.900 | 12 ga. | 800 | 50 |
| 702-2-STR | 2 | 2.375 | 12 ga. | 800 | 50 |
| 702-2-1/2 | 2½ | 2.875 | 12 ga. | 1,000 | 50 |
| 702-3 | 3 | 3.500 | 12 ga. | 1,650 | 50 |
| 702-3-1/2 | 3½ | 4.000 | 11 ga. | 1,650 | 25 |
| 702-4 | 4 | 4.500 | 11 ga. | 1,650 | 25 |
| 702-4-1/2 | 4½ | 5.000 | 11 ga. | 1,650 | 25 |
| 702-5 | 5 | 5.563 | 11 ga. | 1,650 | 25 |
| 702-6 | 6 | 6.625 | 11 ga. | 1,650 | 10 |
| 702-8 | 8 | 8.625 | 11 ga. | 1,650 | 10 |
| 702-10 | 10 | 10.750 | 10 ga. | 1,650 | 25 |
| 702-12 | 12 | 12.750 | 10 ga. | 1,650 | 25 |

Standard Finish — GoldGalv® brand. For Electro-Galvanized (Silver), add EG suffix.

703 — Universal Clamp

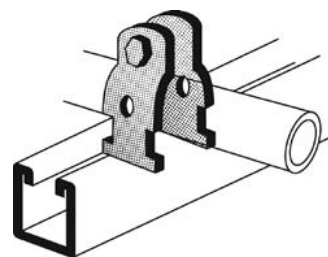

| CAT. NO. | PIPE O.D. (IN.) | STEEL STRAP THICKNESS | DESIGN LOAD (LBS.) | STD. CTN. |
|-----------|-----------------|-----------------------|--------------------|-----------|
| 703-1/2 | .706-.840 | 16 ga. | 400 | 100 |
| 703-3/4 | .932-1.050 | 14 ga. | 550 | 100 |
| 703 1 | 1.163-1.315 | 14 ga. | 550 | 100 |
| 703-1-1/4 | 1.508-1.660 | 14 ga. | 800 | 50 |
| 703-1-1/2 | 1.738-1.900 | 14 ga. | 800 | 50 |
| 703-2 | 2.195-2.375 | 14 ga. | 800 | 50 |

Standard Finish — GoldGalv®