


# Communication & low voltage



- Supports low voltage communication cables from beams or rods when used with other fasteners.
- Ultimate Static Load Capacity: 50 Lbs.
- Finish: Zinc Plated.

## Threaded Bridle Rings

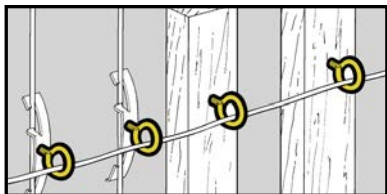

UPC/Part Number	Catalog Number	Ring Size	Thread Size x Thread Length	Box Qty.
78101119550	<b>BR-8-T</b>	1/2"	#10-24 x 9/16"	100
78101119555	<b>BR-12-T</b>	3/4"	#10-24 x 9/16"	100
78101119560	<b>BR-20-T</b>	1 1/4"	#10-24 x 9/16"	100
78101119570	<b>BR-32-T</b>	2"	#10-24 x 9/16"	100
78101119565	<b>BR-20-4T</b>	1 1/4"	1/4"-20 x 9/16"	100
78101119575	<b>BR-32-4T</b>	2"	1/4"-20 x 9/16"	100
78101119889	<b>BR-64-4T</b>	4"	1/4"-20 x 9/16"	50




Lag Screw for Wood Beams

UPC/Part Number	Catalog Number	Ring Size	Thread Size x Thread Length	Box Qty.
78101119875	<b>BR-16-3W</b>	1"	#10 x 9/16"	100
78101119886	<b>BR-24-4W</b>	1 1/2"	1/4" x 27/32"	100
78101119876	<b>BR-32-4W</b>	2"	1/4" x 7/8"	100

Read safety/installation instruction sheets in packages before use.

# Communication & low voltage

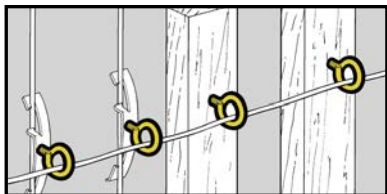

- Supports low voltage communication cables from beams or rods when used with other fasteners.
- Ultimate Static Load Capacity: 50 Lbs.
- Finish: Zinc Plated.

## Threaded Bridle Rings



UPC/Part Number	Catalog Number	Ring Size	Thread Size x Thread Length	Box Qty.
78101119550	<b>BR-8-T</b>	1/2"	#10-24 x 9/16"	100
78101119555	<b>BR-12-T</b>	3/4"	#10-24 x 9/16"	100
78101119560	<b>BR-20-T</b>	1 1/4"	#10-24 x 9/16"	100
78101119570	<b>BR-32-T</b>	2"	#10-24 x 9/16"	100
78101119565	<b>BR-20-4T</b>	1 1/4"	1/4"-20 x 9/16"	100
78101119575	<b>BR-32-4T</b>	2"	1/4"-20 x 9/16"	100
78101119889	<b>BR-64-4T</b>	4"	1/4"-20 x 9/16"	50



Lag Screw for Wood Beams

UPC/Part Number	Catalog Number	Ring Size	Thread Size x Thread Length	Box Qty.
78101119875	<b>BR-16-3W</b>	1"	#10 x 9/16"	100
78101119886	<b>BR-24-4W</b>	1 1/2"	1/4" x 27/32"	100
78101119876	<b>BR-32-4W</b>	2"	1/4" x 7/8"	100

Read safety/installation instruction sheets in packages before use.