369447b 1 09.27.17

Skylark Contour
Quiet Fan Speed Control

Captive knob slide control with an easy to use rocker switch.

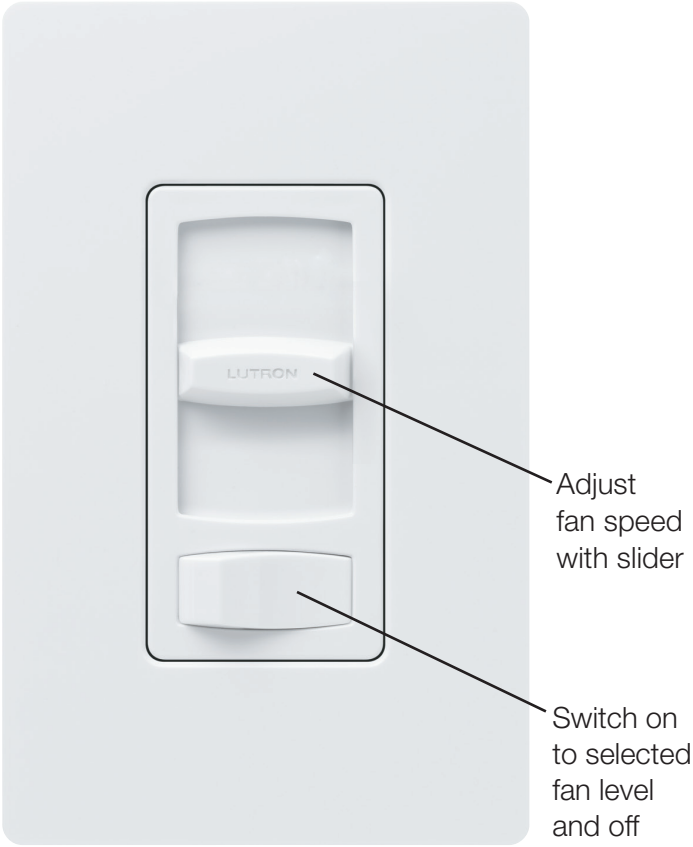

Wallplate sold separately

Product Family Features

- On/off rocker switch with a captive slider for a standard designer wallplate opening
- Switch returns load to previous level
- Uses standard single-pole or 3-way wiring for easy installation in any home
- 100% factory tested
- Coordinating Claro and Stainless Steel wallplates available separately
- Available in all Claro gloss colors
- Skylark Contour Family:
  - Incandescent/Halogen
  - Electronic Low Voltage (ELV)
  - Magnetic Low Voltage (MLV)
  - Quiet Fan Speed
  - Compact Fluorescent (CFL)/LED

Colors and Finishes

Gloss Finishes

Add color suffix to model #
Example: CTFSQ-F-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

Product Specific Features

- Quiet 3-speed control for use with one ceiling paddle fan

Model Number

CTFSQ-F-XX[1,2] Single pole/3-way[3], 3-speed 1.5 A
CTFSQ-FH-XX-C[4] Single pole/3-way[3], 3-speed 1.5A

Notes:

[1] XX Gloss color codes, see section "Colors and Finishes" at left
[2] For clamshell packaging, add an "H" after the F.
[3] For 3-way and 4-way switching, use Claro switches or other mechanical switches.
[4] Clamshell packaged product for Canada.

Job Name:	Model Numbers:	
Job Number:		

369447b 2 09.27.17

Specifications

Regulatory Approvals

- UL Listed to US and Canadian safety standards UL1917 / CSA C22.2 156-M1987
- NOM Certified

Power and Ratings

- 120 V~ 60 Hz
- 1.5 A Ceiling Paddle Fan

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)

Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Fan Speed Control Capacity Chart

Fan Rating	No sides removed	1 side removed	2 sides removed
1.5 A	1.5 A max	1.5 A max	1.5 A max

Dimensions

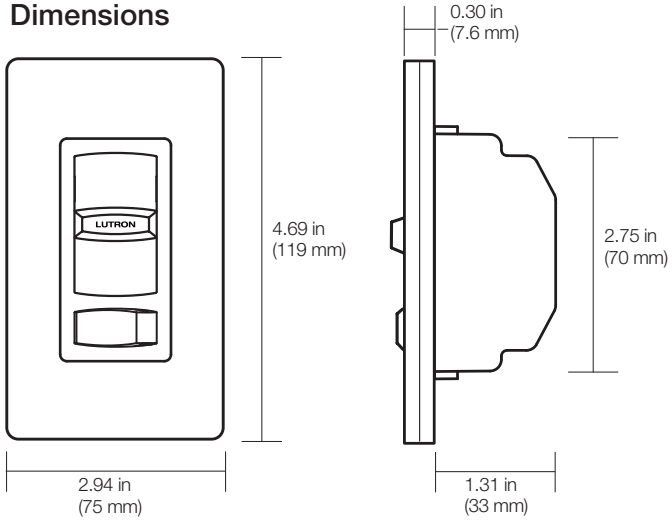

Note: Requires a U.S. wallbox. 2 ½ in (64 mm) deep minimum.

Warranty

- 1 Year Limited Warranty
  For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:	
Job Number:		

369447b 3 09.27.17

Wiring Diagrams

Single-Pole Wiring

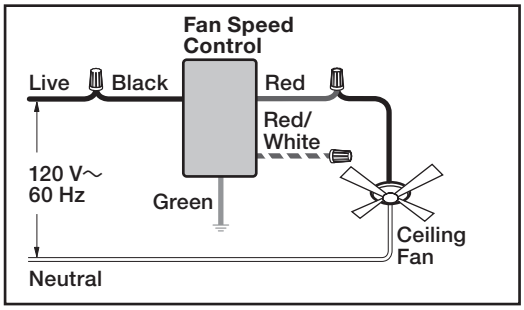

Note: Skylark Contour Quiet Fan Speed Controls are designed to control ceiling fan motors only.

Do not use to control ceiling fan lighting or lighting fixtures.

3-Way Wiring

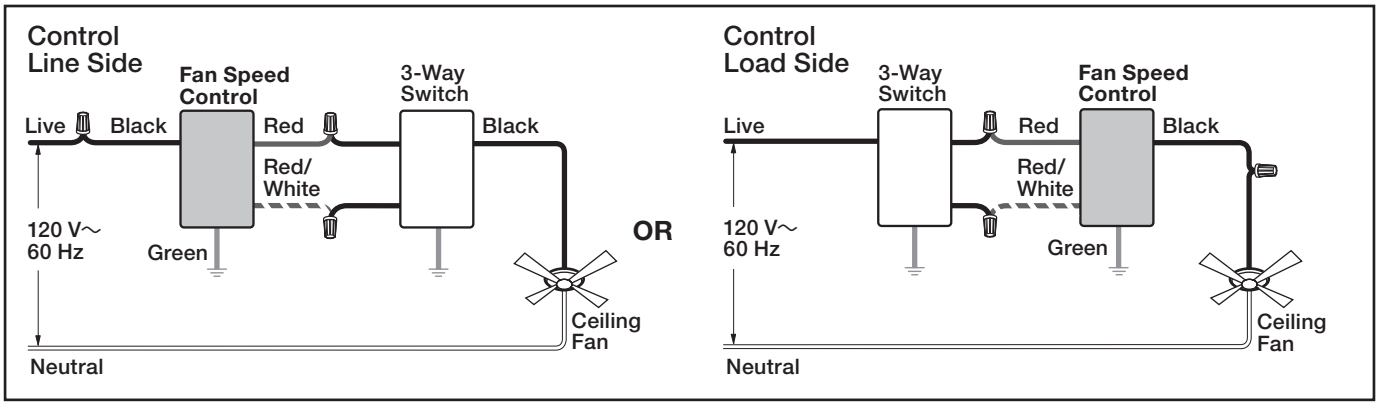

4-Way Wiring

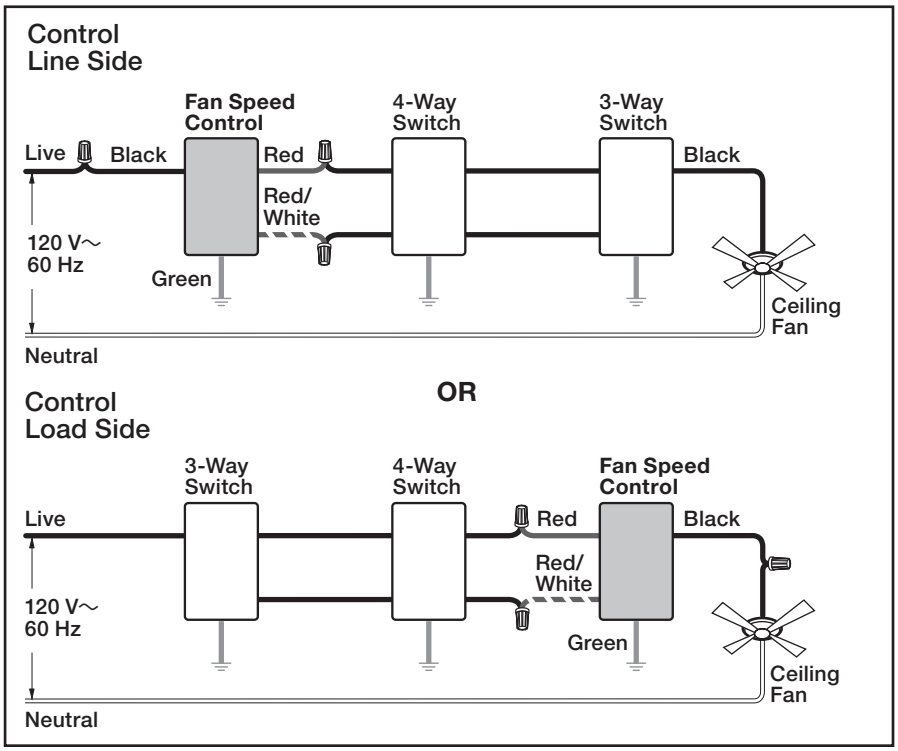

Lutron, Lutron, Skylark, Skylark Contour and Claro are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.

Job Name:	Model Numbers:	
Job Number:		

369447b 1 09.27.17

Skylark Contour
Quiet Fan Speed Control

Captive knob slide control with an easy to use rocker switch.

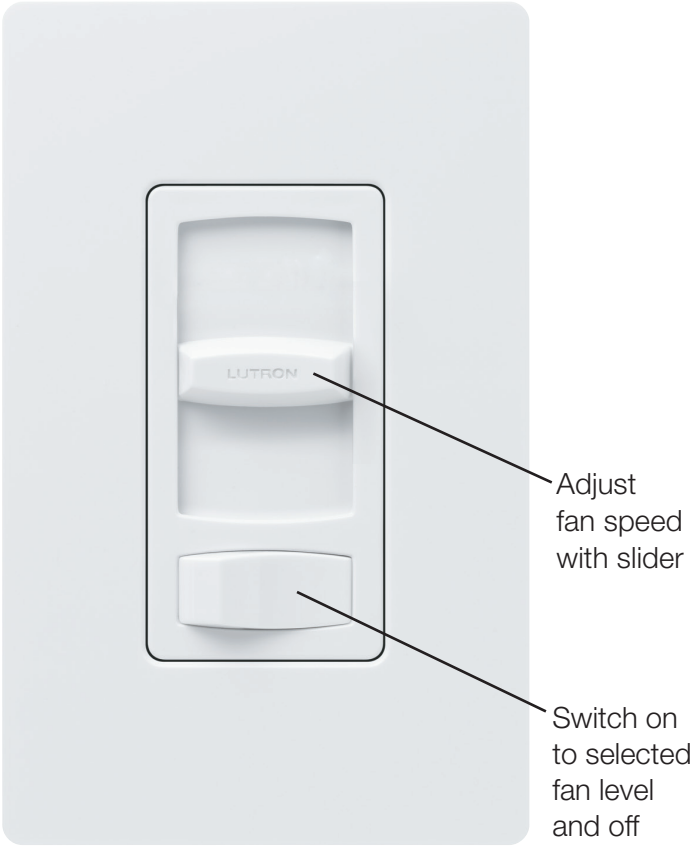

Wallplate sold separately

Product Family Features

- On/off rocker switch with a captive slider for a standard designer wallplate opening
- Switch returns load to previous level
- Uses standard single-pole or 3-way wiring for easy installation in any home
- 100% factory tested
- Coordinating Claro and Stainless Steel wallplates available separately
- Available in all Claro gloss colors
- Skylark Contour Family:
  - Incandescent/Halogen
  - Electronic Low Voltage (ELV)
  - Magnetic Low Voltage (MLV)
  - Quiet Fan Speed
  - Compact Fluorescent (CFL)/LED

Colors and Finishes

Gloss Finishes

Add color suffix to model #
Example: CTFSQ-F-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

Product Specific Features

- Quiet 3-speed control for use with one ceiling paddle fan

Model Number

CTFSQ-F-XX[1,2] Single pole/3-way[3], 3-speed 1.5 A
CTFSQ-FH-XX-C[4] Single pole/3-way[3], 3-speed 1.5A

Notes:

[1] XX Gloss color codes, see section "Colors and Finishes" at left
[2] For clamshell packaging, add an "H" after the F.
[3] For 3-way and 4-way switching, use Claro switches or other mechanical switches.
[4] Clamshell packaged product for Canada.

Job Name:	Model Numbers:	
Job Number:		

369447b 2 09.27.17

Specifications

Regulatory Approvals

- UL Listed to US and Canadian safety standards UL1917 / CSA C22.2 156-M1987
- NOM Certified

Power and Ratings

- 120 V~ 60 Hz
- 1.5 A Ceiling Paddle Fan

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)

Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Fan Speed Control Capacity Chart

Fan Rating	No sides removed	1 side removed	2 sides removed
1.5 A	1.5 A max	1.5 A max	1.5 A max

Dimensions

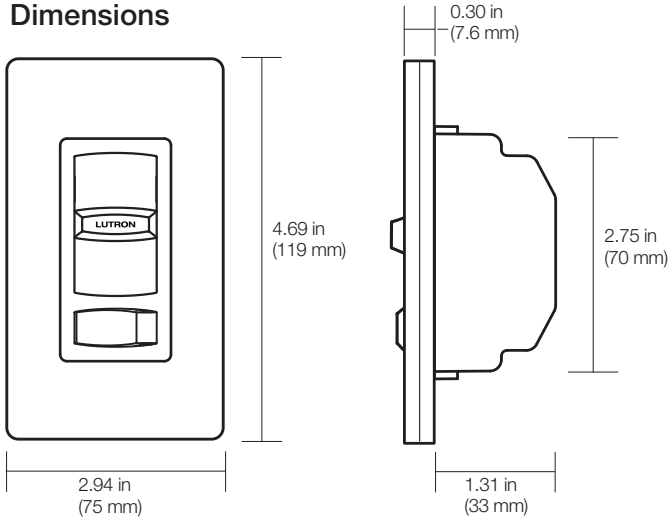

Note: Requires a U.S. wallbox. 2 ½ in (64 mm) deep minimum.

Warranty

- 1 Year Limited Warranty
  For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:	
Job Number:		

369447b 3 09.27.17

Wiring Diagrams

Single-Pole Wiring

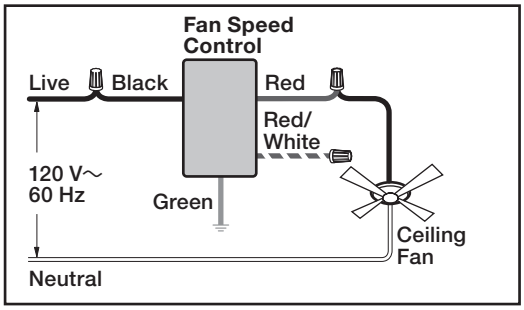

Note: Skylark Contour Quiet Fan Speed Controls are designed to control ceiling fan motors only.

Do not use to control ceiling fan lighting or lighting fixtures.

3-Way Wiring

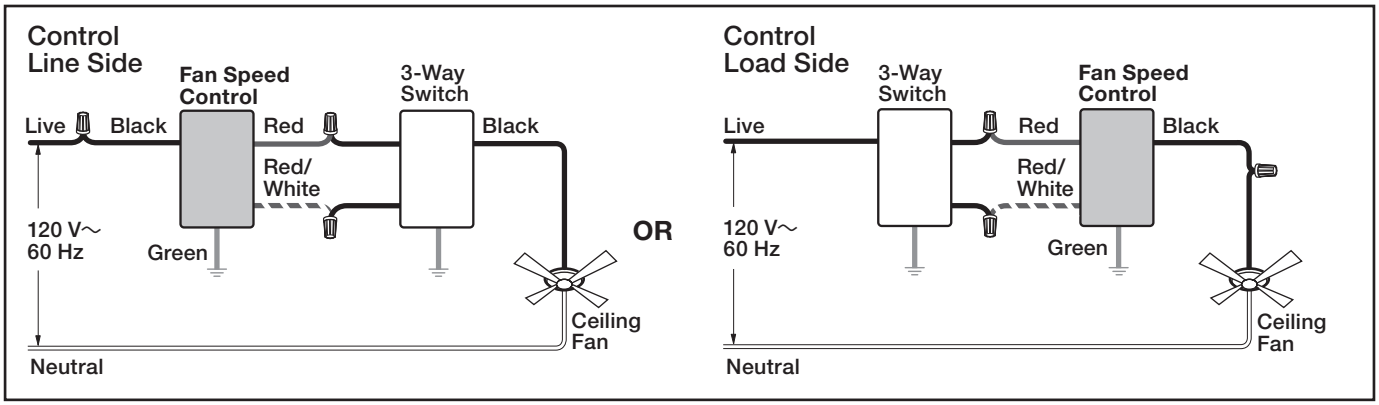

4-Way Wiring

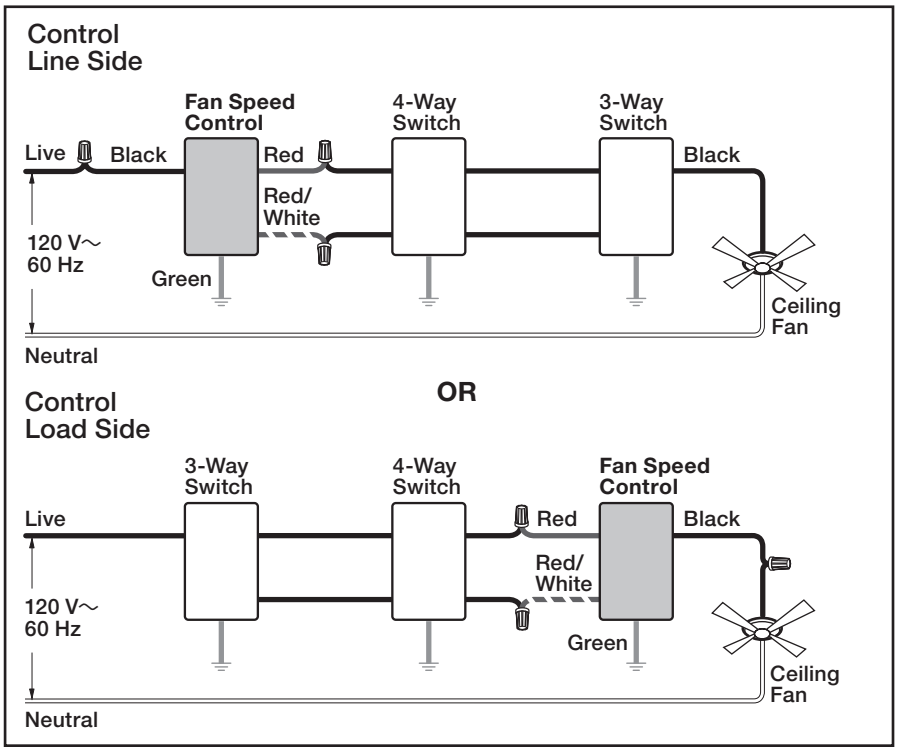

Lutron, Lutron, Skylark, Skylark Contour and Claro are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.

Job Name:	Model Numbers:	
Job Number:		