


Ring Terminals



- Complete line of installing tools engineered to match tool with terminal
- First to gain military approval for pressure connections... many styles available for military applications
- Sta-Kon® products exceed test specification requirements of military, UL and CSA
- Include extra metal sleeve to grip insulation
- Vinyl insulated and bare Sta-Kon® terminals feature brazed seam wire barrels that can be crimped at any place on the barrel circumference
- Can be installed with crimping tools having a single indenter or double indenter (recommended for solid wire)
- Serrated barrel increases grip on wire
- Wire range identification on the tongue of each terminal
- Constructed of electrolytic copper for high conductivity

Nylon-Insulated Ring Terminals

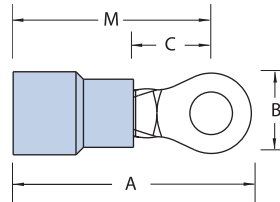

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RZ22-2** | 100 | 26-22 | 0.083 | #2 | ERG4006 | 0.57 | 0.14 | 0.13 | 0.49 | 0.02 |
| RZ22-4** | 100 | 26-22 | 0.083 | #4 | | 0.65 | 0.21 | 0.20 | 0.54 | |
| RZ22-6** | 100 | 26-22 | 0.083 | #6 | | 0.65 | 0.21 | 0.20 | 0.54 | |
| RZ22-8** | 100 | 26-22 | 0.083 | #8 | | 0.75 | 0.25 | 0.23 | 0.62 | |
| RZ22-10** | 100 | 26-22 | 0.083 | #10 | | 0.75 | 0.25 | 0.23 | 0.62 | |
| RAX23* | 1,000 | 26-24 | 0.125 | #2 | WT145A | 0.66 | 0.14 | 0.14 | 0.59 | 0.03 |
| RAX43* | 1,000 | 26-24 | 0.125 | #4 | | 0.74 | 0.20 | 0.19 | 0.64 | |
| RAX63* | 1,000 | 26-24 | 0.125 | #6 | | 0.84 | 0.25 | 0.22 | 0.72 | |
| RAX83* | 1,000 | 26-24 | 0.125 | #8 | | 0.84 | 0.25 | 0.22 | 0.72 | |
| RAX103* | 1,000 | 26-24 | 0.125 | #10 | | 0.84 | 0.25 | 0.24 | 0.72 | |
| RA18-4 | 100 | 22-16 | 0.136 | #4 | ERG4001 | 0.72 | 0.23 | 0.14 | 0.59 | 0.03 |
| RA323 | 1,000 | 22-16 | 0.136 | #4 | | 0.72 | 0.23 | 0.14 | 0.59 | |
| RA333 | 1,000 | 22-16 | 0.136 | #6 | | 0.72 | 0.23 | 0.14 | 0.59 | |
| RA18-6 | 100 | 22-16 | 0.136 | #6 | | 0.86 | 0.26 | 0.25 | 0.71 | |

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RA853 | 1,000 | 22-16 | 0.136 | #6 | WT145A | 0.86 | 0.26 | 0.25 | 0.71 | .03 |
| RA18-8 | 100 | | | #8 | | 0.89 | 0.26 | 0.25 | 0.71 | |
| RA833 | 1,000 | | | #8 | | 0.86 | 0.26 | 0.25 | 0.71 | |
| RA863 | 1,000 | | | #8 | | 0.89 | 0.26 | 0.25 | 0.71 | |
| RA18-10 | 100 | | | #10 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RA873 | 1,000 | | | #10 | 0.89 | 0.31 | 0.25 | 0.71 | | |
| RA18-14 | 100 | | | 1/4 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA713 | 1,000 | | | 1/4 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA18-516 | 100 | | | 5/16 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA723 | 1,000 | | | 5/16 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA18-38 | 100 | | | 3/8 in. | 1.20 | 0.53 | 0.35 | 0.87 | | |
| RA733 | 1,000 | | | 3/8 in. | 1.20 | 0.53 | 0.35 | 0.87 | | |
| RA18-12 | 100 | | | 1/2 in. | 1.30 | 0.72 | 0.50 | 0.92 | | |
| RA753 | 1,000 | | | 1/2 in. | 1.30 | 0.72 | 0.50 | 0.92 | | |

* Not listed by UL or CSA

** CSA Certified only


Most standard bulk catalogue numbers can be put on Mylar Tape for reel feed applications (i.e. 12050 tool and application). Please put the suffix M for Mylar tape i.e. RA2573M.

Ring Terminals

Nylon-Insulated Ring Terminals



| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RB14-4 | 100 | 18-14 | 0.162 | #4 | ERG4001 | 0.72 | 0.26 | 0.14 | 0.59 | 0.03 |
| RB1323 | 1,000 | | | #4 | | 0.72 | 0.26 | 0.14 | 0.59 | |
| RB14-6 | 100 | | | #6 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB853 | 1,000 | | | #6 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB1333 | 1,000 | | | #6 | | 0.74 | 0.26 | 0.14 | 0.59 | |
| RB14-8 | 100 | | | #8 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB863 | 1,000 | | | #8 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB14-10 | 100 | | | #10 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB873 | 1,000 | | | #10 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB14-14 | 100 | | | 1/4 in. | | 1.08 | 0.47 | 0.31 | 0.81 | |
| RB713 | 1,000 | | | 1/4 in. | | 1.08 | 0.47 | 0.31 | 0.81 | |
| RB14-516 | 100 | | | 5/16 in. | | 1.08 | 0.47 | 0.31 | 0.84 | |
| RB723 | 1,000 | | | 5/16 in. | | 1.08 | 0.47 | 0.31 | 0.84 | |
| RB14-38 | 100 | | | 3/8 in. | | 1.17 | 0.53 | 0.35 | 0.87 | |
| RB733 | 1,000 | | | 3/8 in. | | 1.17 | 0.53 | 0.35 | 0.87 | |
| RB14-12 | 100 | | | 1/2 in. | | 1.25 | 0.72 | 0.50 | 0.90 | |
| RB753 | 1,000 | 1/2 in. | 1.25 | 0.72 | 0.50 | 0.90 | | | | |

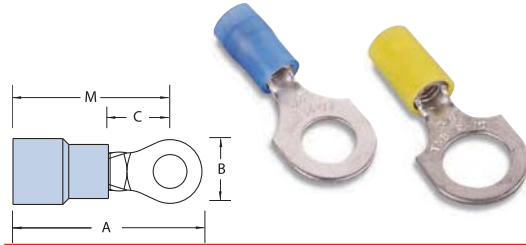


| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RC10-6 | 50 | 12-10 | 0.210 | #6 | ERG4001 | 1.00 | 0.37 | 0.27 | 0.81 | 0.04 |
| RC333 | 500 | | | #6 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC10-8 | 50 | | | #8 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC863 | 500 | | | #8 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC10-10 | 50 | | | #10 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC363 | 500 | | | #10 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC10-14 | 50 | | | 1/4 in. | | 1.12 | 0.53 | 0.32 | 0.86 | |
| RC713 | 500 | | | 1/4 in. | | 1.12 | 0.53 | 0.32 | 0.86 | |
| RC10-516 | 50 | | | 5/16 in. | | 1.21 | 0.53 | 0.31 | 0.94 | |
| RC703 | 500 | | | 5/16 in. | | 1.21 | 0.53 | 0.31 | 0.94 | |
| RC10-38 | 50 | | | 3/8 in. | | 1.27 | 0.59 | 0.35 | 0.98 | |
| RC733 | 500 | | | 3/8 in. | | 1.27 | 0.59 | 0.35 | 0.98 | |
| RC10-12 | 50 | | | 1/2 in. | | 1.37 | 0.72 | 0.52 | 1.02 | |
| RC753 | 500 | | | 1/2 in. | | 1.37 | 0.72 | 0.52 | 1.02 | |

Nylon-Insulated Ring Terminals — Expanded Entry




| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RB14-4X | 100 | 18-14 | 0.190 | #4 | ER4001 | 0.80 | 0.26 | 0.14 | 0.67 | 0.03 |
| RB14-6X | 100 | | | #6 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB854 | 1,000 | | | #6 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB14-8X | 100 | | | #8 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB864 | 1,000 | | | #8 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB14-10X | 100 | | | #10 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB874 | 1,000 | | | #10 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB14-14X | 100 | | | 1/4 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB714 | 1,000 | | | 1/4 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB14-516X | 100 | | | 5/16 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB724 | 1,000 | | | 5/16 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB14-38X | 100 | | | 3/8 in. | | 1.25 | 0.53 | 0.42 | 0.95 | |
| RB734 | 1,000 | | | 3/8 in. | | 1.25 | 0.53 | 0.42 | 0.95 | |



| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RC10-6X | 50 | 12-10 | 0.250 | #6 | ERG4001 | 1.10 | 0.37 | 0.27 | 0.91 | 0.04 |
| RC334 | 500 | | | #6 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC10-8X | 50 | | | #8 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC864 | 500 | | | #8 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC10-10X | 50 | | | #10 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC364 | 500 | | | #10 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC10-14X | 50 | | | 1/4 in. | | 1.22 | 0.53 | 0.32 | 0.96 | |
| RC714 | 500 | | | 1/4 in. | | 1.22 | 0.53 | 0.32 | 0.96 | |
| RC10-516X | 50 | | | 5/16 in. | | 1.32 | 0.53 | 0.31 | 1.05 | |
| RC704 | 500 | | | 5/16 in. | | 1.32 | 0.53 | 0.31 | 1.05 | |
| RC10-38X | 50 | | | 3/8 in. | | 1.38 | 0.59 | 0.48 | 1.09 | |
| RC734 | 500 | | | 3/8 in. | | 1.38 | 0.59 | 0.48 | 1.09 | |
| RC10-12X | 50 | | | 1/2 in. | | 1.48 | 0.72 | 0.52 | 1.13 | |

Ring Terminals

Nylon-Insulated Large Ring Terminals

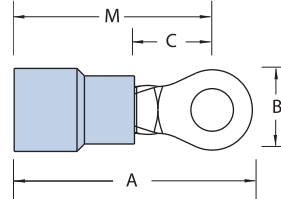

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | |
|-------------------|-----------|------------|-----------------|-----------|-----------|------------------|----------|---------|------|--------------------|------|------|------|
| | | | | | | A | B | C | M | | | | |
| Flex Class 41/24 | | | | | | | | | | | | | |
| RD167 | 200 | 8 | 0.340 | #8 | ERG4007 | 1.48 | 0.42 | 0.28 | 1.29 | 0.04 | | | |
| RD8-10 | 25 | | | #10 | | 1.48 | 0.42 | 0.28 | 1.29 | | | | |
| RD367 | 200 | | | #10 | | 1.48 | 0.42 | 0.28 | 1.29 | | | | |
| RD8-14 | 25 | | | 1/4 in. | | 1.54 | 0.46 | 0.36 | 1.32 | | | | |
| RD717 | 200 | | | 1/4 in. | | 1.54 | 0.46 | 0.36 | 1.32 | | | | |
| RD8-516 | 25 | | | 5/16 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD727 | 200 | | | 5/16 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD8-38 | 25 | | | 3/8 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD737 | 200 | | | 3/8 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD8-12* | 25 | | | 1/2 in. | | 1.79 | 0.82 | 0.55 | 1.39 | | | | |
| RD757* | 200 | | | 1/2 in. | | 1.79 | 0.82 | 0.55 | 1.39 | | | | |
| RD10161 | 200 | | | 8AN | | 0.270 | #8 | ERG4007 | 1.40 | | 0.41 | 0.24 | 1.20 |
| RD10361 | 200 | | | | | | #10 | | 1.40 | | 0.41 | 0.24 | 1.20 |
| RD10711 | 200 | | | | | | 1/4 in. | | 1.45 | | 0.45 | 0.27 | 1.22 |
| RD10721 | 200 | 5/16 in. | 1.53 | | 0.56 | | 0.34 | | 1.25 | | | | |
| RD10731 | 200 | 3/8 in. | 1.53 | | 0.56 | | 0.34 | | 1.25 | | | | |
| Flex Class 63/24 | | | | | | | | | | | | | |
| RE6-10 | 20 | 6 | 0.420 | #10 | ERG4007 | 1.65 | 0.49 | 0.28 | 1.40 | 0.04 | | | |
| RE267 | 200 | | | #10 | | 1.65 | 0.49 | 0.28 | 1.40 | | | | |
| RE6-14 | 20 | | | 1/4 in. | | 1.65 | 0.49 | 0.28 | 1.40 | | | | |
| RE717 | 200 | | | 1/4 in. | | 1.65 | 0.49 | 0.28 | 1.40 | | | | |
| RE6-516 | 20 | | | 5/16 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE727 | 200 | | | 5/16 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE6-38 | 20 | | | 3/8 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE737 | 200 | | | 3/8 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE6-12* | 20 | | | 1/2 in. | | 1.83 | 0.82 | 0.55 | 1.43 | | | | |
| RE757* | 200 | | | 1/2 in. | | 1.83 | 0.82 | 0.55 | 1.43 | | | | |
| RE10261 | 200 | | | 6AN | | 0.315 | #10 | ERG4007 | 1.55 | | 0.49 | 0.24 | 1.31 |
| RE10711 | 200 | | | | | | 1/4 in. | | 1.55 | | 0.49 | 0.27 | 1.31 |
| RE10721 | 200 | | | | | | 5/16 in. | | 1.70 | | 0.60 | 0.34 | 1.40 |
| RE10731 | 200 | | | | | | 3/8 in. | | 1.70 | | 0.60 | 0.34 | 1.40 |
| Flex Class 105/24 | | | | | | | | | | | | | |
| RF4-10 | 15 | 4 | 0.510 | #10 | TBM6S | 1.76 | 0.56 | 0.36 | 1.49 | 0.04 | | | |
| RF267 | 100 | | | #10 | | 1.76 | 0.56 | 0.36 | 1.49 | | | | |
| RF4-14 | 15 | | | 1/4 in. | | 1.76 | 0.56 | 0.36 | 1.49 | | | | |
| RF717 | 100 | | | 1/4 in. | | 1.76 | 0.56 | 0.36 | 1.49 | | | | |
| RF4-516 | 15 | | | 5/16 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF727 | 100 | | | 5/16 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF4-38 | 15 | | | 3/8 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF737 | 100 | | | 3/8 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF757* | 100 | | | 1/2 in. | | 1.90 | 0.82 | 0.55 | 1.49 | | | | |
| RF10261 | 100 | | | 4AN | | 0.380 | #10 | TBM6S | 1.78 | | 0.55 | 0.30 | 1.51 |
| RF10711 | 100 | | | | | | 1/4 in. | | 1.78 | | 0.55 | 0.30 | 1.51 |
| RF10721 | 100 | | | | | | 5/16 in. | | 1.80 | | 0.62 | 0.34 | 1.49 |
| RF10731 | 100 | | | | | | 3/8 in. | | 1.80 | | 0.62 | 0.34 | 1.49 |

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|---------|------|------|--------------------|------|------|
| | | | | | | A | B | C | M | | | |
| RG2-10 | 10 | 2 | 0.588 | #10 | TBM6S | 2.15 | 0.69 | 0.40 | 1.83 | 0.05 | | |
| RG267 | 50 | | | #10 | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-14 | 10 | | | 1/4 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG717 | 50 | | | 1/4 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-516 | 10 | | | 5/16 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG727 | 50 | | | 5/16 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-38 | 10 | | | 3/8 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG737 | 50 | | | 3/8 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-12 | 10 | | | 1/2 in. | | 2.35 | 0.80 | 0.49 | 1.93 | | | |
| RG757 | 50 | | | 1/2 in. | | 2.35 | 0.80 | 0.49 | 1.93 | | | |
| RG9711 | 50 | | | 2AN | | 0.453 | 1/4 in. | 2.07 | 0.69 | | 0.40 | 1.74 |
| RG9731 | 50 | | | | | | 3/8 in. | 2.07 | 0.69 | | 0.40 | 1.74 |
| RG9751 | 50 | | | | | | 1/2 in. | 2.26 | 0.80 | | 0.49 | 1.84 |
| RH717 | 50 | | | | | | 1/4 in. | 2.14 | 0.77 | | 0.43 | 1.81 |
| RH727 | 50 | 5/16 in. | 2.14 | | 0.77 | | 0.43 | 1.81 | | | | |
| RH737 | 50 | 1/0 | 0.629 | 3/8 in. | 2.14 | 0.77 | 0.43 | 1.81 | | | | |
| RH757 | 50 | | | 1/2 in. | 2.34 | 0.77 | 0.54 | 1.90 | | | | |
| RH9711 | 50 | | | 1/4 in. | 2.14 | 0.77 | 0.44 | 1.81 | | | | |
| RH9731 | 50 | | | 3/8 in. | 2.14 | 0.77 | 0.44 | 1.81 | | | | |
| RH9751 | 50 | | | 1/2 in. | 2.34 | 0.77 | 0.54 | 1.90 | | | | |
| RJ717 | 100 | 1AN | 0.500 | 1/4 in. | 2.34 | 0.83 | 0.46 | 1.96 | | | | |
| RJ727 | 100 | | | 5/16 in. | 2.34 | 0.83 | 0.46 | 1.96 | | | | |
| RJ737 | 100 | | | 3/8 in. | 2.34 | 0.83 | 0.46 | 1.96 | | | | |
| RJ757 | 100 | | | 1/2 in. | 2.48 | 0.89 | 0.54 | 2.03 | | | | |
| RJ9711 | 50 | | | 1/4 in. | 2.35 | 0.83 | 0.46 | 1.97 | | | | |
| RJ9731 | 50 | 1/0AN | 0.550 | 3/8 in. | 2.35 | 0.83 | 0.46 | 1.97 | | | | |
| RJ9751 | 50 | | | 1/2 in. | 2.49 | 0.89 | 0.55 | 2.04 | | | | |
| RK717 | 25 | | | 1/4 in. | 2.60 | 0.93 | 0.54 | 2.21 | | | | |
| RK727 | 25 | | | 3/0 | 2.60 | 0.93 | 0.54 | 2.21 | | | | |
| RK737 | 25 | | | 3/8 in. | 2.60 | 0.93 | 0.54 | 2.21 | | | | |
| RK9731 | 100 | 2/0AN | 0.610 | 3/8 in. | 2.52 | 0.93 | 0.55 | 2.14 | | | | |
| RK9751 | 100 | | | 1/2 in. | 2.60 | 0.93 | 0.55 | 2.15 | | | | |
| RL737 | 25 | | | 3/8 in. | 2.83 | 1.04 | 0.57 | 2.35 | | | | |
| RL757 | 25 | | | 4/0 | 2.83 | 1.04 | 0.57 | 2.35 | | | | |
| RL9731 | 25 | | | 1/2 in. | 2.83 | 1.04 | 0.57 | 2.35 | | | | |
| RL9751 | 25 | 3/0AN | 0.680 | 3/8 in. | 2.83 | 1.04 | 0.57 | 2.36 | | | | |
| RL9751 | 25 | | | 1/2 in. | 2.83 | 1.04 | 0.57 | 2.36 | | | | |
| RM737 | 20 | | | 3/8 in. | 3.00 | 1.13 | 0.65 | 2.51 | | | | |
| RM747 | 20 | | | 250kcmil | 3.00 | 1.13 | 0.65 | 2.51 | | | | |
| RM757 | 20 | | | 1/2 in. | 3.00 | 1.13 | 0.65 | 2.51 | | | | |
| RM9731 | 20 | 4/0AN | 0.750 | 3/8 in. | 3.00 | 1.13 | 0.66 | 2.51 | | | | |
| RM9751 | 20 | | | 1/2 in. | 3.00 | 1.13 | 0.66 | 2.51 | | | | |

*Braze Seam
AN=Aircraft Wire

Ring Terminals

Vinyl-Insulated Ring Terminals


Extra-length PVC sleeve offers extra protection



| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| 18RA-4 | 100 | 22-16 | 0.150 | #4 | ERG4001 | 0.97 | 0.31 | 0.27 | 0.81 | 0.03 |
| RA77 | 1,000 | | | #4 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| 18RA-6 | 100 | | | #6 | | 0.94 | 0.25 | 0.27 | 0.81 | |
| RA857 | 1,000 | | | #6 | | 0.94 | 0.25 | 0.27 | 0.81 | |
| 18RA-8 | 100 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| RA867 | 1,000 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| 18RA-10 | 100 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| RA877 | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| 18RA-14 | 100 | | | 1/4 in. | | 1.13 | 0.50 | 0.37 | 0.88 | |
| RA717 | 1,000 | | | 1/4 in. | | 1.13 | 0.50 | 0.37 | 0.88 | |
| 18RA-516 | 100 | | | 5/16 in. | | 1.13 | 0.50 | 0.37 | 0.88 | |
| RA727 | 1,000 | | | 5/16 in. | | 1.13 | 0.50 | 0.37 | 0.88 | |
| 18RA-38 | 100 | | | 3/8 in. | | 1.24 | 0.54 | 0.37 | 0.91 | |
| RA737 | 1,000 | | | 3/8 in. | | 1.24 | 0.54 | 0.37 | 0.91 | |
| 14RB-4 | 100 | 18-14 | 0.170 | #4 | ERG4001 | 0.94 | 0.25 | 0.27 | 0.81 | 0.03 |
| RB1327 | 1,000 | | | #4 | | 0.94 | 0.25 | 0.27 | 0.81 | |
| 14RB-6 | 100 | | | #6 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| RB857 | 1,000 | | | #6 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| 14RB-8 | 100 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| RB867 | 1,000 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| 14RB-10 | 100 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| RB877 | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | |
| 14RB-14 | 100 | | | 1/4 in. | | 1.14 | 0.50 | 0.38 | 0.89 | |
| RB717 | 1,000 | | | 1/4 in. | | 1.14 | 0.50 | 0.38 | 0.89 | |
| 14RB-516 | 100 | | | 5/16 in. | | 1.15 | 0.50 | 0.38 | 0.89 | |
| RB727 | 1,000 | | | 5/16 in. | | 1.15 | 0.50 | 0.38 | 0.89 | |
| 14RB-38 | 100 | | | 3/8 in. | | 1.16 | 0.54 | 0.38 | 0.91 | |
| RB737 | 1,000 | | | 3/8 in. | | 1.16 | 0.54 | 0.38 | 0.91 | |
| 10RC-6 | 50 | 12-10 | 0.210 | #6 | ERG4001 | 1.06 | 0.31 | 0.27 | 0.90 | 0.04 |
| RC337 | 500 | | | #6 | | 1.06 | 0.31 | 0.27 | 0.90 | |
| 10RC-8 | 50 | | | #8 | | 1.06 | 0.31 | 0.27 | 0.90 | |
| RC777 | 500 | | | #8 | | 1.06 | 0.31 | 0.27 | 0.90 | |
| 10RC-10 | 50 | | | #10 | | 1.06 | 0.31 | 0.27 | 0.90 | |
| RC367 | 500 | | | #10 | | 1.06 | 0.31 | 0.27 | 0.90 | |
| 10RC-14 | 50 | | | 1/4 in. | | 1.16 | 0.50 | 0.27 | 0.90 | |
| RC717 | 500 | | | 1/4 in. | | 1.16 | 0.50 | 0.27 | 0.90 | |
| 10RC-516 | 50 | | | 5/16 in. | | 1.17 | 0.50 | 0.37 | 0.92 | |
| RC707 | 500 | | | 5/16 in. | | 1.17 | 0.50 | 0.37 | 0.92 | |
| 10RC-38 | 50 | | | 3/8 in. | | 1.29 | 0.59 | 0.44 | 0.99 | |
| RC737 | 500 | | | 3/8 in. | | 1.29 | 0.59 | 0.44 | 0.99 | |

Vinyl-Insulated Ring Terminals – Expanded Insulation


A wider wire entry for heavy-wall insulation

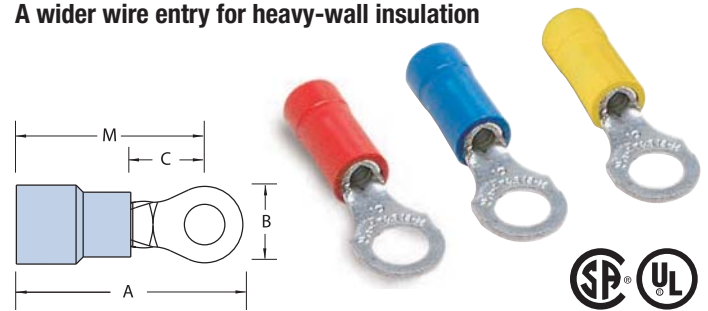

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | | |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|---------|---------|------|--------------------|------|------|------|------|
| | | | | | | A | B | C | M | | | | | |
| 18RA-4X | 100 | 22-16 | 0.170 | #4 | ERG4001 | 0.97 | 0.31 | 0.27 | 0.81 | 0.03 | | | | |
| 18RA-6X | 100 | | | #6 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-8X | 100 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-38X | 100 | | | 3/8 in. | | 1.15 | 0.54 | 0.35 | 0.90 | | | | | |
| RA857-170 | 1,000 | | | #6 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| RA867-170 | 1,000 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-10X | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| RA877-170 | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-14X | 100 | | | 1/4 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| RA727-170 | 1,000 | | | 5/16 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| 14RB-4X | 100 | | | 18-14 | | 0.200 | #4 | ERG4001 | 0.94 | | 0.25 | 0.27 | 0.81 | 0.03 |
| 14RB-6X | 100 | | | | | | #6 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| RB857-200 | 1,000 | | | | | | #6 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| 14RB-8X | 100 | | | | | | #8 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| RB867-200 | 1,000 | #8 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| 14RB-10X | 100 | #10 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| RB877-200 | 1,000 | #10 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| 14RB-14X | 100 | 1/4 in. | 1.14 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| RB717-200 | 1,000 | 1/4 in. | 1.14 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| 14RB-516X | 100 | 5/16 in. | 1.15 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| 14RB-38X | 100 | 3/8 in. | 1.16 | | 0.54 | | 0.35 | | 0.91 | | | | | |
| 10RC-6X | 50 | 12-10 | 0.250 | | #6 | | ERG4001 | | 1.06 | 0.31 | 0.27 | 0.90 | 0.04 | |
| RC337-250 | 500 | | | | #6 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| 10RC-8X | 50 | | | | #8 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| RC777-250 | 500 | | | #8 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| 10RC-10X | 50 | | | #10 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| RC367-250 | 500 | | | #10 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| 10RC-14X | 50 | | | 1/4 in. | 1.16 | 0.50 | | 0.27 | 0.90 | | | | | |
| RC717-250 | 500 | | | 1/4 in. | 1.16 | 0.50 | | 0.27 | 0.90 | | | | | |
| 10RC-516X | 50 | | | 5/16 in. | 1.17 | 0.50 | | 0.37 | 0.92 | | | | | |
| 10RC-38X | 50 | | | 3/8 in. | 1.29 | 0.59 | | 0.44 | 0.99 | | | | | |
| RC737-250 | 500 | | | 3/8 in. | 1.29 | 0.59 | | 0.44 | 0.99 | | | | | |

Ring Terminals

Vinyl-Insulated Large Ring Terminals

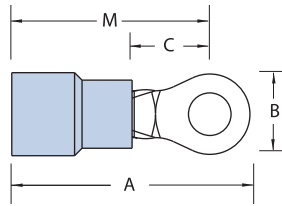


| Cat. No. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-------------------------|------------|-----------------|-----------|-----------|------------------|------|-------|------|--------------------|
| | | | | | A | B | C | M | |
| RDV167 | 8 | 0.340 | #8 | ERG4007 | 1.36 | 0.42 | 0.28 | 1.17 | 0.04 |
| RDV367 | | | #10 | | 1.36 | 0.42 | 0.28 | 1.17 | |
| RDV717 | | | 1/4 in. | | 1.42 | 0.46 | 0.36 | 1.20 | |
| RDV727 | | | 5/16 in. | | 1.51 | 0.57 | 0.36 | 1.23 | |
| RDV737 | | | 3/8 in. | | 1.51 | 0.57 | 0.36 | 1.23 | |
| RDV757* | | | 1/2 in. | | 1.67 | 0.82 | 0.55 | 1.27 | |
| REV267 | 6 | 0.390 | #10 | ERG4007 | 1.48 | 0.45 | 0.28 | 1.23 | |
| REV717 | | | 1/4 in. | | 1.48 | 0.49 | 0.28 | 1.23 | |
| REV727 | | | 5/16 in. | | 1.59 | 0.61 | 0.34 | 1.30 | |
| REV737 | | | 3/8 in. | | 1.59 | 0.61 | 0.34 | 1.30 | |
| REV757* | | | 1/2 in. | | 1.66 | 0.82 | 0.55 | 1.26 | |
| | | | | | | | TBM6S | | |

*Brazeed Seam

Ring Terminals

Non-Insulated Ring Terminals

Constructed of electrolytic copper for high conductivity!

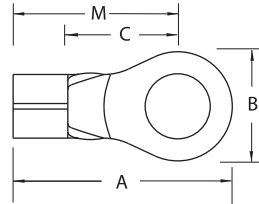


| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|--------------------|------|------|--------------------|
| | | | | | A | B | C | M | |
| A18-4 | 100 | 22-16 | #4 | ERG4002 | 0.75 | 0.31 | 0.27 | 0.59 | 0.03 |
| A18-6 | 100 | | #6 | | 0.72 | 0.25 | 0.27 | 0.59 | |
| A85 | 1,000 | | #6 | | 0.72 | 0.25 | 0.27 | 0.59 | |
| A18-8 | 100 | | #8 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A86 | 1,000 | | #8 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A18-10 | 100 | | #10 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A87 | 1,000 | | #10 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A18-14 | 100 | | 1/4 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A71 | 1,000 | | 1/4 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A18-516 | 100 | | 5/16 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A72 | 1,000 | | 5/16 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A18-38 | 100 | | 3/8 in. | | 0.99 | 0.54 | 0.35 | 0.67 | |
| A73 | 1,000 | | 3/8 in. | | 0.99 | 0.54 | 0.35 | 0.67 | |
| A18-12 | 100 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| A75 | 1,000 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| B14-4 | 100 | | 18-14 | | #4 | ERG4002 ERG4005 | 0.72 | 0.25 | |
| B132 | 1,000 | #4 | | 0.72 | 0.25 | | 0.27 | 0.59 | |
| B14-6 | 100 | #6 | | 0.72 | 0.25 | | 0.27 | 0.59 | |
| B133 | 1,000 | #6 | | 0.72 | 0.25 | | 0.27 | 0.59 | |
| B14-8 | 100 | #8 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B86 | 1,000 | #8 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B14-10 | 100 | #10 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B87 | 1,000 | #10 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B14-14 | 100 | 1/4 in. | | 0.93 | 0.50 | | 0.38 | 0.68 | |

| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|--------------------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| B71 | 1,000 | 18-14 | 1/4 in. | ERG4002 ERG4005 | 0.93 | 0.50 | 0.38 | 0.68 | 0.03 |
| B14-516 | 100 | | 5/16 in. | | 0.93 | 0.50 | 0.38 | 0.68 | |
| B72 | 1,000 | | 5/16 in. | | 0.93 | 0.50 | 0.38 | 0.68 | |
| B14-38 | 100 | | 3/8 in. | | 0.96 | 0.54 | 0.35 | 0.68 | |
| B73 | 1,000 | | 3/8 in. | | 0.96 | 0.54 | 0.35 | 0.68 | |
| B14-12 | 100 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| B75-TB | 1,000 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| B85 | 1,000 | | #6 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| B134 | 1,000 | | #8 | | 0.72 | 0.25 | 0.27 | 0.59 | |
| C10-6-SK | 50 | | #6 | | 0.82 | 0.31 | 0.27 | 0.66 | |
| C33 | 500 | #6 | 0.82 | 0.31 | 0.27 | 0.66 | | | |
| C10-8-SK | 50 | #8 | 0.82 | 0.31 | 0.27 | 0.66 | | | |
| C77 | 500 | #8 | 0.82 | 0.31 | 0.27 | 0.66 | | | |
| C10-10 | 50 | #10 | 0.85 | 0.38 | 0.27 | 0.66 | | | |
| C26 | 500 | #10 | 0.85 | 0.38 | 0.27 | 0.66 | | | |
| C36 | 500 | #10 | 0.82 | 0.31 | 0.27 | 0.66 | | | |
| C10-14 | 50 | 1/4 in. | 0.91 | 0.50 | 0.27 | 0.66 | | | |
| C71 | 500 | 1/4 in. | 0.91 | 0.50 | 0.27 | 0.66 | | | |
| C10-516 | 50 | 5/16 in. | 0.98 | 0.50 | 0.38 | 0.73 | | | |
| C70 | 500 | 5/16 in. | 0.98 | 0.50 | 0.38 | 0.73 | | | |
| C72 | 500 | 5/16 in. | 1.10 | 0.59 | 0.45 | 0.80 | | | |
| C10-38 | 50 | 3/8 in. | 1.10 | 0.59 | 0.45 | 0.80 | | | |
| C73 | 500 | 3/8 in. | 1.10 | 0.59 | 0.45 | 0.80 | | | |
| C10-12 | 50 | 1/2 in. | 1.21 | 0.72 | 0.38 | 0.84 | | | |
| C75 | 500 | 1/2 in. | 1.21 | 0.72 | 0.38 | 0.84 | | | |

Ring Terminals

Non-Insulated Large Ring Terminals — Brazed Seam

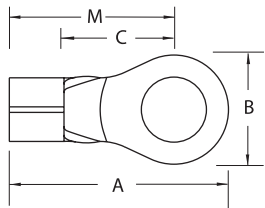


| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| D8-10 | 25 | 8 | #10 | TBM6S | 1.09 | 0.42 | 0.34 | 0.90 | 0.06 |
| D36 | 200 | | #10 | | 1.09 | 0.42 | 0.34 | 0.90 | |
| D26 | 200 | | #10 | | 1.13 | 0.48 | 0.36 | 0.90 | |
| D8-14-SK | 25 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| D71 | 200 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| D8-516 | 25 | | 5/16 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D72 | 200 | | 5/16 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D8-38 | 25 | | 3/8 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D73 | 200 | | 3/8 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D8-12 | 25 | | 1/2 in. | | 1.49 | 0.82 | 0.55 | 1.09 | |
| D75 | 200 | 1/2 in. | 1.49 | 0.82 | 0.55 | 1.09 | | | |
| E6-10 | 20 | 6 | #10 | TBM6S | 1.13 | 0.48 | 0.36 | 0.90 | 0.06 |
| E26 | 200 | | #10 | | 1.13 | 0.48 | 0.36 | 0.90 | |
| E6-14 | 20 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| E71 | 200 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| E6-516 | 20 | | 5/16 in. | | 1.32 | 0.60 | 0.49 | 1.03 | |
| | | | | | | | | | |



| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| E72 | 200 | 6 | 5/16 in. | TBM6S | 1.32 | 0.60 | 0.49 | 1.03 | 0.06 |
| E6-38 | 20 | | 3/8 in. | | 1.32 | 0.60 | 0.49 | 1.03 | |
| E73 | 200 | | 3/8 in. | | 1.32 | 0.60 | 0.49 | 1.03 | |
| E6-12 | 20 | | 1/2 in. | | 1.49 | 0.82 | 0.55 | 1.08 | |
| E75 | 200 | | 1/2 in. | | 1.49 | 0.82 | 0.55 | 1.08 | |
| F4-10 | 20 | | #10 | | 1.16 | 0.48 | 0.36 | 0.93 | |
| F26 | 200 | #10 | 1.16 | 0.48 | 0.36 | 0.93 | | | |
| F4-14 | 20 | 4 | 1/4 in. | TBM6S | 1.16 | 0.48 | 0.36 | 0.93 | 0.07 |
| F71-TB | 200 | | 1/4 in. | | 1.16 | 0.48 | 0.36 | 0.93 | |
| F4-516 | 20 | | 5/16 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F72 | 200 | | 5/16 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F4-38 | 20 | | 3/8 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F73 | 200 | | 3/8 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F4-12 | 20 | 1/2 in. | 1.52 | 0.82 | 0.55 | 1.11 | | | |
| F75 | 200 | 1/2 in. | 1.52 | 0.82 | 0.55 | 1.11 | | | |

Non-Insulated Large Ring Terminals — Tubular

Select the configuration you need!



| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| D10161 | 200 | 8/8AN | #8 | ERG4005 | 1.15 | 0.41 | 0.28 | 0.95 | 0.04 |
| D10361 | 200 | | #10 | | 1.15 | 0.41 | 0.28 | 0.95 | |
| D10711 | 200 | | 1/4 in. | | 1.20 | 0.45 | 0.36 | 0.97 | |
| D10721 | 200 | | 5/16 in. | | 1.28 | 0.56 | 0.36 | 1.00 | |
| D10731 | 200 | | 3/8 in. | | 1.28 | 0.56 | 0.36 | 1.00 | |
| D975* | 200 | | 1/2 in. | | 1.46 | 0.83 | 0.49 | 1.06 | |
| E10261 | 200 | 6/6AN | #10 | ERG4005 | 1.26 | 0.49 | 0.24 | 1.02 | 0.04 |
| E10711 | 200 | | 1/4 in. | | 1.26 | 0.49 | 0.27 | 0.99 | |
| E10721 | 200 | | 5/16 in. | | 1.38 | 0.60 | 0.34 | 1.04 | |
| E10731 | 200 | | 3/8 in. | | 1.38 | 0.60 | 0.34 | 1.04 | |
| F10261 | 100 | | #10 | | 1.37 | 0.55 | 0.30 | 1.07 | |
| F10711 | 100 | | 1/4 in. | | 1.37 | 0.55 | 0.30 | 1.07 | |
| F10721 | 100 | 4/4AN | 5/16 in. | ERG4008 | 1.42 | 0.62 | 0.34 | 1.08 | 0.05 |
| F10731 | 100 | | 3/8 in. | | 1.42 | 0.62 | 0.34 | 1.08 | |
| F975* | 200 | | 1/2 in. | | 1.49 | 0.83 | 0.45 | 1.10 | |
| G926 | 100 | | #10 | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-14 | 10 | | 1/4 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G971 | 100 | | 1/4 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-516 | 10 | 2/2AN | 5/16 in. | ERG4008 | 1.59 | 0.69 | 0.40 | 1.26 | 0.05 |
| G972 | 100 | | 5/16 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-38 | 10 | | 3/8 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G973 | 100 | | 3/8 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-12 | 10 | | 1/2 in. | | 1.79 | 0.80 | 0.49 | 1.36 | |
| G975 | 100 | | 1/2 in. | | 1.79 | 0.80 | 0.49 | 1.36 | |

*Brazed Seam


AN – Aircraft Wire



| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions | | | | Stock Thick. (in.) |
|----------|-----------|----------------|-----------|-----------|------------|-------|------|------|--------------------|
| | | | | | A | B | C | M | |
| H10-14 | 10 | 1AN-1/0 | 1/4 in. | ERG4008 | 1.65 | 0.77 | 0.43 | 1.32 | 0.05 |
| H971 | 100 | | 1/4 in. | | 1.65 | 0.77 | 0.43 | 1.32 | |
| H972 | 100 | | 5/16 in. | | 1.65 | 0.77 | 0.43 | 1.32 | |
| H973 | 100 | | 3/8 in. | | 1.65 | 0.77 | 0.43 | 1.32 | |
| H975 | 100 | | 1/2 in. | | 1.85 | 0.77 | 0.54 | 1.41 | |
| J971 | 50 | | 1/0AN-2/0 | | 1/4 in. | TBM6S | 1.94 | 0.84 | |
| J972 | 50 | 5/16 in. | | 1.94 | 0.84 | | 0.48 | 1.53 | |
| J20-38 | 10 | 3/8 in. | | 1.84 | 0.83 | | 0.46 | 1.46 | |
| J973 | 50 | 3/8 in. | | 1.99 | 0.84 | | 0.53 | 1.58 | |
| J974 | 50 | 7/16 in. | | 1.99 | 0.89 | | 0.51 | 1.56 | |
| J975 | 50 | 1/2 in. | | 1.99 | 0.89 | | 0.51 | 1.56 | |
| J976 | 50 | 2/0AN-3/0 | 5/8 in. | TBM6S | 1.99 | 0.89 | 0.51 | 1.56 | 0.06 |
| K971 | 50 | | 1/4 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K972 | 50 | | 5/16 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K30-38 | 5 | | 3/8 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K973 | 50 | | 3/8 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K974 | 50 | | 7/16 in. | | 2.08 | 0.93 | 0.54 | 1.70 | |
| K975 | 50 | 1/2 in. | 2.08 | 0.93 | 0.54 | 1.70 | | | |
| L971 | 50 | 3/0AN-4/0 | 1/4 in. | TBM6S | 2.25 | 1.04 | 0.57 | 1.77 | 0.07 |
| L972 | 50 | | 5/16 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L40-38 | 5 | | 3/8 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L973 | 50 | | 3/8 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L974 | 50 | | 7/16 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L975 | 50 | | 1/2 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| M972 | 50 | 4/0AN-250kcmil | 5/16 in. | TBM6S | 2.28 | 1.12 | 0.62 | 1.90 | 0.07 |
| M250-38 | 5 | | 3/8 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| M973 | 50 | | 3/8 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| M974 | 50 | | 7/16 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| M975 | 50 | | 1/2 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| | | | | | | | | | |

Ring Terminals


Insulated Heavy-Duty Ring Terminals

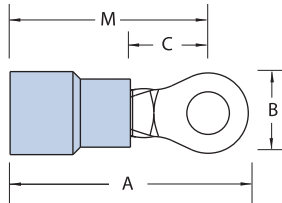

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | |
|--------------|-----------|------------------|-----------------|-----------|-----------|------------------|---------|------|------|--------------------|------|------|------|
| | | | | | | A | B | C | M | | | | |
| Nylon | | | | | | | | | | | | | |
| RBC14-6 | 50 | 16-14 Heavy-duty | 0.210 | #6 | WT2130A | 0.98 | 0.25 | 0.29 | 0.85 | 0.05 | | | |
| RBC14-8 | 50 | 16-14 Heavy-duty | | #8 | | 1.04 | 0.39 | 0.29 | 0.85 | | | | |
| RBC863 | 500 | | | #8 | | 1.04 | 0.39 | 0.29 | 0.85 | | | | |
| RBC14-10 | 50 | 16-14 Heavy-duty | | #10 | | 1.04 | 0.39 | 0.29 | 0.85 | | | | |
| RBC14-14 | 50 | 16-14 Heavy-duty | | 1/4 in. | | 1.10 | 0.51 | 0.29 | 0.85 | | | | |
| RBC713 | 500 | | | 1/4 in. | | 1.10 | 0.51 | 0.29 | 0.85 | | | | |
| RBC14-516 | 50 | 16-14 Heavy-duty | | 5/16 in. | | 1.21 | 0.54 | 0.38 | 0.94 | | | | |
| RBC14-38 | 50 | 16-14 Heavy-duty | | 3/8 in. | | 1.26 | 0.63 | 0.38 | 0.94 | | | | |
| RBC14-12 | 50 | 16-14 Heavy-duty | | 1/2 in. | | 1.49 | 0.76 | 0.54 | 1.11 | | | | |
| RBC753 | 500 | | | 1/2 in. | | 1.49 | 0.76 | 0.54 | 1.11 | | | | |
| Vinyl | | | | | | | | | | | | | |
| 14RBC-6 | 50 | 16-14 Heavy-duty | | 0.210 | | #6 | WT2130A | 1.06 | 0.25 | | 0.29 | 0.93 | 0.05 |
| RBC857 | 500 | | #6 | | 1.06 | 0.25 | | 0.29 | 0.93 | | | | |
| 14RBC-8 | 50 | 16-14 Heavy-duty | #8 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| RBC867 | 500 | | #8 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| 14RBC-10 | 50 | 16-14 Heavy-duty | #10 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| RBC877 | 500 | | #10 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| 14RBC-14 | 50 | 16-14 Heavy-duty | 1/4 in. | | 1.19 | 0.51 | | 0.29 | 0.93 | | | | |
| RBC717 | 500 | | 1/4 in. | | 1.19 | 0.51 | | 0.29 | 0.93 | | | | |
| 14RBC-516 | 50 | 16-14 Heavy-duty | 5/16 in. | | 1.29 | 0.54 | | 0.38 | 1.03 | | | | |
| RBC727 | 500 | | 5/16 in. | | 1.29 | 0.54 | | 0.38 | 1.03 | | | | |
| 14RBC-38 | 50 | 16-14 Heavy-duty | 3/8 in. | | 1.34 | 0.63 | | 0.38 | 1.03 | | | | |
| RBC797 | 500 | | 3/8 in. | | 1.34 | 0.63 | | 0.38 | 1.03 | | | | |
| 14RBC-12 | 50 | 16-14 Heavy-duty | 1/2 in. | | 1.57 | 0.76 | | 0.54 | 1.19 | | | | |

Non-Insulated Heavy-Duty Ring Terminals

The heavy-duty terminal solution!

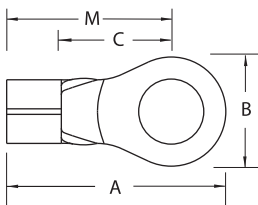


| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------------|-----------|--------------------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| BC14-6 | 50 | 16-14 Heavy-duty | #6 | ERG4002 ERG4005 | 0.81 | 0.25 | 0.29 | 0.68 | 0.05 |
| BC85 | 500 | | #6 | | 0.81 | 0.25 | 0.29 | 0.68 | |
| BC14-8 | 50 | 16-14 Heavy-duty | #8 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC86 | 500 | | #8 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC14-10 | 50 | 16-14 Heavy-duty | #10 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC87 | 500 | | #10 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC14-14 | 50 | 16-14 Heavy-duty | 1/4 in. | | 0.93 | 0.51 | 0.29 | 0.68 | |
| BC71 | 500 | | 1/4 in. | | 0.93 | 0.51 | 0.29 | 0.68 | |
| BC14-516 | 50 | 16-14 Heavy-duty | 5/16 in. | | 1.04 | 0.54 | 0.38 | 0.77 | |
| BC72 | 500 | | 5/16 in. | | 1.04 | 0.54 | 0.38 | 0.77 | |
| BC14-38 | 50 | 16-14 Heavy-duty | 3/8 in. | | 1.09 | 0.63 | 0.38 | 0.77 | |
| BC79 | 500 | | 3/8 in. | | 1.09 | 0.63 | 0.38 | 0.77 | |
| BC14-12 | 50 | 16-14 Heavy-duty | 1/2 in. | | 1.32 | 0.76 | 0.54 | 0.94 | |
| BC75 | 500 | | 1/2 in. | | 1.32 | 0.76 | 0.54 | 0.94 | |

Ring Terminals

Terminals for nichrome wire NW Series


High-Temperature Non-Insulated Rings — 1200° F Max.

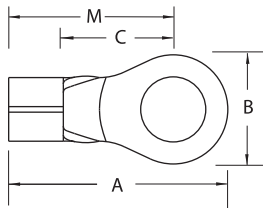

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| NW18-10 | 100 | 20-18 | 2.5 | #10 | WT1377 | 0.63 | 0.31 | 0.28 | 0.38 | 0.032 |
| NW52 | 1,000 | | | #8 | | | | | | |
| NW81 | 1,000 | 16-14 | 2.5 | #6 | WT1377 | 0.66 | 0.31 | 0.28 | 0.51 | 0.040 |
| NW14-8 | 100 | | | #8 | | | | | | |
| NW14-10 | 100 | | | #10 | | | | | | |
| NW83 | 1,000 | | | #10 | | | | | | |
| NW14-12 | 100 | | | #12* | | | | | | |
| NW84 | 1,000 | | | #12* | | | | | | |
| NW10-8 | 50 | 12-10 | 3 | #8 | WT1377 | 0.66 | 0.31 | 0.28 | 0.51 | 0.040 |
| NW10-10 | | | | #10 | | | | | | |
| NW10-12 | | | | #12* | | | | | | |

* #12 stud is smaller than 1/4 in. stud

Tefzel® Insulated Rings — Insulation Grip

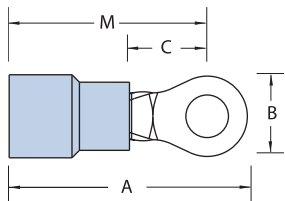


| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RAT853 | 1,000 | 22-18 | 0.140 | #6 | WT145C | 0.81 | 0.25 | 0.25 | 0.69 | 0.03 |
| RAT863 | | | | #8 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RAT873 | | | | #10 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RAT713 | | 1/4 in. | 1.07 | 0.46 | | 0.31 | 0.84 | | | |
| RBT853 | | 16-14 | 0.170 | #6 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RBT863 | | | | #8 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RBT873 | #10 | | | 0.84 | 0.31 | 0.25 | 0.69 | | | |
| RBT713 | 1/4 in. | 1.08 | 0.46 | 0.31 | 0.81 | | | | | |
| RCT333 | 500 | 12-10 | 0.210 | #6 | WT145C | 1.00 | 0.37 | 0.27 | 0.81 | 0.04 |
| RCT863 | | | | #8 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RCT363 | | | | #10 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RCT713 | | | | 1/4 in. | | 1.11 | 0.52 | 0.32 | 0.85 | |
| RCT703 | | | | 5/16 in. | | 1.23 | 0.52 | 0.31 | 0.96 | |
| RCT733 | | | | 3/8 in. | | 1.29 | 0.58 | 0.35 | 1.00 | |

Tefzel® is a registered trademark of DuPont

Ring Terminals

Nylon-Insulated Rectangular Rings

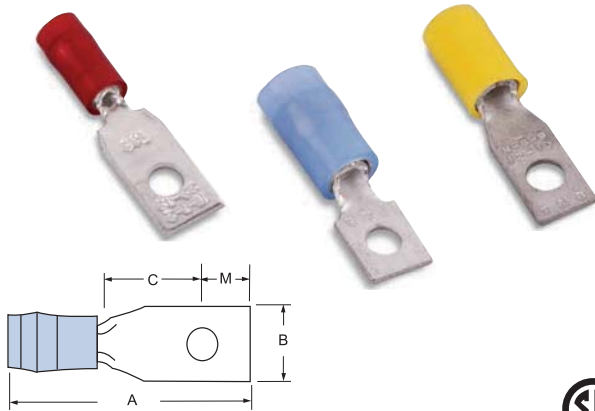


| Cat. No. | Pkg. Qty. | Bolt Hole | Wire Range | Rec. Tool | Dimensions (in.) | | | | BU-Ships Tongue Shape | Stock Thick. (in.) |
|----------|-----------|-----------|------------|-----------|------------------|--------|-------|-------|-----------------------|--------------------|
| | | | | | A | B | C | M | | |
| RA486 | 1,000 | #4 | 22-18 | ERG4001 | 0.796 | 0.237 | 0.237 | 0.143 | L86P-1 | 0.03 |
| RA485 | | #4 | | | 1.015 | 0.237 | 0.404 | 0.195 | L85P-1 | |
| RA483 | | #5 | | | 0.859 | 0.277 | 0.277 | 0.143 | L83P-1 | |
| RA484 | | #6 | | | 1.015 | 0.237 | 0.404 | 0.195 | L84P-1 | |
| RA481 | | #6 | | | 1.109 | 0.302 | 0.465 | 0.227 | L81P-1 | |
| RA482 | | #8 | | | 1.109 | 0.302 | 0.465 | 0.227 | L82P-1 | |
| RA480* | | #8 | | | 1.359 | 0.390 | 0.621 | 0.310 | L80P-1 | |
| RB486 | | #4 | | | 0.796 | 0.237 | 0.237 | 0.143 | L86P-2 | |
| RB485 | | #4 | | | 1.015 | 0.237 | 0.404 | 0.195 | L85P-2 | |
| RB483 | | #5 | | | 0.859 | 0.277 | 0.277 | 0.143 | L83P-2 | |
| RB484 | #6 | 1.015 | 0.237 | 0.404 | 0.195 | L84P-2 | | | | |
| RB481 | #6 | 1.109 | 0.302 | 0.465 | 0.227 | L81P-2 | | | | |
| RB482 | #8 | 1.109 | 0.302 | 0.465 | 0.227 | L82P-2 | | | | |
| RB480* | #8 | 1.359 | 0.390 | 0.621 | 0.310 | L80P-2 | | | | |
| RC486 | 500 | #4 | 12-10 | ERG4005 | 0.984 | 0.237 | 0.237 | 0.143 | L86P-3 | 0.04 |
| RC485 | | #4 | | | 1.187 | 0.237 | 0.404 | 0.195 | L85P-3 | |
| RC483 | | #5 | | | 1.046 | 0.277 | 0.277 | 0.143 | L83P-3 | |
| RC484 | | #6 | | | 1.203 | 0.237 | 0.404 | 0.195 | L84P-3 | |
| RC481 | | #6 | | | 1.281 | 0.302 | 0.465 | 0.227 | L81P-3 | |
| RC482 | | #8 | | | 1.281 | 0.302 | 0.465 | 0.227 | L82P-3 | |
| RC480* | #8 | 1.531 | 0.390 | 0.621 | 0.310 | L80P-3 | | | | |

* Not available on tape.

Note: RA, RB, RC486 for use with BU-Ships terminal board types 26TB. RA, RB, RC485 for use with 25TB and 27TB. RA, RB, RC483 for use with 8TB. RA, RB, RC484 for use with 10TB and 11TB. RA, RB, RC481 for use with 6TB, 7TB and 9TB. RA, RB, RC482 for use with 15TB. RA, RB, RC480 for use with 3TB, 4TB, 5TB, 16TB, 17TB and 18TB.

Note:
 22-18 ga. = 1-2 Navy
 16-14 ga. = 2-1/2-4 Navy
 12-10 ga. = 6-9 Navy

Non-Insulated Rectangular Rings

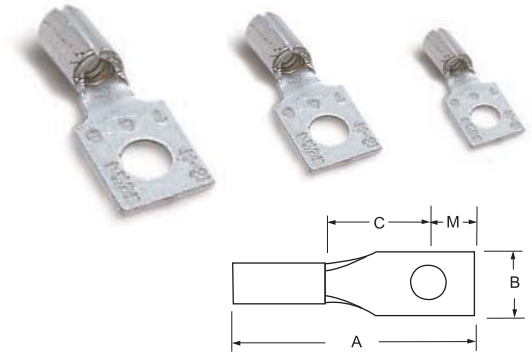

| Cat. No. | Pkg. Qty. | Bolt Hole | Wire Range | Rec. Tool | Dimensions (in.) | | | | BU-Ships Tongue Shape | Stock Thick. (in.) |
|----------|-----------|-----------|------------|-----------|------------------|-------|-------|-------|-----------------------|--------------------|
| | | | | | A | B | C | M | | |
| A486 | 1,000 | #4 | 22-18 | ERG4002 | 0.65 | 0.237 | 0.237 | 0.143 | L86 | 0.03 |
| A485 | | #4 | | | 0.87 | 0.237 | 0.404 | 0.195 | L85 | |
| A483 | | #5 | | | 0.70 | 0.277 | 0.277 | 0.143 | L83 | |
| A484 | | #6 | | | 0.87 | 0.237 | 0.404 | 0.195 | L84 | |
| A481 | | #6 | | | 0.96 | 0.302 | 0.465 | 0.227 | L81 | |
| A482 | | #8 | | | 0.96 | 0.302 | 0.465 | 0.227 | L82 | |
| A480* | | #8 | | | 1.21 | 0.390 | 0.621 | 0.310 | L80 | |
| B486 | | #4 | | | 0.65 | 0.237 | 0.237 | 0.143 | L86 | |
| B485 | | #4 | | | 0.87 | 0.237 | 0.404 | 0.195 | L85 | |
| B483 | | #5 | | | 0.70 | 0.277 | 0.277 | 0.143 | L83 | |
| B484 | #6 | 0.87 | 0.237 | 0.404 | 0.195 | L84 | | | | |
| B481 | #6 | 0.96 | 0.302 | 0.465 | 0.227 | L81 | | | | |
| B482 | #8 | 0.96 | 0.302 | 0.465 | 0.227 | L82 | | | | |
| B480* | #8 | 1.21 | 0.390 | 0.621 | 0.310 | L80 | | | | |
| C486 | 500 | #4 | 12-10 | ERG4005 | 0.73 | 0.237 | 0.237 | 0.143 | L86 | 0.04 |
| C485 | | #4 | | | 0.90 | 0.237 | 0.404 | 0.195 | L85 | |
| C483 | | #5 | | | 0.76 | 0.277 | 0.277 | 0.143 | L83 | |
| C484 | | #6 | | | 0.94 | 0.237 | 0.404 | 0.195 | L84 | |
| C481 | | #6 | | | 1.03 | 0.302 | 0.465 | 0.227 | L81 | |
| C482 | | #8 | | | 1.03 | 0.302 | 0.465 | 0.227 | L82 | |
| C480* | #8 | 1.27 | 0.390 | 0.621 | 0.310 | L80 | | | | |

* Not available on tape.

Note: A, B, C486 for use with BU-Ships terminal board types 26TB. A, B, C485 for use with 25TB, 27TB. A, B, C483 for use with 8TB. A, B, C484 for use with 10TB and 11TB. A, B, C481 for use with 6TB, 7TB and 9TB. A, B, C482 for use with 15TB. A, B, C480 for use with 3TB, 5TB, 16TB, 17TB and 18TB.


Note:
 22-18 ga. = 1-2 Navy
 16-14 ga. = 2-1/2-4 Navy
 12-10 ga. = 6-9 Navy

Ring Terminals



- Complete line of installing tools engineered to match tool with terminal
- First to gain military approval for pressure connections... many styles available for military applications
- Sta-Kon® products exceed test specification requirements of military, UL and CSA
- Include extra metal sleeve to grip insulation
- Vinyl insulated and bare Sta-Kon® terminals feature brazed seam wire barrels that can be crimped at any place on the barrel circumference
- Can be installed with crimping tools having a single indenter or double indenter (recommended for solid wire)
- Serrated barrel increases grip on wire
- Wire range identification on the tongue of each terminal
- Constructed of electrolytic copper for high conductivity

Nylon-Insulated Ring Terminals

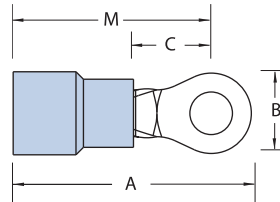

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RZ22-2** | 100 | 26-22 | 0.083 | #2 | ERG4006 | 0.57 | 0.14 | 0.13 | 0.49 | 0.02 |
| RZ22-4** | 100 | 26-22 | 0.083 | #4 | | 0.65 | 0.21 | 0.20 | 0.54 | |
| RZ22-6** | 100 | 26-22 | 0.083 | #6 | | 0.65 | 0.21 | 0.20 | 0.54 | |
| RZ22-8** | 100 | 26-22 | 0.083 | #8 | | 0.75 | 0.25 | 0.23 | 0.62 | |
| RZ22-10** | 100 | 26-22 | 0.083 | #10 | | 0.75 | 0.25 | 0.23 | 0.62 | |
| RAX23* | 1,000 | 26-24 | 0.125 | #2 | WT145A | 0.66 | 0.14 | 0.14 | 0.59 | 0.03 |
| RAX43* | 1,000 | 26-24 | 0.125 | #4 | | 0.74 | 0.20 | 0.19 | 0.64 | |
| RAX63* | 1,000 | 26-24 | 0.125 | #6 | | 0.84 | 0.25 | 0.22 | 0.72 | |
| RAX83* | 1,000 | 26-24 | 0.125 | #8 | | 0.84 | 0.25 | 0.22 | 0.72 | |
| RAX103* | 1,000 | 26-24 | 0.125 | #10 | | 0.84 | 0.25 | 0.24 | 0.72 | |
| RA18-4 | 100 | 22-16 | 0.136 | #4 | ERG4001 | 0.72 | 0.23 | 0.14 | 0.59 | 0.03 |
| RA323 | 1,000 | 22-16 | 0.136 | #4 | | 0.72 | 0.23 | 0.14 | 0.59 | |
| RA333 | 1,000 | 22-16 | 0.136 | #6 | | 0.72 | 0.23 | 0.14 | 0.59 | |
| RA18-6 | 100 | 22-16 | 0.136 | #6 | | 0.86 | 0.26 | 0.25 | 0.71 | |

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RA853 | 1,000 | 22-16 | 0.136 | #6 | WT145A | 0.86 | 0.26 | 0.25 | 0.71 | .03 |
| RA18-8 | 100 | | | #8 | | 0.89 | 0.26 | 0.25 | 0.71 | |
| RA833 | 1,000 | | | #8 | | 0.86 | 0.26 | 0.25 | 0.71 | |
| RA863 | 1,000 | | | #8 | | 0.89 | 0.26 | 0.25 | 0.71 | |
| RA18-10 | 100 | | | #10 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RA873 | 1,000 | | | #10 | 0.89 | 0.31 | 0.25 | 0.71 | | |
| RA18-14 | 100 | | | 1/4 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA713 | 1,000 | | | 1/4 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA18-516 | 100 | | | 5/16 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA723 | 1,000 | | | 5/16 in. | 1.10 | 0.46 | 0.31 | 0.84 | | |
| RA18-38 | 100 | | | 3/8 in. | 1.20 | 0.53 | 0.35 | 0.87 | | |
| RA733 | 1,000 | | | 3/8 in. | 1.20 | 0.53 | 0.35 | 0.87 | | |
| RA18-12 | 100 | | | 1/2 in. | 1.30 | 0.72 | 0.50 | 0.92 | | |
| RA753 | 1,000 | | | 1/2 in. | 1.30 | 0.72 | 0.50 | 0.92 | | |

* Not listed by UL or CSA

** CSA Certified only


Most standard bulk catalogue numbers can be put on Mylar Tape for reel feed applications (i.e. 12050 tool and application). Please put the suffix M for Mylar tape i.e. RA2573M.

Ring Terminals

Nylon-Insulated Ring Terminals



| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RB14-4 | 100 | 18-14 | 0.162 | #4 | ERG4001 | 0.72 | 0.26 | 0.14 | 0.59 | 0.03 |
| RB1323 | 1,000 | | | #4 | | 0.72 | 0.26 | 0.14 | 0.59 | |
| RB14-6 | 100 | | | #6 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB853 | 1,000 | | | #6 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB1333 | 1,000 | | | #6 | | 0.74 | 0.26 | 0.14 | 0.59 | |
| RB14-8 | 100 | | | #8 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB863 | 1,000 | | | #8 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB14-10 | 100 | | | #10 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB873 | 1,000 | | | #10 | | 0.89 | 0.31 | 0.25 | 0.71 | |
| RB14-14 | 100 | | | 1/4 in. | | 1.08 | 0.47 | 0.31 | 0.81 | |
| RB713 | 1,000 | | | 1/4 in. | | 1.08 | 0.47 | 0.31 | 0.81 | |
| RB14-516 | 100 | | | 5/16 in. | | 1.08 | 0.47 | 0.31 | 0.84 | |
| RB723 | 1,000 | | | 5/16 in. | | 1.08 | 0.47 | 0.31 | 0.84 | |
| RB14-38 | 100 | | | 3/8 in. | | 1.17 | 0.53 | 0.35 | 0.87 | |
| RB733 | 1,000 | | | 3/8 in. | | 1.17 | 0.53 | 0.35 | 0.87 | |
| RB14-12 | 100 | | | 1/2 in. | | 1.25 | 0.72 | 0.50 | 0.90 | |
| RB753 | 1,000 | 1/2 in. | 1.25 | 0.72 | 0.50 | 0.90 | | | | |

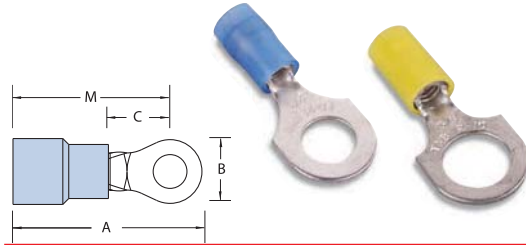


| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RC10-6 | 50 | 12-10 | 0.210 | #6 | ERG4001 | 1.00 | 0.37 | 0.27 | 0.81 | 0.04 |
| RC333 | 500 | | | #6 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC10-8 | 50 | | | #8 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC863 | 500 | | | #8 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC10-10 | 50 | | | #10 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC363 | 500 | | | #10 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RC10-14 | 50 | | | 1/4 in. | | 1.12 | 0.53 | 0.32 | 0.86 | |
| RC713 | 500 | | | 1/4 in. | | 1.12 | 0.53 | 0.32 | 0.86 | |
| RC10-516 | 50 | | | 5/16 in. | | 1.21 | 0.53 | 0.31 | 0.94 | |
| RC703 | 500 | | | 5/16 in. | | 1.21 | 0.53 | 0.31 | 0.94 | |
| RC10-38 | 50 | | | 3/8 in. | | 1.27 | 0.59 | 0.35 | 0.98 | |
| RC733 | 500 | | | 3/8 in. | | 1.27 | 0.59 | 0.35 | 0.98 | |
| RC10-12 | 50 | | | 1/2 in. | | 1.37 | 0.72 | 0.52 | 1.02 | |
| RC753 | 500 | | | 1/2 in. | | 1.37 | 0.72 | 0.52 | 1.02 | |

Nylon-Insulated Ring Terminals — Expanded Entry




| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RB14-4X | 100 | 18-14 | 0.190 | #4 | ER4001 | 0.80 | 0.26 | 0.14 | 0.67 | 0.03 |
| RB14-6X | 100 | | | #6 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB854 | 1,000 | | | #6 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB14-8X | 100 | | | #8 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB864 | 1,000 | | | #8 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB14-10X | 100 | | | #10 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB874 | 1,000 | | | #10 | | 0.95 | 0.31 | 0.25 | 0.79 | |
| RB14-14X | 100 | | | 1/4 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB714 | 1,000 | | | 1/4 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB14-516X | 100 | | | 5/16 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB724 | 1,000 | | | 5/16 in. | | 1.16 | 0.47 | 0.31 | 0.92 | |
| RB14-38X | 100 | | | 3/8 in. | | 1.25 | 0.53 | 0.42 | 0.95 | |
| RB734 | 1,000 | | | 3/8 in. | | 1.25 | 0.53 | 0.42 | 0.95 | |



| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RC10-6X | 50 | 12-10 | 0.250 | #6 | ERG4001 | 1.10 | 0.37 | 0.27 | 0.91 | 0.04 |
| RC334 | 500 | | | #6 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC10-8X | 50 | | | #8 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC864 | 500 | | | #8 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC10-10X | 50 | | | #10 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC364 | 500 | | | #10 | | 1.10 | 0.37 | 0.27 | 0.91 | |
| RC10-14X | 50 | | | 1/4 in. | | 1.22 | 0.53 | 0.32 | 0.96 | |
| RC714 | 500 | | | 1/4 in. | | 1.22 | 0.53 | 0.32 | 0.96 | |
| RC10-516X | 50 | | | 5/16 in. | | 1.32 | 0.53 | 0.31 | 1.05 | |
| RC704 | 500 | | | 5/16 in. | | 1.32 | 0.53 | 0.31 | 1.05 | |
| RC10-38X | 50 | | | 3/8 in. | | 1.38 | 0.59 | 0.48 | 1.09 | |
| RC734 | 500 | | | 3/8 in. | | 1.38 | 0.59 | 0.48 | 1.09 | |
| RC10-12X | 50 | | | 1/2 in. | | 1.48 | 0.72 | 0.52 | 1.13 | |

Ring Terminals

Nylon-Insulated Large Ring Terminals

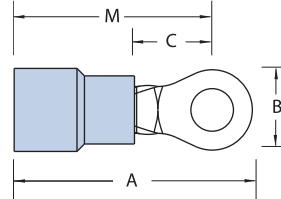

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | |
|-------------------|-----------|------------|-----------------|-----------|-----------|------------------|----------|---------|------|--------------------|------|------|------|
| | | | | | | A | B | C | M | | | | |
| Flex Class 41/24 | | | | | | | | | | | | | |
| RD167 | 200 | 8 | 0.340 | #8 | ERG4007 | 1.48 | 0.42 | 0.28 | 1.29 | 0.04 | | | |
| RD8-10 | 25 | | | #10 | | 1.48 | 0.42 | 0.28 | 1.29 | | | | |
| RD367 | 200 | | | #10 | | 1.48 | 0.42 | 0.28 | 1.29 | | | | |
| RD8-14 | 25 | | | 1/4 in. | | 1.54 | 0.46 | 0.36 | 1.32 | | | | |
| RD717 | 200 | | | 1/4 in. | | 1.54 | 0.46 | 0.36 | 1.32 | | | | |
| RD8-516 | 25 | | | 5/16 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD727 | 200 | | | 5/16 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD8-38 | 25 | | | 3/8 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD737 | 200 | | | 3/8 in. | | 1.63 | 0.57 | 0.36 | 1.35 | | | | |
| RD8-12* | 25 | | | 1/2 in. | | 1.79 | 0.82 | 0.55 | 1.39 | | | | |
| RD757* | 200 | | | 1/2 in. | | 1.79 | 0.82 | 0.55 | 1.39 | | | | |
| RD10161 | 200 | | | 8AN | | 0.270 | #8 | ERG4007 | 1.40 | | 0.41 | 0.24 | 1.20 |
| RD10361 | 200 | | | | | | #10 | | 1.40 | | 0.41 | 0.24 | 1.20 |
| RD10711 | 200 | | | | | | 1/4 in. | | 1.45 | | 0.45 | 0.27 | 1.22 |
| RD10721 | 200 | 5/16 in. | 1.53 | | 0.56 | | 0.34 | | 1.25 | | | | |
| RD10731 | 200 | 3/8 in. | 1.53 | | 0.56 | | 0.34 | | 1.25 | | | | |
| Flex Class 63/24 | | | | | | | | | | | | | |
| RE6-10 | 20 | 6 | 0.420 | #10 | ERG4007 | 1.65 | 0.49 | 0.28 | 1.40 | 0.04 | | | |
| RE267 | 200 | | | #10 | | 1.65 | 0.49 | 0.28 | 1.40 | | | | |
| RE6-14 | 20 | | | 1/4 in. | | 1.65 | 0.49 | 0.28 | 1.40 | | | | |
| RE717 | 200 | | | 1/4 in. | | 1.65 | 0.49 | 0.28 | 1.40 | | | | |
| RE6-516 | 20 | | | 5/16 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE727 | 200 | | | 5/16 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE6-38 | 20 | | | 3/8 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE737 | 200 | | | 3/8 in. | | 1.76 | 0.61 | 0.34 | 1.47 | | | | |
| RE6-12* | 20 | | | 1/2 in. | | 1.83 | 0.82 | 0.55 | 1.43 | | | | |
| RE757* | 200 | | | 1/2 in. | | 1.83 | 0.82 | 0.55 | 1.43 | | | | |
| RE10261 | 200 | | | 6AN | | 0.315 | #10 | ERG4007 | 1.55 | | 0.49 | 0.24 | 1.31 |
| RE10711 | 200 | | | | | | 1/4 in. | | 1.55 | | 0.49 | 0.27 | 1.31 |
| RE10721 | 200 | | | | | | 5/16 in. | | 1.70 | | 0.60 | 0.34 | 1.40 |
| RE10731 | 200 | | | | | | 3/8 in. | | 1.70 | | 0.60 | 0.34 | 1.40 |
| Flex Class 105/24 | | | | | | | | | | | | | |
| RF4-10 | 15 | 4 | 0.510 | #10 | TBM6S | 1.76 | 0.56 | 0.36 | 1.49 | 0.04 | | | |
| RF267 | 100 | | | #10 | | 1.76 | 0.56 | 0.36 | 1.49 | | | | |
| RF4-14 | 15 | | | 1/4 in. | | 1.76 | 0.56 | 0.36 | 1.49 | | | | |
| RF717 | 100 | | | 1/4 in. | | 1.76 | 0.56 | 0.36 | 1.49 | | | | |
| RF4-516 | 15 | | | 5/16 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF727 | 100 | | | 5/16 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF4-38 | 15 | | | 3/8 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF737 | 100 | | | 3/8 in. | | 1.84 | 0.62 | 0.35 | 1.53 | | | | |
| RF757* | 100 | | | 1/2 in. | | 1.90 | 0.82 | 0.55 | 1.49 | | | | |
| RF10261 | 100 | | | 4AN | | 0.380 | #10 | TBM6S | 1.78 | | 0.55 | 0.30 | 1.51 |
| RF10711 | 100 | | | | | | 1/4 in. | | 1.78 | | 0.55 | 0.30 | 1.51 |
| RF10721 | 100 | | | | | | 5/16 in. | | 1.80 | | 0.62 | 0.34 | 1.49 |
| RF10731 | 100 | | | | | | 3/8 in. | | 1.80 | | 0.62 | 0.34 | 1.49 |

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|---------|------|------|--------------------|------|------|
| | | | | | | A | B | C | M | | | |
| RG2-10 | 10 | 2 | 0.588 | #10 | TBM6S | 2.15 | 0.69 | 0.40 | 1.83 | 0.05 | | |
| RG267 | 50 | | | #10 | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-14 | 10 | | | 1/4 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG717 | 50 | | | 1/4 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-516 | 10 | | | 5/16 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG727 | 50 | | | 5/16 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-38 | 10 | | | 3/8 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG737 | 50 | | | 3/8 in. | | 2.15 | 0.69 | 0.40 | 1.83 | | | |
| RG2-12 | 10 | | | 1/2 in. | | 2.35 | 0.80 | 0.49 | 1.93 | | | |
| RG757 | 50 | | | 1/2 in. | | 2.35 | 0.80 | 0.49 | 1.93 | | | |
| RG9711 | 50 | | | 2AN | | 0.453 | 1/4 in. | 2.07 | 0.69 | | 0.40 | 1.74 |
| RG9731 | 50 | | | | | | 3/8 in. | 2.07 | 0.69 | | 0.40 | 1.74 |
| RG9751 | 50 | | | | | | 1/2 in. | 2.26 | 0.80 | | 0.49 | 1.84 |
| RH717 | 50 | | | | | | 1/4 in. | 2.14 | 0.77 | | 0.43 | 1.81 |
| RH727 | 50 | 5/16 in. | 2.14 | | 0.77 | | 0.43 | 1.81 | | | | |
| RH737 | 50 | 1/0 | 0.629 | 3/8 in. | 2.14 | 0.77 | 0.43 | 1.81 | | | | |
| RH757 | 50 | | | 1/2 in. | 2.34 | 0.77 | 0.54 | 1.90 | | | | |
| RH9711 | 50 | | | 1/4 in. | 2.14 | 0.77 | 0.44 | 1.81 | | | | |
| RH9731 | 50 | | | 3/8 in. | 2.14 | 0.77 | 0.44 | 1.81 | | | | |
| RH9751 | 50 | | | 1/2 in. | 2.34 | 0.77 | 0.54 | 1.90 | | | | |
| RJ717 | 100 | 1AN | 0.500 | 1/4 in. | 2.34 | 0.83 | 0.46 | 1.96 | | | | |
| RJ727 | 100 | | | 5/16 in. | 2.34 | 0.83 | 0.46 | 1.96 | | | | |
| RJ737 | 100 | | | 3/8 in. | 2.34 | 0.83 | 0.46 | 1.96 | | | | |
| RJ757 | 100 | | | 1/2 in. | 2.48 | 0.89 | 0.54 | 2.03 | | | | |
| RJ9711 | 50 | | | 1/4 in. | 2.35 | 0.83 | 0.46 | 1.97 | | | | |
| RJ9731 | 50 | 1/0AN | 0.550 | 3/8 in. | 2.35 | 0.83 | 0.46 | 1.97 | | | | |
| RJ9751 | 50 | | | 1/2 in. | 2.49 | 0.89 | 0.55 | 2.04 | | | | |
| RK717 | 25 | | | 1/4 in. | 2.60 | 0.93 | 0.54 | 2.21 | | | | |
| RK727 | 25 | | | 3/0 | 2.60 | 0.93 | 0.54 | 2.21 | | | | |
| RK737 | 25 | | | 3/8 in. | 2.60 | 0.93 | 0.54 | 2.21 | | | | |
| RK9731 | 100 | 2/0AN | 0.610 | 3/8 in. | 2.52 | 0.93 | 0.55 | 2.14 | | | | |
| RK9751 | 100 | | | 1/2 in. | 2.60 | 0.93 | 0.55 | 2.15 | | | | |
| RL737 | 25 | | | 3/8 in. | 2.83 | 1.04 | 0.57 | 2.35 | | | | |
| RL757 | 25 | | | 4/0 | 2.83 | 1.04 | 0.57 | 2.35 | | | | |
| RL9731 | 25 | | | 1/2 in. | 2.83 | 1.04 | 0.57 | 2.35 | | | | |
| RL9751 | 25 | 3/0AN | 0.680 | 3/8 in. | 2.83 | 1.04 | 0.57 | 2.36 | | | | |
| RL9751 | 25 | | | 1/2 in. | 2.83 | 1.04 | 0.57 | 2.36 | | | | |
| RM737 | 20 | | | 3/8 in. | 3.00 | 1.13 | 0.65 | 2.51 | | | | |
| RM747 | 20 | | | 250kcmil | 3.00 | 1.13 | 0.65 | 2.51 | | | | |
| RM757 | 20 | | | 1/2 in. | 3.00 | 1.13 | 0.65 | 2.51 | | | | |
| RM9731 | 20 | 4/0AN | 0.750 | 3/8 in. | 3.00 | 1.13 | 0.66 | 2.51 | | | | |
| RM9751 | 20 | | | 1/2 in. | 3.00 | 1.13 | 0.66 | 2.51 | | | | |

*Braze Seam
AN=Aircraft Wire

Ring Terminals

Vinyl-Insulated Ring Terminals


Extra-length PVC sleeve offers extra protection



| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | | |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|---------|---------|------|--------------------|------|------|------|------|
| | | | | | | A | B | C | M | | | | | |
| 18RA-4 | 100 | 22-16 | 0.150 | #4 | ERG4001 | 0.97 | 0.31 | 0.27 | 0.81 | 0.03 | | | | |
| RA77 | 1,000 | | | #4 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-6 | 100 | | | #6 | | 0.94 | 0.25 | 0.27 | 0.81 | | | | | |
| RA857 | 1,000 | | | #6 | | 0.94 | 0.25 | 0.27 | 0.81 | | | | | |
| 18RA-8 | 100 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| RA867 | 1,000 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-10 | 100 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| RA877 | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-14 | 100 | | | 1/4 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| RA717 | 1,000 | | | 1/4 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| 18RA-516 | 100 | | | 5/16 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| RA727 | 1,000 | | | 5/16 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| 18RA-38 | 100 | | | 3/8 in. | | 1.24 | 0.54 | 0.37 | 0.91 | | | | | |
| RA737 | 1,000 | | | 3/8 in. | | 1.24 | 0.54 | 0.37 | 0.91 | | | | | |
| 14RB-4 | 100 | | | 18-14 | | 0.170 | #4 | ERG4001 | 0.94 | | 0.25 | 0.27 | 0.81 | 0.03 |
| RB1327 | 1,000 | | | | | | #4 | | 0.94 | | 0.25 | 0.27 | 0.81 | |
| 14RB-6 | 100 | #6 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| RB857 | 1,000 | #6 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| 14RB-8 | 100 | #8 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| RB867 | 1,000 | #8 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| 14RB-10 | 100 | #10 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| RB877 | 1,000 | #10 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| 14RB-14 | 100 | 1/4 in. | 1.14 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| RB717 | 1,000 | 1/4 in. | 1.14 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| 14RB-516 | 100 | 5/16 in. | 1.15 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| RB727 | 1,000 | 5/16 in. | 1.15 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| 14RB-38 | 100 | 3/8 in. | 1.16 | | 0.54 | | 0.38 | | 0.91 | | | | | |
| RB737 | 1,000 | 3/8 in. | 1.16 | | 0.54 | | 0.38 | | 0.91 | | | | | |
| 10RC-6 | 50 | 12-10 | 0.210 | | #6 | | ERG4001 | | 1.06 | 0.31 | 0.27 | 0.90 | 0.04 | |
| RC337 | 500 | | | | #6 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| 10RC-8 | 50 | | | #8 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| RC777 | 500 | | | #8 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| 10RC-10 | 50 | | | #10 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| RC367 | 500 | | | #10 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| 10RC-14 | 50 | | | 1/4 in. | 1.16 | 0.50 | | 0.27 | 0.90 | | | | | |
| RC717 | 500 | | | 1/4 in. | 1.16 | 0.50 | | 0.27 | 0.90 | | | | | |
| 10RC-516 | 50 | | | 5/16 in. | 1.17 | 0.50 | | 0.37 | 0.92 | | | | | |
| RC707 | 500 | | | 5/16 in. | 1.17 | 0.50 | | 0.37 | 0.92 | | | | | |
| 10RC-38 | 50 | | | 3/8 in. | 1.29 | 0.59 | | 0.44 | 0.99 | | | | | |
| RC737 | 500 | | | 3/8 in. | 1.29 | 0.59 | | 0.44 | 0.99 | | | | | |

Vinyl-Insulated Ring Terminals – Expanded Insulation


A wider wire entry for heavy-wall insulation

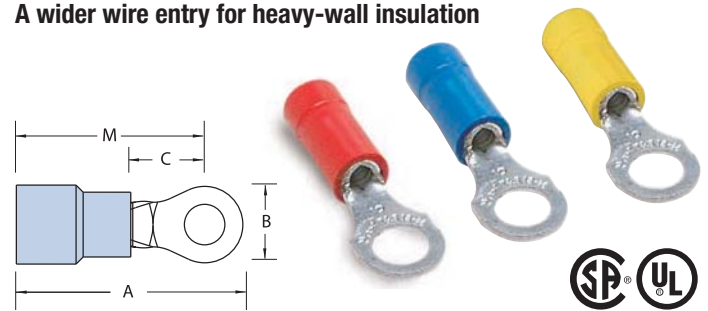

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | | |
|-----------|-----------|------------|-----------------|-----------|-----------|------------------|---------|---------|------|--------------------|------|------|------|------|
| | | | | | | A | B | C | M | | | | | |
| 18RA-4X | 100 | 22-16 | 0.170 | #4 | ERG4001 | 0.97 | 0.31 | 0.27 | 0.81 | 0.03 | | | | |
| 18RA-6X | 100 | | | #6 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-8X | 100 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-38X | 100 | | | 3/8 in. | | 1.15 | 0.54 | 0.35 | 0.90 | | | | | |
| RA857-170 | 1,000 | | | #6 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| RA867-170 | 1,000 | | | #8 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-10X | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| RA877-170 | 1,000 | | | #10 | | 0.97 | 0.31 | 0.27 | 0.81 | | | | | |
| 18RA-14X | 100 | | | 1/4 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| RA727-170 | 1,000 | | | 5/16 in. | | 1.13 | 0.50 | 0.37 | 0.88 | | | | | |
| 14RB-4X | 100 | | | 18-14 | | 0.200 | #4 | ERG4001 | 0.94 | | 0.25 | 0.27 | 0.81 | 0.03 |
| 14RB-6X | 100 | | | | | | #6 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| RB857-200 | 1,000 | | | | | | #6 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| 14RB-8X | 100 | | | | | | #8 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| RB867-200 | 1,000 | | | | | | #8 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| 14RB-10X | 100 | | | | | | #10 | | 0.97 | | 0.31 | 0.27 | 0.81 | |
| RB877-200 | 1,000 | #10 | 0.97 | | 0.31 | | 0.27 | | 0.81 | | | | | |
| 14RB-14X | 100 | 1/4 in. | 1.14 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| RB717-200 | 1,000 | 1/4 in. | 1.14 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| 14RB-516X | 100 | 5/16 in. | 1.15 | | 0.50 | | 0.38 | | 0.89 | | | | | |
| 14RB-38X | 100 | 3/8 in. | 1.16 | | 0.54 | | 0.35 | | 0.91 | | | | | |
| 10RC-6X | 50 | 12-10 | 0.250 | | #6 | | ERG4001 | | 1.06 | 0.31 | 0.27 | 0.90 | 0.04 | |
| RC337-250 | 500 | | | | #6 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| 10RC-8X | 50 | | | | #8 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| RC777-250 | 500 | | | | #8 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| 10RC-10X | 50 | | | | #10 | | | | 1.06 | 0.31 | 0.27 | 0.90 | | |
| RC367-250 | 500 | | | #10 | 1.06 | 0.31 | | 0.27 | 0.90 | | | | | |
| 10RC-14X | 50 | | | 1/4 in. | 1.16 | 0.50 | | 0.27 | 0.90 | | | | | |
| RC717-250 | 500 | | | 1/4 in. | 1.16 | 0.50 | | 0.27 | 0.90 | | | | | |
| 10RC-516X | 50 | | | 5/16 in. | 1.17 | 0.50 | | 0.37 | 0.92 | | | | | |
| 10RC-38X | 50 | | | 3/8 in. | 1.29 | 0.59 | | 0.44 | 0.99 | | | | | |
| RC737-250 | 500 | | | 3/8 in. | 1.29 | 0.59 | | 0.44 | 0.99 | | | | | |

Ring Terminals

Vinyl-Insulated Large Ring Terminals

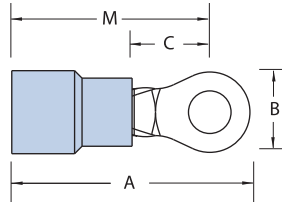


| Cat. No. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-------------------------|------------|-----------------|-----------|-----------|------------------|------|-------|------|--------------------|
| | | | | | A | B | C | M | |
| RDV167 | 8 | 0.340 | #8 | ERG4007 | 1.36 | 0.42 | 0.28 | 1.17 | 0.04 |
| RDV367 | | | #10 | | 1.36 | 0.42 | 0.28 | 1.17 | |
| RDV717 | | | 1/4 in. | | 1.42 | 0.46 | 0.36 | 1.20 | |
| RDV727 | | | 5/16 in. | | 1.51 | 0.57 | 0.36 | 1.23 | |
| RDV737 | | | 3/8 in. | | 1.51 | 0.57 | 0.36 | 1.23 | |
| RDV757* | | | 1/2 in. | | 1.67 | 0.82 | 0.55 | 1.27 | |
| REV267 | 6 | 0.390 | #10 | ERG4007 | 1.48 | 0.45 | 0.28 | 1.23 | |
| REV717 | | | 1/4 in. | | 1.48 | 0.49 | 0.28 | 1.23 | |
| REV727 | | | 5/16 in. | | 1.59 | 0.61 | 0.34 | 1.30 | |
| REV737 | | | 3/8 in. | | 1.59 | 0.61 | 0.34 | 1.30 | |
| REV757* | | | 1/2 in. | | 1.66 | 0.82 | 0.55 | 1.26 | |
| | | | | | | | TBM6S | | |

*Brazeed Seam

Ring Terminals

Non-Insulated Ring Terminals

Constructed of electrolytic copper for high conductivity!

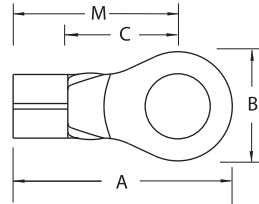


| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------------|-----------|------------|-----------|-----------|------------------|--------------------|------|------|--------------------|
| | | | | | A | B | C | M | |
| A18-4 | 100 | 22-16 | #4 | ERG4002 | 0.75 | 0.31 | 0.27 | 0.59 | 0.03 |
| A18-6 | 100 | | #6 | | 0.72 | 0.25 | 0.27 | 0.59 | |
| A85 | 1,000 | | #6 | | 0.72 | 0.25 | 0.27 | 0.59 | |
| A18-8 | 100 | | #8 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A86 | 1,000 | | #8 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A18-10 | 100 | | #10 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A87 | 1,000 | | #10 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| A18-14 | 100 | | 1/4 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A71 | 1,000 | | 1/4 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A18-516 | 100 | | 5/16 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A72 | 1,000 | | 5/16 in. | | 0.92 | 0.50 | 0.37 | 0.67 | |
| A18-38 | 100 | | 3/8 in. | | 0.99 | 0.54 | 0.35 | 0.67 | |
| A73 | 1,000 | | 3/8 in. | | 0.99 | 0.54 | 0.35 | 0.67 | |
| A18-12 | 100 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| A75 | 1,000 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| B14-4 | 100 | | 18-14 | | #4 | ERG4002 ERG4005 | 0.72 | 0.25 | |
| B132 | 1,000 | #4 | | 0.72 | 0.25 | | 0.27 | 0.59 | |
| B14-6 | 100 | #6 | | 0.72 | 0.25 | | 0.27 | 0.59 | |
| B133 | 1,000 | #6 | | 0.72 | 0.25 | | 0.27 | 0.59 | |
| B14-8 | 100 | #8 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B86 | 1,000 | #8 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B14-10 | 100 | #10 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B87 | 1,000 | #10 | | 0.75 | 0.31 | | 0.27 | 0.59 | |
| B14-14 | 100 | 1/4 in. | | 0.93 | 0.50 | | 0.38 | 0.68 | |

| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|-----------------|-----------|------------|-----------|--------------------|------------------|--------------------|------|------|--------------------|
| | | | | | A | B | C | M | |
| B71 | 1,000 | 18-14 | 1/4 in. | ERG4002 ERG4005 | 0.93 | 0.50 | 0.38 | 0.68 | 0.03 |
| B14-516 | 100 | | 5/16 in. | | 0.93 | 0.50 | 0.38 | 0.68 | |
| B72 | 1,000 | | 5/16 in. | | 0.93 | 0.50 | 0.38 | 0.68 | |
| B14-38 | 100 | | 3/8 in. | | 0.96 | 0.54 | 0.35 | 0.68 | |
| B73 | 1,000 | | 3/8 in. | | 0.96 | 0.54 | 0.35 | 0.68 | |
| B14-12 | 100 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| B75-TB | 1,000 | | 1/2 in. | | 1.06 | 0.72 | 0.38 | 0.70 | |
| B85 | 1,000 | | #6 | | 0.75 | 0.31 | 0.27 | 0.59 | |
| B134 | 1,000 | | #8 | | 0.72 | 0.25 | 0.27 | 0.59 | |
| C10-6-SK | 50 | | 12-10 | | #6 | ERG4002 ERG4005 | 0.82 | 0.31 | |
| C33 | 500 | #6 | | 0.82 | 0.31 | | 0.27 | 0.66 | |
| C10-8-SK | 50 | #8 | | 0.82 | 0.31 | | 0.27 | 0.66 | |
| C77 | 500 | #8 | | 0.82 | 0.31 | | 0.27 | 0.66 | |
| C10-10 | 50 | #10 | | 0.85 | 0.38 | | 0.27 | 0.66 | |
| C26 | 500 | #10 | | 0.85 | 0.38 | | 0.27 | 0.66 | |
| C36 | 500 | #10 | | 0.82 | 0.31 | | 0.27 | 0.66 | |
| C10-14 | 50 | 1/4 in. | | 0.91 | 0.50 | | 0.27 | 0.66 | |
| C71 | 500 | 1/4 in. | | 0.91 | 0.50 | | 0.27 | 0.66 | |
| C10-516 | 50 | 5/16 in. | | 0.98 | 0.50 | | 0.38 | 0.73 | |
| C70 | 500 | 5/16 in. | 0.98 | 0.50 | 0.38 | 0.73 | | | |
| C72 | 500 | 5/16 in. | 1.10 | 0.59 | 0.45 | 0.80 | | | |
| C10-38 | 50 | 3/8 in. | 1.10 | 0.59 | 0.45 | 0.80 | | | |
| C73 | 500 | 3/8 in. | 1.10 | 0.59 | 0.45 | 0.80 | | | |
| C10-12 | 50 | 1/2 in. | 1.21 | 0.72 | 0.38 | 0.84 | | | |
| C75 | 500 | 1/2 in. | 1.21 | 0.72 | 0.38 | 0.84 | | | |

Ring Terminals

Non-Insulated Large Ring Terminals — Brazed Seam

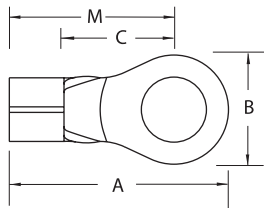


| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| D8-10 | 25 | 8 | #10 | TBM6S | 1.09 | 0.42 | 0.34 | 0.90 | 0.06 |
| D36 | 200 | | #10 | | 1.09 | 0.42 | 0.34 | 0.90 | |
| D26 | 200 | | #10 | | 1.13 | 0.48 | 0.36 | 0.90 | |
| D8-14-SK | 25 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| D71 | 200 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| D8-516 | 25 | | 5/16 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D72 | 200 | | 5/16 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D8-38 | 25 | | 3/8 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D73 | 200 | | 3/8 in. | | 1.32 | 0.59 | 0.49 | 1.03 | |
| D8-12 | 25 | | 1/2 in. | | 1.49 | 0.82 | 0.55 | 1.09 | |
| D75 | 200 | 1/2 in. | 1.49 | 0.82 | 0.55 | 1.09 | | | |
| E6-10 | 20 | 6 | #10 | TBM6S | 1.13 | 0.48 | 0.36 | 0.90 | 0.06 |
| E26 | 200 | | #10 | | 1.13 | 0.48 | 0.36 | 0.90 | |
| E6-14 | 20 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| E71 | 200 | | 1/4 in. | | 1.13 | 0.48 | 0.36 | 0.90 | |
| E6-516 | 20 | | 5/16 in. | | 1.32 | 0.60 | 0.49 | 1.03 | |
| | | | | | | | | | |



| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| E72 | 200 | 6 | 5/16 in. | TBM6S | 1.32 | 0.60 | 0.49 | 1.03 | 0.06 |
| E6-38 | 20 | | 3/8 in. | | 1.32 | 0.60 | 0.49 | 1.03 | |
| E73 | 200 | | 3/8 in. | | 1.32 | 0.60 | 0.49 | 1.03 | |
| E6-12 | 20 | | 1/2 in. | | 1.49 | 0.82 | 0.55 | 1.08 | |
| E75 | 200 | | 1/2 in. | | 1.49 | 0.82 | 0.55 | 1.08 | |
| F4-10 | 20 | | #10 | | 1.16 | 0.48 | 0.36 | 0.93 | |
| F26 | 200 | #10 | 1.16 | 0.48 | 0.36 | 0.93 | | | |
| F4-14 | 20 | 4 | 1/4 in. | TBM6S | 1.16 | 0.48 | 0.36 | 0.93 | 0.07 |
| F71-TB | 200 | | 1/4 in. | | 1.16 | 0.48 | 0.36 | 0.93 | |
| F4-516 | 20 | | 5/16 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F72 | 200 | | 5/16 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F4-38 | 20 | | 3/8 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F73 | 200 | | 3/8 in. | | 1.35 | 0.60 | 0.49 | 1.06 | |
| F4-12 | 20 | 200 | 1/2 in. | TBM6S | 1.52 | 0.82 | 0.55 | 1.11 | 0.07 |
| F75 | 200 | | 1/2 in. | | 1.52 | 0.82 | 0.55 | 1.11 | |

Non-Insulated Large Ring Terminals — Tubular

Select the configuration you need!



| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| D10161 | 200 | 8/8AN | #8 | ERG4005 | 1.15 | 0.41 | 0.28 | 0.95 | 0.04 |
| D10361 | 200 | | #10 | | 1.15 | 0.41 | 0.28 | 0.95 | |
| D10711 | 200 | | 1/4 in. | | 1.20 | 0.45 | 0.36 | 0.97 | |
| D10721 | 200 | | 5/16 in. | | 1.28 | 0.56 | 0.36 | 1.00 | |
| D10731 | 200 | | 3/8 in. | | 1.28 | 0.56 | 0.36 | 1.00 | |
| D975* | 200 | | 1/2 in. | | 1.46 | 0.83 | 0.49 | 1.06 | |
| E10261 | 200 | 6/6AN | #10 | ERG4005 | 1.26 | 0.49 | 0.24 | 1.02 | 0.04 |
| E10711 | 200 | | 1/4 in. | | 1.26 | 0.49 | 0.27 | 0.99 | |
| E10721 | 200 | | 5/16 in. | | 1.38 | 0.60 | 0.34 | 1.04 | |
| E10731 | 200 | | 3/8 in. | | 1.38 | 0.60 | 0.34 | 1.04 | |
| F10261 | 100 | | #10 | | 1.37 | 0.55 | 0.30 | 1.07 | |
| F10711 | 100 | | 1/4 in. | | 1.37 | 0.55 | 0.30 | 1.07 | |
| F10721 | 100 | 4/4AN | 5/16 in. | ERG4008 | 1.42 | 0.62 | 0.34 | 1.08 | 0.05 |
| F10731 | 100 | | 3/8 in. | | 1.42 | 0.62 | 0.34 | 1.08 | |
| F975* | 200 | | 1/2 in. | | 1.49 | 0.83 | 0.45 | 1.10 | |
| G926 | 100 | | #10 | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-14 | 10 | | 1/4 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G971 | 100 | | 1/4 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-516 | 10 | 2/2AN | 5/16 in. | ERG4008 | 1.59 | 0.69 | 0.40 | 1.26 | 0.05 |
| G972 | 100 | | 5/16 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-38 | 10 | | 3/8 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G973 | 100 | | 3/8 in. | | 1.59 | 0.69 | 0.40 | 1.26 | |
| G2-12 | 10 | | 1/2 in. | | 1.79 | 0.80 | 0.49 | 1.36 | |
| G975 | 100 | | 1/2 in. | | 1.79 | 0.80 | 0.49 | 1.36 | |

*Brazed Seam


AN – Aircraft Wire



| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions | | | | Stock Thick. (in.) |
|----------|-----------|----------------|-----------|-----------|------------|-------|------|------|--------------------|
| | | | | | A | B | C | M | |
| H10-14 | 10 | 1AN-1/0 | 1/4 in. | ERG4008 | 1.65 | 0.77 | 0.43 | 1.32 | 0.05 |
| H971 | 100 | | 1/4 in. | | 1.65 | 0.77 | 0.43 | 1.32 | |
| H972 | 100 | | 5/16 in. | | 1.65 | 0.77 | 0.43 | 1.32 | |
| H973 | 100 | | 3/8 in. | | 1.65 | 0.77 | 0.43 | 1.32 | |
| H975 | 100 | | 1/2 in. | | 1.85 | 0.77 | 0.54 | 1.41 | |
| J971 | 50 | | 1/0AN-2/0 | | 1/4 in. | TBM6S | 1.94 | 0.84 | |
| J972 | 50 | 5/16 in. | | 1.94 | 0.84 | | 0.48 | 1.53 | |
| J20-38 | 10 | 3/8 in. | | 1.84 | 0.83 | | 0.46 | 1.46 | |
| J973 | 50 | 3/8 in. | | 1.99 | 0.84 | | 0.53 | 1.58 | |
| J974 | 50 | 7/16 in. | | 1.99 | 0.89 | | 0.51 | 1.56 | |
| J975 | 50 | 1/2 in. | | 1.99 | 0.89 | | 0.51 | 1.56 | |
| J976 | 50 | 2/0AN-3/0 | 5/8 in. | TBM6S | 1.99 | 0.89 | 0.51 | 1.56 | 0.06 |
| K971 | 50 | | 1/4 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K972 | 50 | | 5/16 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K30-38 | 5 | | 3/8 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K973 | 50 | | 3/8 in. | | 2.08 | 0.93 | 0.54 | 1.69 | |
| K974 | 50 | | 7/16 in. | | 2.08 | 0.93 | 0.54 | 1.70 | |
| K975 | 50 | 3/0AN-4/0 | 1/2 in. | TBM6S | 2.08 | 0.93 | 0.54 | 1.70 | 0.07 |
| L971 | 50 | | 1/4 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L972 | 50 | | 5/16 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L40-38 | 5 | | 3/8 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L973 | 50 | | 3/8 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L974 | 50 | | 7/16 in. | | 2.25 | 1.04 | 0.57 | 1.77 | |
| L975 | 50 | 4/0AN-250kcmil | 1/2 in. | TBM6S | 2.25 | 1.04 | 0.57 | 1.77 | 0.07 |
| M972 | 50 | | 5/16 in. | | 2.28 | 1.12 | 0.62 | 1.90 | |
| M250-38 | 5 | | 3/8 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| M973 | 50 | | 3/8 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| M974 | 50 | | 7/16 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |
| M975 | 50 | | 1/2 in. | | 2.40 | 1.12 | 0.65 | 1.91 | |

Ring Terminals


Insulated Heavy-Duty Ring Terminals

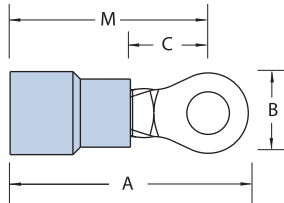

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) | | | |
|--------------|-----------|------------------|-----------------|-----------|-----------|------------------|---------|------|------|--------------------|------|------|------|
| | | | | | | A | B | C | M | | | | |
| Nylon | | | | | | | | | | | | | |
| RBC14-6 | 50 | 16-14 Heavy-duty | 0.210 | #6 | WT2130A | 0.98 | 0.25 | 0.29 | 0.85 | 0.05 | | | |
| RBC14-8 | 50 | 16-14 Heavy-duty | | #8 | | 1.04 | 0.39 | 0.29 | 0.85 | | | | |
| RBC863 | 500 | | | #8 | | 1.04 | 0.39 | 0.29 | 0.85 | | | | |
| RBC14-10 | 50 | 16-14 Heavy-duty | | #10 | | 1.04 | 0.39 | 0.29 | 0.85 | | | | |
| RBC14-14 | 50 | 16-14 Heavy-duty | | 1/4 in. | | 1.10 | 0.51 | 0.29 | 0.85 | | | | |
| RBC713 | 500 | | | 1/4 in. | | 1.10 | 0.51 | 0.29 | 0.85 | | | | |
| RBC14-516 | 50 | 16-14 Heavy-duty | | 5/16 in. | | 1.21 | 0.54 | 0.38 | 0.94 | | | | |
| RBC14-38 | 50 | 16-14 Heavy-duty | | 3/8 in. | | 1.26 | 0.63 | 0.38 | 0.94 | | | | |
| RBC14-12 | 50 | 16-14 Heavy-duty | | 1/2 in. | | 1.49 | 0.76 | 0.54 | 1.11 | | | | |
| RBC753 | 500 | | | 1/2 in. | | 1.49 | 0.76 | 0.54 | 1.11 | | | | |
| Vinyl | | | | | | | | | | | | | |
| 14RBC-6 | 50 | 16-14 Heavy-duty | | 0.210 | | #6 | WT2130A | 1.06 | 0.25 | | 0.29 | 0.93 | 0.05 |
| RBC857 | 500 | | #6 | | 1.06 | 0.25 | | 0.29 | 0.93 | | | | |
| 14RBC-8 | 50 | 16-14 Heavy-duty | #8 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| RBC867 | 500 | | #8 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| 14RBC-10 | 50 | 16-14 Heavy-duty | #10 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| RBC877 | 500 | | #10 | | 1.13 | 0.39 | | 0.29 | 0.93 | | | | |
| 14RBC-14 | 50 | 16-14 Heavy-duty | 1/4 in. | | 1.19 | 0.51 | | 0.29 | 0.93 | | | | |
| RBC717 | 500 | | 1/4 in. | | 1.19 | 0.51 | | 0.29 | 0.93 | | | | |
| 14RBC-516 | 50 | 16-14 Heavy-duty | 5/16 in. | | 1.29 | 0.54 | | 0.38 | 1.03 | | | | |
| RBC727 | 500 | | 5/16 in. | | 1.29 | 0.54 | | 0.38 | 1.03 | | | | |
| 14RBC-38 | 50 | 16-14 Heavy-duty | 3/8 in. | | 1.34 | 0.63 | | 0.38 | 1.03 | | | | |
| RBC797 | 500 | | 3/8 in. | | 1.34 | 0.63 | | 0.38 | 1.03 | | | | |
| 14RBC-12 | 50 | 16-14 Heavy-duty | 1/2 in. | 1.57 | 0.76 | 0.54 | 1.19 | | | | | | |

Non-Insulated Heavy-Duty Ring Terminals

The heavy-duty terminal solution!




| Cat. No. | Pkg. Qty. | Wire Range | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------------|-----------|--------------------|------------------|------|------|------|--------------------|
| | | | | | A | B | C | M | |
| BC14-6 | 50 | 16-14 Heavy-duty | #6 | ERG4002 ERG4005 | 0.81 | 0.25 | 0.29 | 0.68 | 0.05 |
| BC85 | 500 | | #6 | | 0.81 | 0.25 | 0.29 | 0.68 | |
| BC14-8 | 50 | 16-14 Heavy-duty | #8 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC86 | 500 | | #8 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC14-10 | 50 | 16-14 Heavy-duty | #10 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC87 | 500 | | #10 | | 0.87 | 0.39 | 0.29 | 0.68 | |
| BC14-14 | 50 | 16-14 Heavy-duty | 1/4 in. | | 0.93 | 0.51 | 0.29 | 0.68 | |
| BC71 | 500 | | 1/4 in. | | 0.93 | 0.51 | 0.29 | 0.68 | |
| BC14-516 | 50 | 16-14 Heavy-duty | 5/16 in. | | 1.04 | 0.54 | 0.38 | 0.77 | |
| BC72 | 500 | | 5/16 in. | | 1.04 | 0.54 | 0.38 | 0.77 | |
| BC14-38 | 50 | 16-14 Heavy-duty | 3/8 in. | | 1.09 | 0.63 | 0.38 | 0.77 | |
| BC79 | 500 | | 3/8 in. | | 1.09 | 0.63 | 0.38 | 0.77 | |
| BC14-12 | 50 | 16-14 Heavy-duty | 1/2 in. | | 1.32 | 0.76 | 0.54 | 0.94 | |
| BC75 | 500 | | 1/2 in. | | 1.32 | 0.76 | 0.54 | 0.94 | |

Ring Terminals

Terminals for nichrome wire NW Series


High-Temperature Non-Insulated Rings — 1200° F Max.

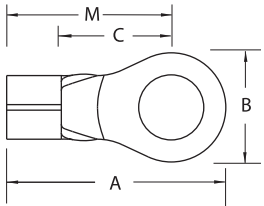

| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| NW18-10 | 100 | 20-18 | 2.5 | #10 | WT1377 | 0.63 | 0.31 | 0.28 | 0.38 | 0.032 |
| NW52 | 1,000 | | | #8 | | | | | | |
| NW81 | 1,000 | 16-14 | 2.5 | #6 | WT1377 | 0.66 | 0.31 | 0.28 | 0.51 | 0.040 |
| NW14-8 | 100 | | | #8 | | | | | | |
| NW14-10 | 100 | | | #10 | | | | | | |
| NW83 | 1,000 | | | #10 | | | | | | |
| NW14-12 | 100 | | | #12* | | | | | | |
| NW84 | 1,000 | | | #12* | | | | | | |
| NW10-8 | 50 | 12-10 | 3 | #8 | WT1377 | 0.66 | 0.31 | 0.28 | 0.51 | 0.040 |
| NW10-10 | | | | #10 | | | | | | |
| NW10-12 | | | | #12* | | | | | | |

* #12 stud is smaller than 1/4 in. stud

Tefzel® Insulated Rings — Insulation Grip

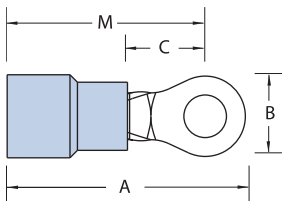


| Cat. No. | Pkg. Qty. | Wire Range | Max. Ins. (in.) | Bolt Hole | Rec. Tool | Dimensions (in.) | | | | Stock Thick. (in.) |
|----------|-----------|------------|-----------------|-----------|-----------|------------------|------|------|------|--------------------|
| | | | | | | A | B | C | M | |
| RAT853 | 1,000 | 22-18 | 0.140 | #6 | WT145C | 0.81 | 0.25 | 0.25 | 0.69 | 0.03 |
| RAT863 | | | | #8 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RAT873 | | | | #10 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RAT713 | | 1/4 in. | 1.07 | 0.46 | | 0.31 | 0.84 | | | |
| RBT853 | | 16-14 | 0.170 | #6 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RBT863 | | | | #8 | | 0.84 | 0.31 | 0.25 | 0.69 | |
| RBT873 | #10 | | | 0.84 | 0.31 | 0.25 | 0.69 | | | |
| RBT713 | 500 | 12-10 | 0.210 | 1/4 in. | WT145C | 1.08 | 0.46 | 0.31 | 0.81 | 0.04 |
| RCT333 | | | | #6 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RCT863 | | | | #8 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RCT363 | | | | #10 | | 1.00 | 0.37 | 0.27 | 0.81 | |
| RCT713 | | | | 1/4 in. | | 1.11 | 0.52 | 0.32 | 0.85 | |
| RCT703 | | | | 5/16 in. | | 1.23 | 0.52 | 0.31 | 0.96 | |
| RCT733 | 3/8 in. | 1.29 | 0.58 | 0.35 | 1.00 | | | | | |

Tefzel® is a registered trademark of DuPont

Ring Terminals

Nylon-Insulated Rectangular Rings

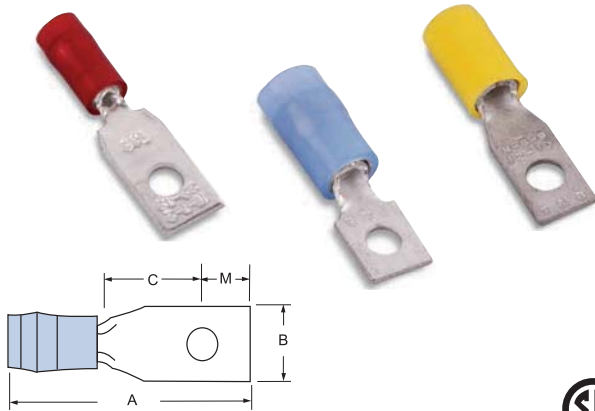


| Cat. No. | Pkg. Qty. | Bolt Hole | Wire Range | Rec. Tool | Dimensions (in.) | | | | BU-Ships Tongue Shape | Stock Thick. (in.) |
|----------|-----------|-----------|------------|-----------|------------------|--------|-------|-------|-----------------------|--------------------|
| | | | | | A | B | C | M | | |
| RA486 | 1,000 | #4 | 22-18 | ERG4001 | 0.796 | 0.237 | 0.237 | 0.143 | L86P-1 | 0.03 |
| RA485 | | #4 | | | 1.015 | 0.237 | 0.404 | 0.195 | L85P-1 | |
| RA483 | | #5 | | | 0.859 | 0.277 | 0.277 | 0.143 | L83P-1 | |
| RA484 | | #6 | | | 1.015 | 0.237 | 0.404 | 0.195 | L84P-1 | |
| RA481 | | #6 | | | 1.109 | 0.302 | 0.465 | 0.227 | L81P-1 | |
| RA482 | | #8 | | | 1.109 | 0.302 | 0.465 | 0.227 | L82P-1 | |
| RA480* | | #8 | | | 1.359 | 0.390 | 0.621 | 0.310 | L80P-1 | |
| RB486 | | #4 | | | 0.796 | 0.237 | 0.237 | 0.143 | L86P-2 | |
| RB485 | | #4 | | | 1.015 | 0.237 | 0.404 | 0.195 | L85P-2 | |
| RB483 | | #5 | | | 0.859 | 0.277 | 0.277 | 0.143 | L83P-2 | |
| RB484 | #6 | 1.015 | 0.237 | 0.404 | 0.195 | L84P-2 | | | | |
| RB481 | #6 | 1.109 | 0.302 | 0.465 | 0.227 | L81P-2 | | | | |
| RB482 | #8 | 1.109 | 0.302 | 0.465 | 0.227 | L82P-2 | | | | |
| RB480* | #8 | 1.359 | 0.390 | 0.621 | 0.310 | L80P-2 | | | | |
| RC486 | 500 | #4 | 12-10 | ERG4005 | 0.984 | 0.237 | 0.237 | 0.143 | L86P-3 | 0.04 |
| RC485 | | #4 | | | 1.187 | 0.237 | 0.404 | 0.195 | L85P-3 | |
| RC483 | | #5 | | | 1.046 | 0.277 | 0.277 | 0.143 | L83P-3 | |
| RC484 | | #6 | | | 1.203 | 0.237 | 0.404 | 0.195 | L84P-3 | |
| RC481 | | #6 | | | 1.281 | 0.302 | 0.465 | 0.227 | L81P-3 | |
| RC482 | | #8 | | | 1.281 | 0.302 | 0.465 | 0.227 | L82P-3 | |
| RC480* | #8 | 1.531 | 0.390 | 0.621 | 0.310 | L80P-3 | | | | |

* Not available on tape.

Note: RA, RB, RC486 for use with BU-Ships terminal board types 26TB. RA, RB, RC485 for use with 25TB and 27TB. RA, RB, RC483 for use with 8TB. RA, RB, RC484 for use with 10TB and 11TB. RA, RB, RC481 for use with 6TB, 7TB and 9TB. RA, RB, RC482 for use with 15TB. RA, RB, RC480 for use with 3TB, 4TB, 5TB, 16TB, 17TB and 18TB.

Note:
 22-18 ga. = 1-2 Navy
 16-14 ga. = 2-1/2-4 Navy
 12-10 ga. = 6-9 Navy

Non-Insulated Rectangular Rings

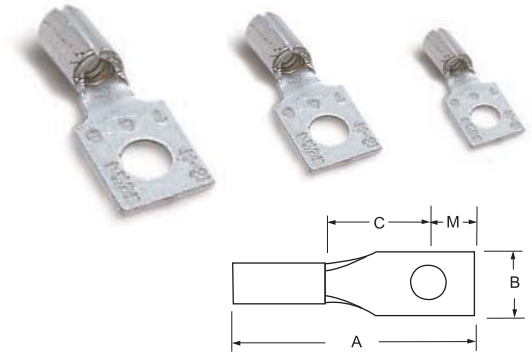

| Cat. No. | Pkg. Qty. | Bolt Hole | Wire Range | Rec. Tool | Dimensions (in.) | | | | BU-Ships Tongue Shape | Stock Thick. (in.) |
|----------|-----------|-----------|------------|-----------|------------------|-------|-------|-------|-----------------------|--------------------|
| | | | | | A | B | C | M | | |
| A486 | 1,000 | #4 | 22-18 | ERG4002 | 0.65 | 0.237 | 0.237 | 0.143 | L86 | 0.03 |
| A485 | | #4 | | | 0.87 | 0.237 | 0.404 | 0.195 | L85 | |
| A483 | | #5 | | | 0.70 | 0.277 | 0.277 | 0.143 | L83 | |
| A484 | | #6 | | | 0.87 | 0.237 | 0.404 | 0.195 | L84 | |
| A481 | | #6 | | | 0.96 | 0.302 | 0.465 | 0.227 | L81 | |
| A482 | | #8 | | | 0.96 | 0.302 | 0.465 | 0.227 | L82 | |
| A480* | | #8 | | | 1.21 | 0.390 | 0.621 | 0.310 | L80 | |
| B486 | | #4 | | | 0.65 | 0.237 | 0.237 | 0.143 | L86 | |
| B485 | | #4 | | | 0.87 | 0.237 | 0.404 | 0.195 | L85 | |
| B483 | | #5 | | | 0.70 | 0.277 | 0.277 | 0.143 | L83 | |
| B484 | #6 | 0.87 | 0.237 | 0.404 | 0.195 | L84 | | | | |
| B481 | #6 | 0.96 | 0.302 | 0.465 | 0.227 | L81 | | | | |
| B482 | #8 | 0.96 | 0.302 | 0.465 | 0.227 | L82 | | | | |
| B480* | #8 | 1.21 | 0.390 | 0.621 | 0.310 | L80 | | | | |
| C486 | 500 | #4 | 12-10 | ERG4005 | 0.73 | 0.237 | 0.237 | 0.143 | L86 | 0.04 |
| C485 | | #4 | | | 0.90 | 0.237 | 0.404 | 0.195 | L85 | |
| C483 | | #5 | | | 0.76 | 0.277 | 0.277 | 0.143 | L83 | |
| C484 | | #6 | | | 0.94 | 0.237 | 0.404 | 0.195 | L84 | |
| C481 | | #6 | | | 1.03 | 0.302 | 0.465 | 0.227 | L81 | |
| C482 | | #8 | | | 1.03 | 0.302 | 0.465 | 0.227 | L82 | |
| C480* | #8 | 1.27 | 0.390 | 0.621 | 0.310 | L80 | | | | |

* Not available on tape.

Note: A, B, C486 for use with BU-Ships terminal board types 26TB. A, B, C485 for use with 25TB, 27TB. A, B, C483 for use with 8TB. A, B, C484 for use with 10TB and 11TB. A, B, C481 for use with 6TB, 7TB and 9TB. A, B, C482 for use with 15TB. A, B, C480 for use with 3TB, 5TB, 16TB, 17TB and 18TB.

Note:
 22-18 ga. = 1-2 Navy
 16-14 ga. = 2-1/2-4 Navy
 12-10 ga. = 6-9 Navy