Project	Catalog #	Туре	
Prepared by	Notes	Date	



- Energy and Performance Data page 2
- · Accessories page 2
- Photometric Data page 3
- Sensor Coverage page 3
- Product Warranty

Top Product Features

- · Easy lumen/power selectable packages
- Simple 3 CCT Select colors 3000/4000/5000K
- · Sensor ready port for quick plug and play install
- 120-347 volt operating range with 0-10V dimming
- · IP65 rated and UL wet location listed
- · Mounting ring included for rapid install
- · 6ft power and dimming cords for no-hassle wiring

Metalux

EZBY

Simple. Easy. Selectable LED Round High Bay

Typical Applications

Light Commercial • Large Open Areas • Warehouse • Barns • Residential

Product Certification









Product Features
















Dimensional and Mounting Details

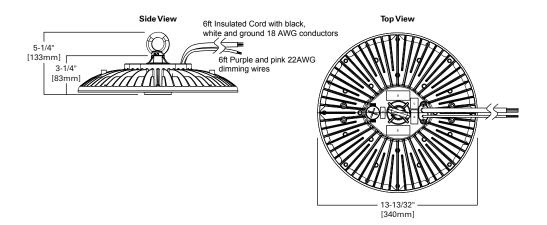



Energy and Performance Data

Default CCT/Lumen Setting: 4000K / High Power

277 Volt

Catalog Number	Voltage	Lumen Setting	Nominal CCT	Nominal Lumen	Watts (277V)	Efficacy (LPW)
			3000K	18727	122.3	153
		Low	4000K	20439	119.1	172
			5000K	19694	122.2	161
			3000K	22783	156.7	145
EZBY-1830C3-MV-BLK	120-347V	Medium	4000K	25245	151.2	167
			5000K	24235	154.2	157
		High	3000K	26490	189.2	140
			4000K	29688	181.6	163
			5000K	28566	191.0	150

Shipping Data

Catalog Number	UPC	Unit Weight (LBS)	Units per Carton	Pallet Qty.	Pallet Weight
EZBY-1830C3-MV-BLK	080083305889	8.5 lbs.	1 PC	72	650 lbs.

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (hours)
25°C	> 84%	> 125,000

IK Rating

ik ikating			
EZBY	IK Rating		
Lens	IK08		
Housing	IK08		

Energy Data

Input Watts:	
119/156/191W	

Ambient Ratings

Lumen Package	Ambient Rating
EZBY-1830C3	50C

Product Specifications

Construction

- · Diecast aluminum housing and heatsink
- Polycarbonate lens seals LED for IP65 rating
- Impact protection rating IK08 Lens and IK08 Housing

Electrical

- Selectable power switch for 3 levels of lumen output
- Selectable color switch provides 3000, 4000 and 5000 at CRI >82
- Multi-volt 120 through 347V operation
- 0-10V dimming, 10% to 100% dimming range
- Separate purple and pink 22AWG wires must be pulled from control to luminaire in order to enable 0-10V dimming function
- 6ft (72" long) long power and dimming cords provided
- Integral 6kV surge protection
- Operating temperature of -40°C to 50°C
- Default CCT/Lumen setting is 4000K and High Power

Optics

- UV stabilized polycarbonate lens
- General coverage and wide distribution

Mounting

- · Mounting ring included
- Great for mounting heights between 20 and 40ft high

Compliance

- · cULus listed for wet location
- IP65 rated
- · IESNA LM-79 and LM-80 standards compliant
- Qualifies as State of California Title 24 nonresidential high efficiency luminaire
- · FCC part 15 class A compliant
- DesignLights Consortium® Qualified and classified for DLC Premium, refer to www.designlights.org for details

Sensor

- Plug and play low-voltage sensor accessory available
- · Sensor installs directly to integral fixture port
- PIR motion sensor with 0-10V control
- Wet location and IP65 rated
- Sensor coverage up to 50ft mounting height (large objects)
- · Sensor remote control must be ordered separately

Emergency Pack Option

- 120-347V universal input remote emergency driver accessory available. Must be ordered separately
- Field installed EM driver wires directly to fixture and provides constant power to LED system for 90-minutes
- Test switch/indicator button can be tested safely from the ground using remote control
- EM remote control included with emergency driver accessory
- Accessory comes with grommets and mounting hardware, see EM driver spec sheet

Finish

 Standard black polyester powder coat painted after fabrication

Warranty

Five year limited warranty

Accessories

Catalog Number		Description	Unit Carton UPC	
	EBP-RM40R (1)	40W Emergency Driver, Remote Mount 120-347V White w/ remote included	080083259496	
	UHBS-SENSOR PK (1)	PIR Sensor 360 Lens 60FT MH Kit	080083257898	
	UHBS SENSOR REMOTE	UHBS Sensor Remote Control	080083260249	

Notes: (1) To meet state and local codes, EBP cannot be used with EZBY with sensor or with UHBS sensor accessory.



SENSOR (1) Plug in sensor




EBP-RM40R (1) Field installed Remote EM



Metalux

Photometric Data





EZBY-1830C3-MV-BLK-MED-3000K-277V

Electronic Driver


Round Select LED 3000K

Spacing criterion: (II) 1.42 x mounting height, (⊥) 1.42 x mounting height

Lumens: 22783 Input Watts: 157.6W Efficacy: 145.4 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-3000K-277V.IES



EZBY-1830C3-MV-BLK-MED-5000K-277V

Electronic Driver


Round Select LED 5000K

Spacing criterion: (II) 1.42 x mounting height, (\perp) 1.42 x mounting height

Lumens: 24235 Input Watts: 157.2W Efficacy: 154.2 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-5000K-277V.IES



EZBY-1830C3-MV-BLK-MED-4000K-277V

Electronic Driver

Round Select LED 4000K


Spacing criterion: (II) 1.42 x mounting

height, (⊥) 1.42 x mounting height

Lumens: 25245 Input Watts: 151.2W Efficacy: 167 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-4000K-277V.IES



EZBY-1830C3-MV-BLK-MED-4000K-347V

Electronic Driver

Round Select LED 4000K


Spacing criterion: (II) 1.42 x mounting height, (⊥) 1.42 x mounting height


Lumens: 25336 Input Watts: 151.8W Efficacy: 166.9 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-4000K-347V.IES

Sensor Coverage





Sensor Specifications

12V-24V DC, >30mA
0-10V, max. 25mA sinking current
50ft. (15m) indoor, no backlight
0-10V
20% / 50% / 75% / 100% (1-8m)
Up to 50ft (15.25 m)
10s / 1 min / 5 min / 10 min / 15 min / 20 min / 30 min / 60 min
24H / 10 LUX / 30 LUX / 50 LUX
-40°F ~+ 158°F (-40°C ~+ 70°C)
IP65

Notes: Warm up time 40 sec after sensor first receives input power. Fixture will stay on 40 seconds then work move to default mode.

Any setting changed by sensor remote control (order remote separately), will led lights on remote to turn on and off to confirm. See sensor instruction sheet on UHBS product page found on www.cooperlighting.com

Sensor Modes

	Brightness	Sensitivity	Hold Time	Daylight Sensor	Stand-by Dim	Stand-by Period
MODE 1 (Default)	100%	75%	5 min	Disabled	30%	30 min
MODE 2	100%	75%	1 min	Disabled	30%	œ
MODE 3	100%	75%	5 min	30LUX	30%	30 min
MODE 4	100%	75%	1 min	(30LUX /300LUX)	30%	œ

Cooper Lighting Solutions 1121 Highway 74 South Peachtree City, GA 30269 P: 770-486-4800

www.cooperlighting.com

Project	Catalog #	Туре	
Prepared by	Notes	Date	



- Energy and Performance Data page 2
- · Accessories page 2
- Photometric Data page 3
- Sensor Coverage page 3
- Product Warranty

Top Product Features

- · Easy lumen/power selectable packages
- Simple 3 CCT Select colors 3000/4000/5000K
- · Sensor ready port for quick plug and play install
- 120-347 volt operating range with 0-10V dimming
- · IP65 rated and UL wet location listed
- · Mounting ring included for rapid install
- · 6ft power and dimming cords for no-hassle wiring

Metalux

EZBY

Simple. Easy. Selectable LED Round High Bay

Typical Applications

Light Commercial • Large Open Areas • Warehouse • Barns • Residential

Product Certification









Product Features
















Dimensional and Mounting Details

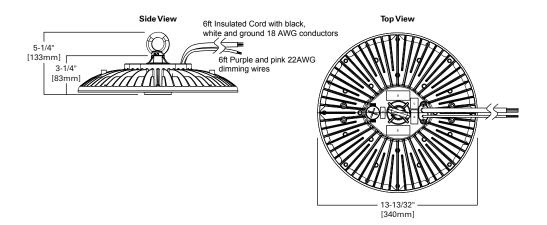



Energy and Performance Data

Default CCT/Lumen Setting: 4000K / High Power

277 Volt

Catalog Number	Voltage	Lumen Setting	Nominal CCT	Nominal Lumen	Watts (277V)	Efficacy (LPW)
			3000K	18727	122.3	153
		Low	4000K	20439	119.1	172
			5000K	19694	122.2	161
EZBY-1830C3-MV-BLK 120-347V			3000K 22783 156.7 4000K 25245 151.2 5000K 24235 154.2	22783	156.7	145
	120-347V	Medium		167		
		5000K	24235	154.2	157	
			3000K	26490	189.2	140
	н	High	4000K	29688	181.6	163
			5000K	28566	191.0	150

Shipping Data

Catalog Number	UPC	Unit Weight (LBS)	Units per Carton	Pallet Qty.	Pallet Weight
EZBY-1830C3-MV-BLK	080083305889	8.5 lbs.	1 PC	72	650 lbs.

Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (hours)
25°C	> 84%	> 125,000

IK Rating

in nating		
EZBY	IK Rating	
Lens	IK08	
Housing	IK08	

Energy Data

Input Watts:	
119/156/191W	

Ambient Ratings

Lumen Package	Ambient Rating		
EZBY-1830C3	50C		

Product Specifications

Construction

- · Diecast aluminum housing and heatsink
- Polycarbonate lens seals LED for IP65 rating
- Impact protection rating IK08 Lens and IK08 Housing

Electrical

- Selectable power switch for 3 levels of lumen output
- Selectable color switch provides 3000, 4000 and 5000 at CRI >82
- Multi-volt 120 through 347V operation
- 0-10V dimming, 10% to 100% dimming range
- Separate purple and pink 22AWG wires must be pulled from control to luminaire in order to enable 0-10V dimming function
- 6ft (72" long) long power and dimming cords provided
- Integral 6kV surge protection
- Operating temperature of -40°C to 50°C
- Default CCT/Lumen setting is 4000K and High Power

Optics

- UV stabilized polycarbonate lens
- General coverage and wide distribution

Mounting

- · Mounting ring included
- Great for mounting heights between 20 and 40ft high

Compliance

- · cULus listed for wet location
- IP65 rated
- · IESNA LM-79 and LM-80 standards compliant
- Qualifies as State of California Title 24 nonresidential high efficiency luminaire
- · FCC part 15 class A compliant
- DesignLights Consortium® Qualified and classified for DLC Premium, refer to www.designlights.org for details

Sensor

- Plug and play low-voltage sensor accessory available
- · Sensor installs directly to integral fixture port
- PIR motion sensor with 0-10V control
- Wet location and IP65 rated
- Sensor coverage up to 50ft mounting height (large objects)
- · Sensor remote control must be ordered separately

Emergency Pack Option

- 120-347V universal input remote emergency driver accessory available. Must be ordered separately
- Field installed EM driver wires directly to fixture and provides constant power to LED system for 90-minutes
- Test switch/indicator button can be tested safely from the ground using remote control
- EM remote control included with emergency driver accessory
- Accessory comes with grommets and mounting hardware, see EM driver spec sheet

Finish

 Standard black polyester powder coat painted after fabrication

Warranty

Five year limited warranty

Accessories

Catalog Number	Description	Unit Carton UPC
EBP-RM40R (1)	40W Emergency Driver, Remote Mount 120-347V White w/ remote included	080083259496
UHBS-SENSOR PK (1) PIR Sensor 360 Lens 60FT MH Kit		080083257898
UHBS SENSOR REMOTE	UHBS Sensor Remote Control	080083260249

Notes: (1) To meet state and local codes, EBP cannot be used with EZBY with sensor or with UHBS sensor accessory.



SENSOR (1) Plug in sensor




EBP-RM40R (1) Field installed Remote EM



Metalux

Photometric Data





EZBY-1830C3-MV-BLK-MED-3000K-277V

Electronic Driver


Round Select LED 3000K

Spacing criterion: (II) 1.42 x mounting height, (⊥) 1.42 x mounting height

Lumens: 22783 Input Watts: 157.6W Efficacy: 145.4 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-3000K-277V.IES



EZBY-1830C3-MV-BLK-MED-5000K-277V

Electronic Driver


Round Select LED 5000K

Spacing criterion: (II) 1.42 x mounting height, (\perp) 1.42 x mounting height

Lumens: 24235 Input Watts: 157.2W Efficacy: 154.2 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-5000K-277V.IES



EZBY-1830C3-MV-BLK-MED-4000K-277V

Electronic Driver

Round Select LED 4000K


Spacing criterion: (II) 1.42 x mounting

height, (⊥) 1.42 x mounting height

Lumens: 25245 Input Watts: 151.2W Efficacy: 167 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-4000K-277V.IES



EZBY-1830C3-MV-BLK-MED-4000K-347V

Electronic Driver

Round Select LED 4000K


Spacing criterion: (II) 1.42 x mounting height, (⊥) 1.42 x mounting height


Lumens: 25336 Input Watts: 151.8W Efficacy: 166.9 LPW

Test Report: EZBY-1830C3-MV-BLK-

MED-4000K-347V.IES

Sensor Coverage





Sensor Specifications

Sensor Specifications				
Power supply	12V-24V DC, >30mA			
Dim control output	0-10V, max. 25mA sinking current			
Remote range	50ft. (15m) indoor, no backlight			
Dim control output	0-10V			
Detection radius	20% / 50% / 75% / 100% (1-8m)			
Mounting height	Up to 50ft (15.25 m)			
Time setting	10s / 1 min / 5 min / 10 min / 15 min / 20 min / 30 min / 60 min			
Light-control	24H / 10 LUX / 30 LUX / 50 LUX			
Sensor Operating Temp.	-40°F ~+ 158°F (-40°C ~+ 70°C)			
IP rating	IP65			

Notes: Warm up time 40 sec after sensor first receives input power. Fixture will stay on 40 seconds then work move to default mode.

Any setting changed by sensor remote control (order remote separately), will led lights on remote to turn on and off to confirm. See sensor instruction sheet on UHBS product page found on www.cooperlighting.com

Sensor Modes

	Brightness	Sensitivity	Hold Time	Daylight Sensor	Stand-by Dim	Stand-by Period
MODE 1 (Default)	100%	75%	5 min	Disabled	30%	30 min
MODE 2	100%	75%	1 min	Disabled	30%	∞
MODE 3	100%	75%	5 min	30LUX	30%	30 min
MODE 4	100%	75%	1 min	(30LUX /300LUX)	30%	∞

Cooper Lighting Solutions 1121 Highway 74 South Peachtree City, GA 30269 P: 770-486-4800

www.cooperlighting.com