


HALO®

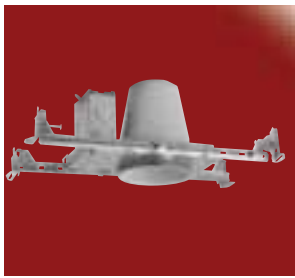

H99T


4" Aperture
Shallow Ceiling
120V Incandescent

RECESSED DOWNLIGHTING

- Thermally Protected Non-IC Shallow Ceiling Housing
- Insulation must be kept 3" away from all sides of housing

* For use with 120V incandescent lamp

DIMENSIONS

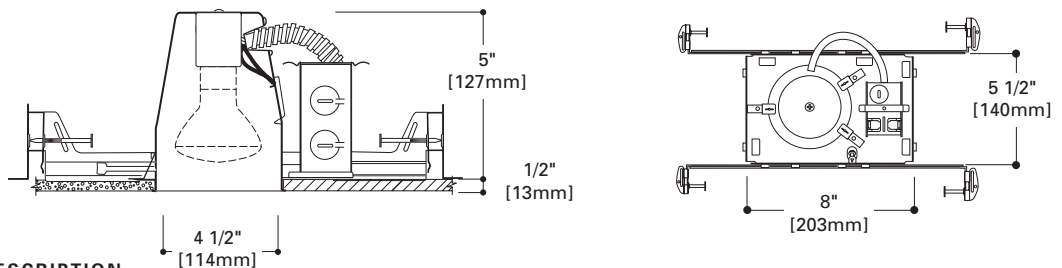

DESCRIPTION

H99T is a small aperture housing for providing accent and task lighting. The H99T is designed for use in non-insulated ceiling or for insulated ceilings but insulation MUST be kept 3" from all sides of the housing.

Housing

Formed of 20 gauge CRS with white powder coat finish.

Plaster Frame

Housing is secured in plaster frame with spring barbs. The housing can be adjusted in the plaster frame to adjust for different ceiling materials. The housing can be removed from the plaster frame for access to the junction box. Halo name embossed on plaster frame.

Junction Box

- UL listed for through branch circuit wiring
- Positioned to accommodate straight conduit runs
- Seven 1/2" trade size conduit knockouts with true pry-out slots
- Slide-N-Side™ wire traps allow non-metallic "NM" sheathed cable

DIMENSIONS



H99RT

4" Aperture
Shallow Ceiling
Remodel Housing
120V Line Voltage

RECESSED DOWNLIGHTING

- Thermally Protected Non-IC Shallow Ceiling Remodel Housing can be installed from below the ceiling
- Insulation must be kept 3" away from housing
- For 120V incandescent lamps

DESCRIPTION

The H99T is a small aperture housing for accent and task lighting. The H99RT is designed for use in non-insulated existing ceiling or for existing insulated ceilings but insulation MUST be kept 3" from all sides of the housing. It can be installed from below the ceiling.

Housing

Formed of 20 gauge CRS with white powder coat finish.

Junction Box

J-Box features include:

- Listed for through branch circuit wiring

to be installed without tools and without removing knockouts. Accepts a wider range of non-metallic sheathed cable – the standard cable types used in lighting for both U.S. and Canada.

- Wiring connections are made outside the junction box. Insert the cable directly into the trap after connections are made and close J-box.

- Accommodates the following standard non-metallic sheathed cable types:
(US) #14/2, #14/3, #12/2, #12/3
(Canada) #14/2, #14/3, #12/2

GOT NAIL!™ Pass-N-Thru™ Bar Hangers

Bar Hanger Features include:

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary.
- Automatic levelling flange aligns the housing and lets you hold the housing in place with one hand

while driving nails

- Housing can be positioned at any point within 24" joist span
- Score lines allow "toolless" shortening for 12" joists
- Bar hangers may be repositioned 90°
- Bar hangers do not need to be removed from frame for shortening
- Integral T-bar clips snaps onto T-bars - no additional clips required

Socket


Fixed position porcelain socket with nickel plated brass screw shell provides consistent lamp positioning. Shipping insert protects socket from overspray

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels

- UL/cUL Listed for Damp Location
- UL/cUL listed for Feed Through
- IP Rated (Improper Lamp)

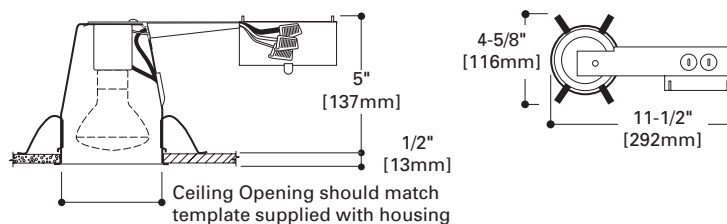

DESCRIPTION

The H99T is a small aperture housing for accent and task lighting. The H99RT is designed for use in non-insulated existing ceiling or for existing insulated ceilings but insulation MUST be kept 3" from all sides of the housing. It can be installed from below the ceiling.

Housing

Formed of 20 gauge CRS with white powder coat finish.

Junction Box

J-Box features include:

- Listed for through branch circuit wiring

- 1/2" trade size knockouts with true pry-out slots
- Four pryouts with integral strain relief for non-metallic sheathed cable

"Quick Connect" Connectors

Three "Quick Connect" connectors eliminate need for separate wire nuts - simply strip supply wires and push in.

Socket

Fixed position porcelain socket with nickel plated brass screw shell provides consistent lamp positioning. Shipping insert protects socket from overspray.

Remodel Clips

Four remodel clips secure housing and accommodate 1/2" and 5/8" ceiling materials.

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels

- UL/cUL Listed for Damp Location
- UL/cUL listed for Feed Through

HALO®

H99T


H99RT

H99ICT

999 Reflector

- Die cast trim ring with metal reflector
- For general lighting
- Lamps:

H99T H99RT H99ICT	40W R16, 40W A19, 50W R20, 50W PAR20
--	---

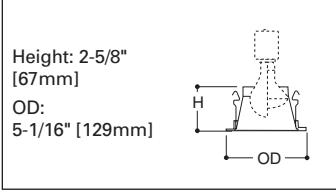

999MB
White Trim with Black Reflector

999RG
White Trim with Gold Reflector


999
White Trim with Clear Reflector



999SN
Satin Nickel Trim with Satin Nickel Reflector

999SL
Silver Trim with Clear Reflector

999H
White Trim with Haze Reflector



999TBZ
Tuscan Bronze with Tuscan Bronze Reflector

999AC
Antique Copper with Antique Copper Reflector

993 Coilex® Baffle


- Features:
- Die cast trim ring with Coilex® precision baffle
 - For general lighting
 - Lamps:

H99T H99RT	40W R16, 50W R20, 50W PAR20
H99ICT	30W R20, 35W PAR20 (50W PAR20, 50W PAR20 With H1999 Socket Extender)

Accessory
H1999
Socket Extender



Height: 2-5/8" [67mm]
OD: 5-1/16" [129mm]



993PB
Polished Brass with Black Baffle

993W
White Trim with White Baffle


993P
White Trim with Black Baffle



993AC
Antique Copper with Black Baffle

993SN
Satin Nickel Trim with Black Baffle

993SL
Silver Trim with Black Baffle



993TBZ
Tuscan Bronze with Black Baffle

HALO®



H99T



4" Aperture
Shallow Ceiling
120V Incandescent

RECESSED DOWNLIGHTING

- Thermally Protected Non-IC Shallow Ceiling Housing
- Insulation must be kept 3" away from all sides of housing

* For use with 120V incandescent lamp

DIMENSIONS

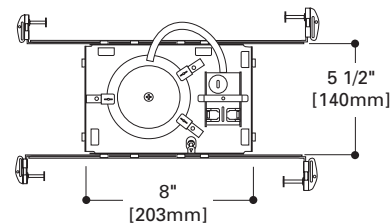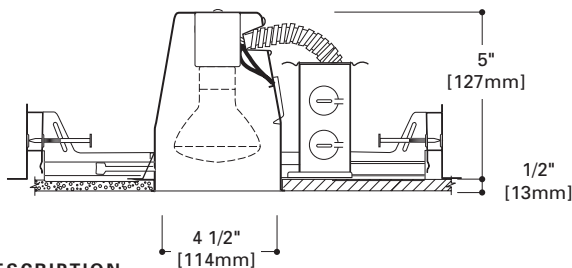

DESCRIPTION

H99T is a small aperture housing for providing accent and task lighting. The H99T is designed for use in non-insulated ceiling or for insulated ceilings but insulation MUST be kept 3" from all sides of the housing.

Housing

Formed of 20 gauge CRS with white powder coat finish.

Plaster Frame

Housing is secured in plaster frame with spring barbs. The housing can be adjusted in the plaster frame to adjust for different ceiling materials. The housing can be removed from the plaster frame for access to the junction box. Halo name embossed on plaster frame.

Junction Box

- UL listed for through branch circuit wiring
- Positioned to accommodate straight conduit runs
- Seven 1/2" trade size conduit knockouts with true pry-out slots
- Slide-N-Side™ wire traps allow non-metallic "NM" sheathed cable

to be installed without tools and without removing knockouts. Accepts a wider range of non-metallic sheathed cable – the standard cable types used in lighting for both U.S. and Canada.

- Wiring connections are made outside the junction box. Insert the cable directly into the trap after connections are made and close J-box.

- Accommodates the following standard non-metallic sheathed cable types:
(US) #14/2, #14/3, #12/2, #12/3
(Canada) #14/2, #14/3, #12/2

GOT NAIL!™ Pass-N-Thru™ Bar Hangers

Bar Hanger Features include:

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary.
- Automatic levelling flange aligns the housing and lets you hold the housing in place with one hand

while driving nails

- Housing can be positioned at any point within 24" joist span
- Score lines allow "toolless" shortening for 12" joists
- Bar hangers may be repositioned 90°
- Bar hangers do not need to be removed from frame for shortening
- Integral T-bar clips snaps onto T-bars - no additional clips required

Socket

Fixed position porcelain socket with nickel plated brass screw shell provides consistent lamp positioning. Shipping insert protects socket from overspray



Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels

- UL/cUL Listed for Damp Location
- UL/cUL listed for Feed Through
- IP Rated (Improper Lamp)

DIMENSIONS

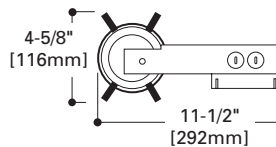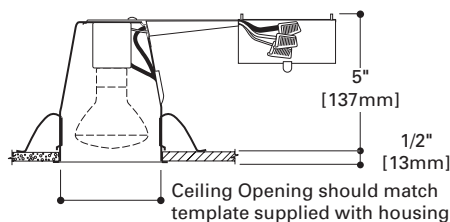

DESCRIPTION

The H99T is a small aperture housing for accent and task lighting. The H99RT is designed for use in non-insulated existing ceiling or for existing insulated ceilings but insulation MUST be kept 3" from all sides of the housing. It can be installed from below the ceiling.

Housing

Formed of 20 gauge CRS with white powder coat finish.

Junction Box

J-Box features include:

- Listed for through branch circuit wiring

- 1/2" trade size knockouts with true pry-out slots
- Four pryouts with integral strain relief for non-metallic sheathed cable

"Quick Connect" Connectors

Three "Quick Connect" connectors eliminate need for separate wire nuts - simply strip supply wires and push in.

Socket

Fixed position porcelain socket with nickel plated brass screw shell provides consistent lamp positioning. Shipping insert protects socket from overspray.

Remodel Clips

Four remodel clips secure housing and accommodate 1/2" and 5/8" ceiling materials.

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels

- UL/cUL Listed for Damp Location
- UL/cUL listed for Feed Through



H99RT

4" Aperture
Shallow Ceiling
Remodel Housing
120V Line Voltage

RECESSED DOWNLIGHTING

- Thermally Protected Non-IC Shallow Ceiling Remodel Housing can be installed from below the ceiling
- Insulation must be kept 3" away from housing
- For 120V incandescent lamps

HALO®

H99T


H99RT

H99ICT

999 Reflector

- Die cast trim ring with metal reflector
- For general lighting
- Lamps:

H99T H99RT H99ICT	40W R16, 40W A19, 50W R20, 50W PAR20
--	---

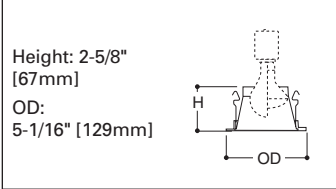

999MB
White Trim with Black Reflector

999RG
White Trim with Gold Reflector


999
White Trim with Clear Reflector



999SN
Satin Nickel Trim with Satin Nickel Reflector

999SL
Silver Trim with Clear Reflector

999H
White Trim with Haze Reflector





999TBZ
Tuscan Bronze with Tuscan Bronze Reflector

999AC
Antique Copper with Antique Copper Reflector

993 Coilex® Baffle

- Features:
- Die cast trim ring with Coilex® precision baffle
 - For general lighting
 - Lamps:

H99T H99RT	40W R16, 50W R20, 50W PAR20
H99ICT	30W R20, 35W PAR20 (50W PAR20, 50W PAR20 With H1999 Socket Extender)

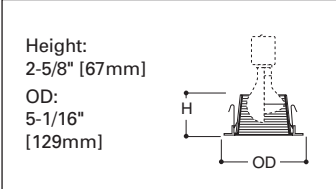

993PB
Polished Brass with Black Baffle

993W
White Trim with White Baffle

993P
White Trim with Black Baffle



993AC
Antique Copper with Black Baffle

993SN
Satin Nickel Trim with Black Baffle

993SL
Silver Trim with Black Baffle



993TBZ
Tuscan Bronze with Black Baffle