



Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Contact/Phone: \_\_\_\_\_

## SLOPE CEILING IC HOUSING

STANDARD SLOPE  
 2/12 to 6/12 PITCH (9° to 27°)  
 INCANDESCENT LAMPS  
**IC926 SERIES**

### PRODUCT DESCRIPTION

Slope ceiling IC Housing "Air-Loc" • Energy efficient, sealed inner housing • Double wall housing construction • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs.

### PRODUCT SPECIFICATIONS

- Lamp** Lamp ratings based on trim selected – see page 2.
- Socket** Medium base porcelain with nickel-plated copper screw shell • Adjustable to position lamp perpendicular to floor.
- Trims** Trim selection shown on page 2.
- Labels** UL listed for through-branch wiring, damp locations and IP
  - Product thermally protected against improper use of lamps
  - Union made • UL Listed/CSA certified • Trim No. 610 is wet location approved for covered ceiling applications.
- Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance. Specifications subject to change without notice.

### INSTALLATION


**Real Nail® 3 Bar Hangers** Telescoping, Patented (US Patent D552,969) Real Nail 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

**Junction Box** Pre-wired junction box provided with (5)  $\frac{1}{2}$ " and (1)  $\frac{3}{4}$ " knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • **W option** is supplied with **push-in electrical connectors** for fast installation.

**Mounting Frame** 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance • Access door for junction box accessibility • Inner housing is vertically adjustable to accommodate up to a 1" ceiling thickness • Designed to fit into 2 x 8 construction.

### DIMENSIONS

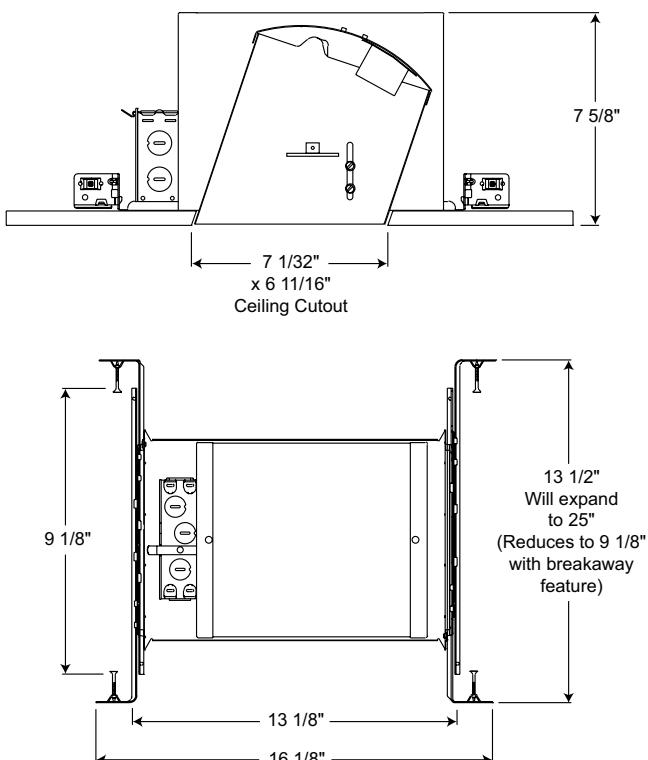

### Accessories

Catalog Number	Description
ALG926	Air-Loc Gasket To order, specify catalog number.

### PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC926	120V	A19/MR16/BR30/R30/PAR30/PAR30L/PAR38 (See page 2 for max. trim rating)
IC926 W	120V	A19/MR16/BR30/R30/PAR30/PAR30L/PAR38 (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone 1-800-705-SERV (7378) • Visit us at [www.acuitybrands.com/juno-recessed](http://www.acuitybrands.com/juno-recessed)

Printed in U.S.A. ©2017-2020 Acuity Brands Lighting, Inc. Rev. 05/19/20

Light Commercial & Residential

# SLOPE CEILING IC HOUSING

STANDARD SLOPE  
2/12 to 6/12 PITCH (9° to 27°)  
INCANDESCENT LAMPS

## IC926 SERIES

### TRIMS/LAMPS

Catalog Number	Description	Max. Lamp Rating	
 610 BWH ♦	Lensed Shower Flat Diffuser Trim, Black Baffle, White Trim Ring	50W PAR30	
 610 WWH ♦	Lensed Shower Flat Diffuser Trim, White Baffle, White Trim Ring		
612 CWH	Clear Alzak® Cone, White Trim Ring	75W PAR30, 90W PAR38, 65W BR30	
612 GWH	Gold Alzak® Cone, White Trim Ring		
612 BWH	Black Alzak® Cone, White Trim Ring		
 612 HZWH	Haze Cone, White Trim Ring		
612 HZSC	Haze Cone, Satin Chrome Trim Ring		
612 WWH	White Cone, White Trim Ring		
612 WHZWH	Wheat Haze Cone, White Trim Ring		
612 WHZBRZ	Wheat Haze Cone, Bronze Trim Ring		
 614 BWH	Standard Slope Downlight Black Baffle, White Trim Ring	90W PAR38	
614 BSC	Standard Slope Downlight Black Baffle, Satin Chrome Trim Ring		
614 BBRZ	Standard Slope Downlight Black Baffle, Bronze Trim Ring		
614 BBL	Standard Slope Downlight Black Baffle, Black Trim Ring		
 614 WWH	Standard Slope Downlight White Baffle, White Trim Ring		
 616 BWH	Cylinder Spotlight, Black Baffle, White Trim Ring	60W PAR16	
616 WWH	Cylinder Spotlight, White Baffle, White Trim Ring		♦ UL Listed for use in wet location.
 617 WWH	Cylinder Spotlight, White Baffle, White Trim Ring	35W MRT16 supplied with magnetic transformer	Housing and trim can be ordered together or separate, but will always ship separately.
 619 BWH <sup>1</sup>	Eyeball, Black Baffle, White Trim Ring	85W BR30	Notes:
619 WWH <sup>1</sup>	Eyeball, White Baffle, White Trim Ring		1 Requires the C29 Adapter.



Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Contact/Phone: \_\_\_\_\_

## SLOPE CEILING IC HOUSING

STANDARD SLOPE  
 2/12 to 6/12 PITCH (9° to 27°)  
 INCANDESCENT LAMPS  
**IC926 SERIES**

### PRODUCT DESCRIPTION

Slope ceiling IC Housing "Air-Loc" • Energy efficient, sealed inner housing • Double wall housing construction • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs.

### PRODUCT SPECIFICATIONS

- Lamp** Lamp ratings based on trim selected – see page 2.
- Socket** Medium base porcelain with nickel-plated copper screw shell • Adjustable to position lamp perpendicular to floor.
- Trims** Trim selection shown on page 2.
- Labels** UL listed for through-branch wiring, damp locations and IP
  - Product thermally protected against improper use of lamps
  - Union made • UL Listed/CSA certified • Trim No. 610 is wet location approved for covered ceiling applications.
- Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance. Specifications subject to change without notice.

### INSTALLATION


**Real Nail® 3 Bar Hangers** Telescoping, Patented (US Patent D552,969) Real Nail 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

**Junction Box** Pre-wired junction box provided with (5)  $\frac{1}{2}$ " and (1)  $\frac{3}{4}$ " knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • **W option** is supplied with **push-in electrical connectors** for fast installation.

**Mounting Frame** 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance • Access door for junction box accessibility • Inner housing is vertically adjustable to accommodate up to a 1" ceiling thickness • Designed to fit into 2 x 8 construction.

### DIMENSIONS

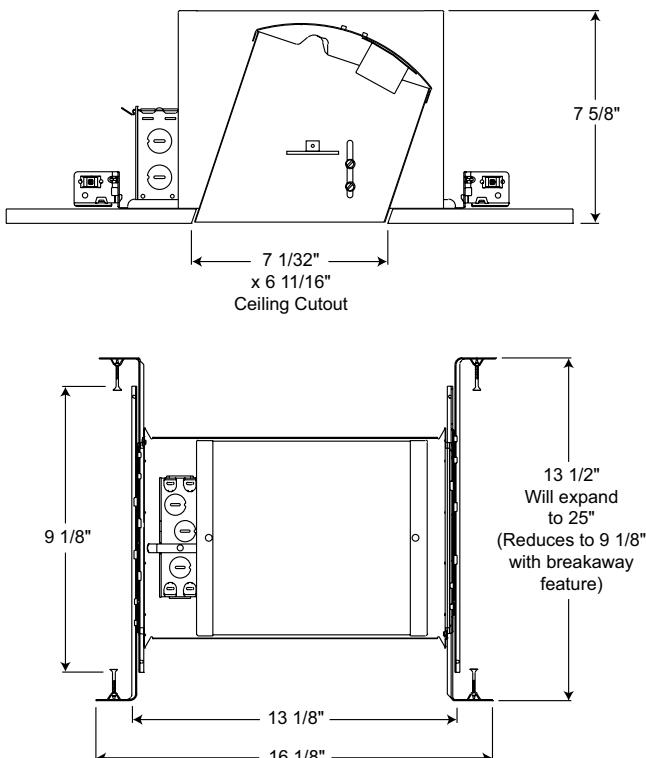

### Accessories

Catalog Number	Description
ALG926	Air-Loc Gasket To order, specify catalog number.

### PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC926	120V	A19/MR16/BR30/R30/PAR30/PAR30L/PAR38 (See page 2 for max. trim rating)
IC926 W	120V	A19/MR16/BR30/R30/PAR30/PAR30L/PAR38 (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone 1-800-705-SERV (7378) • Visit us at [www.acuitybrands.com/juno-recessed](http://www.acuitybrands.com/juno-recessed)

Printed in U.S.A. ©2017-2020 Acuity Brands Lighting, Inc. Rev. 05/19/20

Light Commercial & Residential

# SLOPE CEILING IC HOUSING

STANDARD SLOPE  
2/12 to 6/12 PITCH (9° to 27°)  
INCANDESCENT LAMPS

## IC926 SERIES

### TRIMS/LAMPS

Catalog Number	Description	Max. Lamp Rating	
 610 BWH ♦	Lensed Shower Flat Diffuser Trim, Black Baffle, White Trim Ring	50W PAR30	
 610 WWH ♦	Lensed Shower Flat Diffuser Trim, White Baffle, White Trim Ring		
612 CWH	Clear Alzak® Cone, White Trim Ring	75W PAR30, 90W PAR38, 65W BR30	
612 GWH	Gold Alzak® Cone, White Trim Ring		
612 BWH	Black Alzak® Cone, White Trim Ring		
 612 HZWH	Haze Cone, White Trim Ring		
612 HZSC	Haze Cone, Satin Chrome Trim Ring		
612 WWH	White Cone, White Trim Ring		
612 WHZWH	Wheat Haze Cone, White Trim Ring		
612 WHZBRZ	Wheat Haze Cone, Bronze Trim Ring		
 614 BWH	Standard Slope Downlight Black Baffle, White Trim Ring	90W PAR38	
614 BSC	Standard Slope Downlight Black Baffle, Satin Chrome Trim Ring		
614 BBRZ	Standard Slope Downlight Black Baffle, Bronze Trim Ring		
614 BBL	Standard Slope Downlight Black Baffle, Black Trim Ring		
 614 WWH	Standard Slope Downlight White Baffle, White Trim Ring		
 616 BWH	Cylinder Spotlight, Black Baffle, White Trim Ring	60W PAR16	
616 WWH	Cylinder Spotlight, White Baffle, White Trim Ring		♦ UL Listed for use in wet location.
 617 WWH	Cylinder Spotlight, White Baffle, White Trim Ring	35W MRT16 supplied with magnetic transformer	Housing and trim can be ordered together or separate, but will always ship separately.
 619 BWH <sup>1</sup>	Eyeball, Black Baffle, White Trim Ring	85W BR30	Notes:
619 WWH <sup>1</sup>	Eyeball, White Baffle, White Trim Ring		1 Requires the C29 Adapter.