JUNO

Project:

Fixture Type:

Location:

Contact/Phone:

# INCANDESCENT LOUVERED NIGHT LIGHT

INCANDESCENT LAMP

## ICTC113

## PRODUCT DESCRIPTION

ICTC Housing designed for use in insulated or non-insulated areas. Refer to lamp data for correct lamp wattage.

## PRODUCT SPECIFICATIONS

**Lamp** IC - One 25W A19 lamp • TC - One 40W A19 lamp.

**Socket** Medium base porcelain with nickel-plated copper screw shell.

**Trims** Available in white baked enamel on steel • Fastens to housing with two torsion springs.

**Labels** UL listed for damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.


## INSTALLATION

**Real Nail 3 Bar Hangers** Telescoping, Patented (US Patent D552,969) Real Nail® 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

**Junction Box** Pre-wired junction compartment provided with (3) ½" knockouts, and ground wire, UL Listed, C-UL/CSA certified for No. 12 AWG daisy chain circuit connectors suitable for 90° C permitted in junction box • Junction compartment provided with removable access plate • Knockouts equipped with pryout slots.

**Housing** TC housing, 22-gauge white painted steel • 8¼" L x 3½" H x 3½" D.

## DIMENSIONS

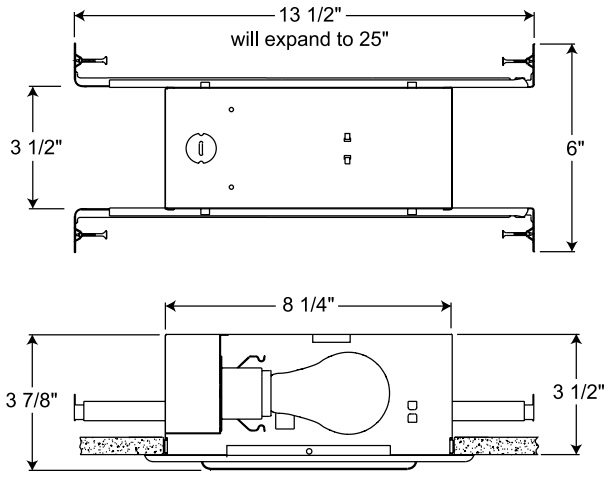


8 3/4" X 3 3/4" WALL CUTOUT

## ORDERING INFORMATION: Housing and trim can be ordered together or separate, but will always ship separately.

| Example (Housing): **ICTC113** | Example (Trim): **104 WH** | Example (Together): **ICTC113 104 WH** |
|---|---|---|

**Series**

**ICTC113**

**Trims**

**104** Diffuse Glass Lens Step Light Trim



**840** Angled Louvers Step Light Trim



**Trim Finish**

**WH** White

Trim Size: 9 9/16" L x 4 7/8" H
Lamp Rating: 7W or 9W Twin Tube CFL.


Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17

JUNO

Project:

Fixture Type:

Location:

Contact/Phone:

# INCANDESCENT LOUVERED NIGHT LIGHT

INCANDESCENT LAMP

## ICTC113

## PRODUCT DESCRIPTION

ICTC Housing designed for use in insulated or non-insulated areas. Refer to lamp data for correct lamp wattage.

## PRODUCT SPECIFICATIONS

**Lamp** IC - One 25W A19 lamp • TC - One 40W A19 lamp.

**Socket** Medium base porcelain with nickel-plated copper screw shell.

**Trims** Available in white baked enamel on steel • Fastens to housing with two torsion springs.

**Labels** UL listed for damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.


## INSTALLATION

**Real Nail 3 Bar Hangers** Telescoping, Patented (US Patent D552,969) Real Nail® 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

**Junction Box** Pre-wired junction compartment provided with (3) ½" knockouts, and ground wire, UL Listed, C-UL/CSA certified for No. 12 AWG daisy chain circuit connectors suitable for 90° C permitted in junction box • Junction compartment provided with removable access plate • Knockouts equipped with pryout slots.

**Housing** TC housing, 22-gauge white painted steel • 8¼" L x 3½" H x 3½" D.

## DIMENSIONS

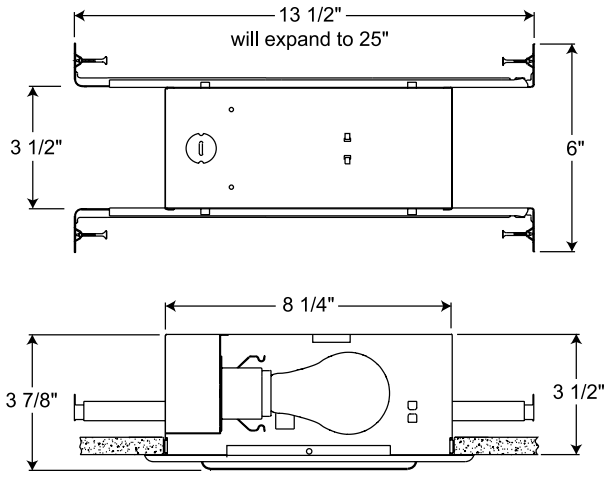


8 3/4" X 3 3/4" WALL CUTOUT

## ORDERING INFORMATION: Housing and trim can be ordered together or separate, but will always ship separately.

| Example (Housing): **ICTC113** | Example (Trim): **104 WH** | Example (Together): **ICTC113 104 WH** |
|---|---|---|

**Series**

**ICTC113**

**Trims**

**104** Diffuse Glass Lens Step Light Trim



**840** Angled Louvers Step Light Trim



**Trim Finish**

**WH** White

Trim Size: 9 9/16" L x 4 7/8" H
Lamp Rating: 7W or 9W Twin Tube CFL.


Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17