



FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting Power Sentry PS1400DW on exterior of a fluorescent fixture. Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3.5 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

Inverter Accessories

ELA PSMK

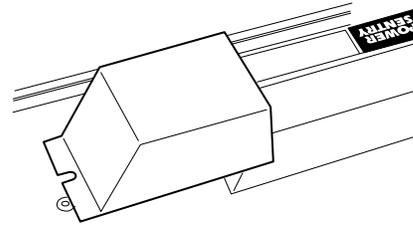

Remote Mounting Kit

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

| Series |
|---|
| ELA PSMK Remote mounting kit for PS1400DW; two required |

FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting self-diagnostics module (PSSD2) on exterior of a fluorescent fixture.

Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


Dimensions: 3.04" L x 1.22" H x 1.26" W

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Inverter Accessories

ELA PSMKSD

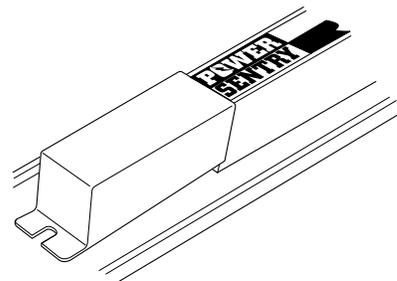

Remote Mounting Kit for Self-Diagnostics

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

| Series |
|--|
| ELA PSMKSD External mounting kit for self-diagnostics module |

FEATURES & SPECIFICATIONS

INTENDED USE — Provides simple and fast installation of PSDL3, PS1055LCP, PS1555LCP, PS1055CP FMC, PS1555CP FMC emergency drivers.


CONSTRUCTION — External mounting tray.

Adjustable bar hanging brackets.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

ELA PSDMT

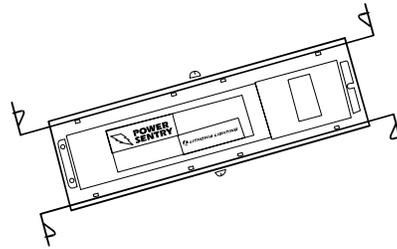

Mounting Tray

| ORDERING INFORMATION | |
|---|------------------------|
| Lead times will vary depending on options selected. Consult with your sales representative. | |
| Series | |
| ELA PSDMT | External mounting tray |

FEATURES & SPECIFICATIONS

INTENDED USE — Provides remote mounting of Power Sentry products in air-rated plenums.

Complies with National Electrical Code Provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 18-gauge steel, post-painted black.

Provides two standard 3/4" conduit knockouts and two 1/2" knockouts for test switch/pilot light mounting.

ELA PSRME Dimensions: 17" L x 3" W x 2" H

ELA PSRME IC Dimensions: 23.57" L x 3.75" W x 3.4" H

ELA PSRME and ELA PSRME IC compatible with PSQ500QD MVOLT, PS600QD MVOLT, PS1400QD MVOLT, PS730, PS750, PS1030 and PS1050, PS1055LCP.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

ELA PSRME



(ELA PSRME IC)

Remote Mounting Enclosure

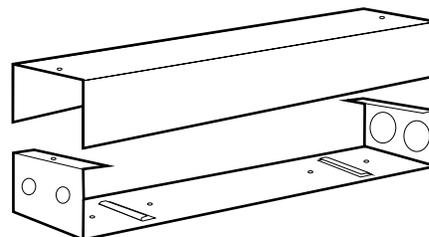

| ORDERING INFORMATION | |
|---|---|
| Lead times will vary depending on options selected. Consult with your sales representative. | |
| Series | |
| ELA PSRME | Remote mounting enclosure |
| ELA PSRME IC | Insulated ceiling rated remote mounting enclosure |





FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting Power Sentry PS1400DW on exterior of a fluorescent fixture. Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3.5 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

Inverter Accessories

ELA PSMK

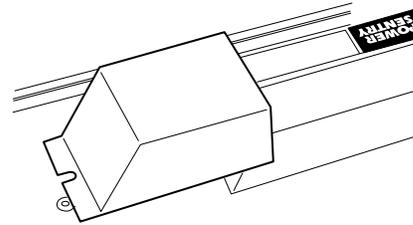

Remote Mounting Kit

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

| Series |
|---|
| ELA PSMK Remote mounting kit for PS1400DW; two required |

FEATURES & SPECIFICATIONS

INTENDED USE — Use when mounting self-diagnostics module (PSSD2) on exterior of a fluorescent fixture.

Complies with National Electrical Code provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 20-gauge steel. Adds 3 inches maximum to overall module length. Grommeting included to protect wiring from sharp edges of fixture knockout.


Dimensions: 3.04" L x 1.22" H x 1.26" W

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Inverter Accessories

ELA PSMKSD

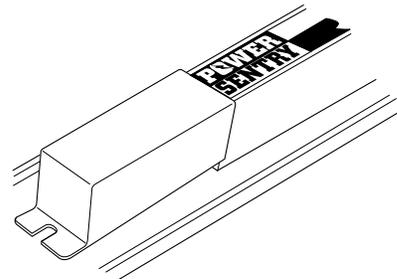

Remote Mounting Kit for Self-Diagnostics

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

| Series |
|--|
| ELA PSMKSD External mounting kit for self-diagnostics module |

FEATURES & SPECIFICATIONS

INTENDED USE — Provides simple and fast installation of PSDL3, PS1055LCP, PS1555LCP, PS1055CP FMC, PS1555CP FMC emergency drivers.


CONSTRUCTION — External mounting tray.

Adjustable bar hanging brackets.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

ELA PSDMT

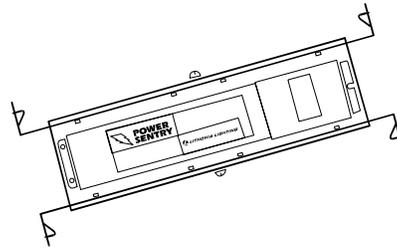

Mounting Tray

| ORDERING INFORMATION | |
|---|------------------------|
| Lead times will vary depending on options selected. Consult with your sales representative. | |
| Series | |
| ELA PSDMT | External mounting tray |

FEATURES & SPECIFICATIONS

INTENDED USE — Provides remote mounting of Power Sentry products in air-rated plenums.

Complies with National Electrical Code Provision (NEC 300) that prohibits exposed wiring.

CONSTRUCTION — Constructed of 18-gauge steel, post-painted black.

Provides two standard 3/4" conduit knockouts and two 1/2" knockouts for test switch/pilot light mounting.

ELA PSRME Dimensions: 17" L x 3" W x 2" H

ELA PSRME IC Dimensions: 23.57" L x 3.75" W x 3.4" H

ELA PSRME and ELA PSRME IC compatible with PSQ500QD MVOLT, PS600QD MVOLT, PS1400QD MVOLT, PS730, PS750, PS1030 and PS1050, PS1055LCP.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

ELA PSRME



(ELA PSRME IC)

Remote Mounting Enclosure

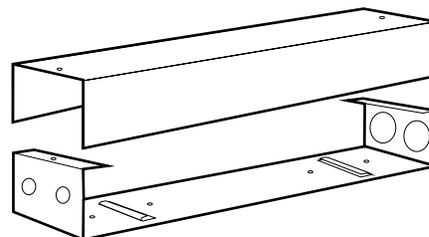

| ORDERING INFORMATION | |
|---|---|
| Lead times will vary depending on options selected. Consult with your sales representative. | |
| Series | |
| ELA PSRME | Remote mounting enclosure |
| ELA PSRME IC | Insulated ceiling rated remote mounting enclosure |

