

## For NEMA Configuration Receptacle Interiors For FS and FD Cast Device Boxes Flush Device Boxes

### Applications:

WLRS, WLRD and WLGf series covers are suitable for use in wet and damp locations. WLGf is suitable for damp and wet locations only when cover is closed. WLRS and WLRD series wiring device covers are designed to meet the total NEC Code requirements for wet locations – Article 410-57:

"A receptacle installed outdoors where exposed to weather or in other wet locations shall be in a weatherproof enclosure, the integrity of which is not affected when the receptacle is in use (attachment plug cap inserted)."

Use WLRS, WLRD and WLGf:

- Wherever portable equipment is required
- As general purpose utility receptacle covers
- For industrial, commercial or residential use
- In areas where electrical requirements do not exceed medium duty ratings
- To mount FS and FD single-gang or multi-gang boxes having individual cover openings (see Sect. 2F for listings)
- To mount on most flush device boxes (see Accessories)

### Features:

#### WLRS, WLRD and WLGf covers:

- Self-closing spring door assures protection of wiring device at all times, in wet and damp locations
- One piece EPDM gasket provides environmental protection of wiring device at all times
- Specially formulated elastomeric gasketing material offers excellent resistance to ozone, weather and temperature extremes of -50°F to 260°F
- Die cast, copper-free aluminum construction with aluminum lacquer finish provides maximum corrosion resistance
- Positive ground path ensured for all exposed metal parts

#### NEMA configuration receptacle interiors:

- Comply with NEMA Standards WD-1 and WD-5
- Grounded through an extra contact in all types except 3-phase applications; self-grounded in duplex variety
- Back and side wired
- Offered in single and duplex configurations for use with standard plugs
- Specification grade

### Certifications and Complies:

- ANSI/UL Standard: 514A
- NEC Code 410-57
- NEMA Standards: WD-1, 1983 (Straight Blade) and WD-5, 1982 (Locking Type)

### Standard Materials:


- WLRS, WLRD and WLGf face plate and cover – die cast copper-free aluminum
- Cover hinge spring – stainless steel
- Cover screws – corrosion resistant metal
- Gasket – WLRS and WLRD – ethylene propylene rubber (EPDM)
- Gasket – WLGf – neoprene

### Standard Finishes:

- Copper-free aluminum

### Electrical Rating Ranges:

- 15 amperes; 125, 250, or 277 volts
- 20 and 30 amperes; 125, 250, 277, 480, 600, 125/250, 208/120, 480/277 or 600/347 volts

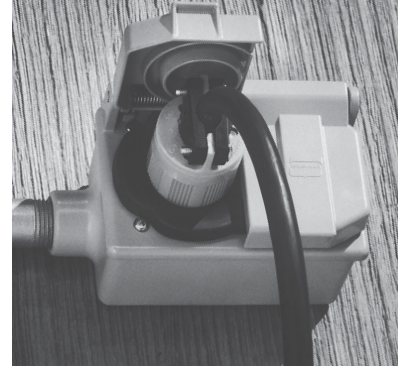


Typical Installation


### Accessories:

- Flush mounting adapter – WLRA-1 required for mounting on device boxes (not required with WLGf)

### Spring Door Covers – with Gasket\*



Single Cover




Duplex Cover

Cat. #	Description	Opening Dia.
WLRS1	Single cover	1 3/8" "
WLRS2	Single cover	1 1/2" "
WLRD1	Duplex cover	1 3/8" "

\*Patent Number 4,058,358



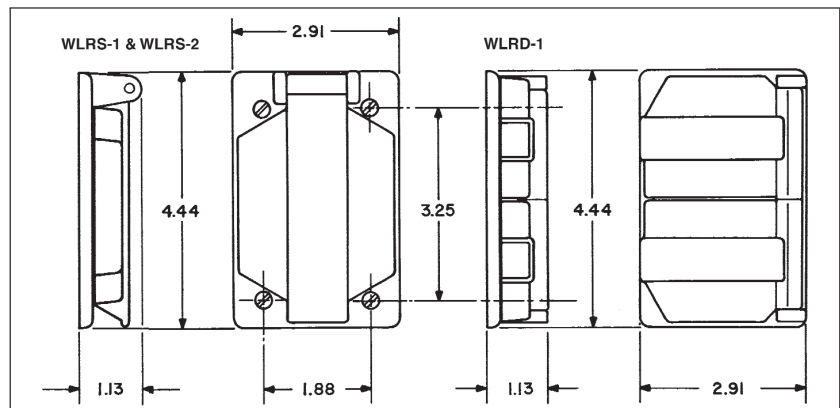





### Dimensions In Inches:








# WLRS, WLRD and WLGf Wet Location Covers

6P

## Covers with and without NEMA Configuration Receptacles Single Device

Type	Volts	NEMA Configuration	Complete Cover with Receptacle Assy. Cat. #	Spring Door Cover & Gasket Only Cat. #‡
<b>For Non-locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V	 5-15R	<b>WLRS 5 15</b>	<b>WLRs1</b>
	250V	 6-15R	<b>WLRS 6 15</b>	<b>WLRs1</b>
2-Pole 3-Wire Grounding <b>20 Amp</b>	125V	 5-20R	<b>WLRS 5 20</b>	<b>WLRs1</b>
	250V	 6-20R	<b>WLRS 6 20</b>	<b>WLRs1</b>
<b>For Locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V	 L5-15R	<b>WLRS L5 15</b>	<b>WLRs1</b>
	250V	 L6-15R	<b>WLRS L6 15</b>	<b>WLRs1</b>
2-Pole 3-Wire Grounding <b>20 Amp</b>	125V	 L5-20R	<b>WLRS L5 20</b>	<b>WLRs2</b>
	250V	 L6-20R	<b>WLRS L6 20</b>	<b>WLRs2</b>

## Duplex Device

Type	Volts	NEMA Configuration	Complete Cover with Receptacle Assy. Cat. #	Spring Door Cover & Gasket Only Cat. #‡
<b>For Non-locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V	 5-15R	<b>WLRD 5 15</b>	<b>WLRD1</b>
	250V	 6-15R	<b>WLRD 6 15</b>	<b>WLRD1</b>
2-Pole 3-Wire Grounding <b>20 Amp</b>	125V	 5-20R	<b>WLRD 5 20</b>	<b>WLRD1</b>
	250V	 6-20R	<b>WLRD 6 20</b>	<b>WLRD1</b>
<b>For Locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V	 L5-15R	<b>WLRD L5 15</b>	<b>WLRD1</b>

## Wet Location Covers for GFCI Duplex Receptacles:



WLGF - horizontal mount for flush device boxes.





WLGf FS - horizontal mount for FS and FD device boxes.



WLGf FSV - vertical mount for FS and FD device boxes.

## Dimensions In Inches:

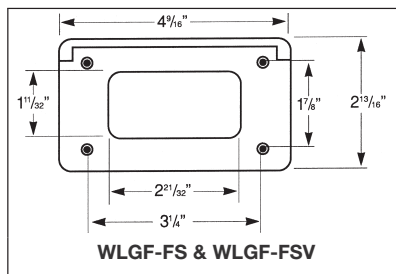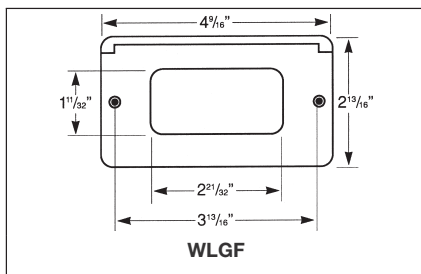

‡ Must be used with a wet locations rated wiring device.

## For NEMA Configuration Receptacle Interiors For FS and FD Cast Device Boxes Flush Device Boxes

### Applications:

WLRS, WLRD and WLGf series covers are suitable for use in wet and damp locations. WLGf is suitable for damp and wet locations only when cover is closed. WLRS and WLRD series wiring device covers are designed to meet the total NEC Code requirements for wet locations – Article 410-57:

"A receptacle installed outdoors where exposed to weather or in other wet locations shall be in a weatherproof enclosure, the integrity of which is not affected when the receptacle is in use (attachment plug cap inserted)."

Use WLRS, WLRD and WLGf:

- Wherever portable equipment is required
- As general purpose utility receptacle covers
- For industrial, commercial or residential use
- In areas where electrical requirements do not exceed medium duty ratings
- To mount FS and FD single-gang or multi-gang boxes having individual cover openings (see Sect. 2F for listings)
- To mount on most flush device boxes (see Accessories)

### Features:

#### WLRS, WLRD and WLGf covers:

- Self-closing spring door assures protection of wiring device at all times, in wet and damp locations
- One piece EPDM gasket provides environmental protection of wiring device at all times
- Specially formulated elastomeric gasketing material offers excellent resistance to ozone, weather and temperature extremes of -50°F to 260°F
- Die cast, copper-free aluminum construction with aluminum lacquer finish provides maximum corrosion resistance
- Positive ground path ensured for all exposed metal parts

#### NEMA configuration receptacle interiors:

- Comply with NEMA Standards WD-1 and WD-5
- Grounded through an extra contact in all types except 3-phase applications; self-grounded in duplex variety
- Back and side wired
- Offered in single and duplex configurations for use with standard plugs
- Specification grade

### Certifications and Compliances:

- ANSI/UL Standard: 514A
- NEC Code 410-57
- NEMA Standards: WD-1, 1983 (Straight Blade) and WD-5, 1982 (Locking Type)

### Standard Materials:


- WLRS, WLRD and WLGf face plate and cover – die cast copper-free aluminum
- Cover hinge spring – stainless steel
- Cover screws – corrosion resistant metal
- Gasket – WLRS and WLRD – ethylene propylene rubber (EPDM)
- Gasket – WLGf – neoprene

### Standard Finishes:

- Copper-free aluminum

### Electrical Rating Ranges:

- 15 amperes; 125, 250, or 277 volts
- 20 and 30 amperes; 125, 250, 277, 480, 600, 125/250, 208/120, 480/277 or 600/347 volts

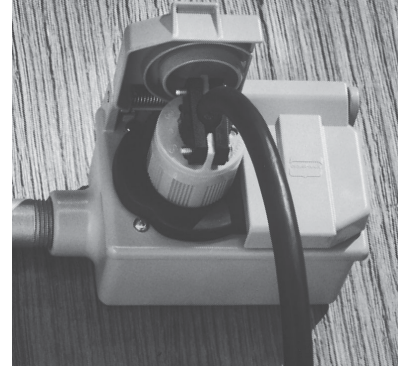


Typical Installation


### Accessories:

- Flush mounting adapter – WLRA-1 required for mounting on device boxes (not required with WLGf)

### Spring Door Covers – with Gasket\*



Single Cover




Duplex Cover

Cat. #	Description	Opening Dia.
WLRS1	Single cover	1 3/8" "
WLRS2	Single cover	1 1/2" "
WLRD1	Duplex cover	1 3/8" "

\*Patent Number 4,058,358

### Dimensions In Inches:

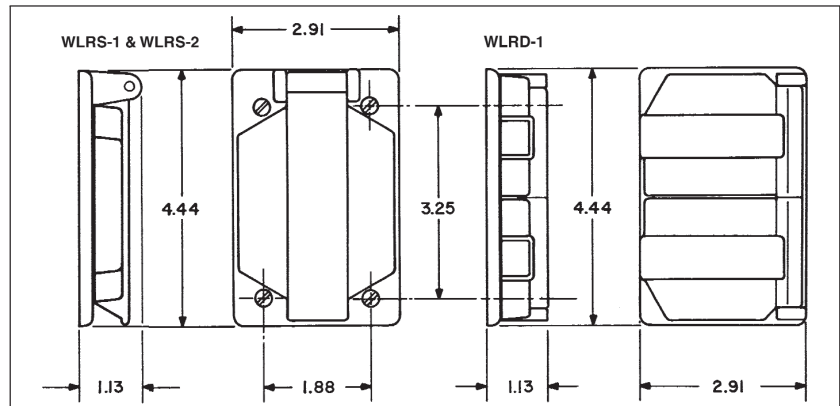

# WLRS, WLRD and WLGf Wet Location Covers

6P

## Covers with and without NEMA Configuration Receptacles Single Device

Type	Volts	NEMA Configuration	Complete Cover with Receptacle Assy. Cat. #	Spring Door Cover & Gasket Only Cat. #‡
<b>For Non-locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V		<b>WLRS 5 15</b>	<b>WLRs1</b>
	250V		<b>WLRS 6 15</b>	<b>WLRs1</b>
2-Pole 3-Wire Grounding <b>20 Amp</b>	125V		<b>WLRS 5 20</b>	<b>WLRs1</b>
	250V		<b>WLRS 6 20</b>	<b>WLRs1</b>
<b>For Locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V		<b>WLRS L5 15</b>	<b>WLRs1</b>
	250V		<b>WLRS L6 15</b>	<b>WLRs1</b>
2-Pole 3-Wire Grounding <b>20 Amp</b>	125V		<b>WLRS L5 20</b>	<b>WLRs2</b>
	250V		<b>WLRS L6 20</b>	<b>WLRs2</b>

## Duplex Device

Type	Volts	NEMA Configuration	Complete Cover with Receptacle Assy. Cat. #	Spring Door Cover & Gasket Only Cat. #‡
<b>For Non-locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V		<b>WLRD 5 15</b>	<b>WLRD1</b>
	250V		<b>WLRD 6 15</b>	<b>WLRD1</b>
2-Pole 3-Wire Grounding <b>20 Amp</b>	125V		<b>WLRD 5 20</b>	<b>WLRD1</b>
	250V		<b>WLRD 6 20</b>	<b>WLRD1</b>
<b>For Locking Blade Plugs</b>				
2-Pole 3-Wire Grounding <b>15 Amp</b>	125V		<b>WLRD L5 15</b>	<b>WLRD1</b>

## Wet Location Covers for GFCI Duplex Receptacles:



WLGF - horizontal mount for flush device boxes.





WLGf FS - horizontal mount for FS and FD device boxes.



WLGf FSV - vertical mount for FS and FD device boxes.

## Dimensions In Inches:

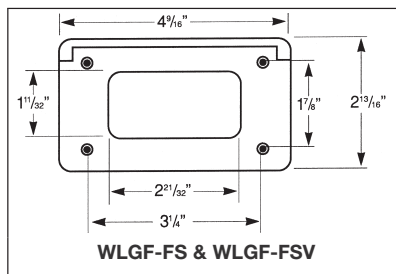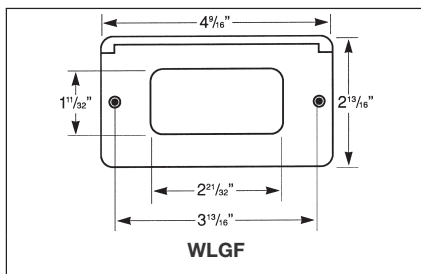

‡ Must be used with a wet locations rated wiring device.