| | |
|---|---|
| Catalog Number | |
| Notes | |
| Type | |

Contractor Select™

# WPX LED

## Wall packs



The WPX LED wall packs are energy-efficient, cost-effective, and aesthetically appealing full-cut off solution for both new construction and HID wall pack replacement/renovation opportunities. Reliable IP66 construction and excellent LED lumen maintenance ensure a long service life.

### FEATURES:

- Architectural design at very economical prices
- Energy efficient - payback in less than two years
- Wide range of configuration options available

Note : WPX3 lumen package and all the WPX configuration options are not included in the Contractor Select program. For more information, please visit WPX LED.

| Luminaire | CCT | Lumens | Input Watts | Photocell | Finish | Voltage | Catalog Number | CI Code | UPC | Pallet qty. | Replaces Up To |
|---|---|---|---|---|---|---|---|---|---|---|---|
| WPX0 | SWW2 3000K/ 4000K/ 5000K | 850 - 1,650 | 6.4-13W | Switchable On/Off | DARK BRONZE | 120-277V | WPX0 LED ALO SWW2 MVOLT PE DDBXD M2 | *276U4U | 196182511806 | 280 | 70W Metal Halide |
| WPX1 | 4000K | 2,900 | 24W | N/A | DARK BRONZE | 120-277V | WPX1 LED P2 40K MVOLT DDBXD M4 | *265SWK | 193048870589 | 160 | 150W Metal Halide |
| WPX2 | 4000K | 6,000 | 47W | N/A | DARK BRONZE | 120-277V | WPX2 LED 40K MVOLT DDBXD M2 | *265SX3 | 193048870756 | 120 | 250W Metal Halide |
| | 5000K | 6,000 | 47W | N/A | DARK BRONZE | 120-277V | WPX2 LED 50K MVOLT DDBXD M2 | *265SX6 | 193048870770 | 120 | 250W Metal Halide |

More configurations are available. Click here or visit www.acuitybrands.com and search for WPX LED.

## Specifications

**INTENDED USE:**

The WPX LED wall packs are designed to provide a cost-effective, energy-efficient solution for the one-for-one replacement of existing HID wall packs. The WPX0, WPX1, WPX2 and WPX3 are ideal for replacing up to 70W, 150W, 250W, and 400W HID luminaires respectively. WPX luminaires deliver a uniform, wide distribution. WPX is rated for -40°C to 40°C.

**CONSTRUCTION:**

WPX feature a die-cast aluminum main body with optimal thermal management that both enhances LED efficacy and extends component life. The luminaires are IP66 rated, and sealed against moisture or environmental contaminants.

**ELECTRICAL:**

Light engine(s) configurations consist of high-efficacy LEDs with a min LED lumen maintenance of L86/100,000 hours. Color temperature (CCT) options of 3000K, 4000K and 5000K with minimum CRI of 70 (80 for WPX0). Electronic drivers ensure system power factor >90% and THD <20%. All luminaires have 6kV surge protection (Note: WPX1 LED P1 package and WPX0 comes with a standard surge protection rating of 2.5kV).

**INSTALLATION:**

WPX can be mounted directly over a standard electrical junction box. A port on the back surface allows poke-through conduit wiring on surfaces that don't have an electrical junction box. WPX1, WPX2 and WPX3 come with three 1/2 inch conduit ports on three sides that allow for surface conduit wiring. Wiring can be made in the integral wiring compartment in all cases. WPX is only recommended for installations with LEDs facing downwards.

**LISTINGS:**

CSA Certified to meet U.S. and Canadian standards. Suitable for wet locations. IP66 Rated.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.


**WARRANTY:**

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

**Note**: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

## Dimensions

All dimensions are inches (centimeters) unless otherwise indicated.

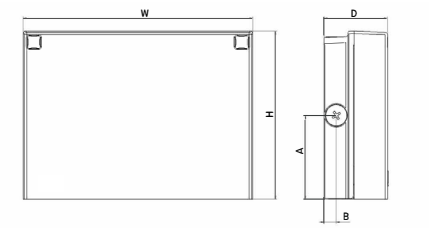


Front View Side View

| Luminaire | Height (H) | Width (W) | Depth (D) | Side Conduit Location | | Weight |
|---|---|---|---|---|---|---|
| | | | | A | B | |
| WPX0 | 5.75″ (14.6 cm) | 5.5″ (14.0 cm) | 2″ (5.1 cm) | N/A | N/A | 2.5 lbs (1.1kg) |
| WPX1 | 8.1″ (20.6 cm) | 11.1″ (28.3 cm) | 3.2″ (8.1 cm) | 4.0″ (10.3 cm) | 0.6″ (1.6 cm) | 6.1 lbs (2.8kg) |
| WPX2 | 9.1″ (23.1 cm) | 12.3″ (31.1 cm) | 4.1″ (10.5 cm) | 4.5″ (11.5 cm) | 0.7″ (1.7 cm) | 8.2 lbs (3.7kg) |
| WPX3 | 9.5″ (24.1 cm) | 13.0″ (33.0 cm) | 5.5″ (13.7 cm) | 4.7″ (12.0 cm) | 0.7″ (1.7 cm) | 11.0 lbs (5.0kg) |


© 2020-2024 Acuity Brands Lighting, Inc. All rights reserved. Rev. 09/16/24

| | |
|---|---|
| Catalog Number | |
| Notes | |
| Type | |

Contractor Select™

# WPX LED

## Wall packs



The WPX LED wall packs are energy-efficient, cost-effective, and aesthetically appealing full-cut off solution for both new construction and HID wall pack replacement/renovation opportunities. Reliable IP66 construction and excellent LED lumen maintenance ensure a long service life.

### FEATURES:

- Architectural design at very economical prices
- Energy efficient - payback in less than two years
- Wide range of configuration options available

Note : WPX3 lumen package and all the WPX configuration options are not included in the Contractor Select program. For more information, please visit WPX LED.

| Luminaire | CCT | Lumens | Input Watts | Photocell | Finish | Voltage | Catalog Number | CI Code | UPC | Pallet qty. | Replaces Up To |
|---|---|---|---|---|---|---|---|---|---|---|---|
| WPX0 | SWW2 3000K/ 4000K/ 5000K | 850 - 1,650 | 6.4-13W | Switchable On/Off | DARK BRONZE | 120-277V | WPX0 LED ALO SWW2 MVOLT PE DDBXD M2 | *276U4U | 196182511806 | 280 | 70W Metal Halide |
| WPX1 | 4000K | 2,900 | 24W | N/A | DARK BRONZE | 120-277V | WPX1 LED P2 40K MVOLT DDBXD M4 | *265SWK | 193048870589 | 160 | 150W Metal Halide |
| WPX2 | 4000K | 6,000 | 47W | N/A | DARK BRONZE | 120-277V | WPX2 LED 40K MVOLT DDBXD M2 | *265SX3 | 193048870756 | 120 | 250W Metal Halide |
| | 5000K | 6,000 | 47W | N/A | DARK BRONZE | 120-277V | WPX2 LED 50K MVOLT DDBXD M2 | *265SX6 | 193048870770 | 120 | 250W Metal Halide |

More configurations are available. Click here or visit www.acuitybrands.com and search for WPX LED.

## Specifications

**INTENDED USE:**

The WPX LED wall packs are designed to provide a cost-effective, energy-efficient solution for the one-for-one replacement of existing HID wall packs. The WPX0, WPX1, WPX2 and WPX3 are ideal for replacing up to 70W, 150W, 250W, and 400W HID luminaires respectively. WPX luminaires deliver a uniform, wide distribution. WPX is rated for -40°C to 40°C.

**CONSTRUCTION:**

WPX feature a die-cast aluminum main body with optimal thermal management that both enhances LED efficacy and extends component life. The luminaires are IP66 rated, and sealed against moisture or environmental contaminants.

**ELECTRICAL:**

Light engine(s) configurations consist of high-efficacy LEDs with a min LED lumen maintenance of L86/100,000 hours. Color temperature (CCT) options of 3000K, 4000K and 5000K with minimum CRI of 70 (80 for WPX0). Electronic drivers ensure system power factor >90% and THD <20%. All luminaires have 6kV surge protection (Note: WPX1 LED P1 package and WPX0 comes with a standard surge protection rating of 2.5kV).

**INSTALLATION:**

WPX can be mounted directly over a standard electrical junction box. A port on the back surface allows poke-through conduit wiring on surfaces that don't have an electrical junction box. WPX1, WPX2 and WPX3 come with three 1/2 inch conduit ports on three sides that allow for surface conduit wiring. Wiring can be made in the integral wiring compartment in all cases. WPX is only recommended for installations with LEDs facing downwards.

**LISTINGS:**

CSA Certified to meet U.S. and Canadian standards. Suitable for wet locations. IP66 Rated.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.


**WARRANTY:**

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

**Note**: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

## Dimensions

All dimensions are inches (centimeters) unless otherwise indicated.

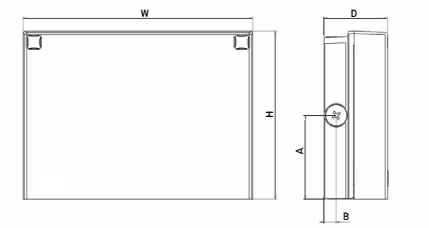


Front View Side View

| Luminaire | Height (H) | Width (W) | Depth (D) | Side Conduit Location | | Weight |
|---|---|---|---|---|---|---|
| | | | | A | B | |
| WPX0 | 5.75″ (14.6 cm) | 5.5″ (14.0 cm) | 2″ (5.1 cm) | N/A | N/A | 2.5 lbs (1.1kg) |
| WPX1 | 8.1″ (20.6 cm) | 11.1″ (28.3 cm) | 3.2″ (8.1 cm) | 4.0″ (10.3 cm) | 0.6″ (1.6 cm) | 6.1 lbs (2.8kg) |
| WPX2 | 9.1″ (23.1 cm) | 12.3″ (31.1 cm) | 4.1″ (10.5 cm) | 4.5″ (11.5 cm) | 0.7″ (1.7 cm) | 8.2 lbs (3.7kg) |
| WPX3 | 9.5″ (24.1 cm) | 13.0″ (33.0 cm) | 5.5″ (13.7 cm) | 4.7″ (12.0 cm) | 0.7″ (1.7 cm) | 11.0 lbs (5.0kg) |


© 2020-2024 Acuity Brands Lighting, Inc. All rights reserved. Rev. 09/16/24