



ENERGY CODE REFERENCE GUIDE



Responsible Energy is the mark of TORK's commitment to developing and manufacturing energy saving, environmentally friendly products.

EXTERIOR LIGHTING ZONES

When ambient light levels drop at dusk, lighting is needed to provide safety and security. BUT: Does all lighting need to be on all night long? The proper selection of lighting controls is essential to ensuring that energy is only used when needed. An efficient lighting control design creates zones of light levels that can be varied by time at night.

ZONE 1 - DUSK TO DAWN - All night Security LightingPhotocontrols and Photosensors


The first zone gives a minimum light level where security is the primary need. Determine what lighting is necessary, such as building-mounted wallpacks and a portion of the parking lot lighting. These should be on from dusk to dawn, and are best controlled by a photosensor device.


ZONE 2 - DUSK TO TIME OFF - Safety and Architectural LightingPhotosensor/Time-based controls, Astronomic controls

The second zone provides a higher light level for safety, when people are normally present. Maximum levels for the parking lot and all walkway lighting are needed. These lights are best controlled by a combination photosensor and time-based device to allow shut-off during the night. The astronomic-calculated sunset/time control can also be useful.

ZONE 3 - ARCHITECTURAL - Building Facade, Landscape and SignageAstronomic controls

The third zone covers architectural lighting for building facade or landscape and signs. These are best controlled with an astronomic-calculated sunset/time control.

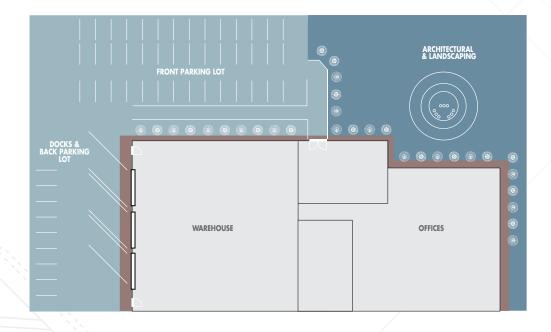

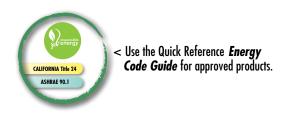

INTERIOR LIGHTING ZONES

The first way to save energy begins with eliminating lighting when it isn't needed. As with exterior lighting, an efficient design matches controls to the typical use of the area.



Responsible Energy

Each of these marked products have features that decrease energy consumption and/or damage to the environment by one or more of the following:

- Timed control, Photocontrol and/or Astronomic control of on and off functions of lighting, fans, pumps and appliances
- · Timed control of systems or multiple zones of lighting
- · Photo or occupancy sensing control of lighting
- Supercapacitor backup, no batteries to replace or dispose.
- Helps meet CA Title 24, ASHRAE, IECC and other standards for responsible building products

ZONE A - SMALL SPACES - Meeting rooms, restrooms, storage spaces Occupancy sensors, interval timers

The first zone includes small spaces such as offices, restrooms and storage areas – places where people may not occupy the space continuously. Individual wall switch replacement provides low cost installation, with occupancy sensors and interval timers as the best solution. In the event that wall switches do not provide proper coverage for the occupancy sensor, ceiling mounted options are available.

ZONE B - LARGE SPACES - Open offices, public spaces, hallways, warehousesTime of Day with Override, Occupancy Sensors


The second zone is for common areas, such as hallways, reception spaces or large spaces for open offices. These places are commonly controlled with time-of-day devices and must include an after-hours override. A conveniently placed switch should provide a limited override with a maximum length of two or four hours*, or occupancy sensors can be used to ensure that lights are shut off when people have left the building.

* Energy codes vary on the stated maximum time, but shorter times can give more energy savings.

ZONE C - DAYLIGHT HARVESTING - Large or small spaces with natural lightLight Sensors, Light Sensors with Occupancy, Astronomic Timers

A third zone that uses daylighting control can be added to either of the first two zones. Light sensors can shut off a portion of the lighting when windows or skylights contribute sufficient natural light to the area. This "harvesting" of light is an excellent, green way to conserve energy.



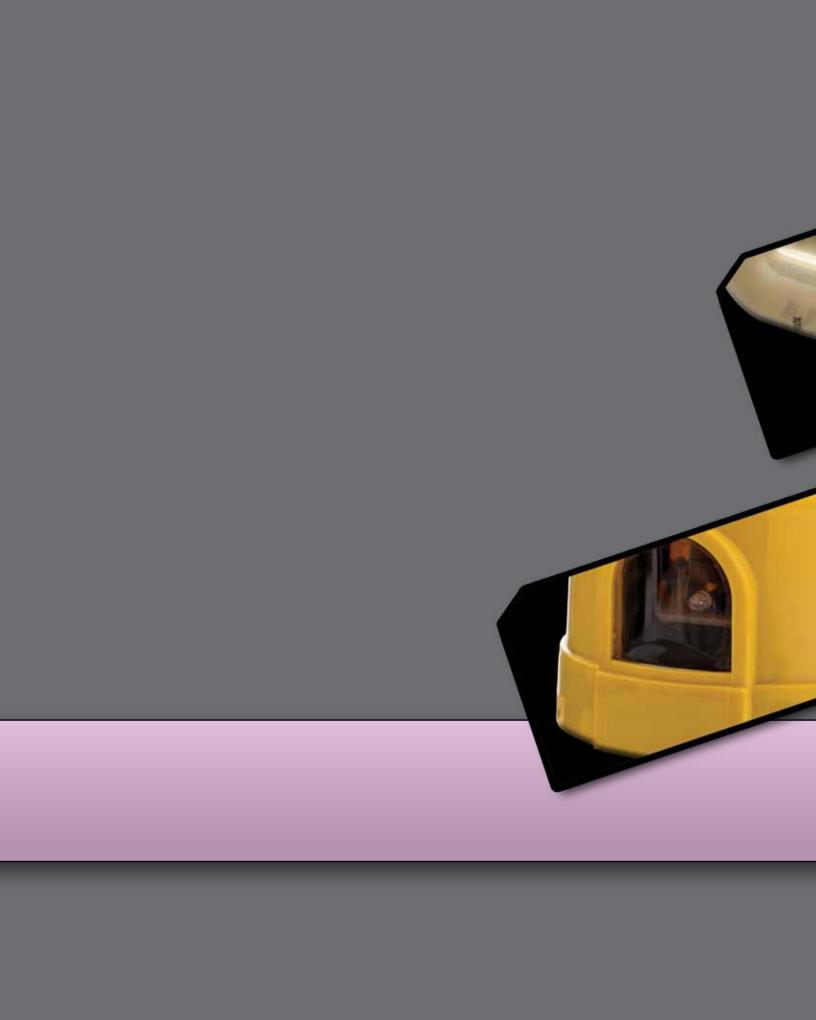



TORK® PHOTOCONTROLS

QUICK REFERENCE GUIDE

| | 2100 SERIES | 2110 SERIES | 2000 SERIES | 2001/ 2020 SERIES | 3000 SERIES | 5000M SERIES | 2005A SERIES | 2005B SERIES | 5200 SERIES | 5200-UL SERIES | 5737 SERIES |
|-----------------------------------|----------------|----------------------|----------------|-------------------------|----------------|--------------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------|
| Page | 403 | 404 | 405 | 406/407 | 408 | 409 | 411 | 412 | 413 | 414 | 415 |
| Mounting | Conduit | Conduit | Conduit | Conduit | Flush | Turn-Lock | Turn-Lock | Turn-Lock | Turn-Lock | Turn-Lock | Turn-Lock |
| Adjustable Swivel | | | | Yes | | | | | | | |
| Housing | Die Cast Zinc | Die Cast Aluminum | Lexan® | Lexan® | Lexan® | UV Stabilized Plastic | UV Stabilized Plastic | UV Stabilized Plastic | UV Stabilized Plastic | UV Stabilized Plastic | UV Stabilized Plastic |
| Turn ON Light Level | 1 - 5 fc | 1 - 5 fc | 1 - 5 fc | 1 - 5 fc | 1 - 5 fc | 1 to 3 fc | 1 to 3 fc | 1.5 fc | 1.5 fc | 1.5 fc | 5 fc |
| Adjustable light level adjustment | Yes | Yes | Yes | Yes (2001) | | | | | | | |
| Turn OFF Ratio | 3:1 | 3:1 | 3:1 | 3:1 | 3:1 | 5:1 | 3:1 | 1.5:1 | 1.5:1 | 1.5:1 | 1.5:1 |
| Time Delay ON | Yes | Yes | Yes | Yes | Yes | Yes | Instant | Instant | Instant | Instant | Instant |
| Time Delay OFF | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Light Sensor | CdS | Cq2 | Cq2 | Cq2 | Cq2 | Cq2 | Cq2 | Filtered Silicon Sensor | Silicon Sensor | Filtered Silicon Sensor | Silicon Sensor |
| CFL Compatible | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| LED Driver Listed | | | | | | | | | | Yes | |
| Surge Protection | | | | | | Yes | Yes | Yes | Yes | Yes | Yes |
| Photo Timer | | | | | | | | | | | Yes |



FEATURES

CHOICE OF PHOTOCELLS



Molded sealed IR filtered sensor resists effects of moisture and airborne contaminants. Available on turn-lock photocontrols. IR Filtering responds to the light spectrum near to that of a human eye.



Conformal coated CdS photocell resists effects of moisture and airborne contaminants. Available in 1/2" and 1" size on both wired and turn-lock photocontrols. Photocell responds to the light spectrum near to that of a human eye.

TOUGH ENCLOSURES



All conduit and flush mounted models utilize die-cast zinc, die cast aluminum, or genuine Lexan® materials. All turnlock models utilize high impact UV stabilized polypropylene, ABS, PBT or polycarbonate materials.

TURN-LOCKS MEET ANSI C136.10



All models meet the current ANSI requirements for locking-type prongs and color coded voltage designations. Locking prongs are solid brass.

Color-Coded Dome

Grey 105-130VAC
Maroon 208-277VAC
Blue 105-285VAC
Yellow 480VAC
Green 347VAC

CHOICE OF MOUNTING ORIENTATION



Models are available in fixed position or 180° swivel.

DEPENDABLE PERFORMANCE

Built-in time delay prevents false switching due to light from passing vehicles, lightning, etc.

QUALITY ASSURANCE

TORK® Photocontrols are designed and manufactured with components which adhere to the highest industry standards. Trained personnel and in-process quality procedures ensure that every unit meets our strictest quality standards.


2100 SERIES SPECIFICATION GRADE

1/2" CONDUIT MOUNTING **DIE CAST ZINC** PHOTOCONTROL

APPLICATIONS







Building perimeter lighting

Outdoor signage



ON/OFF: Turn ON is 1 to 5fc, Turn OFF is 3 to 15fc, without the slide in position. ON/OFF adjustment is easily made by moving a slide cover. No tools required.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy conformal coated 1" diameter.

CONTACTS: Remain closed between dusk and dawn. (The unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION:

Averages under 1 watt.

TEMPERATURE RANGE: -40° to $+140^{\circ}$ F (-40° to $+60^{\circ}$ C).

FAIL MODE: ON.

WARRANTY: 5 years.

FEATURES

SENSOR: Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.


OPERATION: Delay of up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

STANDARDS: Meets ANSI/UL773A.

HOUSING: Heavy Duty die cast zinc housing and base. Gasketed for maximum weather protection.

ENERGY SAVINGS: Works with screw base CFLs.

| CAT. | UPC | VOLTAGE | SWITCH | RATING | | |
|-------|-------|------------------|--------|----------|---------|--|
| NO. | CODE | (VAC) 50-60Hz | JWIICH | TUNGSTEN | BALLAST | |
| 2101 | 60012 | 120 | SPST | 2000W | 1800VA | |
| 2104 | 60013 | 208-277 | SPST | 2000W | 1800VA | |
| 2107 | 60031 | 120/277 | SPST | 2000W | 1800VA | |
| 73866 | 62020 | Mounting Bracket | | | | |

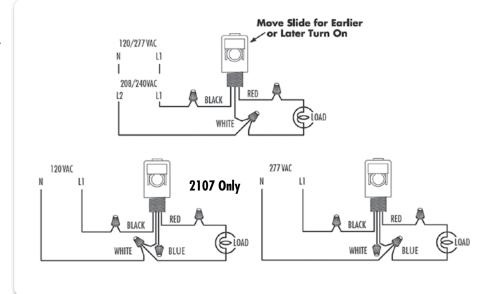



SPECIFICATION GRADE
1/2" CONDUIT MOUNTING
DIE CAST ALUMINUM
PHOTOCONTROL

APPLICATIONS

- Parking lot lighting
- Building perimeter lighting
- Outdoor signage



2115 & 2116

SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc, Turn OFF is 3 to 15fc, without the slide in position. ON/OFF adjustment is easily made by moving a slide cover. No tools required.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy conformal coated 1/2" diameter. MODEL 2117 is 1" cell.

CONTACTS: Remain closed between dusk and dawn (the unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C. (2117 #10AWG red and black).

POWER CONSUMPTION:

Averages under 1 watt.

TEMPERATURE RANGE:

-40° to +140°F (-40° to +60°C).

FAIL MODE: ON.

WARRANTY: 5 years.

FEATURES

SENSOR: Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

STANDARDS: Meets ANSI/UL773A.


OPERATION: Delay of up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

HOUSING: Die cast aluminum housing and base. Gasketed for weather protection.

ENERGY SAVINGS: Works with screw base CFLs.

| CAT. | UPC | VOLTAGE | SWITCH | RATING | | |
|-------|-------|------------------|---------|------------|-------------|--|
| NO. | CODE | (VAC) 50-60Hz | JWIICII | TUNGSTEN | BALLAST | |
| 2115 | 60032 | 120 | SPST | 2000W | 1800VA | |
| 2116 | 60033 | 208-277 | SPST | 3470-4620W | 2080-2770VA | |
| 2117* | 60037 | 120 | SPST | 3000W | 3000VA | |
| 73866 | 62020 | Mounting Bracket | | | | |

^{*}Not UL or CSA rated.

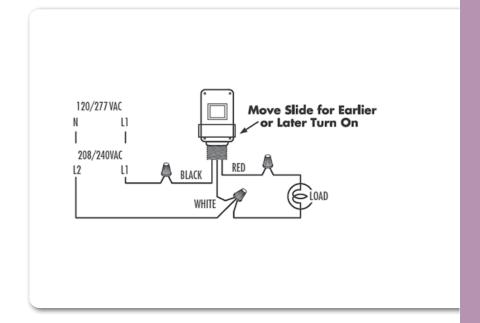

1/2" CONDUIT MOUNTING
FIXED POSITION, LEXAN® HOUSING
WITH WEATHERPROOF SEALANT
PHOTOCONTROL

APPLICATIONS





■ Patio lamp

Decorative lighting

FEATURES

SENSOR: Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

OPERATION: Delay of up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

STANDARDS: Meets ANSI/UL773A

HOUSING: All Lexan® enclosures are impact and vandal resistant. Translucent Lexan® Dome prolongs cell life by further screening out ultraviolet rays. Dome and base are ultrasonically welded for maximum strength.

ENERGY SAVINGS: Works with screw base CFLs.



ON/OFF: Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc, without the slide in position. ON/OFF adjustment is easily made by moving a slide cover. No tools required.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy comformal coated 1/2" diameter.

CONTACTS: Remain closed between dusk and dawn. (The unit fails in the ON position).


LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION: Averages under 1 watt.

TEMPERATURE RANGE: -40° to +140°F (-40° to +60°C).

FAIL MODE: ON. **WARRANTY:** 5 years.

| CAT. | UPC | VOLTAGE | SWITCH | RATING | | |
|--------|-------|------------------|--------|------------|-------------|--|
| NO. | CODE | (VAC) 50-60Hz | SWIICH | TUNGSTEN | BALLAST | |
| 2000 | 60017 | 120 | SPST | 2000W | 1800VA | |
| 2000-2 | 60018 | 208-277 | SPST | 3470-4620W | 2080-2770VA | |
| 73866 | 62020 | Mounting Bracket | | | | |

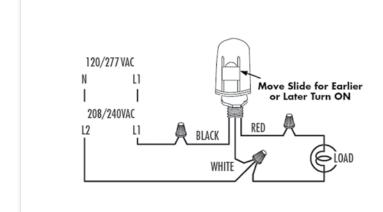



1/2" CONDUIT MOUNTING 180° SWIVEL, LEXAN® HOUSING PHOTOCONTROL

APPLICATIONS

c (UL) us

Flood lamp
Patio lamp

Decorative lighting

SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc, without the slide in position. ON/OFF adjustment is easily made by moving a slide cover. No tools required.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy comformal coated 1/2" diameter.

CONTACTS: Remain closed between dusk and dawn. (The unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION:

Averages under 1 watt.

TEMPERATURE RANGE:

 -40° to $+140^{\circ}$ F (-40° to $+60^{\circ}$ C).

FAIL MODE: ON. WARRANTY: 5 years.

FEATURES

SENSOR: Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

OPERATION: Delay of up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

STANDARDS: Meets ANSI/UL773A


HOUSING: All Lexan® enclosures are impact and vandal resistant. Translucent Lexan® Dome prolongs cell life by further screening out ultraviolet rays. Dome and base are ultrasonically welded for maximum strength.

ENERGY SAVINGS:

Works with screw base CFLs.

| | CAT. | UPC | VOLTAGE | SWITCH | RATING | | |
|-----|--------|-------|------------------|--------|------------|-------------|--|
| | NO. | CODE | (VAC) 50-60Hz | SWILCE | TUNGSTEN | BALLAST | |
| | 2001 | 60015 | 120 | SPST | 2000W | 1800VA | |
| , | 2002 | 60016 | 208-277 | SPST | 3470-4620W | 2080-2770VA | |
| NEW | 2006* | 60028 | 347 | SPST | 5760W | 3470VA | |
| NEW | 2018** | 62021 | 480 | SPST | 7500W | 4800VA | |
| | 73866 | 62020 | Mounting Bracket | | | | |

*CSA certified only. **Not UL or CSA rated.

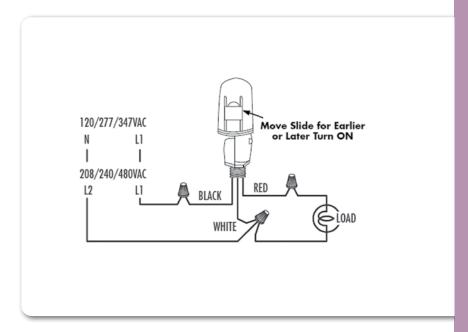

2020 SERIES 1/2" CONDUIT MOUNTING 180° SWIVEL, LEXAN® HOUSING PHOTOCONTROL

APPLICATIONS

- ─■ Flood and patio lamps─■ Decorative lighting
- Ideal for applications where it is essential to aim the photocell in an exact direction to sense natural light but avoid artificial light.



SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy conformal coated 1/2" diameter.

CONTACTS: Normally closed (the unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION:

Averages under 1 watt.

TEMPERATURE RANGE: -40° to +140°F (-40° to +60°C).

FAIL MODE: ON.

WARRANTY: 5 years.

FEATURES

SENSOR: Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.


OPERATION: Delay of up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

STANDARDS: Meets ANSI/UL773A

HOUSING: All Lexan® enclosures are impact and vandal resistant, cover and base are ultrasonically welded for maximum strength.

ENERGY SAVINGS: Works with screw base CFLs.

| CAT. | UPC VOLTAGE | | SWITCH | RATING | | |
|-------|-------------|------------------|--------|------------|-------------|--|
| NO. | CODE | (VAC) 50-60Hz | SWIICH | TUNGSTEN | BALLAST | |
| 2021 | 60024 | 120 | SPST | 2000W | 1800VA | |
| 2022 | 60025 | 208-277 | SPST | 3470-4620W | 2080-2770VA | |
| 73866 | 62020 | Mounting Bracket | | | | |

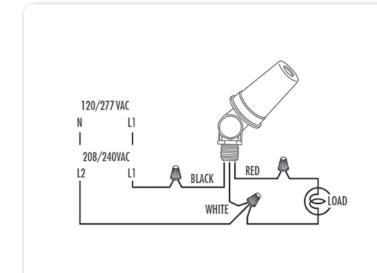





SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc. Turn

OFF is 3 to 15fc.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, conformal

coated 1/2" diameter.

CONTACTS: Normally closed (the unit

fails in the ON position).

LEAD WIRES: Three color coded. minimum 9" wire leads, #16AWG, rated

for 105°C.

POWER CONSUMPTION:

Averages under 1 watt.

TEMPERATURE RANGE:

 -40° to $+158^{\circ}$ F (-40° to $+70^{\circ}$ C).

FAIL MODE: ON.

WARRANTY: 5 years.

FEATURES

SENSOR: Conformal coated cadmium sulphide photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

OPERATION: Delay of up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

STANDARDS: Meets ANSI/UL773A

HOUSING & MOUNTING: Control housing is weather-resistant molded Lexan® with ultrasonically welded seams.


MODEL 3000: Flush mounting through .6875" hole in post lantern or lighting fixture, 3/4" NPT, stem 3/4" long. Gasket and nut supplied.

MODEL 3010: flush mounting into standard, raintight junction box. Includes aluminum plate and gasket to fit FS type outdoor junction box.

ENERGY SAVINGS: Works with screw base CFLs.

| | CAT. | UPC | VOLTAGE | SWITCH | RATING | | |
|-----|-------|-------|---------------|--------|------------|-------------|--|
| | NO. | CODE | (VAC) 50-60Hz | JWIICH | TUNGSTEN | BALLAST | |
| | 3000 | 60020 | 120 | SPST | 2000W | 1800VA | |
| | 3002 | 60019 | 208-277 | SPST | 3470-4620W | 2080-2770VA | |
| NEW | 3006* | 60026 | 347 | SPST | 5760W | 3470VA | |
| | 3010 | 60021 | 120 | SPST | 2000W | 1800VA | |
| | | _ | | | | | |



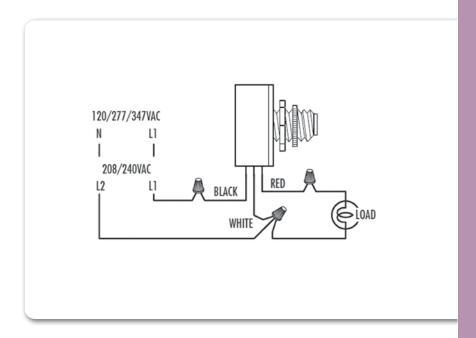

5000M SERIES

DELAYED RESPONSE UTILITY GRADE MOV SURGE ARRESTOR PHOTOCONTROL

APPLICATIONS

 For use on streets, highways and other luminaries equipped with locking type receptacles, where most stringent surge protection is needed.



SPECIFICATIONS

ON/OFF: Turn-ON is 1 to 3 fc. Turn-OFF to Turn-ON ratio is 5 max.

TIME DELAY: ON and OFF.

CELL: CdS, epoxy conformal coated $\frac{1}{2}$ " and 1" diameter models.

SURGE ARRESTOR: 380 joule MOV (metal oxide varistor) exceeds ANSI and NEMA requirements.

LOCKING PRONGS: Solid brass for maximum corrosion resistance and electrical conductivity.

TEMPERATURE RANGE: -40° to +140°F (-40° to +60°C).

WARRANTY: 3 years.

FAIL MODE: ON.

FEATURES

SENSOR: Conformal coated CdS photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

OPERATION: Delayed response prevents false switching due to light from vehicles or lighting, etc.


STANDARDS: Meets UL773 and ANSI C136.10 including color designations. Also meets EEI NEMA standards.

HOUSING: Polycarbonate housing and window, UV stabilized for permanent color. Provides high impact performance, flammability resistance, and electrically safe operations.

CONTACTS: Bi-metal provides positive snap action switching, reducing bounce and prolonging contact life.

| | CAT. | UPC | VOLTAGE | LIGHT | RATI | NG |
|----|---------|-------|-----------------|--------|---------------------|-----------------------|
| | NO. | CODE | (VAC) 50-60Hz | SENSOR | TUNGSTEN | BALLAST |
| | 5001M | 61012 | 105-130 | 1" | 2000W | 1800VA |
| | 5004M | 61013 | 208-277 | 1" | 3470-4620W | 2080-2770VA |
| | 5007M | 61014 | 105-130/208-285 | 1/2" | 2000W 3470-4620W | 1800VA 2080-2770VA |
| | 5008M* | 61017 | 480 | 1" | 7500W | 4800VA |
| | 5021M | 61015 | 105-130 | 1/2" | 2000W | 1800VA |
| | 5024M | 61016 | 208-277 | 1/2" | 3470-4620W | 2080-2770VA |
| VI | 5026M** | 61045 | 347 | 1/2" | 5760W | 3470VA |

*Not UL listed or CSA certified. **CSA certified only. (\$\$\overline{F}_0\)

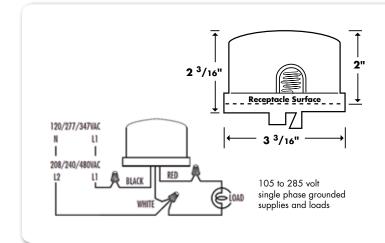



5400A SERIES CONTACTORS WITH TURN-LOCK PHOTOCONTROL

APPLICATIONS

(ÎI)

 For street lighting. Controls all lighting loads in excess of the capacity of the photoelectric control contacts.



SPECIFICATIONS

RECEPTACLE: 3-prong turn-lock meets the requirements of EEI NEMA.

POWER CONSUMPTION:

Maximum 3 watts during daylight.

| CAT. NO. | UPC CODE | PHOTOCONTROL INCLUDED | VOLTAGE (VAC) 60Hz | SWITCH |
|-------------|-------------|--------------------------|-----------------------|--------|
| 5403A | 81012 | 2005B | 120 | DPST |
| 5404A | 81013 | 2007B | 208-240 | DPST |
| 5404-3A | 81014 | 2007B | 277 | DPST |

FEATURES


OPERATION: Delay up to two minutes to prevent false switching due to light from passing vehicles, lighting, etc. Photocontrol provides dusk to dawn control of lighting contactor for heavy duty switching.

STANDARDS: Meets UL773 and ANSI C136.10 for photocontrols.

HOUSING: Outdoor NEMA Type 3R. Beige enamel finish.

Two $\frac{1}{2}$ " – $\frac{3}{4}$ " combination KO in bottom.

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING PER POLE |
|------------|------------------|----------------------------|
| Resistive | 120-277 | 40A |
| Tungsten | 120 | 30A |
| Ballast | 120-277 | 40A |
| LED Driver | 120-277 | 40A |
| Motor | 120 240 | 3HP 7.5HP |

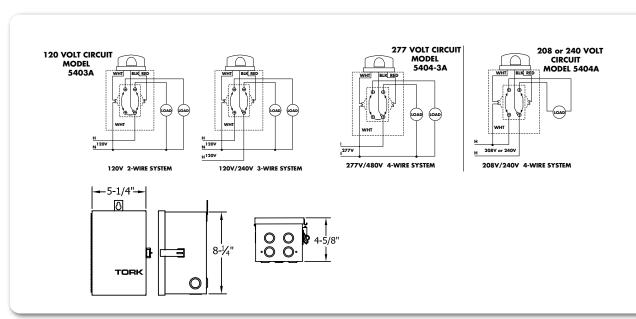

2005A SERIES INSTANT RESPONSE TURN-LOCK PHOTOCONTROL



APPLICATIONS

 For state and county DOT & municipalities use on roadway and bridges. Also use for general commercial facilities.

c (UL) us

SPECIFICATIONS

ON/OFF: Turn-ON is 1.5 foot candle +/-0.5 OFF/ON ratio is 1.5:1 average.

TIME DELAY: Instant ON/3-5 seconds OFF.

CELL: CdS, epoxy conformal coated ½" diameter.

RELAY: Rated life 6,000 operations

SURGE ARRESTOR: 360 joules MOV exceeds NEMA and ANSI requirements.

LOCKING PRONGS: Solid brass prongs for maximum corrosion resistance and electrical conductivity.

TEMPERATURE RANGE: -40° to +70°C).

FAIL MODE: ON.
WARRANTY: 3 years.

FEATURES


SENSOR: Conformal coated CdS photocell resists effects of moisture and airborne contaminants. Photocell responds to the light spectrum near to that of a human eye.

STANDARDS: Meets UL773 and ANSI C136.10 including color designations. Also meets EEI NEMA standards.

HOUSING: Polypropylene, UV stabilized, permanent color with UV resistant clear acrylic window. Provides high impact, flammability resistance and electrically save operations.

CONTACTS: DC relay has positive snap action switching, reducing bounce and prolonging contact life.

| 1 | CAT. | UPC VOLTAGE | | COLOR | RATING | | |
|---|-------|-------------|---------------|-------|----------|---------|--|
| | NO. | CODE | (VAC) 50-60Hz | COLOR | TUNGSTEN | BALLAST | |
| | 2005A | 62012 | 105-130 | Grey | 1000W | 1800VA | |
| | 2007A | 62013 | 105-285 | Blue | 1000W | 1800VA | |

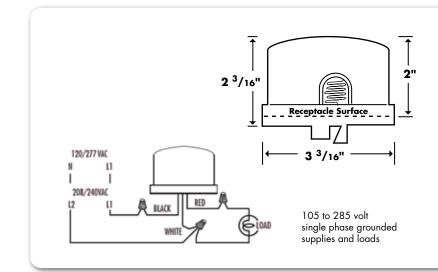



2005B SERIES INSTANT RESPONSE TURN-LOCK PHOTOCONTROL



APPLICATIONS



 For state and county DOT & municipalities use on roadway and bridges. Also use for general commercial facilities.

SPECIFICATIONS

ON/OFF: Turn-ON is 1.5 foot candle +/-0.2 OFF/ON ratio is 1.5:1 average.

TIME DELAY: Instant ON/3-5 seconds

OFF.

CELL: Molded sealed IR filtered sensor

RELAY: Rated life 6,000 operations

SURGE ARRESTOR: 360 joules MOV exceeds ANSI and NEMA requirements.

LOCKING PRONGS: Solid brass prongs for maximum corrosion resistance and electrical conductivity.

TEMPERATURE RANGE:

-40° to +158°F (-40° to +70°C).

FAIL MODE: ON.

WARRANTY: 4 years.

FEATURES


SENSOR: Molded sealed IR filtered sensor resists effects of moisture and airborne contaminants. IR filter responds to the light spectrum near to that of a human eye.

STANDARDS: Meets UL773 and ANSI C136.10 including color designations. Also meets EEI NEMA standards.

HOUSING: Polycarbonate housing and window, UV stabilized for permanent color. Polycarbonate provides high impact performance, flammability resistance, and electrically safe operations.

CONTACTS: DC relay has positive snap action switching, reducing bounce and prolonging contact life. Fail ON for safety.

| CAT | UPC | VOLTAGE | COLOR | RATI | NG |
|------------------------|-------|---------------|--------|----------|---------|
| NO. | CODE | (VAC) 50-60Hz | COLOR | TUNGSTEN | BALLAST |
| 2005B | 60015 | 105-130 | Grey | 1000W | 1800VA |
| 2007B | 60016 | 105-305 | Blue | 1000W | 1800VA |
| 2008B* *Not UL listed. | 62017 | 400-550 | Yellow | 1000W | 1800VA |

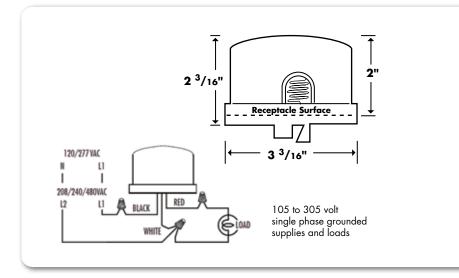

5200 SERIES UTILITY GRADE ELECTRONIC WITH FAIL ON MODE PHOTOCONTROL



APPLICATIONS

 Designed meet local utility standards for street and highway lighting controls.

FEATURES

SENSOR: Molded sealed silicon sensor resists effects of moisture and airborne contaminants.

STANDARDS: Meets ANSI C136 including color designations. Also meets EEI NEMA standards.

HOUSING: Polycarbonate housing and window, UV stabilized for permanent color. Polycarbonate provides high impact performance, flammability resistance, and electrically safe operations.

CONTACTS: DC relay has positive snap action switching, reducing bounce and prolonging contact life. Fail ON for safety.

SPECIFICATIONS

ON/OFF: Turn ON is 1.5 foot candle +/- 0.2 OFF/ON ratio is 1.5:1 average*.

TIME DELAY: Instant ON/3-5 second

CELL: Molded sealed silicon sensor

CONTACTS: DC relay has positive snap action switching, reducing bounce and prolonging contact life.
Fail ON for safety.

SURGE ARRESTOR: 360 joule MOV (metal oxide varistor) exceeds ANSI and NEMA requirements.

LOCKING PRONGS: Solid brass for maximum corrosion resistance and electrical conductivity.


CUSTOM: Available for custom design to meet specific utility specification.

TEMPERATURE RANGE: -40° to +70°C).

FAIL MODE: ON.

WARRANTY: 5 years.

| CAT.NO. | UPC | VOLTAGE | COLOR | RATI | RATING |
|---------|-------|---------------|-------|----------|---------|
| CAI.NU. | CODE | (VAC) 50-60Hz | COLOR | TUNGSTEN | BALLAST |
| 5231 | 78885 | 105-130 | Grey | 1000W | 1800VA |
| 5237 | 78886 | 105-305 | Blue | 1000W | 1800VA |

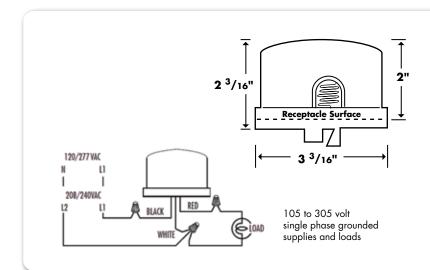



5200-UL SERIES INSTANT RESPONSE TURN-LOCK PHOTOCONTROL



APPLICATIONS

(II)

 Designed meet local utility standards for street and highway lighting controls.

SPECIFICATIONS

ON/OFF: Turn ON is 1.5 foot candle +/- 0.2 OFF/ON ratio is 1.5:1 average.

TIME DELAY: Instant ON/3-5 second OFF.

CELL: Molded sealed IR filtered sensor

RELAY: Rated life 6,000 operations

SURGE ARRESTOR: 360 joule MOV (metal oxide varistor) exceeds ANSI and NEMA requirements.

LOCKING PRONGS: Solid brass for maximum corrosion resistance and electrical conductivity.

CUSTOM: Available for custom design to meet specific utility specification.

TEMPERATURE RANGE: -40° to +70°C).

FAIL MODE: ON.

WARRANTY: 6 years.

FEATURES

SENSOR: Molded sealed IR filtered sensor resists effects of moisture and airborne contaminants. IR filter responds to the light spectrum near to that of a human eye.


STANDARDS: Meets UL773 and ANSI C136.10 including color designations. Also meets EEI NEMA standards.

HOUSING: Polycarbonate housing and window, UV stabilized for permanent color. Polycarbonate provides high impact performance, flammability resistance, and electrically safe operations.

ENERGY SAVINGS: Listed for use with LED lamp drivers

CONTACTS: DC relay has positive snap action switching, reducing bounce and prolonging contact life. Fail ON for safety.

| CAT. | UPC | VOLTAGE | COLOR | RAT | ING | LED | |
|--------------|-------|--------------------------|-------|----------|---------|--------|--|
| NO. | CODE | VOLTAGE (VAC) 50-60Hz | COLOR | TUNGSTEN | BALLAST | DRIVER | |
| NEW! 5237-UL | 78895 | 105-305 | Blue | 1000W | 1800VA | 1000W | |

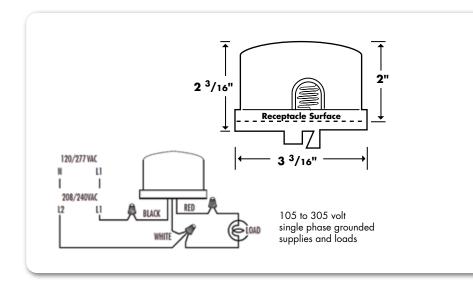

ON AT DUSK, OFF AT MIDNIGHT ON EARLY MORNING, OFF AT DAWN PHOTO-TIMERS



APPLICATIONS

- Offices
- Restaurant signage
- Billboards
- Landscape and yard lighting
- Ideal for situations when visible traffic is reduced — lights ON at dusk and OFF at 10pm or later, then on again for early morning illumination.

FEATURES

OPERATION: Microprocessor tracks the dusk and dawn times with the seasons and automatically determines midnight, NO PROGRAMMING REQUIRED. Automatically "re-learns" and resets after power outage, eliminating costly maintenance. DST correction built in.

STANDARDS: Meets ANSI C136.10 including color designations. Also meets EEI NEMA standards.

HOUSING: UV stabilized, ANSI color-coded polypropylene dome. UV stabilized, clear acrylic window. ABS base. Cross-linked, polypropylene gasket.

CONTACTS: DC relay has positive snap action switching, reducing bounce and prolonging contact life. Fail ON for safety

SPECIFICATIONS

ON/OFF: Turn ON at dusk is 5.0 foot candle +/-0.5 OFF/ON ratio is 1.5:1 average.

TIME DELAY: Instant ON/3-5 seconds OFF.

CELL: Silicon photosensor

SURGE ARRESTOR: 360 joule MOV (metal oxide varistor) exceeds ANSI and NEMA requirements.

5737TM HALF-NIGHT FUNCTION: Allows user to adjust OFF time during the night. OFF time can be set for up to two hours before (for extra energy savings) or up to two hours after midnight. Use to stagger groups of lights to go OFF at different times during the night.

5737TZ TWO FUNCTION:

- 1) Standard: Set as a Dusk to Dawn photocontrol.
- 2) Half-night & Pre-Dawn: Turns on at Dusk. User adjusts OFF time for up to two hours before or after midnight. Then set countdown to Pre-dawn ON again 2 10 hours later. It always turns OFF at Dawn.

LOCKING PRONGS: Solid brass Prongs for maximum corrosion resistance and electrical conductivity.


TEMPERATURE RANGE:


 -40° to $+158^{\circ}$ F (-40° to $+70^{\circ}$ C).

FAIL MODE: ON.

WARRANTY: 3 years.

| CAT. | UPC | VOLTAGE (VAC) 50-60Hz | COLOR | SWITCH | SWITCH RATING | | |
|--------|-------|--------------------------|-------|--------|---------------|---------|--|
| NO. | CODE | (VAC) 50-60Hz | COLOR | JWIICH | TUNGSTEN | BALLAST | |
| 5737TZ | 62010 | 105-305 | Blue | SPST | 1000W | 1800VA | |
| 5737TM | 62009 | 105-305 | Grey | SPST | 1000W | 1800VA | |

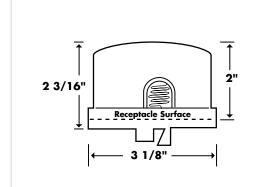



105-305 VAC single phase grounded supplies and loads

PHOTOCONTROL ACCESSORIES FOR TURN-LOCK CONTROLS

MOUNTING BRACKET

Utility mounting bracket for 1/2" threaded conduit photocontrols.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION |
|--------|----------------|-------------|------------------|
| | 73866 | 62020 | Mounting Bracket |

REPLACEMENT CAPS



5500 replaces photocontrol to change light fixture to always ON. 5500-OC replaces photocontrol to change light fixture to always OFF. Durable materials and gasket provide longevity and weatherproof protection.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION |
|--------|----------------|-------------|--|
| | 5500 | 61130 | Shorting cap 480VAC max 1800W Tungsten 1800VA Ballast |
| | 5500-OC | 61132 | Open cap 480VAC max (Black housing) |

RECEPTACLE CSU'us

120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, gasket and two mounting screws.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION |
|--------|----------------|-------------|------------------------|
| | 2223 | 61025 | Receptacle with gasket |

RECEPTACLE of



120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, mounting bracket and one mounting screw.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION |
|--------|----------------|-------------|------------------------------------|
| | 2224 | 61026 | Receptacle and mounting bracket |

RECEPTACLE C





120-480V 50/60 Hz 15 amp maximum receptacle with color-coded 12" long, #14 leads, plastic housing, lock nut (with 1/2" NPT) and a mounting bracket.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION |
|--------|----------------|-------------|--|
| | 2421 | 61021 | Receptacle with plastic housing and bracket |

NSi offers many splicing options to complete the pole installation. See the splicing section pages 211-232.



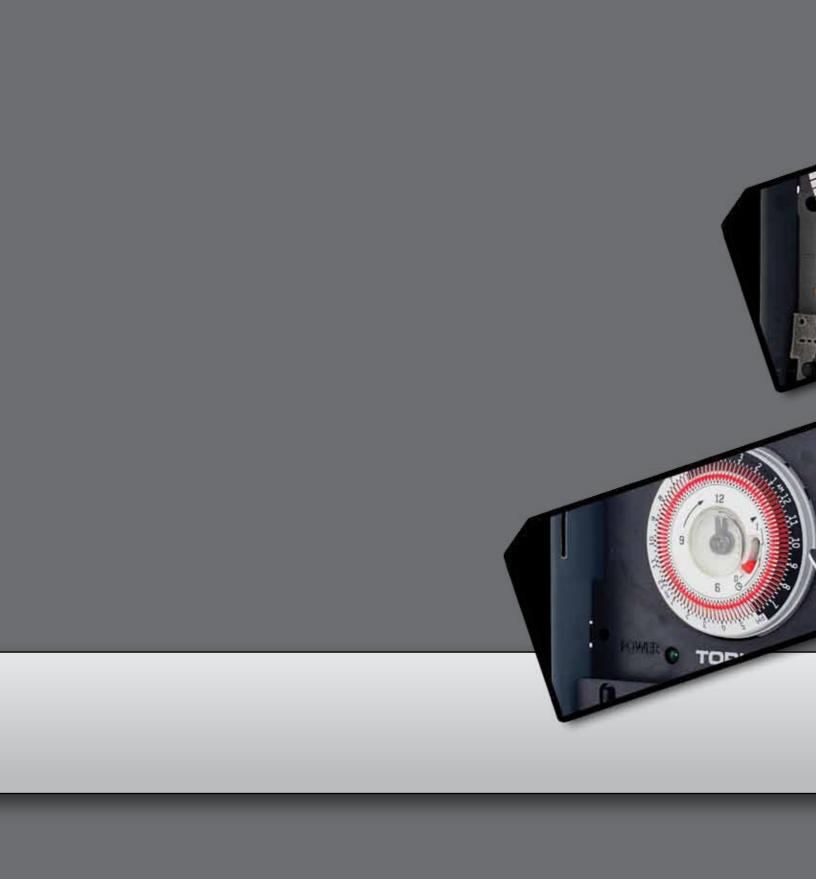

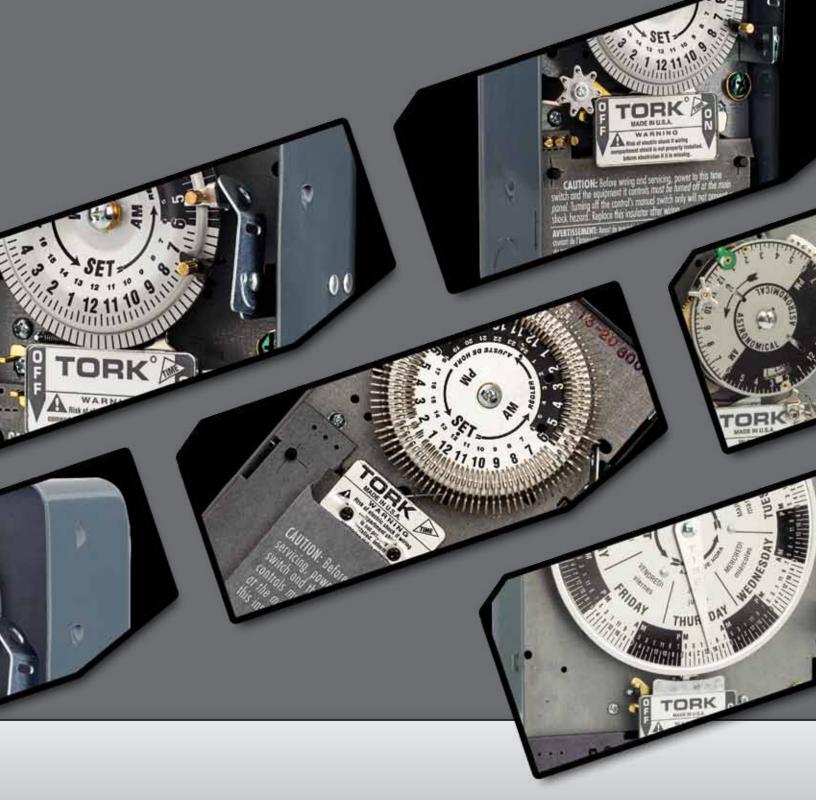

TORK® ELECTROMECHANICAL TIME SWITCHES

TORK MECHANICALS

QUICK REFERENCE GUIDE

| SERIES | PAGE NO. | CLOCK DIAL | SETT | IMUM TINGS IUTES) OFF | SKIP A Day | MANUAL OVERRIDE | SUNRISE/ SUNSET | MAX ON & OFF EVENTS PER DAY | | SW | ІТСН ТҮ | PES | | RATINGS (AMPS) | RESERVE POWER |
|--------|-------------|------------------------|------|--------------------------------|------------------|-------------------------|--------------------|--------------------------------------|---------|---------|----------|-----------|------------------|-------------------|------------------|
| TU40 | 421 | 24 Hour | 15 | 15 | | Permanent | | 48 | SPST | DPST | SPDT | DPDT | | 40 | |
| 1100 | 423 | 24 Hour | 20 | 75 | | Yes | | 12 | SPST | DPST | | | | 40 | |
| 7000 | 425 | 24 Hour | 20 | 75 | Yes | Yes | | 12 | SPST | DPST | SPDT | DPDT | 3PST | 40 | Available |
| 7000Z | 427 | 24 Hour | | or 40 e Offset | Yes | Yes | SunSet | 1 | SPST | DPST | SPDT | DPDT | 3PST | 40 | Available |
| TZ | 441 | 24 Hour | | or 40 e Offset | Yes | Permanent by circuit | SunSet | 1 | | | | DPDT | 3PST | 20 | Standard |
| W | 435 | 7 Day | 60 | 120 | Yes | Yes | | 2 | SPST | DPST | SPDT | DPDT | 3PST 4PST | 40 | Available |
| TW | 439 | 7 Day | 60 | 120 | Yes | Permanent by circuit | | 2 | | | | DPDT | 3PST | 20 | Standard |
| T900 | 437 | 7 Day | 60 | 120 | Yes | Permanent by circuit | Photo Control | 2 | | | | | 2 SPDT 3 SPDT | 20 | Standard |
| 1847A | 433 | 24 Hour | 20 | 75 | Yes | | | 12 | | SPDT, M | omentary | Contact | | 10 | Available |
| 1847AZ | 433 | 24 Hour | | or 40 e Offset | Yes | Yes | SunSet | 1 | | SPDT, M | omentary | Contact | | 10 | Available |
| 1847AW | 433 | 7 Day | 60 | 120 | Yes | Yes | | 2 | | SPDT, M | omentary | Contact | | 10 | Available |
| 8000 | 429 | 24 Hour | 15 | 15 | Available | | | 48 | SPDT 20 | | 20 | Available | | | |
| 8000 | 431 | 6, 12, 30 & 60 Min. | | by dial o 1 min. | | | | 30/dial | SPDT 20 | | | | | | |
| WH2B | 432 | 24 Hour | 20 | 75 | | Yes | | 12 | | | DPST | | | 40 | |



FEATURES

EASY TO SET DIAL ASSEMBLY



Tork's 24 hour dial assembly allows the user to set the time switch more accurately, easily moving it by hand in small increments. Dial can provide up to 12 ON/OcFFs per day with cycles as short as 20 minutes. AM and PM settings are easy to see by the light and dark areas of the dial.

CAPTIVE TABS – DUTY CYCLE DIAL



For applications requiring many ON/OFF cycles per day, captive tabs on this dial tilt in and out just using your fingertip!

FIELD UPGRADEABLE TO SUNSET DIALS



All Tork 24 hour time switches can be upgraded in the field to a SunSet timer dial.

SPRING WOUND RESERVE



During power outages, precision spring mechanism takes over instantly and automatically. Keeps the mechanism on time up to 16 hours on 24 hour models and up to 24 hours on 7 day models. No resetting is needed after power resumes, and field installation is easy!

REMOVABLE DOOR



Tork time switches feature removable doors to provide easy access for installation and wiring.

ENCLOSED MOTOR



Time switch motors are enclosed to protect from dust and damage.

QUALITY ASSURANCE

TORK® Electromechanical Controls are designed and manufactured with components which adhere to the highest industry standards. Trained personnel and in-process quality procedures ensure that every unit meets our strictest quality expectations.

TU40 SERIES UNIVERSAL MULTI-VOLTAGE

SAME ON/OFF TIMES EACH DAY **24 HOUR TIME SWITCH**



ALL PURPOSE CONTACTS, HOUSING, & VOLTAGES!

APPLICATIONS



- Lighting
- Pumps
- Signs
- Air conditioning
 - Water heaters
 - Fans

FEATURES

SPDT, & DPST.

MULTI-VOLTAGE: Automatic input voltage detection.

EASY SET: Real time clock face and day/night markings for setting trippers.

SCHEDULING: Minimum ON is setting 15 minutes. Dial has 96 captive trippers.

4 in 1 CONTACTS: DPDT can also wire as SPST,

BYPASS SWITCH: Sets timer to permanent

ON, OFF or timer operation.

VACATION MODE: Set timer OFF with no change of tripper settings.

INDICATING LIGHTS: Power ON green and load ON red and LED indicators.

| CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 60Hz | DRY CONTACTS (UNPOWERED) | ENCLOSURE Type |
|----------------|-------------|----------------------------|--------------------------|-----------------------------------|
| TU40 | 24000 | 120/208-240/277 | DPDT | Plastic Indoor/Outdoor NEMA 3R |
| TU40-Y | 24001 | 120/208-240/277 | DPDT | Metal Indoor NEMA 1 |



SPECIFICATIONS

INPUT VOLTAGE: 120/208-240/277VAC, 60Hz (auto detection).

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #18 AWG.

OPERATING TEMPERATURE: -31°F to 116°F (-35°C to +47°C).

POWER CONSUMPTION: 6 watts

maximum.

ENCLOSURE: Polycarbonate Indoor/ Outdoor NEMA 3R or -Y suffix metal indoor NEMA 1 enclosure. Both with lockable hasp standard (see page 557 for enclosure dimensions).

| TYPE | VOLTAGE | RAT | ING |
|-----------------|------------|--|--|
| ***** | (VAC) | NO | NC |
| General Purpose | 120-277 | 40A | 30A |
| Inductive | 120-277 | 30A | 15A |
| Ballast | 120 277 | 30A 20A | 10A 10A |
| Tungsten | 120 | 15A | |
| Motor Load | 120 240 | 1HP, 30FLA, 90LRA 2HP, 20FLA, 60LRA | 1/4HP, 12FLA, 30LRA 1/2HP, 12FLA, 33LRA |
| Pilot Duty | 120 240 | 720VA 720VA | 290VA 360VA |
| Resistive | 28VDC | 20A | |
| Max above 104°F | 120-277 | 30A | |

TYPICAL DPST WIRING - LOAD SAME VOLTAGE AS TIMER SUPPLY TYPICAL SPST WIRING - LOAD SAME VOLTAGE AS TIMER SUPPLY SUPPLY SUPPLY 3 4 7 2 5 C 2 H/L1 N/L2 NO NO H/L1 N/L2 NC NO NC NO OPTIONAL FOR 208 VAC L1 SECOND LOAD 120 VAC OR OR 240 VAC L2 277 VAC SINGLE PHASE GROUND GROUND CONNECT LINE VOLTAGE (L1) TO TERMINAL 5 CONNECT LINE VOLTAGE (H) TO TERMINAL 5 CONNECT LINE VOLTAGE (L2) TO TERMINAL 8

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

1100 SERIES SAME DAY ON/OFF **TIMES EACH DAY 24 HOUR TIME SWITCH**

APPLICATIONS



- Lighting
- Pumps
- **-■** Signs
- Air conditioning
 - Water heaters
 - **−** Fans
 - Automatic ON/OFF control when operation is required at the same time every day.

FEATURES

SCHEDULING: Minimum ON is setting 20 minutes with a minimum OFF setting of 75 minutes. Dial accommodates up to 12 pairs of trippers. One pair included.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF automatic operation then resumes.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE |
|-------------------------|-------------|----------------------------|--------------------|--|
| 1101 | 10011 | 120 | SPST | Metal Indoor NEMA 1 |
| 1101B-P* | 10068 | 120 | SPST | Polycarbonate Indoor/ Outdoor NEMA 3R |
| 1101-NC | 10053 | 120 | SPST | Noryl® Indoor/Outdoor w/ clear Lexan® cover |
| 1101-0 | 10015 | 120 | SPST | Metal Indoor/Outdoor NEMA 3 |
| 1101BM-IAP* | 10073 | 120 | SPST | Mechanism and retrofit plate |
| 1101-7 ** | 10033 | 347 | SPST | Metal Indoor NEMA 1 |
| 1102B | 10065 | 208-277 | SPST | Metal Indoor NEMA 1 |
| 1103 | 10013 | 120 | DPST | Metal Indoor NEMA 1 |
| 1103B-P* | 10069 | 120 | DPST | Polycarbonate Indoor/ Outdoor NEMA 3R |
| 1103-NC | 10054 | 120 | DPST | Noryl® Indoor/Outdoor w/ clear Lexan® cover |
| 1103-0 | 10016 | 120 | DPST | Metal Indoor/Outdoor NEMA 3 |
| 1103M | 10023 | 120 | DPST | Mechanism |
| 1104 | 10014 | 208-277 | DPST | Metal Indoor NEMA 1 |
| 1104B-P * | 10070 | 208-277 | DPST | Polycarbonate Indoor/ Outdoor NEMA 3R |
| 1104-NC | 10055 | 208-277 | DPST | Noryl® Indoor/Outdoor w/ clear Lexan® cover |
| 1104B-0 * | 10075 | 208-277 | DPST | Metal Indoor/Outdoor NEMA 3 |
| 1104BM-MB* | 10076 | 208-277 | DPST | Mechanism and surface mounting bracket |
| 1104BM-IAP* | 10074 | 208-277 | DPST | Mechanism and retrofit plate |
| Replacement Trippers | | Order #P47 for a | pair of ON/OFF | trippers |
| Replacement Motor | | #101 (120V) | & #201 (208-27 | 77V) |
| _ | | | | |



Astronomic dial. Consult factory for correct number for your latitude

** 1101-7 CSA only





^{*} B suffix units cULus cQL us

SPECIFICATIONS

INPUT VOLTAGE: 120 or 208-277 VAC

60 Hz, varies by model.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14 AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).

POWER CONSUMPTION:

3 watts maximum.

ENCLOSURE: Lockable hasp. Type varies by model (see page 557 for enclosure


dimensions).

OTHER MOUNTINGS:

Intermatic® Adaptor Plate model #IAP allows any 1100 series to fit into an Intermatic case.

| | ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|--|-----------------|---------------------|-------------------|
| | General Purpose | 120 -277 | 40A |
| | Resistive | 120 -277 | 40A |
| | Tungsten | 120 | 40A |
| | Ballast | 120-277 | 20A |
| | LED Driver* | 120-277 | 20A |
| | Pilot Duty | 120 -277 | 1000VA** |
| | Motor | 120 240 | 2HP 5HP |
| | | 277VAC Single Phase | |

^{*} LED rating UL only or cULus on B suffix units of the B suffix units 120VAC 1000VA / 240VAC 2000VA 1101-7 is 30 AMP inductive at 347 volts and CSA only

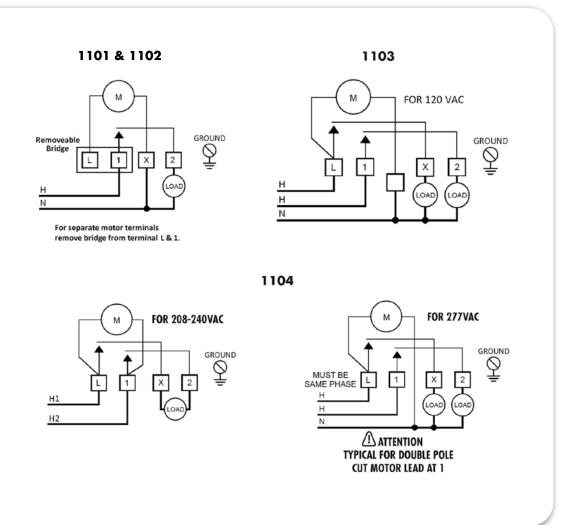

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

7000 SERIES WITH SKIP-A-DAY FEATURE **RESERVE POWER OPTIONAL 24 HOUR TIME SWITCH**

CALIFORNIA Title 24

ASHRAE 90.1

SKIP-A-DAY 24 HOUR!

APPLICATIONS





- Lighting
- Heating
- Pumps
- Air conditioning
 - Signs
 - Automatic ON/OFF control when operation is required at the same time every day, with optional versatility of one to six days omission.

FEATURES

SCHEDULING: Minimum ON setting is 20 minutes with minimum OFF setting at 75 minutes. Dial accommodates up to 12 pairs of trippers. One pair included.

SKIP-A-DAY: Omit operations on any day with a 7-spoke wheel marked with days of week. 3 omitting screws included.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

OPTIONAL RESERVE POWER: "L" models keep dial on time up to 16 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE | |
|--|-------------|----------------------------|--------------------|--------------------------------|--|
| 7100 | 10001 | 120 | SPST | Metal Indoor NEMA 1 | |
| 7102 | 10002 | 208-277 | SPST | Metal Indoor NEMA 1 | |
| 7200 | 11001 | 120 | DPST | Metal Indoor NEMA 1 | |
| 7200-0 | 10512 | 120 | DPST | Metal Indoor/Outdoor NEMA 3 | |
| 7202 | 11002 | 208-277 | DPST | Metal Indoor NEMA 1 | |
| 7202-0 | 10509 | 208-277 | DPST | Metal Indoor/Outdoor NEMA 3 | |
| 7300 | 12001 | 120 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7302 | 12002 | 208-277 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7120 | 13001 | 120 | SPDT | Metal Indoor NEMA 1 | |
| 7122 | 13002 | 208-277 | SPDT | Metal Indoor NEMA 1 | |
| 7220 | 14001 | 120 | DPDT | Metal Indoor NEMA 1 | |
| 7222 | 14002 | 208-277 | DPDT | Metal Indoor NEMA 1 | |
| WITH RESERVE POWER | | | | | |
| 7200L | 19003 | 120 | DPST | Metal Indoor NEMA 1 | |
| 7202L | 19004 | 208-277 | DPST | Metal Indoor NEMA 1 | |
| 7300L | 19005 | 120 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7302L | 19006 | 208-277 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7120L | 19007 | 120 | SPDT | Metal Indoor NEMA 1 | |
| 7220L | 19009 | 120 | DPDT | Metal Indoor NEMA 1 | |
| 7222L | 19011 | 208-277 | DPDT | Metal Indoor NEMA 1 | |
| Replacement Order #P49 for a pair of ON/OFF per dial. Additional ON/OFF trippers per dial order #P47. 3 omitting screws #53005 supplied. | | | | | |
| Replacement | #101 (1) | 20V) & #201 (208-277) | /). For "L" model | s #36 (120V) & #46 | |

Motor (208-277V). For Astronomic Conversion: Order #Z KIT for 7000 Series.



Astronomic dial. Consult factory for correct number for your latitude



SPECIFICATIONS

INPUT VOLTAGE: 120 or 208-277 VAC 60 Hz varies by model.

TIMING ACCURACY: Line frequency.
TERMINAL RANGE: #8 - #14 AWG.

OPERATING TEMPERATURE: -40° to 165°F (-40° to +74°C).

POWER CONSUMPTION: 3 watts, 5 watts for "L" models

maximum.


ENCLOSURE: Lockable hasp. Type varies by model (see page

557 for enclosure dimensions).

OTHER MOUNTINGS: Intermatic® Adaptor Plate model #IAP allows any 7100 and 7200 series (except "L" models) to fit into an Intermatic case.

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 120 -277 | 40A |
| Resistive | 120 -277 | 40A |
| Tungsten | 120 | 40A |
| Ballast | 120-277 | 20A |
| Pilot Duty | 120 -277 | 1000VA |
| Motor | 120 240 | 2HP 5HP |

277 volt Single Phase

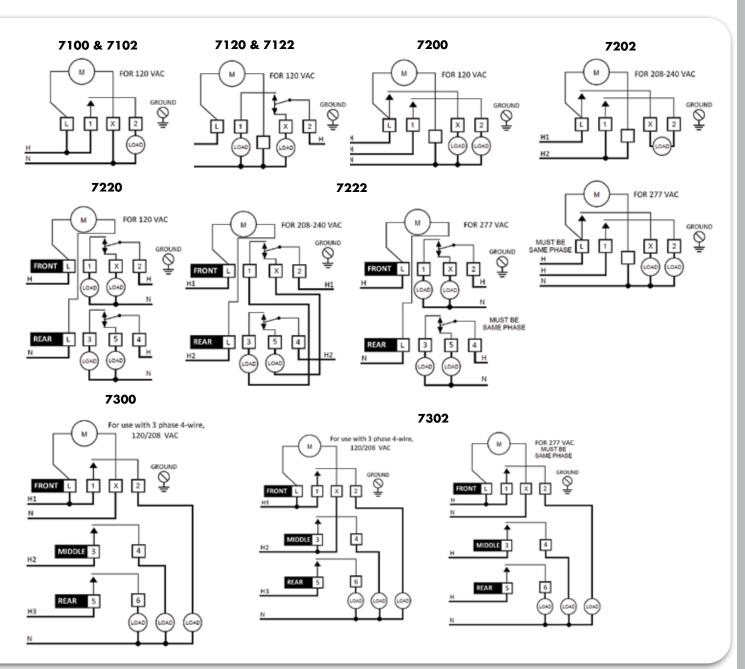

7000Z SERIES

SunSet WITH SKIP-A-DAY FEATURE **RESERVE POWER OPTIONAL ASTRONOMIC TIME SWITCH**

APPLICATIONS









- Walkways
- Outdoor signage
- Window displays
- Canopy lighting
- Landscape lighting
- Automatic ON at dusk, OFF at dawn. Control of outdoor lighting.



ADJUSTS TO DAILY CHANGES IN SUNSET TIMES!

FEATURES

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Turn ON at sunset and OFF at sunrise daily. OFF time can be set from 8:30PM to 2:30AM. Can be individually offset +/- 20 or 40 minutes from both sunset and OFF times. Available from 18° - 45° northern latitudes.

SKIP-A-DAY: Omit operations on any day with a 7 spoke wheel marked with days of the week. 3 omitting screws included.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

OPTIONAL RESERVE POWER: "L" models keep dial on time up to 16 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE | |
|--|-------------|----------------------------|--------------------|----------------------------------|--|
| 7200Z-* | ** | 120 | DPST | Noryl® Indoor/Outdoor NEMA 3R | |
| 7202Z-* | ** | 208-277 | DPST | Noryl® Indoor/Outdoor NEMA 3R | |
| 7300Z-* | ** | 120 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7302Z-* | ** | 208-277 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7120Z-* | ** | 120 | SPDT | Noryl® Indoor/Outdoor NEMA 3R | |
| WITH RESERVE POWER | | | | | |
| 7200ZL-* | ** | 120 | DPST | Noryl® Indoor/Outdoor NEMA 3R | |
| 7202ZL-* | ** | 208-277 | DPST | Noryl® Indoor/Outdoor NEMA 3R | |
| 7300ZL-* | ** | 120 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7302ZL-* | ** | 208-277 | 3PST | Metal Indoor/Outdoor NEMA 3 | |
| 7120ZL-* | ** | 120 | SPDT | Noryl® Indoor/Outdoor NEMA 3R | |
| 7122ZL-* | ** | 208-277 | SPDT | Noryl® Indoor/Outdoor NEMA 3R | |
| Replacement #101 (120Y) & #201 (208-277V). Motor For "L" models #36 (120Y) & #46 (208-277V) | | | | | |

^{*}Add degrees latitude to complete number (18, 30, 34, 38, 40, 42, or 45).



^{**}Consult factory for UPC number.

SPECIFICATIONS

INPUT VOLTAGE: 120 or 208-277 VAC

60 Hz, varies by model.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14 AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).

POWER CONSUMPTION: 3 watts,


5 watts for "L" models maximum.

ENCLOSURE: Lockable hasp. Type varies by model (see page 557 for enclosure

dimensions).

| TYPE | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 120 -277 | 40A |
| Resistive | 120 -277 | 40A |
| Tungsten | 120 | 40A |
| Ballast | 120-277 | 20A |
| Pilot Duty | 120 -277 | 1000VA |
| Motor | 120 240 | 2HP 5HP |

277VAC Single Phase

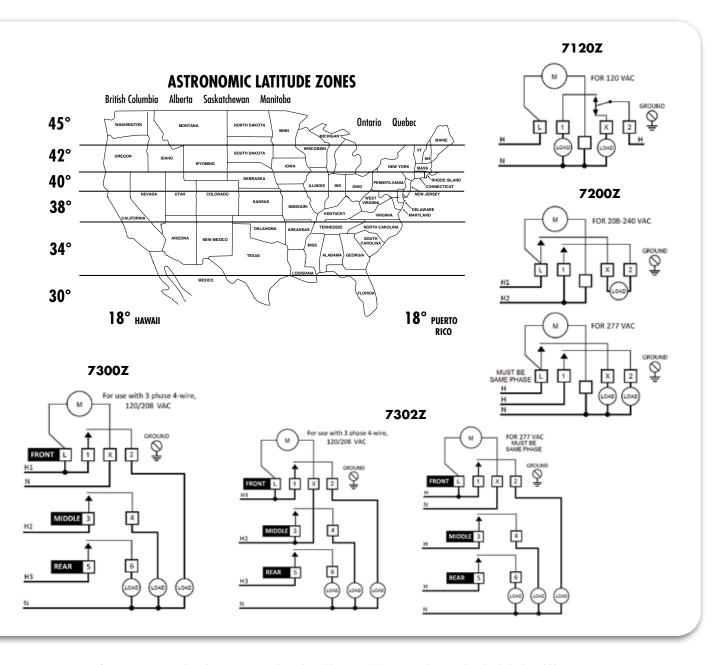

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

8000 SERIES MANY DAILY ON/OFF OPERATIONS PER DAY DUTY CYCLE 24 HOUR TIME SWITCH

TORK

DUTY CYCLE FOR MULTIPLE ON/OFF OPERATIONS!

APPLICATIONS



- Duty cycling
- Ventilating fans
- Pumping
- Irrigation
 - Process control
 - Laboratory experiments
 - For one or multiple daily ON/OFF operations.

FEATURES

SCHEDULING: Minimum ON setting is 15 minutes with minimum OFF setting at 15 minutes. Dial has 96 captive tabs.

DUTY CYCLE: Adjustable from ½, 1, 2, 3, 4, 6, 12, and 24 hours.

SKIP-A-DAY: Some models include 7 day or 14 day wheel to omit selected days of the week.

OPTIONAL RESERVE POWER: "L" models keep dial on time up to 16 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE Type | |
|---|-------------|----------------------------|--------------------|--|--|
| 8001 | 70001 | 120 | SPDT | Metal Indoor NEMA 1 | |
| 8001-N | 70025 | 120 | SPDT | Noryl® Indoor/Outdoor NEMA 3R | |
| 8001-NC | 70009 | 120 | SPDT | Noryl® Indoor/Outdoor NEMA 3R w/ clear Lexan® cover | |
| 8001-LC/WB | 70010 | 120 | SPDT | Mechanism and bracket | |
| 8001-0 | 70029 | 120 | SPDT | Metal Indoor/Outdoor NEMA 3 | |
| 8004 | 70002 | 208-277 | SPDT | Metal Indoor NEMA 1 | |
| 8001U | 70003 | 480/120 Trans. | SPDT | Metal Indoor NEMA 1 | |
| 8001U-N | 70014 | 480/120 Trans. | SPDT | Noryl® Indoor/Outdoor NEMA 3R | |
| 8001U-0 | 70011 | 480/120 Trans. | SPDT | Metal Indoor/Outdoor NEMA 3 | |
| 24 HOUR WITH | 7 DAY OMIT | | | | |
| 8007 | 70005 | 120 | SPDT | Metal Indoor NEMA 1 | |
| 8007-0 | 70012 | 120 | SPDT | Metal Indoor/Outdoor NEMA 3 | |
| 8008 | 70006 | 208-277 | SPDT | Metal Indoor NEMA 1 | |
| 8007U | 70008 | 480/120 Trans. | SPDT | Metal Indoor NEMA 1 | |
| 8007U-0 | 70028 | 480/120 Trans. | SPDT | Metal Indoor/Outdoor NEMA 3 | |
| 24 HOUR WITH 7 DAY OMIT & RESERVE POWER | | | | | |
| 8007L | 70015 | 120 | SPDT | Metal Indoor NEMA 1 | |
| 8008L | 70016 | 208-277 | SPDT | Metal Indoor NEMA 1 | |
| 24 HOUR WITH 14 DAY OMIT | | | | | |
| 8007V | 70007 | 120 | SPDT | Metal Indoor NEMA 1 | |
| 24 HOUR WITH 14 DAY OMIT & RESERVE POWER | | | | | |
| 8007VL | 70017 | 120 | SPDT | Metal Indoor NEMA 1 | |
| Renlacement #101/120V\ 8. #201 (208-277V) | | | | | |

Replacement #101(120V) & #201 (208-277V).

Motor For "L" models #36 (120V) & #46 (208-277V)



SPECIFICATIONS

INPUT VOLTAGE: 120, 208-277VAC or 480VAC, 60Hz, varies by model.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).


POWER CONSUMPTION: 3 watts, 5 watts for "L" models maximum.

ENCLOSURE: Lockable hasp. Type varies by model (see page 557 for enclosure

dimensions).

OTHER MOUNTINGS: Intermatic® Adaptor Plate model #IAP allows 8001 & 8004 to fit into an Intermatic case.

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------|-------------------|-------------------|
| Resistive | 120 or 240 480 | 20A 20A |
| Motor | 120 | 3/4 HP |

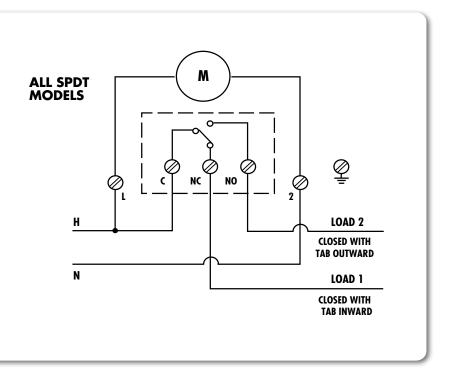

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

8000 SERIES MULTIPLE ON/OFF CYCLES REPEATING VARIABLE CYCLE TIME SWITCH

APPLICATIONS



- Duty cycling
- Ventilating fans
- ─■ Pumping
- —**■** Irrigation
- ─■ Process control
- Laboratory experiments
- For one or many daily ON/OFF operations.



SCHEDULING: 60 captive tabs per dial with minimum ON/OFF settings:

- 60 minute dial with 1 minute tabs.
- 30 minute dial with 30 second tabs.
- 12 minute dial with 12 second tabs.
- 6 minute dial with 6 second tabs.

DUTY CYCLE: Settings of 1/60 th of dial speed.



SPECIFICATIONS

INPUT VOLTAGE: 120VAC, 60Hz.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE: -40° to 165°F (-40° to +74°C).


POWER CONSUMPTION:

3 watts maximum.

ENCLOSURE: Indoor NEMA 1 Metal with lockable hasp (see page 557 for enclosure dimensions).

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ТҮРЕ |
|----------------------|-------------|----------------------------|--------------------|-------------------|
| 8601 | 70034 | 120 | SPDT | 60 Minute |
| 8301 | 70033 | 120 | SPDT | 30 Minute |
| 8121 | 70032 | 120 | SPDT | 12 Minute |
| 8061 | 70031 | 120 | SPDT | 6 Minute |
| Replacement Motor | For 8601 # | 102, for 8301 #108, f | or 8121 #107, a | nd for 8061 #105. |

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------|-------------------|-------------------|
| Resistive | 120 or 240 480 | 20A 20A |
| Motor | 120 | 3/4 HP |

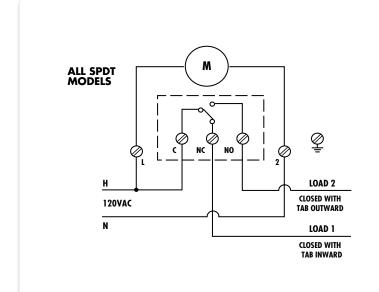



WH2B 24 HOUR WATER HEATER TIME SWITCH

APPLICATIONS

c (UL) us

Automatic ON/OFF control of electric water heaters. Schedules the water heater to turn ON only when needed, avoiding energy waste when hot water is not needed.



Avoid utility peak rates Turn off when not needed

SPECIFICATIONS

INPUT VOLTAGE: 208 – 250V 60 Hz.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).

POWER CONSUMPTION:

3 watts maximum.

ENCLOSURE: Indoor NEMA 1 Metal with lockable hasp (see page 557 for enclosure dimensions).


| CATALOG | UPC | INPUT SUPPLY | OUTPUT | ENCLOSURE |
|---------|-------|--------------|----------|------------------------|
| NO. | CODE | (VAC) 60Hz | CONTACTS | Type |
| WH2B | 70044 | 208-250 | DPST | Metal Indoor NEMA 1 |

FEATURES

SCHEDULING: Minimum ON is setting 20 minutes with a minimum OFF setting of 75 minutes. Dial accommodates up to 12 pairs. 3 pairs of trippers supplied.

EXTERNAL MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF automatic operation then resumes.

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|----------------------|-----------------------|--------------------|
| Resistive | 208-250 | 40 A 10,000W |
| Replacement Motor | #201 (208-277) | |
| Replacement Trippers | Order #P47 for a pair | of ON/OFF trippers |

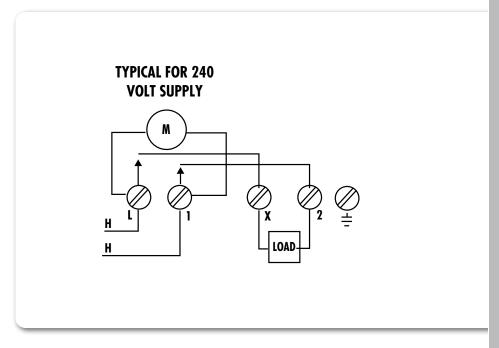


1800 SERIES

FOR MECHANICALLY HELD CONTACTORS AND LOW VOLTAGE REMOTE CONTROL MOMENTARY CONTACT TIME SWITCH

APPLICATIONS







- **■** 3-wire momentary
- lighting systems
- Remote station switching



CALIFORNIA Title 24 ASHRAE 90.1

FEATURES

SCHEDULING: Choice of three types.

24 HOUR SKIP-A-DAY: Minimum ON setting is 20 minutes with minimum OFF setting at 75 minutes. Dial accommodates up to 12 pairs of trippers. Omit operations on any day with a 7 spoke wheel marked with days of week.

ASTRONOMIC SCHEDULING: Turn ON at sunset and OFF at sunrise daily. OFF time can be set from 8:30PM to 2:30AM. Can be individually offset +/-20 or 40 minutes from both sunset and OFF times.

7 DAY SCHEDULING: Minimum ON setting is 1 hour with a minimum OFF setting of 2 hours. Minimum 8 hours between 2 OFF settings. 7 day calendar dial will accomodate up to 2 pairs on ON/ OFF trippers per day - 7 pairs are supplied.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

OPTIONAL RESERVE POWER: "L" models keep dial on time up to 16 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | TYPE |
|-------------------------|--|----------------------------|--------------------|--------------|
| 1847A | 52001 | 120 | SPDT Momentary | 24 Hour |
| 1848A | 52014 | 208-277 | SPDT Momentary | 24 Hour |
| 1847AZ* | ** | 120 | SPDT Momentary | Astronomic |
| 1847AW | 52005 | 120 | SPDT Momentary | 7 Day |
| WITH RESER | VE POWER | | | |
| 1847AL | 52006 | 120 | SPDT Momentary | 24 Hour |
| 1847AZL* | ** | 120 | SPDT Momentary | Astronomic |
| 1847AWL | 52010 | 120 | SPDT Momentary | 7 Day |
| Replacement Trippers | For 24 hour models order #P49 for a pair ON/OFF per dial. Additional ON/OFF trippers per dial order #P47. 3 omitting screws #53005 supplied. 7 day models order #P69 for 7 pairs of ON/OFF trippers. | | | |
| Replacement Motor | #101 | (120V) & #201 (208-27 | 7V). For "L" model | s #36 (120V) |

^{*}Add degrees latitude to complete number (18, 30, 34, or 42).



^{**}Consult factory for UPC number.

INPUT VOLTAGE: 120VAC or 208-277VAC, 60Hz,

varies by model.

TIMING ACCURACY: Line frequency.
TERMINAL RANGE: #12 - #22AWG.


OPERATING TEMPERATURE: -40° to 165°F (-40° to +74°C).

POWER CONSUMPTION: 3 watts, 5 watts for

"L" models maximum.

ENCLOSURE: NEMA 1 Metal with lockable hasp (see page 557 for enclosure dimensions).

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 24-277 | 10A |
| Pilot Duty | 24-277 | 360VA |

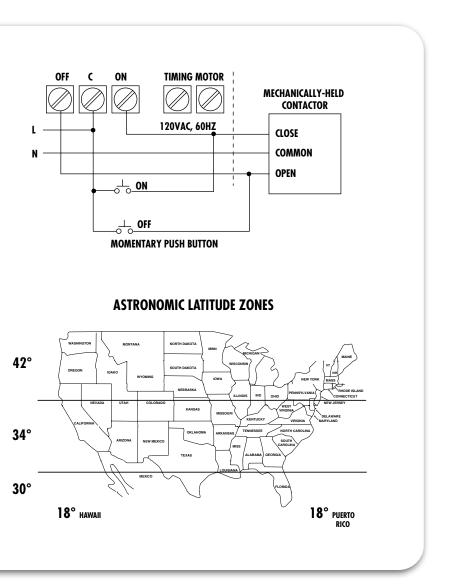

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

W SERIES DIFFERENT SCHEDULES EACH DAY 7 DAY TIME SWITCH

APPLICATIONS









- Air conditioning
- Display lighting
- Ventilating systems
 - Lighted signage
 - Storefront lighting



FEATURES

SCHEDULING: Minimum ON setting is 1 hour with a minimum OFF setting of 2 hours. Minimum 8 hours between 2 OFF settings. Models W400A and W402A offer minimum ON/OFF settings of $3\frac{1}{2}$ hours. 7 day calendar dial accommodates up to 2 pairs of ON/OFF trippers per day -7 pairs are supplied.

SKIP-A-DAY: Omit operations on any day.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF automatic operation then resumes.

OPTIONAL RESERVE POWER: "L" models keep dial on time up to 24 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE |
|-------------------------|-------------|----------------------------|--------------------|--------------------------------|
| W100 | 30001 | 120 | SPST | |
| W120 | 33001 | 120 | SPDT | |
| W200 | 31001 | 120 | DPST | Maral Indian |
| W202 | 31011 | 208-277 | DPST | Metal Indoor NEMA 1 |
| W220 | 34001 | 120 | DPDT | |
| W222 | 34011 | 208-277 | DPDT | |
| W300 | 32001 | 120 | 3PST | |
| W300-0 | 32003 | 120 | 3PST | Metal Indoor/Outdoor NEMA 3 |
| W302 | 32002 | 208-277 | 3PST | |
| W400B* | 35003 | 120 | 4PST | Metal Indoor NEMA 1 |
| W402B* | 35004 | 208-277 | 4PST | |
| WITH RESER | VE POWER | | | |
| W220L | 39009 | 120 | DPDT | |
| W222L | 39010 | 208-277 | DPDT | |
| W300L | 39005 | 120 | 3PST | Metal Indoor NEMA 1 |
| W302L | 39006 | 208-277 | 3PST | |
| W400BL* | 39008 | 120 | 4PST | |
| Replacement Trippers | | Order #P69 for 7 pa | irs of ON/OFF | trippers |
| Replacement | #101 (120 | V) & #201 (208-277V |). For "L" mode | els order #36 (120V) |

Motor and #46 (208-277V).

*UL Listed only.



INPUT VOLTAGE: 120 or 208-277VAC, 60Hz, varies

by model.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).


POWER CONSUMPTION: 3 watts, 5 watts for "L"

models maximum.

ENCLOSURE: Indoor NEMA 1 Metal with lockable hasp. Other enclosures include metal Indoor/Outdoor NEMA 3 with suffix "0" (see page 557 for enclosure dimensions).

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 120 -277 | 40A |
| Resistive | 120 -277 | 40A |
| Tungsten | 120 | 40A |
| Ballast | 120-277 | 20A |
| Pilot Duty | 120 -277 | 1000VA |
| Motor | 120 240 | 2HP 5HP |

277VAC Single Phase

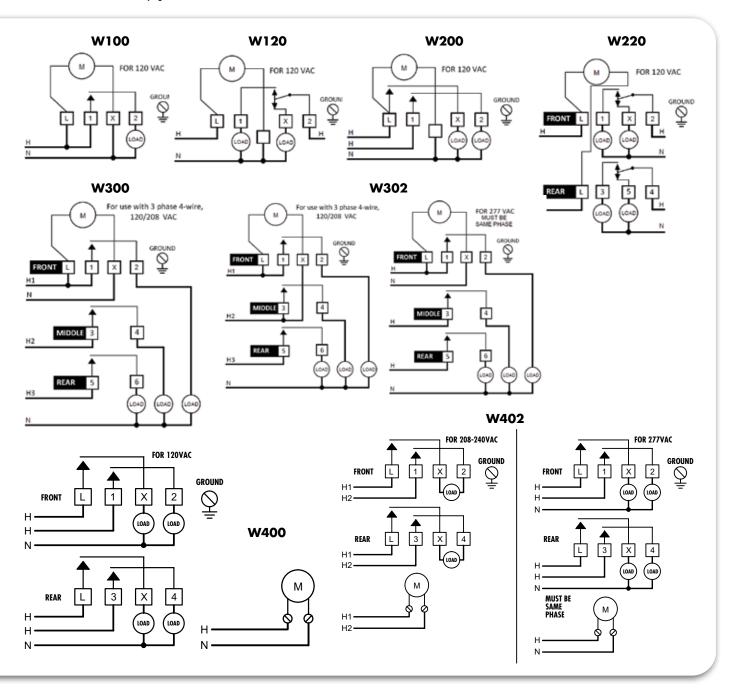

T900 SERIES

PHOTOELECTRIC & 7 DAY CONTROL COMBO DIFFERENT SCHEDULES EACH DAY RESERVE POWER STANDARD 2 & 3 CIRCUIT CONTROL CENTERS

APPLICATIONS

- Parking lot lighting
- HVAC
- Display lighting
- Security lighting
 - Lighted signage
 - Storefront lighting



FEATURES

SCHEDULING:

CIRCUIT 1: ON automatically at dusk, OFF at individual preset times each day, including skipping days when desired. Unit can be set to turn ON before dawn for early morning lighting.

CIRCUIT 2: ON at dusk, OFF at dawn automatically, daily.

CIRCUIT 3: Individual daily ON and OFF settings at desired times, including skipping any desired day or days Minimum ON is setting 1 hour with a minimum OFF setting of 2 hours. Minimum 8 hours between 2 OFF settings. 7 day calendar dial will accommodate up to 2 pairs of ON-OFF trippers per day — 7 pairs are supplied.

SKIP-A-DAY: Omit operations on any day.

MANUAL BY-PASS SWITCHES: Single pole, 20 Amps — one per circuit. Factory pre-wired to terminal strip. ON/OFF/AUTO positions for each circuit is independent — will not disturb automatic settings.

RESERVE POWER: Standard feature on all models keep dial on time up to 24 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE | |
|------------------------------|--------------------------------------|----------------------------|--------------------|---|--|
| T920L | 41033 | 120 | 2 SPDT | Metal Indoor NEMA 1 | |
| T920L-E | 41034 | 120 | 2 SPDT | Metal Indoor NEMA 1 with switch access | |
| T920L-0 | 41035 | 120 | 2 SPDT | Metal Indoor/outdoor NEMA 3 | |
| T930L | 41055 | 120 | 3 SPDT | Metal Indoor NEMA 1 | |
| T930L-E | 41056 | 120 | 3 SPDT | Metal Indoor NEMA 1 with switch access | |
| T930L-0 | 41057 | 120 | 3 SPDT | Metal Indoor/outdoor NEMA 3 | |
| Replacement Trippers | #P69 for 7 pairs of ON/OFF trippers. | | | | |
| Replacement Motor | #36 (120V) | | | | |
| Replacement Bypass Switch | #66061 | | | | |

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 120/277 | 20A |
| Motor | 120 240 | 1HP 2HP |

NOTE: All models are designed to control a contactor circuit and are not recommended for direct switching of most lighting loads.



INPUT VOLTAGE: 120 or 208-277VAC, 60 Hz,

varies by model.

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14AWG.


OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).


POWER CONSUMPTION: 5 watts maximum.

ENCLOSURE: Indoor NEMA 1 Metal with lockable hasp. Other enclosures include cover for access to by-pass switches with suffix "E" or Indoor/Outdoor NEMA 3 metal with suffix "O" (see page 557 for enclosure dimensions).

T920L ONLY CIRCUITS 1 AND 2 ARE INCLUDED IN T920L

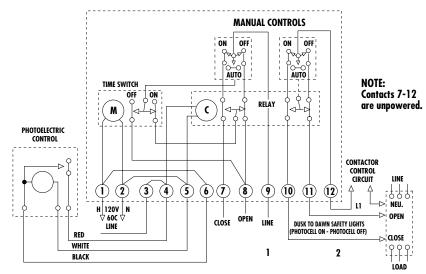

T930L ALL 3 CIRCUITS ARE INCLUDED IN T930L

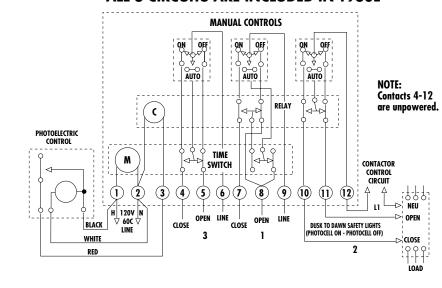

NOTE 1: All models designed to control mechanically-held and magnetic contactors, when wired in accordance with manufacturers recommendations. Contacts are unpowered control circuits rated for 24-277V contactor coils. See notes on wiring schematics.

NOTE 2: For momentary Contact of contactor coils, use TORK Model SMC-3D, in our Digital Controls Catalog.

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

TW SERIES

DIFFERENT SCHEDULES EACH DAY MANUAL BYPASS SWITCHES RESERVE POWER STANDARD 7 DAY TIME SWITCH

APPLICATIONS

- Heating
- Air conditioning
- Display lighting
- Ventilating systems
 - Lighted signage
 - Storefront lighting



FEATURES

SCHEDULING: Minimum ON setting is 1 hour with a minimum OFF setting of 2 hours. Minimum 8 hours between 2 OFF settings. 7 day calendar dial accommodates up to 2 pairs of ON-OFF trippers per day - 7 pairs are supplied.

SKIP-A-DAY: Omit operations on any day.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

MANUAL BY-PASS SWITCHES: Single pole, 20 Amps — one per circuit. Factory pre-wired to terminal strip. ON/OFF/AUTO positions for each circuit is independent — will not disturb automatic settings.

RESERVE POWER: Standard feature on all models keep dial on time up to 24 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE |
|------------------------------|-------------|----------------------------|--------------------|---|
| TW-220L | 39013 | 120 | DPDT | Metal Indoor NEMA 1 |
| TW-220L-E | 39021 | 120 | DPDT | Metal Indoor NEMA 1 with switch access |
| TW-222L | 39014 | 208-277 | DPDT | Metal Indoor NEMA 1 |
| TW-300L | 39015 | 120 | 3PST | Metal Indoor NEMA 1 |
| TW-302L | 39016 | 208-277 | 3PST | Metal Indoor NEMA 1 |
| Replacement Trippers | | Order #P69 for 7 p | pairs of ON/OFF | trippers. |
| Replacement Motor | | #36 (120V) | & #46 (208-277 | V) |
| Replacement Bypass Switch | #66061 | | | |

ASHRAE 90.1

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 120/277 | 20A |
| Motor | 120 240 | 1HP 2HP |

NOTE: All models are designed to control a contactor circuit and are not recommended for direct switching of most lighting loads.



INPUT VOLTAGE:

120 or 208 - 277VAC, 60Hz, varies by model.

TIMING ACCURACY: Line frequency.


TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).


POWER CONSUMPTION: 5 watts maximum.

ENCLOSURE: Indoor NEMA 1 Metal with lockable hasp (see page 557 for enclosure dimensions).

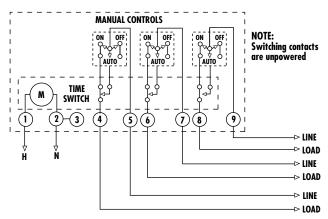

TW300L

When single line source is used, jumper terminals 1-5-7-9 and connect all commons to terminals 2 and 3.

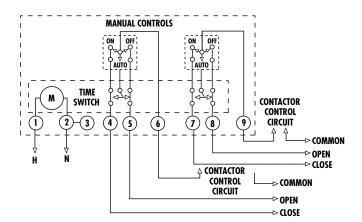

TW220L

Wiring shown is for mechanically-held contactors. Use CLOSE terminal only for magnetically-held contactors and to control direct loads not exceeding 2000 watts.

For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

TZ SERIES SUNSET MANUAL BYPASS SWITCHES RESERVE POWER STANDARD ASTRONOMIC TIME SWITCH

APPLICATIONS

- Schools
- Industrial yards
- Shop windows
- Parking lots
- Highway signs
- Bridges



FEATURES

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Turn ON at sunset and OFF at sunrise daily. OFF time can be set from 8:30PM to 2:30AM. Can be individually offset +/- 20 or 40 minutes from both sunset and OFF times. Available from 18° - 45° northern latitudes.

SKIP-A-DAY: Omit operations on any day with a 7 spoke wheel marked with days of the week. 3 omitting screws included.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

MANUAL BYPASS SWITCHES: Single pole, 20 Amps - one per circuit. Factory pre-wired to terminal strip. ON/OFF/AUTO positions for each circuit is independent, will not disturb automatic settings.

RESERVE POWER: Standard feature on all models keep dial on time up to 24 hours during power outage.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE | | |
|------------------------------|--|----------------------------|--------------------|--------------------------------|--|--|
| TZ220L* | ** | 120 | DPDT | Metal Indoor NEMA 1 | | |
| TZ220L-0* | ** | 120 | DPDT | Metal Indoor/outdoor NEMA 3 | | |
| TZ222L* | ** | 208 - 277 | DPDT | Metal Indoor NEMA 1 | | |
| TZ300L* | ** | 120 | 3PST | Metal Indoor NEMA 1 | | |
| TZ300L-0* | ** | 120 | 3PST | Metal Indoor/outdoor NEMA 3 | | |
| TZ302L* | ** | 208 - 277 | 3PST | Metal Indoor NEMA 1 | | |
| Replacement Motor | For "L" models #36 (120V) & #46 (208-277V) | | | | | |
| Replacement Bypass Switch | #66061 | | | | | |

^{*}Add degrees latitude to complete number (18, 30, 34, 38, 40, 42, or 45).

^{**}Consult factory for UPC number.

| ТҮРЕ | VOLTAGE (VAC) | CONTACT RATING |
|-----------------|------------------|-------------------|
| General Purpose | 120/277 | 20A |
| Motor | 120 240 | 1HP 2HP |

NOTE: All models are designed to control a contactor circuit and are not recommended for direct switching of most lighting loads.



INPUT VOLTAGE:

120 or 208 - 277VAC, 60Hz, varies by model.

TIMING ACCURACY: Line frequency.


TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE:

-40° to 165°F (-40° to +74°C).


POWER CONSUMPTION: 5 watts maximum.

ENCLOSURE: Indoor NEMA 1 Metal with lockable hasp and for some models enclosures is Indoor/Outdoor NEMA 3 metal with suffix "0" (see page 557 for enclosure dimensions).

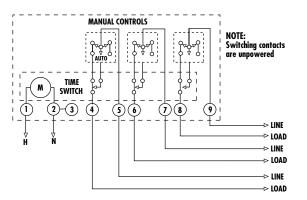

TZ300L

When single line source is used, jumper terminals 1, 5, 7, 9 and connect all commons to terminals 2 and 3.

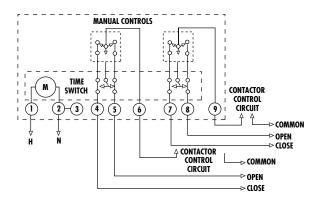


TZ220L

Wiring shown is for mechanically held contactors. Use CLOSE terminal only for magnetically held contactors and to control direct loads not exceeding 2000 watts.

ASTRONOMIC LATITUDE ZONES



For Specification Writers' Guides, please visit our website: http://www.nsiindustries.com/support-downloads/technical-library.aspx

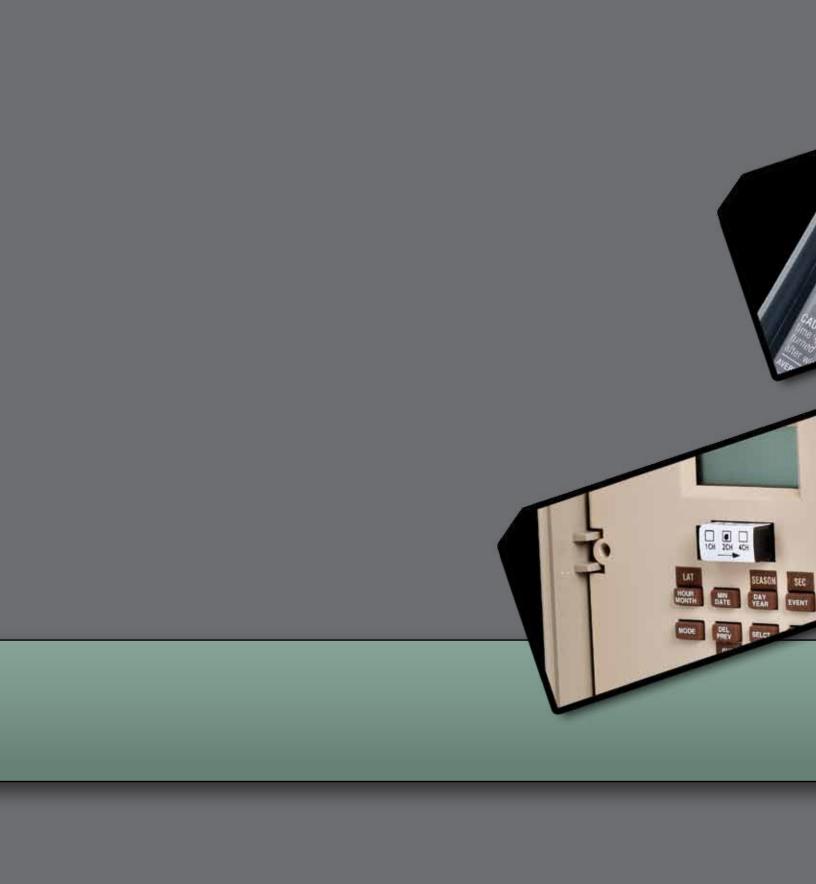



TORK® DIGITAL TIME SWITCHES

QUICK REFERENCE GUIDE

| | DTU40 | | | | | | | | | | | |
|---|-------------------------|--------------------------|-------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| | DTWH40 | EH20C | SA300 | E-PB | E | EW | EWZ | DG | DGM | DW | DWZ | DTS |
| Page No. | 447 | 449 | 451 | 453 | 453 | 455 | 457 | 459 | 459 | 461 | 461 | 463 |
| Number of Channels | 1 | 1 | 1 | 1 | 1 or 2 | 1 or 2 | 1 or 2 | 1 or 2 | 1 | 2 | 1 | 1, 2 or 4 |
| ON/OFF Set Points | 7 pair | 14 | 1 pair | 20 | 20 | 20 | 20 | 56 | 56 | 99 | 99 | 99 |
| 365 Day/7 Day Scheduling | 7 day | 7 day | 7 day | 24 hour | 24 hour | 7 day | 7 day | 7/365 day | 7/365 day | 7/365 day | 7/365 day | 7/365 day |
| Automatic Daylight Savings Adjustment | Manual | Yes | Manual | Yes |
| Leap Year | | Yes | | Yes |
| Individual Holiday Schedules | | | | | | | | | | 24 | 24 | 24 |
| Block Holiday | | Yes | | | | | | 9 | 9 | | | |
| Season Scheduling | | | | | | | | | | | | 4 |
| SunSet (Astronomic) | | | ZipSet | | | | Yes | | | | Yes | |
| Photosensor Input | | | | | | | | | | | | |
| Remote Override Input | | | | | | | | | | | | |
| Signal/Pulse Duration | | | | | | | | | | | | Yes |
| Momentary for Contactors | | | | | Option | Option | Option | | Yes | | | |
| Duty Cycle | | | | | | | | | | | | |
| 31 Day Cycle | | | | | | | | | | | | |
| Manual Override | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Clock Format | AM/PM | AM/PM | AM/PM | AM/PM | AM/PM | AM/PM | AM/PM | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 |
| Power Outage Backup | Rechargeable Battery | 4 day Super Capacitor | Battery | 4 day Super Capacitor | 4 day Super Capacitor | 4 day Super Capacitor | 4 day Super Capacitor | 7 day Super Capacitor |
| Schedule Retention without power | Battery | Permanent | Battery | Permanent |
| Staggered Start | | | | | Yes | Yes | Yes | Yes | Yes | Yes | | Yes |
| Memory Module | | | | | | | | | | | | |
| Computer Programming Software | | | | | | | | | | | | |
| Output Contacts: Amps Resistive or General Purpose | 40A | 40A | 40A | 30A | 40A | 40A | 40A | 20A | 20A | 30A | 30A | 30A |
| Contact Type: Dry Unpowered | Yes | Yes | No | Yes |
| Voltage Input AC | 120/208- 240/277 | 120-277 | 120 or 120/277 | 120 | 120-277 | 120-277 | 120-277 | 120-277 | 120-277 | 120/208- 240/277 | 120/208- 240/277 | 120/208- 240/277 |
| Other Voltage Inputs Available | | | | | | | | | | | | |



| | | | LIGHTING CONTROLS | | | CYCLE - SI | | | | |
|---|--------------------------|--------------------------|-----------------------------------|--------------------------|--------------------------|--------------------------|---------------------|--------------------------|--------------------------|---------------------|
| | DZS | DZM | ELC74/78/712 | DGU | DGUM | DGLC | DLC400 | DG | DGS | DIN |
| Page No. | 465 | 467 | 473 | 471 | 471 | 471 | 475 | 479 | 479 | 485 |
| Number of Channels | 1, 2, or 4 | 2 | 4, 8, or 12 | 1 | 1 | 1 or 2 | 4 | 1 or 2 | 1 | 1 or 2 |
| ON/OFF Set Points | 99 | 99 | 128 | 56 | 56 | 56 | 99 | 56 | 56 | 8 pair 3 pair/ch |
| 365 Day/7 Day Scheduling | 7/365 day | 7/365 day | 7/365 day | 7/365 day | 7/365 day | 7/365 day | 7/365 day | 24 Hour | 7 Day | 7 Day |
| Automatic Daylight Savings Adjustment | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | |
| Leap Year | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | |
| Individual Holiday Schedules | 24 | 24 | 26 | | | | 24 | | | |
| Block Holiday | | | 10 | 9 | 9 | 9 | | | | |
| Season Scheduling | 4 | 4 | | | | | 4 | | | |
| SunSet (Astronomic) | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | | |
| Photosensor Input | | | Yes | Yes | Yes | Yes | Yes | | | |
| Remote Override Input | | | Yes | Yes | Yes | Yes | Yes | | | |
| Signal/Pulse Duration | Yes | | Yes | | | | | Yes | Yes | |
| Momentary for Contactors | | Yes | Yes | | Yes | | | | | |
| Duty Cycle | | | Yes | | | | | Yes | Yes | |
| 31 Day Cycle | | | | | | | | Yes | | |
| Manual Override | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Clock Format | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | AM/PM |
| Power Outage Backup | 7 day Super Capacitor | 7 day Super Capacitor | 2 day Capacitor 1 year battery | 7 day Super Capacitor | 7 day Super Capacitor | 7 day Super Capacitor | 6 month battery | 7 day Super Capacitor | 7 day Super Capacitor | 8 year battery |
| Schedule Retention without power | Permanent | Permanent | Battery | Permanent | Permanent | Permanent | Permanent | Permanent | Permanent | Battery |
| Staggered Start | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | |
| Memory Module | Yes | Yes | | | | | Yes | | | |
| Computer Programming Software | Yes | Yes | | | | | Yes | | | |
| Output Contacts: Amps Resistive or General Purpose | 30A/20A | 30A | 20 A | 20A | 20A | 20A | 30A | 20A | 20A | 16A |
| Contact Type: Dry Unpowered | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Voltage Input AC | 120/208- 240/277 | 120/208- 240/277 | 24/120/208 240/ 277 | 120-277 | 120-277 | 120-277 | 120/208- 240/277 | 120-277 | 120-277 | 120 |
| Other Voltage Inputs Available | 12VDC 24VAC | | 24VAC All Models | | | | | 12VDC 24VAC | 24VAC | |

DT SERIES AUTOMATIC VOLTAGE DETECTION

7 DAY TIME SWITCH AND

WATER HEATER TIMER



APPLICATIONS



- **■** DTU40
- Pumps, motors, fans
- Signs and lighting
- Water heaters
 - Heating and air conditioning
 - DTWH40
 - Water Heaters
 - This timer turns OFF when rates are high and turns OFF when no one is home.





Avoid utility peak rates Turn off when not needed

FEATURES

SCHEDULING: 7 ON & OFF pairs of set points for individual programs on each day of the week. Minimum setting is 1 minute.

DAYLIGHT SAVING: Manual button push for one hour adjustment.

MANUAL OVERRIDE: Until the next

regularly scheduled ON or OFF, automatic operation then resumes.

EXTERNAL MANUAL OVERRIDE: DTWH40 only on clear door. Override without opening

RANDOM MODE: Varies ON and OFF times to

create "lived-in" look when away.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Battery retains time and schedule.

| CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | DRY CONTACTS (UNPOWERED) |
|----------------|-------------|-------------------------------|--------------------|--------------------------|
| DTU40 | 24004 | 120/208-240/277 | 1 | DPDT |
| DTWH40 | 24005 | 120/240 | 1 | DPDT |

| TYPE | VOLTAGE | RA | TING |
|-----------------|------------|------------------------------------|--|
| 1112 | (VAC) | NO | NC |
| Resistive | 120-277 | 40A | 30A |
| Inductive | 120-277 | 30A | 15A |
| Ballast | 120 277 | 30A 20A | 10A 10A |
| Tungsten | 120 | 15A | |
| Motor | 120 240 | 1HP/30FLA/90LRA 2HP/20FLA/60LRA | 1/4HP/12FLA/30LRA 1/2HP/12FLA/33LRA |
| Pilot duty | 120 240 | 720VA 720VA | 290VA 260VA |
| Resistive | 28VDC | 20A | |
| Max above 104°F | 120-277 | 30A | |



INPUT VOLTAGE: 120/208-240/277 VAC, 50/60 Hz (auto detection). DTWH40 is 120/240VAC 50/60Hz (auto detection).


TERMINAL RANGE: #8 - #18AWG.

OPERATING TEMPERATURE:

-31°F to 116°F (-35°C to +47°C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: DTU40 polycarbonate Indoor/ Outdoor NEMA 3R. DTWH40 polycarbonate indoor NEMA 1 enclosure with clear cover. Both with lockable hasp (see page 557 for enclosure dimensions).

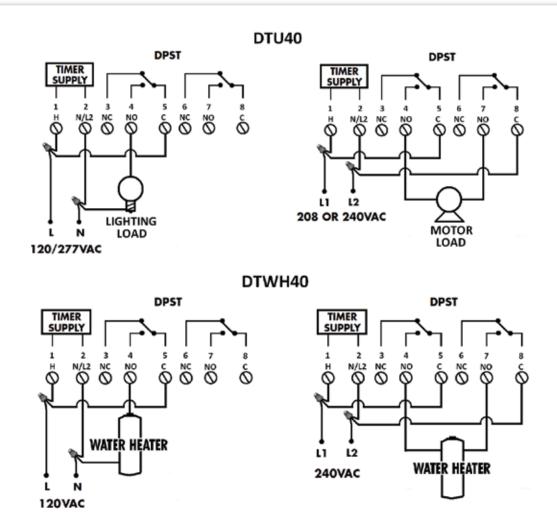



NEW!

responsible energy

Avoid utility peak rates Turn off when not needed

PRE PROGRAMMED FOR EASY SET-UP

APPLICATIONS



Electric water heaters for residential or commercial.

FEATURES

PRE-PROGRAMMED: Unit preset for daily OFF time from 12:00am to 4:00am daily.

SUMMER LOAD SHED: Additional OFF time from 3:00pm to 7:00pm during Summer time (6/1 to 9/30) annually to avoid peak usage.

SCHEDULING: Additional 14 ON or OFF set points for individual programs for each day of the week. Minimum setting 1 minute.

HOLIDAY SCHEDULE: Extend to the load shed date throughout the year or preset extra load shed schedules while on vacation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF. Override during pre-programed times limited to 60 minutes per day.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Lithium battery. Non-rechargeable with 8 year expected life.

| CATALOG | UPC | INPUT SUPPLY | OUTPUT |
|---------|-------|---------------|----------|
| NO. | CODE | (VAC) 50-60Hz | CONTACTS |
| EH20C | 82314 | 120-277 | DPST |

| ТҮРЕ | VOLTAGE (VAC) | RATING |
|-----------------|-----------------------|--------------------------|
| General Purpose | 120-277 | 40A |
| Inductive | 120-277 | 40A |
| Pilot duty | 120-277 | 720VA |
| Motor | 120 208 240-277 | 1 HP 1 1/2 HP 2 HP |



TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE: 120-277VAC, 50/60Hz

(automatic detection).

TERMINAL RANGE: #8 - #16AWG.

OPERATING TEMPERATURE:


 -40° to $+149^{\circ}$ F (-40° to $+65^{\circ}$ C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: Indoor/Outdoor NEMA 3R

Polycarbonate with locking hasp.

(see page 557 for enclosure dimensions).

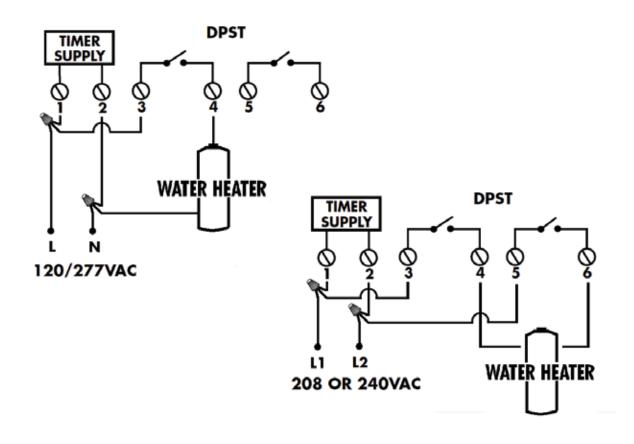

SA300 SERIES DIGITAL TIME SWITCH



AREA CODE ENTRY FOR FAST SET-UP

APPLICATIONS



Outdoor lighting

Electric motors

Indoor lighting or signs

FEATURES

ZIP-SET: Fast and easy. Just enter area code and timer adjusts to your time with preset program of Sunset ON and time off program.

SCHEDULING: One On/Off set point pair is active at a time. Only one schedule may be active at a time: Schedule 1, Schedule 2, a combination of 1 & 2, or ZipSet $^{\text{TM}}$. Day combinations for 7-5-2 speed programming.

MANUAL DAYLIGHT SAVING:

Simple switch adjustment.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

RANDOM FEATURE: Varies on time +/-90 minutes each day for lived in look.

CLOCK FORMAT: AM/PM. **POWER OUTAGE BACKUP:** Replaceable batteries

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS |
|----------------|-------------|----------------------------|--------------------|
| SA300 | 16546 | 120 | SPST |
| SA306 | 16549 | 120 | DPST |
| SA400 | 16552 | 120/277 | SPST |

| ТҮРЕ | VOLTAGE (VAC) 60Hz | RATING |
|--------------|-----------------------|---------|
| Resistive | 120* | 40A |
| Inductive | 120* | 40A |
| Tungsten | 120* | 40A |
| Incandescent | 120* | 40A |
| Motor | 120 | 1 1/2HP |
| *SA400 | 120/277 | |

INPUT VOLTAGE: 120VAC, 60Hz SA400 120/277VAC, 60Hz


TERMINAL RANGE: #8 - #16AWG.

OPERATING TEMPERATURE:

 32° to $+100^{\circ}$ F (0° to $+37^{\circ}$ C).

POWER CONSUMPTION: 5VA Max.

ENCLOSURE: Indoor Metal with locking hasp. SA400 Outdoor Metal with locking hasp. (see page 557 for enclosure dimensions).

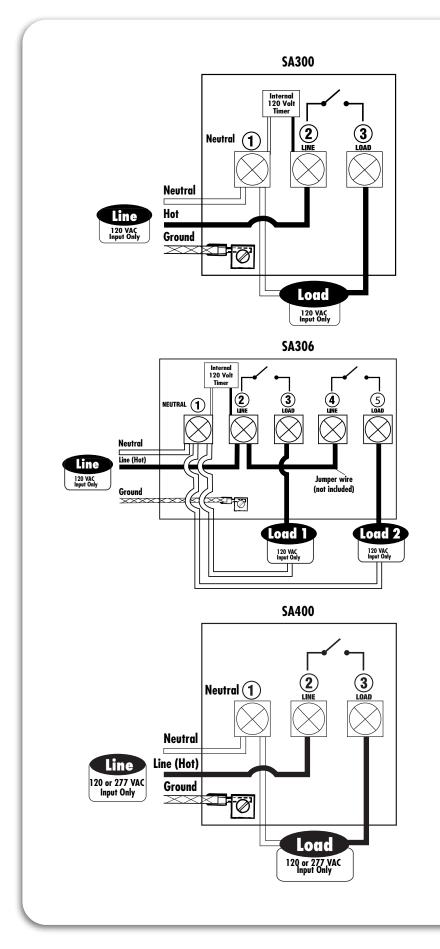



c (UL) us

TORK

TORK

BACKUP WITHOUT BATTERY, ECO FRIENDLY!

APPLICATIONS

- **-■** Signs
- Air conditioning
- Lighting
- Sump pumps
 - Ventilating fans

FEATURES

SCHEDULING: 20 ON/OFF set points repeat each day. Minimum setting 1 minute.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 4 days of real time backup.

MOMENTARY OPTION: For mechanically held contractors: Model E201B only. Configure with simple jumper change for single-channel momentary operation.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | OUTPUT DRY CONTACTS |
|----------------|-------------|-------------------------------|--------------------|------------------------|
| E101B | 82401 | 120-277 | 1 | SPST |
| E103B | 82411 | 120-277 | 1 | DPST |
| E120B | 82406 | 120-277 | 1 | SPDT |
| E201B | 82466 | 120-277 | 2 | SPST |
| E101PB | 82461 | 120 | 1 | SPST |

| | E101B, E10 | 3B, E201B | E12 | 20B | E1011 | PB |
|-----------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------|----------------|
| ТҮРЕ | VOLTAGE (VAC) | RATING NO | RAT NO | ING NC | VOLTAGE (VAC) | RATING NO |
| General Purpose | 120-277 | 40A | 30A | 30A | 120/240 277 | 30A 12A |
| Inductive | 120-277 | 40A | 30A | 30A | 120/240 277 | 30A 12A |
| Ballast | 120 208-277 | 30A 20A | 30A 20A | 10A 10A | 120 277 | 20A 6A |
| Tungsten | 120 | 15A | 15A | 2A | 120 | 5A |
| Pilot Duty | 120-277 | 720VA | 720VA | 720VA | 120-240 277 | 470VA 690VA |
| Motor | 120 208 240-277 | 1HP 1 1/2HP 2HP | 1HP 1 1/2HP 2HP | 1HP 1 1/2HP 2HP | 120 240 | 1HP 2HP |
| Resistive | 28VDC | 30A | 30A | 30A | 28VDC | 20A |



TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE:

E SERIES

120 - 277VAC, 50/60Hz (automatic detection).

E-PB

120VAC, 50/60Hz.

TERMINAL RANGE: #8 - #16AWG.


OPERATING TEMPERATURE:

-40° to +149°F (-40° to +65°C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: Polycarbonate Indoor/Outdoor NEMA 3R is standard with lockable hasp (see page

557 for enclosure dimensions).

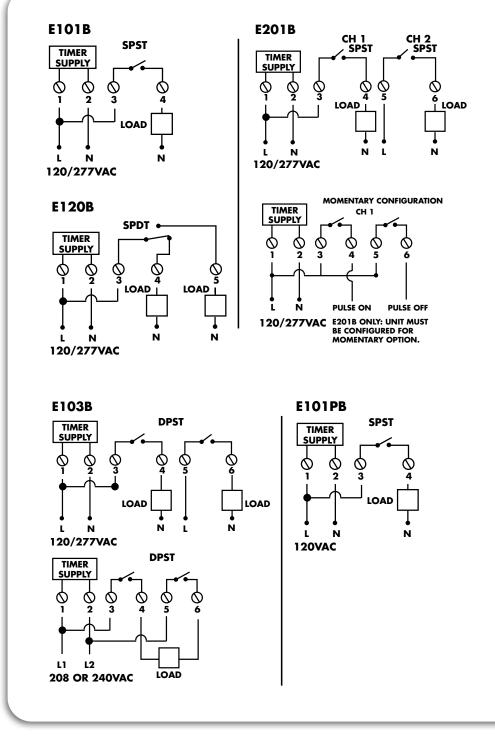

For Specification Writers' Guides:

Please visit our website:



TORK c(UL)us **CALIFORNIA Title 24** ASHRAE 90.1

AUTOMATIC DST SAVES TIME CHANGES TWICE A YEAR!

APPLICATIONS

- Outdoor signs
- Lighting security
- Heating and air conditioning

FEATURES

SCHEDULING: 20 ON & OFF set points for individual programs for each day of the week. Minimum setting is 1 minute.

DAYLIGHT SAVING: Automatic (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 4 days of real time backup.

MOMENTARY OPTION: For mechanically held contractors: Model EW201B only. Configure with simple jumper change for single-channel momentary operation.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | OUTPUT DRY CONTACTS |
|----------------|-------------|-------------------------------|--------------------|------------------------|
| EW101B | 82431 | 120-277 | 1 | SPST |
| EW103B | 82441 | 120-277 | 1 | DPST |
| EW120B | 82436 | 120-277 | 1 | SPDT |
| EW201B | 82467 | 120-277 | 2 | SPST |
| EW101B-Y | 82249 | 120-277 | 1 | SPST |
| EW103B-C | 82253 | 120-277 | 1 | DPST |
| EW103B-Y | 82255 | 120-277 | 1 | DPST |
| EW120B-C | 82437 | 120-277 | 1 | SPDT |
| EW120B-Y | 82261 | 120-277 | 1 | SPDT |
| EW201B-Y | 82299 | 120-277 | 2 | SPST |

| | EW101B, EW1 | | EW | 120B | |
|-----------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| TYPE | VOLTAGE (VAC) | RATING NO | VOLTAGE (VAC) | RAT No | ING NC |
| General Purpose | 120-277 | 40A | 120-277 | 30A | 30A |
| Inductive | 120-277 | 40A | 120-277 | 30A | 30A |
| Ballast | 120 208-277 | 30A 20A | 120 208-277 | 30A 20A | 10A 10A |
| Tungsten | 120 | 15A | 120 | 15A | 2A |
| Pilot Duty | 120-277 | 720VA | 120-277 | 720VA | 720VA |
| Motor | 120 208 240-277 | 1HP 1 1/2HP 2HP | 120 208 240-277 | 1HP 1 1/2HP 2HP | 1HP 1 1/2HP 2HP |
| Resistive | 28VDC | 30A | 28VDC | 30A | 30A |



TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE:

120 - 277VAC, 50/60Hz (automatic detection).


TERMINAL RANGE: #8 - #16AWG.


OPERATING TEMPERATURE:


-40° to +149°F (-40° to +65°C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: Polycarbonate Indoor/Outdoor NEMA 3R. Suffix -C plastic clear cover Indoor/Outdoor NEMA 3R. Suffix -Y metal Indoor enclosure NEMA 1. All with lockable hasp (see page 557 for enclosure dimensions).





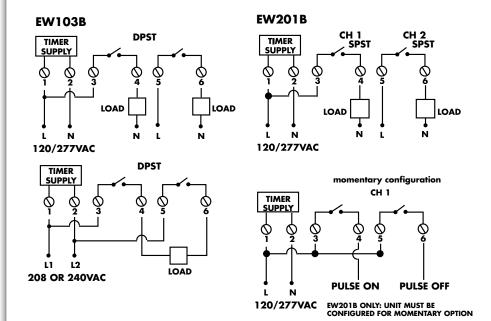

For Specification Writers' Guides:

Please visit our website:



PREFERRED FOR OUTDOOR LIGHTING!

FEATURES

SCHEDULING: 20 ON & OFF set points for individual programs for each day of the week. Minimum setting is 1 minute.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Adjustable 10° - 60° Northern or Southern latitudes. Can be individually offset +/-1-240 minutes from both sunset and sunrise times.

DAYLIGHT SAVING: Automatic (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 4 days of real time backup.

MOMENTARY OPTION: For mechanically held contactors: Model EWZ201 only. Configure with simple jumper change for single-channel momentary operation.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | OUTPUT DRY CONTACTS |
|----------------|-------------|-------------------------------|--------------------|------------------------|
| EWZ101 | 82470 | 120-277 | 1 | SPST |
| EWZ103 | 82473 | 120-277 | 1 | DPST |
| EWZ120 | 82471 | 120-277 | 1 | SPDT |
| EWZ201 | 82472 | 120-277 | 2 | SPST |
| EWZ101-MB | 82263 | 120-277 | 1 | SPST |
| EWZ103-MB | 82269 | 120-277 | 1 | DPST |
| EWZ120-MB | 82275 | 120-277 | 1 | SPDT |
| EWZ201-MB | 82281 | 120-277 | 2 | SPST |

| | EWZ101,EWZ1 | 103, EWZ201 | EW | Z120 | |
|-----------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| ТҮРЕ | VOLTAGE (VAC) | RATING NO | VOLTAGE (VAC) | RATI NO | ING NC |
| General Purpose | 120-277 | 40A | 120-277 | 30A | 30A |
| Inductive | 120-277 | 40A | 120-277 | 30A | 30A |
| Ballast | 120 208-277 | 30A 20A | 120 208-277 | 30A 20A | 10A 10A |
| Tungsten | 120 | 15A | 120 | 15A | 2A |
| Pilot Duty | 120-277 | 720VA | 120-277 | 720VA | 720VA |
| Motor | 120 208 240-277 | 1HP 1 1/2HP 2HP | 120 208 240-277 | 1HP 1 1/2HP 2HP | 1HP 1 1/2HP 2HP |
| Resistive | 28VDC | 30A | 28VDC | 30A | 30A |



TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE:

120 - 277VAC, 50/60Hz (automatic detection).

TERMINAL RANGE: #8 - #16AWG.


OPERATING TEMPERATURE:


-40° to +149°F (-40° to +65°C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: Polycarbonate Indoor/Outdoor NEMA 3R is standard with lockable hasp (see page 557 for enclosure dimensions). Suffix -MB without enclosure and includes mounting bracket.

OPTIONS: Suffix -Q Quartz crystal timing. Maintains accurate timing where 50 or 60 Hz is not consistent such as on-site generator produced power. Consult factory for minimum order size.

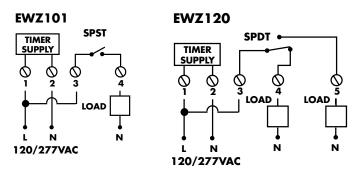

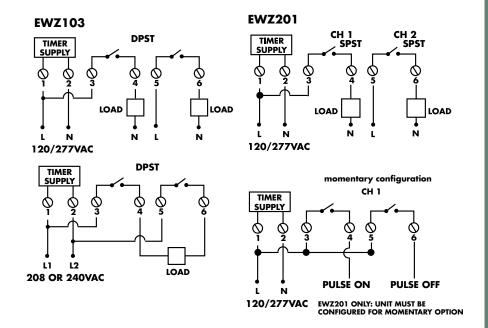

For Specification Writers' Guides:

Please visit our website:



c (VL) us

CALIFORNIA Title 24
ASHRAE 90.1

HOLIDAY PROGRAMMING FOR MORE SAVINGS!

APPLICATIONS

- Indoor/Outdoor lighting
- HVAC equipment
- School warning and other
- ─**-** Traffic lights
 - Water heaters in offices, churches and factories

FEATURES

SCHEDULING: 56 ON & OFF set points provide individual programs for each day of the week. Minimum setting is 1 minute.

MOMENTARY CONTACT: DGM100A has 2 second contact closures for ON & OFF control of mechanically held contactors or latching relays.

BLOCK HOLIDAY: 9 holiday blocks can be set for individual days or for duration of any number of days.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM or 24 Hour

format.

POWER OUTAGE BACKUP: Permanent schedule retention is provided. Supercapacitor provides 7 days of real time back up.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | OUTPUT CONTACTS |
|----------------|-------------|-------------------------------|--------------------|--------------------|
| DG100A | 82201 | 120-277 | 1 | DPDT |
| DG200A | 82209 | 120-277 | 2 | SPDT |
| DGM100A | 82210 | 120-277 | 1 | SPDT Momentary |
| DG100A-Y | 82221 | 120-277 | 1 | DPDT |
| DGM100A-Y | 82222 | 120-277 | 1 | SPDT Momentary |

| TYPE | VOLTAGE | RAT | ING |
|------------|------------|------------|----------------|
| | (VAC) | NO | NC |
| Resistive | 24-277 | 20A | 10A |
| Ballast | 120-277 | 20A | 10A |
| Tungsten | 120 | 15A | |
| Pilot Duty | 120 240 | 720VA | 290VA 360VA |
| Motor | 120 240 | 1HP 2HP | 1/4HP 1/2HP |
| Resistive | 28VDC | 20A | 10A |

TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE:

120 - 277VAC, 50/60Hz (automatic detection).


TERMINAL RANGE: #12 - #18AWG.

OPERATING TEMPERATURE:


-31° to +131°F (-35° to +55°C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R. Suffix -Y metal indoor enclosure NEMA 1. All with lockable hasp (see page 557 for enclosure dimensions).

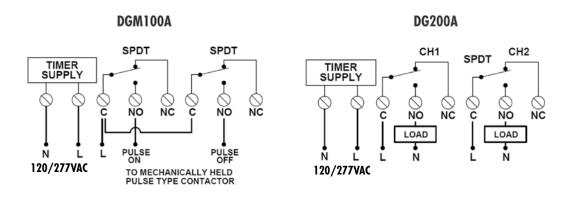

DG100A

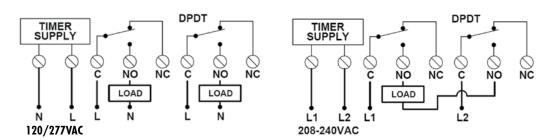

For Specification Writers' Guides:

Please visit our website:

DW SERIES MULTIPURPOSE CONTROLS 1 OR 2 CHANNEL 365 / 7 DAY ADVANCE TIME SWITCHES





APPLICATIONS



- 1 CHANNEL
- Outdoor lighting
- Security lighting
- ─**■** Parking lot lighting
 - Canopy lighting
 - 2 CHANNEL
 - HVAC equipment
- ─**■** Interior lighting
- Electric motors
- Refrigerator defrost control: condensers, heaters.



SCHEDULING: 99 ON & OFF set points allow individual programs for each day of the week at a minimum 1 minute apart.

SunSet ASTRONOMIC (DWZ100B only):

Adjusts daily to changes in sunset times.

Adjustable 10°- 60° Northern or Southern latitudes. Can be individually offset +/- 1 to 240 minutes from both sunset and sunrise times.

HOLIDAYS: 1 to 24 individual dates.

DAYLIGHT SAVING: Automatic adjustment

(can be omitted).

LEAP YEAR: Automatic Compensation scheduled ON or OFF, automatic operation then resumes.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM or 24 Hour Format

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 7 days of real time backup.

| ı | CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | DRY CONTACTS (UNPOWERED) |
|---|----------------|-------------|-------------------------------|--------------------|--------------------------|
| | DWZ100B | 82189 | 120/208-240/277 | 1 | SPDT |
| | DW200B | 82190 | 120/208-240/277 | 2 | SPDT |
| | DW200B-0 | 82231 | 120/208-240/277 | 2 | SPDT |

| TVDF | VOLTAGE | RAT | ING |
|-----------------|----------------|------------|------------|
| TYPE | (VAC) | NO | NC |
| General Purpose | 24-277 | 30A | 30A |
| Ballast | 120 277 | 30A 20A | 10A 10A |
| Tungsten | 120-277 | 15A | 2 A |
| Pilot Duty | 120-277 | 720VA | 720VA |
| Motor Load | 120 208-277 | 1HP 2HP | 1HP 2HP |
| Resistive | 28VDC | 30A | 30A |



TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE:

120/208-240-277VAC, 50/60Hz.

TERMINAL RANGE:


#14 - #16AWG for line input. #12 - #16AWG load outputs.

OPERATING TEMPERATURE:

-40° to +158°F (-40° to 70°C).

POWER CONSUMPTION: 5VA Max.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R. Suffix -O metal Indoor/Outdoor NEMA 3. All with lockable hasp (see page 557 for enclosure dimensions).

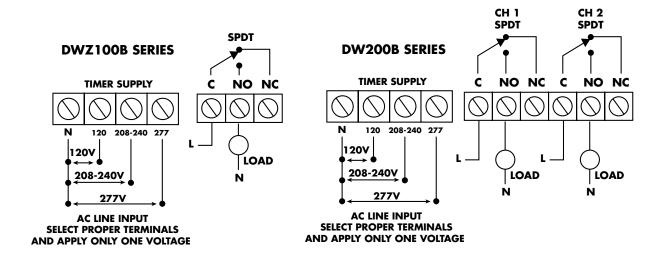

For Specification Writers' Guides:

Please visit our website:



MAINTAINED AND SIGNAL TIMING!

APPLICATIONS

- Indoor and outdoor lighting
- Heating and air conditioning
- Security systems
- Horns and bells
- Low voltage lighting
- Misting and spraying
 - Roof cooling
- Clock correction systems
 - Process functions





FEATURES

SCHEDULING: 99 ON/OFF set points allow individual programs for each day of the week at a minimum 1 minute apart.

SEASONS: 1 to 4 with different daily schedules which can wrap around into the new year.

HOLIDAYS: 1 to 24 individual dates.

SIGNAL/PULSE DURATION: 2 different settings per channel: each 1-99 seconds.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes. In signal mode, activates pulse.

CLOCK FORMAT: AM/PM or 24 Hour Format.

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 7 days of real time back up.

| CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | DRY CONTACTS (UNPOWERED) |
|----------------|-------------|-------------------------------|--------------------|-----------------------------|
| DTS100B | 82185 | 120/208- 240/277 | 1 | DPDT |
| DTS200B | 82186 | 120/208- 240/277 | 2 | SPDT |
| DTS400B | 82187 | 120/208- 240/277 | 4 | SPDT |

| | DTS100B, | | | DTS40 | | |
|-----------------|----------------|------------|------------|---------|------------|-------|
| TYPE | VOLTAGE | RAT | ING | VOLTAGE | RAT | ING |
| | (VAC) | NO | NC | (VAC) | NO | NC |
| General Purpose | 24-277 | 30A | 30A | 24-277 | 20A | 20A |
| Ballast | 120 277 | 30A 20A | 10A 10A | 120-277 | 13A | |
| Tungsten | 120-277 | 15A | 2 A | 120 | 8 A | |
| Pilot Duty | 120-277 | 720VA | 720VA | 120-277 | 720VA | 360VA |
| Motor Load | 120 208-277 | 1HP 2HP | 1HP 2HP | 120/240 | 1/2HP | 1/2HP |
| Resistive | 28VDC | 30A | 30A | - | - | - |



TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE: 120/208-277VAC,

50/60Hz.

TERMINAL RANGE:


#14 - #16AWG for line input. #12 - #16AWG load outputs.

OPERATING TEMPERATURE:

-40° to +149°F (-40° to +65°C).

POWER CONSUMPTION: 6VA Max.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R with lockable hasp (see page 557 for enclosure dimensions).

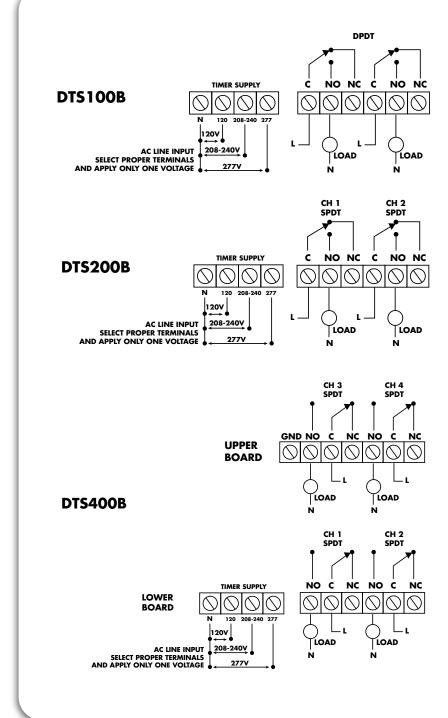

For Specification Writers' Guides:

Please visit our website:

DZS SERIES MULTIPURPOSE CONTROLS 1, 2 OR 4 CHANNEL 365 / 7 DAY ADVANCED TIME SWITCH

CALIFORNIA Title 24 ASHRAE 90.1

REMOVABLE **MEMORY MODULE FOR COMPUTER** PROGRAMMING!

APPLICATIONS



- HVAC equipment
- Horns and bells
- Interior lighting
- Electric motors
 - Outdoor lighting and signs



FEATURES

SCHEDULING: 99 ON & OFF set points allow individual programs for each day of the week at a minimum 1 minute apart.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Adjustable 10° - 60° Northern or Southern latitudes can be individually offset +/-1 to 240 minutes from both sunset and sunrise times.

SEASONS: 1 to 4 with different daily schedules which can wrap around into the new year.

HOLIDAYS: 1 to 24 individual dates.

SIGNAL/PULSE DURATION: 2 different

settings per channel: 1-99 seconds.

DAYLIGHT SAVING: Automatic adjustment

(can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes. In signal mode, activates pulse.

CLOCK FORMAT: AM/PM or 24 Hour Format.

POWER OUTAGE BACKUP: Permanent schedule retention with memory module. Supercapacitor provides 7 days of real time backup.

MEMORY MODULE: Removable MM can be programmed at any one location and inserted into another DZS series unit.

COPY FEATURE: Unit can be configured to copy program schedule to multiple memory modules.

OPTION: Memory Module Programmer with software for computer connection programming. Also allows stand alone battery operation for portable copy feature.

| CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | DRY CONTACTS (UNPOWERED) |
|----------------|-------------|-------------------------------|-----------------------------|-----------------------------|
| DZS100BP | 82182 | 120/208-240/277 | 1 | DPDT |
| DZS200BP | 82183 | 120/208-240/277 | 2 | SPDT |
| DZS400BP | 82184 | 120/208-240/277 | 4 | SPDT |
| DZS100BP-0 | 82215 | 120/208-240/277 | 1 | DPDT |
| DZS200BP-0 | 82227 | 120/208-240/277 | 2 | SPDT |
| DZS200BP-12 | 82228 | 12VDC | 2 | SPDT |
| DZS200BP-24 | 82229 | 24VAC | 2 | SPDT |
| DZS400BP-0 | 82230 | 120/208-240/277 | 4 | SPDT |
| USB-MMP | 82196 | | Memory Module Programmer | Includes software |

| | DZS100E | BP, DZS200I | BP | DZS | 400BP | |
|-----------------|------------------|-------------|------------|------------------|-----------|-----------|
| TYPE | VOLTAGE (VAC) | RAT NO | ING NC | VOLTAGE (VAC) | RAT NO | ING NC |
| General Purpose | 24-277 | 30A | 30A | 24-277 | 20A | 20A |
| Ballast | 120 277 | 30A 20A | 10A 10A | 120-277 | 13A | |
| Tungsten | 120-277 | 15A | 2 A | 120 | A8 | - |
| Motor Load | 120 208-277 | 1HP 2HP | 1HP 2HP | 120/240 | 1/2HP | 1/2 HP |
| Pilot Duty | 120-277 | 720VA | 720VA | 120-277 | 720VA | 360VA |
| Resistive | 28VDC | 30A | 30A | - | - | - |



TIMING ACCURACY: Line frequency.

INPUT VOLTAGE: 120/208-240/277VAC,

50/60Hz.

TERMINAL RANGE:

#14-#16AWG for line input. #12-#16AWG load outputs.


OPERATING TEMPERATURE:

-40° to +158°F (-40° to 70°C).

POWER CONSUMPTION:

5VA Max: DZS100/200BP. 6VA Max: DZS400BP.

ENCLOSURE: Nory I® Indoor/Outdoor NEMA 3R. Suffix -O metal Indoor/Outdoor NEMA 3. All with lockable hasp (see page 557 for enclosure dimensions).

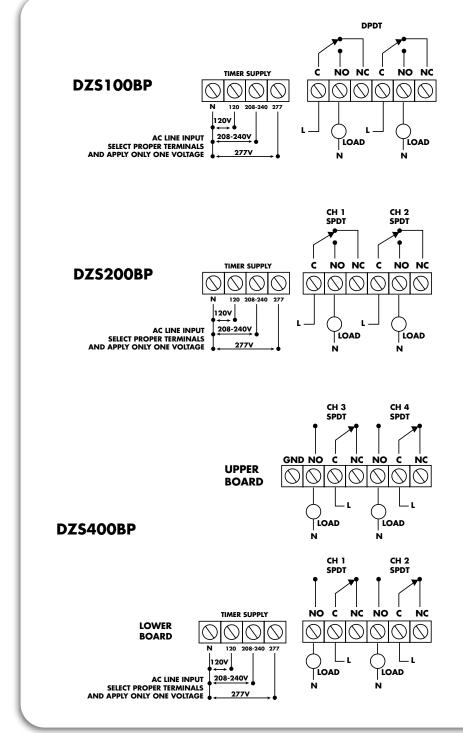

For Specification Writers' Guides:

Please visit our website:

DZM SERIES MOMENTARY OUTPUT 365 / 7 DAY ADVANCED LIGHTING CONTROL TIME **SWITCH**

APPLICATIONS





held contactors



GREAT FOR LATCHING CONTACTORS!

FEATURES

SCHEDULING: 99 ON & OFF set points

allow individual programs for each day of the week at a minimum 1 minute apart.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Adjustable 10° - 60° Northern or Southern latitudes can be individually offset +/- 1 to 240 minutes from both sunset and sunrise times.

SEASONS: 1 to 4 with different daily schedules which can wrap around into the new year.

HOLIDAYS: 1 to 24 individual dates.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON

or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM or 24 Hour Format.

POWER OUTAGE BACKUP: Permanent scheduled retention with memory module. Supercapacitor provides 7 days of real time backup.

MEMORY MODULE: Removable MM can be programmed at any one location and inserted into another DZM series unit.

COPY FEATURE: Unit can be configured to copy program schedule to multiple memory modules.

OPTION: Memory Module Programmer with software for computer connection programming. Also allows stand alone battery operation for portable copy feature.

| CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | DRY CONTACTS (UNPOWERED) |
|----------------|-------------|-------------------------------|-----------------------------|-----------------------------|
| DZM200BP | 82188 | 120/208-240/277 | 2 | SPDT Momentary |
| DZM200BP-0 | 82232 | 120/208-240/277 | 2 | SPDT Momentary |
| USB-MMP | 82196 | | Memory Module Programmer | Includes software |

| ТҮРЕ | VOLTAGE (VAC) | RATING |
|-----------------|---------------|--------|
| General Purpose | 120-277 | 20A |
| Pilot Duty | 120-277 | 720VA |



TIMING ACCURACY: Line frequency.

INPUT VOLTAGE: 120/208-240/277VAC,

50/60Hz.

TERMINAL RANGE:


#14 - #16AWG for line input. #12 - #16AWG load outputs.

OPERATING TEMPERATURE:

-40° to 158°F (-40° to +70°C).

POWER CONSUMPTION: 4VA Max.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R. Suffix -0 metal Indoor/Outdoor NEMA 3. All with lockable hasp (see page 557 for dimensions).

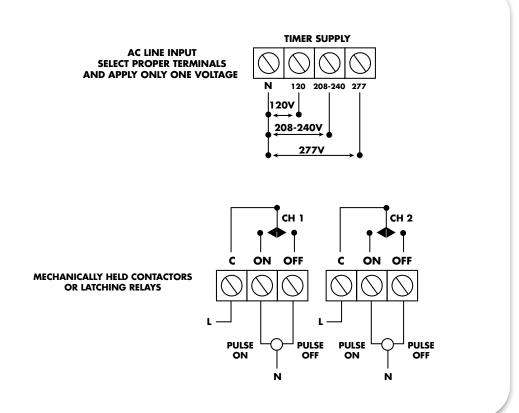

For Specification Writers' Guides:

Please visit our website:

http://www.nsiindustries.com/support-downloads/technical-library.aspx

LC200 SERIES LIGHT LEVEL / TIME OF DAY OPTION

2 ZONES LIGHTING CONTROL

STAGE LIGHTING TURN ON LEVEL

APPLICATIONS



- 24 hour convenience stores
- Open wall parking structures
- Large canopies
- Building perimeters **Atriums**
- Use to control two different outdoor lighting circuits utilizing one photocell. Sign lighting can turn ON at one ambient light level while parking lot lighting turns ON at a different light level.



ASHRAE 90.1

FEATURES

PHOTOSENSOR INPUT: EPC1 included.

DUAL OUTPUTS: with independent turn-ON adjustment for Stage 1 and Stage 2.

LIGHT LEVEL ACTIVATION: Turn ON is user settable from 2 to 100 footcandle; Independent light level adjustment for each zone. Turn OFF is a maximum of 2 times turn ON level. Built-in delay OFF of 30 seconds to avoid reaction to lightning or headlights.

SWITCHED INPUT: Turns off loads. Can be used for photocell ON and time switch OFF operation.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60Hz | NO. OF ZONES | OUTPUT CONTACTS |
|----------------|-------------|-------------------------------|-----------------|--------------------|
| LC200 | 82111 | 120/240/277 | 2 | SPDT |
| LC200M | 82113 | 120/240/277 | 2 | SPDT |

| TYPE | VOLTAGE (VAC) | RAT NO | 'ING NC |
|------------|------------------|----------------|------------|
| Resistive | 120/240 277 | 20A 12A | 10A |
| Ballast | 120 240/277 | 20A 6A | 10A 3A |
| Tungsten | 120/240/277 | 5A | 3A |
| Pilot Duty | 120/240 277 | 470VA 690VA | 275VA |



INPUT VOLTAGE:

120/240/277VAC, 50/60Hz.

TERMINAL RANGE: Relay #12AWG; input power terminals #14 - #22AWG; TOD/sensor terminals accept #18 - #22AWG.

OPERATING TEMPERATURE:


-40°F to +140°F (-40°C to + 60°C).

POWER CONSUMPTION: 5VA Maximum.

ENCLOSURE: LC200 includes metal Indoor NEMA 1 with lockable hasp (see page 557 for dimensions).

OTHER MOUNTINGS:

LC200M mechanism only.

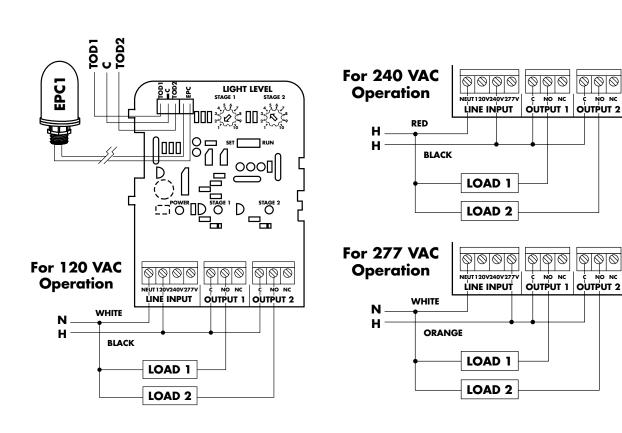

For Specification Writers' Guides:

Please visit our website:

http://www.nsiindustries.com/support-downloads/technical-library.aspx



SMALL BUSINESS ENERGY CODE PANEL

APPLICATIONS

INTERIOR LIGHTING

- Open office zoning
- Hallways
- —■ Meeting and sales areas
 - Stock rooms and warehouses

EXTERIOR LIGHTING

- Signage and store windows
- Security
 - Parking lots



| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60 Hz | NO. OF CHANNELS | OUTPUT CONTACTS |
|----------------|-------------|--------------------------------|---------------------------|--------------------|
| DGU100A-Y | 82211 | 120-277 | 1 | DPDT |
| DGUM100A | 82212 | 120-277 | 1 | SPDT Momentary |
| DGUM100A-Y | 82224 | 120-277 | 1 | SPDT Momentary |
| DGLC100A-NC | 82223 | 120-277 | 1 | DPDT |
| DGLC200A-NC | 82213 | 120-277 | 2 | SPDT |
| EPC-A | 82112 | Accessory Photo Sensor | - | - |
| SS410 | 14033 | 24VAC/24VDC | - | SPDT |
| TRP-24B | 98225 | 120/277 | Transformer Power Pack | SPST |

FEATURES

SCHEDULING: 56 ON & OFF set points provide individual programs for each day of the week. Minimum setting is 1 minute.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Adjustable 10° - 60° Northern or Southern latitudes. Can be individually offset +/- 1-240 minutes from both sunset and sunrise times.

PHOTOSENSOR INPUT: Unique push button set-up assures accurate operation with automatic calibration that adjusts for wire size and distance. EPC-A photo sensor is included with the DGLC-A and may be ordered as an option for use with model DGU100A & DGUM100A.

LIGHT LEVEL ACTIVATION: Turn ON is user settable from 1 to 100 footcandle; Turn OFF is a maximum of 2 times turn ON level. Each channel has an independent setting. Includes a user settable delay before ON and OFF between 1 — 90 seconds.

REMOTE OVERRIDE ON: Each channel has independent input for a maintained dry-contact closure. May use TORK model SS410 and TRP-24Bfor timed override. May use with occupancy sensor with dry contacts as override.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

MOMENTARY CONTACT - DGUM100A:

2 second contact closure ON & OFF to control mechanically held contactors or latching relays.

BLOCK HOLIDAY: 9 holiday blocks can be set for individual days or for duration of any number of days.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

CLOCK FORMAT: AM/PM or 24 Hour

format.

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 7 days of real time backup.



TIMING ACCURACY: Line frequency.

INPUT VOLTAGE: 120-277VAC, 50/60Hz

(auto detection).

TERMINAL RANGE:

#12 - #18AWG for line/load.

#18 - #26AWG sensor/switch input.


OPERATING TEMPERATURE:

-31°F to +131°F (-35°C to + 55°C).

POWER CONSUMPTION: 6VA Maximum.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R . Suffix -NC Noryl® Indoor/Outdoor NEMA 3R with clear Lexan® cover. Suffix -Y metal Indoor enclosure NEMA 1. All with lockable hasp (see page 557 for dimensions).

| TYPE | VOLTAGE | RAT | ING |
|------------|------------------|------------|----------------|
| | | NO | NC |
| Resistive | 24-277VAC | 20A | 10A |
| Ballast | 120-277VAC | 20A | 10A |
| Tungsten | 120VAC | 15A | |
| Pilot Duty | 120VAC 240VAC | 720VA | 290VA 360VA |
| Motor | 120VAC 240VAC | 1HP 2HP | 1/4HP 1/2HP |
| Resistive | 28VDC | 20A | 10A |

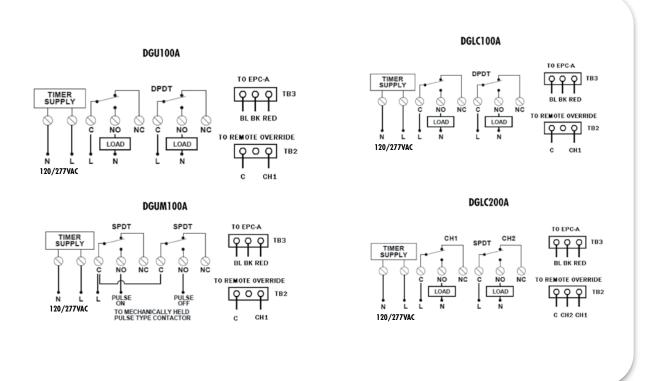

For Specification Writers' Guides:

Please visit our website:

http://www.nsiindustries.com/support-downloads/technical-library.aspx

ELC SERIES ENERGY AND LIGHTING CONTROL & 12 ZONE LIGHTING CONTROL

c(NT)ns

ELC712

DO-IT-ALL **ENERGY** & LIGHTING CONTROLLER

THE

APPLICATIONS

- HVAC equipment
- Indoor/Outdoor lighting
- Meets indoor/outdoor lighting energy code requirements



| CATALOG NO. | UPC CODE | TIMER SUPPLY (VAC) 50/60Hz | NO. OF CHANNELS | OUTPUT CONTACTS |
|----------------|-------------|-------------------------------|--------------------|--------------------|
| ELC74 | 82523 | 24/120/208- 240/277 | 4 | SPDT |
| ELC78 | 82524 | 24/120/208- 240/277 | 8 | SPDT |
| ELC712 | 82525 | 24/120/208- 240/277 | 12 | SPDT |
| EPC-LC | 82233 | Accessory Photo Sensor | - | - |
| LCS115M | 82082 | Accessory Momentary Switch | - | SPST |

FEATURES

SCHEDULING: 128 time based events allow individual programs for each day of the week at a minimum 1 minute apart. Event types include ON, OFF, Duration, or Duty Cycle.

SENSOR EVENT: 32 sensor driven events allow individual programs for each day of the week.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Adjustable 10° - 70° Northern or Southern latitudes. Settings can be offset from both sunset and sunrise times.

UNIVERSAL INPUT: 8 inputs may be assigned to any channel. ELC74 includes 4.

SWITCHED INPUT: Accepts input from optional momentary or maintained switch for a timed override. **PHOTOSENSOR INPUT:** Accepts input from optional sensor. EPC-LC (indoor/outdoor) has a range from 0 -250 foot-candels.

MOMENTARY CONTACT: May be configured for momentary ON/OFF operation to control latching contactors. The ELC74 operates as a two channel unit. The ELC78 operates as a four channel unit. The ELC712 operates as a six channel unit.

HOLIDAYS: 26 holidays may be set using 10 individual dates, 10 month type (last Monday in May), or 6 specific holidays with one of 3 independent holiday schedules.

BLOCK HOLIDAY: 10 holiday blocks can be set for individual days or for duration of any number of days and may use one of 3 holiday schedules.

PULSE/TIME DURATION: 4 different ON settings from 1 second to 23 hours, 59 minutes, 59 seconds.

DUTY CYCLE: 4 different ON and OFF patterns from 1 second to 23 hours, 59 minutes, 59 seconds.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

REMOTE OVERRIDE: Universal input may be programmed for timed override from a momentary or maintained dry contact switch.

MANUAL OVERRIDE: Keyboard button control until the next regularly scheduled ON or OFF, automatic operation then resumes.

STAGGERED START: Optional stagger up time between channels, after a power outage; selectable from 5 seconds, 15 seconds, 30 seconds, 1 minute, 5 minutes, 10 minutes, and 15 minutes.

CLOCK FORMAT: AM/PM or 24 hour format.

POWER OUTAGE BACKUP: The program and time of day are maintained for a minimum of 2 days by means of a capacitor. After two days, a lithium battery takes over and provides a minimum accumulated time of 1 year. The lithium battery should provide over 10 years of protection.



TIMING ACCURACY: Line frequency.

INPUT VOLTAGE:

24/120/208-240/277VAC, 50/60Hz.

TERMINAL RANGE:

#10 - #16AWG for line input.

#10 - #16AWG for load output.

#14 - #22AWG universal input.


OPERATING TEMPERATURE:

 -20° F to $+140^{\circ}$ F (-29° C to $+60^{\circ}$ C).

POWER CONSUMPTION: 10VA Maximum.

ENCLOSURE: Metal Indoor NEMA 1 with lockable hasp (see page 558 for dimensions).

| TYPE | VOLTAGE | RAT | ING |
|-----------------|----------------------|------------|----------------|
| | | NO | NC |
| General Purpose | 24/120 - 277VAC | 20A | 15A |
| Ballast | 120-277VAC | 20A | 20A |
| Tungsten | 120-277VAC | 5A | - |
| Pilot Duty | 120-240VAC | 470VA | 275VA |
| Motor | 120VAC 208-277VAC | 1HP 2HP | 1/4HP 1/2HP |

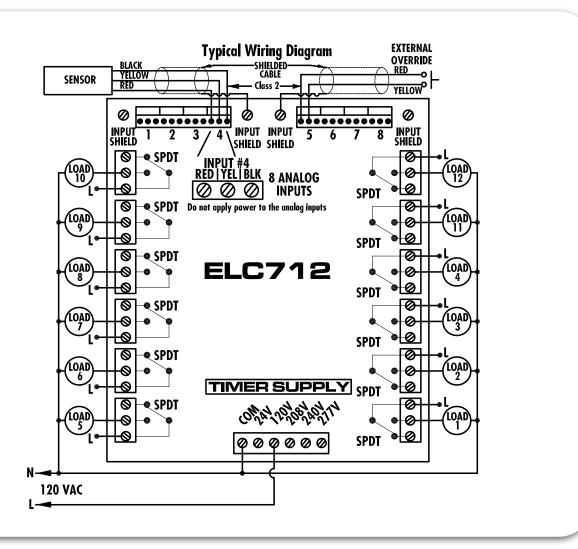

For Specification Writers' Guides:

Please visit our website:

http://www.nsiindustries.com/support-downloads/technical-library.aspx

DLC400BP **4 ZONE LIGHTING CONTROL TIME SWITCH**

Memory Module

Programmer optional



FLEXIBLE

INDOOR &

OUTDOOR LIGHTING CONTROLLER



CALIFORNIA Title 24

ASHRAE 90.1

Model EPC2 supplied with unit

c(UL)us

Stock rooms and warehouses

Meeting and sales areas

INTERIOR LIGHTING Open office zoning

APPLICATIONS

EXTERIOR LIGHTING

- Signage and store windows
- Security
 - **Parking lots**

- Hallways

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60 Hz | NO. OF CHANNELS | OUTPUT CONTACTS |
|----------------|-------------|--------------------------------|--------------------|--------------------|
| DLC400BP | 82191 | 120/208-240/277 | 4 | SPDT |
| USB-MMP | 82196 | Memory Module Programmer | Includes | Software |
| SS410 | 14033 | 24VAC/24VDC | - | SPDT |

With optional Timed Override

FEATURES

CONFIGURABLE ZONES: Simple three position slide switch sets logic for each zone: Time ON/Time OFF, Photo ON/Photo OFF, or Photo ON/Time OFF.

SCHEDULING: 99 ON & OFF set points allow individual programs for each day of the week. Minimum 1 minute apart.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. 1. Adjustable 10° -60° Northern or Southern latitudes. 2. Can be individually offset +/-1-240 minutes from both sunset and sunrise times.

PHOTOSENSOR INPUT: EPC2 photo sensor included.

LIGHT LEVEL ACTIVATION: Turn ON and OFF level is user settable from 1 to 100 footcandle. Each channel has an independent settina.

REMOTE OVERRIDE: Maintained dry contact closure or use TORK Model SS410 for timed override with flash warning before OFF. May use with occupancy sensor as override.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

SEASONS: 1 to 4 with different daily schedules which can wrap around into the new

HOLIDAYS: 1 to 24 individual dates.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

POWER OUTAGE BACKUP: Permanent schedule retention with memory module. Battery provides real time backup for 6 months cumulative.

MEMORY MODULE: Removable MM can be programmed at any one location and inserted into another DZS series unit.

OPTION: Memory Module Programmer with software for computer connection programming. Also allows stand alone battery operation for portable copy feature.



TIMING ACCURACY: Line frequency.

INPUT VOLTAGE:

120/208 - 240/277VAC, 50/60Hz.

TERMINAL RANGE: #10 - #14AWG.


OPERATING TEMPERATURE:


 -40° F to $+158^{\circ}$ F (-40° C to $+55^{\circ}$ C).

POWER CONSUMPTION: 30VA Maximum.

ENCLOSURE: Metal Indoor/Outdoor NEMA 3 with lockable hasp (see page 557 for dimensions).

| ТҮРЕ | VOLTAGE | RATING | |
|-----------------|------------------|-------------|-------|
| | | NO | NC |
| General Purpose | 24-277VAC, 30VDC | 30A | 30A |
| Ballast | 120-277VAC | 20 A | 10A |
| Tungsten | 120VAC | 10A | |
| Pilot Duty | 120-277VAC | 720VA | 720VA |

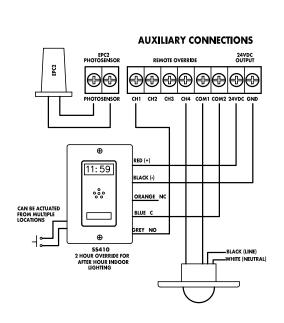

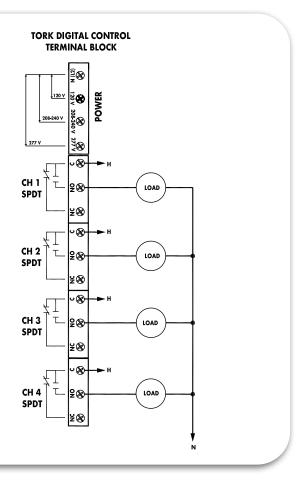


For Specification Writers' Guides:

Please visit our website:

http://www.nsiindustries.com/support-downloads/technical-library.aspx

LD SERIES EXTENDED LIGHTING CONTROL LIGHTING DELAY TIME SWITCH



ADD A WARNING BLINK TO ANY CONTROL

APPLICATIONS

Open offices

- Gvmngsiums
- Warehouses
- Outdoor recreation courts
- User-activated lights with time limits
- Match with photocontrol and
- timer to limit hours of use

SPECIFICATIONS

INPUT VOLTAGE:

120/208/240/277VAC, 50/60Hz.

TERMINAL RANGE: #10 - #16AWG for line/load. #18 - #26AWG switch input.

OPERATING TEMPERATURE: -22° to 150°F (-30° to +65°C).

POWER CONSUMPTION:

5VA Maximum.

ENCLOSURE: Metal Indoor NEMA 1 with lockable hasp (see page 557 for dimensions).

CATALOG **INPUT SUPPLY (VAC)** OUTPUT NO. CODE 50/60 Hz CONTACTS TYPE Metal Indoor LDS-A 81026 120/208-240/277 **SPDT** NEMA 1 LDS 81025 120/208-240/277 **SPDT** Mechanism Metal Indoor LDSH-A 81031 120/208-240/277 **SPDT** LDSH 81028 120/208-240/277 SPDT Mechanism

| TYPE | VOLTAGE | RAT | ING |
|--------------------|----------------|----------------|-----------|
| | (VAC) | NO | NC |
| General Purpose | 24/240 277 | 20A 20A | 10A 3A |
| Ballast | 120 208-277 | 20A 10A | 10A 3A |
| Tungsten | 120-277 | 5A | 3A |
| Pilot Duty | 120-240 277 | 470VA 690VA | 275VA |
| Resistive | 28VDC | 20A | 10A |

FEATURES

MAINTAINED INPUT WITH LOAD WARNING BLINK:

LDS Series controls output load contacts based on power applied to the time switch input contact. At removal of power from the time switch input, LDS Series provides 1 second blink then keeps load contacts closed for an extra 1 or 5 minutes (user selectable) before turn off.


MAINTAINED INPUT WITH AUXILARY WARNING:

LDSH Series controls output load contacts based on power applied to the time switch input contact. At removal of power from the time switch input, LDSH Series closes a second set of contacts for a user supplied audible or visual warning device. The warning circuit closes for a selected time of 4 seconds (best for audible device or continuous, then keeps load contacts closed for an extra 1 or 5 minutes (user selectable) before turn OFF.

MOMENTARY INPUT: Provides timed override when time switch input contact is unpowered (timer OFF). When activated during the warning period, load contacts are kept closed and timing starts. Both series can accept momentary input contact closure for ON to start the timing and OFF to end the timing.

TIMED OVERRIDE SETTINGS: User may select override times of $\frac{1}{2}$, 1, $\frac{1}{2}$, 2, 6, 9, or 12 hours. Warning before OFF is always active after override time.



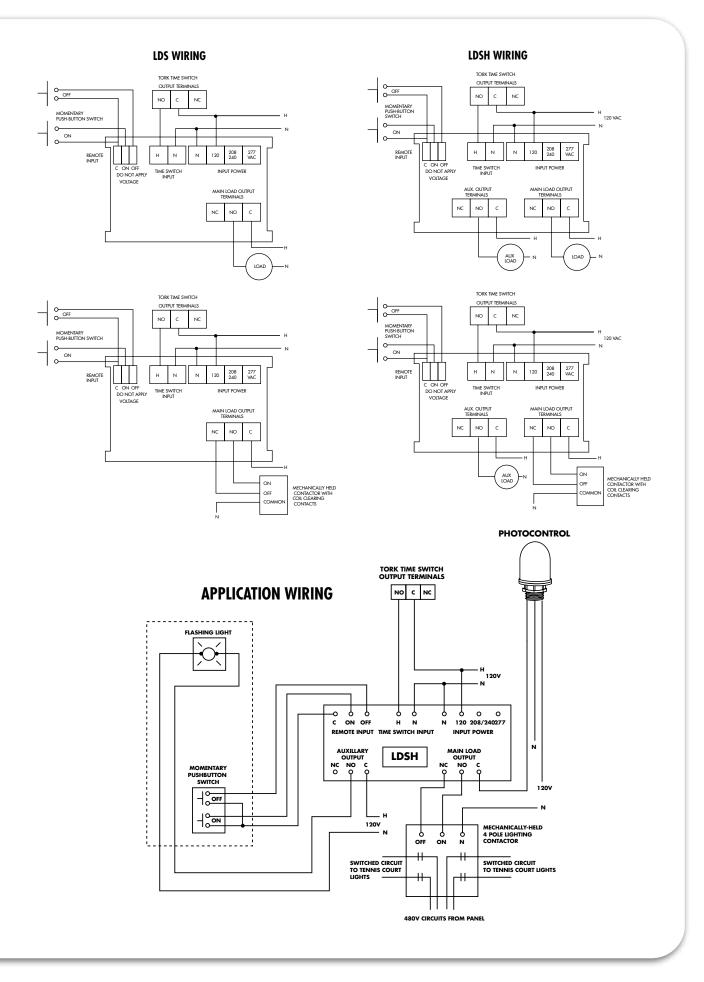



31 DAY CYCLE TIME: AN INDUSTRY FIRST!

FEATURES

DG180A & DG280A: 56 ON & OFF set points provide daily repeated programs. Minimum setting is 1 minute.

DGS100A: 56 ON & OFF set points provide individual programs for each day of the week. Minimum setting is 1 minute.

DUTY CYCLE & SIGNALING: Two different ON/OFF patterns or signal durations may be programmed. The durations can be up to 23 hours, 59 minutes and 59 seconds in length.

SKIP FUNCTION (24 HOUR UNITS ONLY): Each channel can be set for ACTIVE/SKIP operations that alternate from 1 - 31 days. This becomes an effective way to cycle loads on varying days within the month. Using the two-circuit DG280A, two loads can be set to operate on alternate days in a simple manner.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM or 24 hour.

POWER OUTAGE BACKUP: Permanent schedule retention. Supercapacitor provides 7 days of real time backup.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60 Hz | NO. OF CHANNELS | OUTPUT CONTACTS |
|----------------|-------------|--------------------------------|--------------------|--------------------|
| 24 HOUR N | ODELS | | | |
| DG180A | 82206 | 120-277 | 1 | DPDT |
| DG280A | 82207 | 120-277 | 2 | SPDT |
| DG280A-24 | 82220 | 24VAC | 2 | SPDT |
| 7 DAY MO | DELS | | | |
| DGS100A | 82205 | 120-277 | 1 | DPDT |
| DGS100A-12 | 82218 | 12VDC | 1 | DPDT |
| DGS100A-24 | 82219 | 24VAC | 1 | DPDT |

TIMING ACCURACY: Line frequency.

INPUT VOLTAGE:

120 - 277 VAC, 50/60 Hz (auto detection).

TERMINAL RANGE: #12 - #18AWG.

OPERATING TEMPERATURE:


-31°F to +131°F (-35°C to + 55°C).

POWER CONSUMPTION: 6VA Maximum.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R with lockable hasp (see page 557 for

enclosure dimensions).

| TYPE | VOLTAGE (VAC) | RAT NO | ING NC |
|------------|------------------|------------|----------------|
| Resistive | 24-277 | 20A | 10A |
| Ballast | 120-277 | 20A | 10A |
| Tungsten | 120 | 15 A | |
| Pilot Duty | 120 240 | 720VA | 290VA 360VA |
| Motor | 120 240 | 1HP 2HP | 1/4HP 1/2HP |
| Resistive | 28VDC | 20A | 10A |

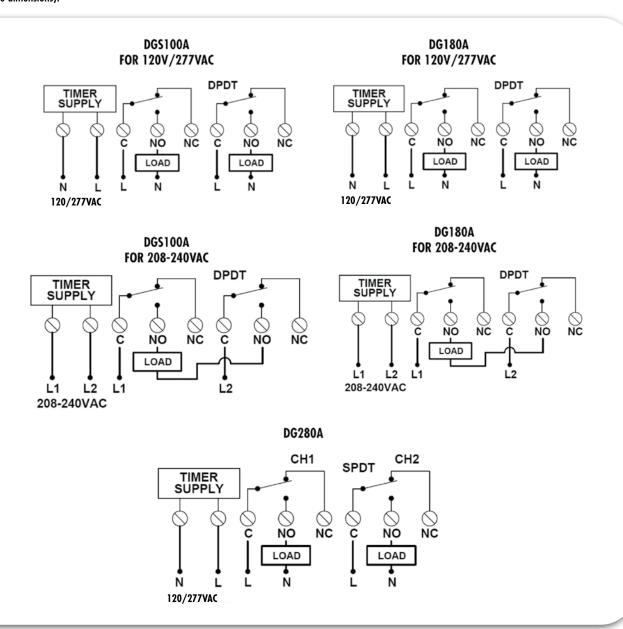

For Specification Writers' Guides:

Please visit our website:

http://www.nsiindustries.com/support-downloads/technical-library.aspx



FEATURES

EJWT – PERCENTAGE TIMER

960 time combinations with two dials.

Cycle Time Dial sets 32 repeating cycles from 15 seconds to 24 hours.

Percentage ON Dial has 32 steps from 0% to 100%.

Repeats cycle as long as power is applied.

E500T - ON DELAY TIMER

Dial sets 30 time delay durations from 5 seconds to 3 hours. External switch activated starts delay to ON. Runs until external switch turns OFF.

E501T – AUTO OFF INTERVAL TIMER

Dial sets 30 time durations from 10 seconds to 12 hours. Start/Stop button or External switch starts interval ON. Automatically turns OFF at end of preset time. START/STOP or External switch turns OFF.

E502T - OFF DELAY TIMER

Dial sets 30 time durations from 5 seconds to 3 hours. External switch starts interval ON. Automatically turns OFF at end of preset time. External switch turns OFF.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60 Hz | OUTPUT CONTACT |
|----------------|-------------|-----------------------------|-------------------|
| EJWT | 82513 | 120-240 | SPDT |
| E500T | 82514 | 120-240 | SPDT |
| E501T | 82515 | 120-240 | SPDT |
| E502T | 82516 | 120-240 | SPDT |

E501T


| TYPE | VOLTAGE | RATING | |
|-----------------|----------------|------------|----------------|
| | (VAC) | NO | NC |
| General Purpose | 120-240 | 20A | 10A |
| Resistive | 120-240 | 20A | 10A |
| Motor | 120 208-240 | 1HP 2HP | 1/4HP 1/2HP |
| Pilot Duty | 120/240 | 470VA | 275VA |

TIMING ACCURACY: 1% of timing range.
INPUT VOLTAGE: 120/240VAC, 60Hz.
TERMINAL RANGE: #12 - #18AWG.

OPERATING TEMPERATURE: 32°F to +122°F (0°C to + 50°C).


POWER CONSUMPTION: 1 6VA Maximum. ENCLOSURE: Indoor NEMA 4X is standard (see

page 558 for enclosure dimensions).

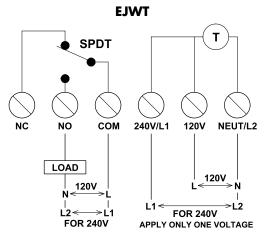

Use copper conductors. For supply connections use AWG #12 wire rated for at least 90°C (194°F) or equivalent.

E500T / E501T / E502T

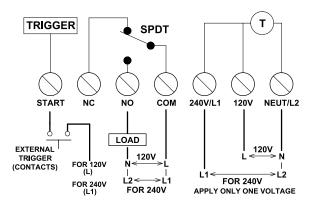

Use copper conductors. For supply connections use AWG #12 wire rated for at least 90°C (194°F) or equivalent.

PCT SERIES PANEL MOUNT CYCLE TIME SWITCHES PERCENTAGE ON PERCENTAGE ON

SPECIFICATIONS

TIMING ACCURACY:

1% of timing range.

INPUT VOLTAGE: 120-240VAC, 50/60Hz (automatic detection).

TERMINAL RANGE: #14 - #16AWG for line input, #12 - #16AWG for load

output.

POWER CONSUMPTION: 5VA Max.

OPERATING TEMPERATURE: -40° to +149°F (-40° to +65°C).

| CATALOG | UPC | INPUT SUPPLY (VAC) | OUTPUT | |
|---------|-------|--------------------|---------|--|
| NO. | CODE | 60 Hz | CONTACT | |
| PCT15M | 82528 | 120-240 | SPDT | |

· LOAD

| TVDF | R/ | ATINGS |
|---|-----|------------|
| TYPE | NO | NC |
| 120-240VAC General Purpose & Resistive | 20A | 20A |
| 120VAC Motor | 1HP | 1/4HP |
| 240VAC Motor | 2HP | 1/2HP |

FEATURES

FIXED TIMER CYCLE: 15 minutes repeating cycle when unit is powered.

PERCENTAGE ON: 1% to 99% increments.

DISPLAY: Digital percentage reading.

Oil field pumping stations

and watering

Ventilation

Process control

Poultry and livestock feeding


ON SETTING: Hold ON.
OFF SETTING: Hold OFF.

POWER OUTAGE BACKUP: Remembers place in cycle when power resumes.

TEST MODE: For temporary ON/OFF cycle

verification.

PANEL MOUNTING: 3" diameter back housing retrofits to existing mechanical timer dimensions. Two sets of mounting dimensions to choose from. (see page 558 for enclosure dimensions).

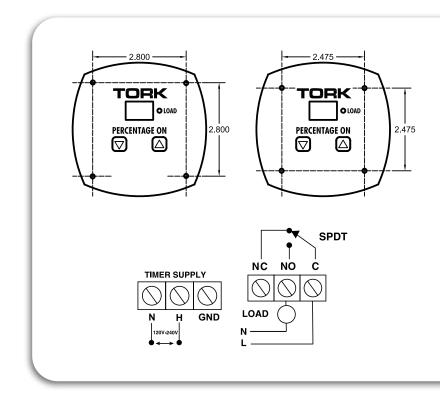



ACT30MA SERIES

ADJUSTABLE CYCLE TIMER TIME SWITCHES



SPECIFICATIONS

INPUT VOLTAGE: 120-240VAC

TERMINAL RANGE: #18 - #12AWG

CONTACTS: SPDT

ENCLOSURE:

Indoor NEMA 4X is standard (see page

558 for enclosure dimensions).

APPLICATIONS

- Poultry and livestock feeding and watering
- Agriculture irrigation for field or greenhouse
- Oil well pumping daily cycle
- Ventilation
- Process control

| ACT30MA | 82527 | 120-240 | SPDT | |
|---------|-------|--------------------|---------|--|
| CATALOG | UPC | INPUT SUPPLY (VAC) | OUTPUT | |
| NO. | CODE | 60 Hz | CONTACT | |


| TVDF | RA | TINGS |
|---|-------|-------|
| TYPE | NO | NC |
| 120-240VAC General Purpose & Resistive | 20A | 10A |
| 120VAC Motor | 1HP | 1/4HP |
| 208-240VAC Motor | 2HP | 1/2HP |
| 120-240VAC Pilot Duty | 470VA | 275VA |

FEATURES

960 time combinations with two dials ON time dial sets 30 time steps from 30 seconds to 15.5 minutes

OFF dial has 30 steps time steps from 30 seconds to 15.5 minutes

Repeats cycle as long as power is applied Hold On or Hold Off positions included

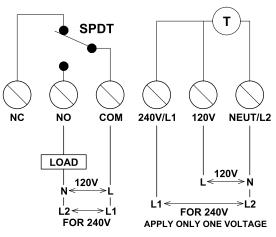

Use copper conductors. For supply connections use AWG #12 wire rated for at least 90°C (194°F) or equivalent.



PANEL BUILDERS' CHOICE

FEATURES

HVAC equipment

SCHEDULING: 8 ON and OFF pairs of set points for DIN100B. 4 ON and OFF (CH A) and 3 ON and OFF (CH B) pairs of set points for DIN200B. Individual programs on each day of the week. Minimum setting is 1 minute.

MANUAL OVERRIDE: Until the next regular scheduled ON or OFF, automatic operation then resumes.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Battery retains time and schedule.

| CATALOG NO. | UPC CODE | DRY CONTACTS | CLOCK INPUT (VAC)50/60 Hz | NO. OF CHANNELS | NUMBER OF ON/OFF |
|----------------|-------------|-----------------|------------------------------|--------------------|----------------------------|
| DIN100B | 82193 | SPDT | 120 | 1 | 8 |
| DIN200B | 82192 | SPDT | 120 | 2 | 4 Channel A 3 Channel B |


| TYPE | VOLTAGE | RATI | ING | |
|------------------------|---------|-----------|-----|--|
| | (VAC) | NO | NC | |
| Resistive | 120 | 16A | 16A | |
| General Purpose | 120 | A8 | A8 | |
| Motor (DIN100 only) | 120 | 1/2HP | | |

INPUT VOLTAGE: 120VAC, 50/60Hz. TERMINAL RANGE: #12 - #18AWG.

OPERATING TEMPERATURE:DIN100B: 14°-131°F (-10°-+55°C).
DIN200B: 14°-113°F (-10°-+45°C).

POWER CONSUMPTION: 4VA Maximum. **MOUNTING:** DIN rail #50022 (35mm) or

flat surface using supplied adapter.

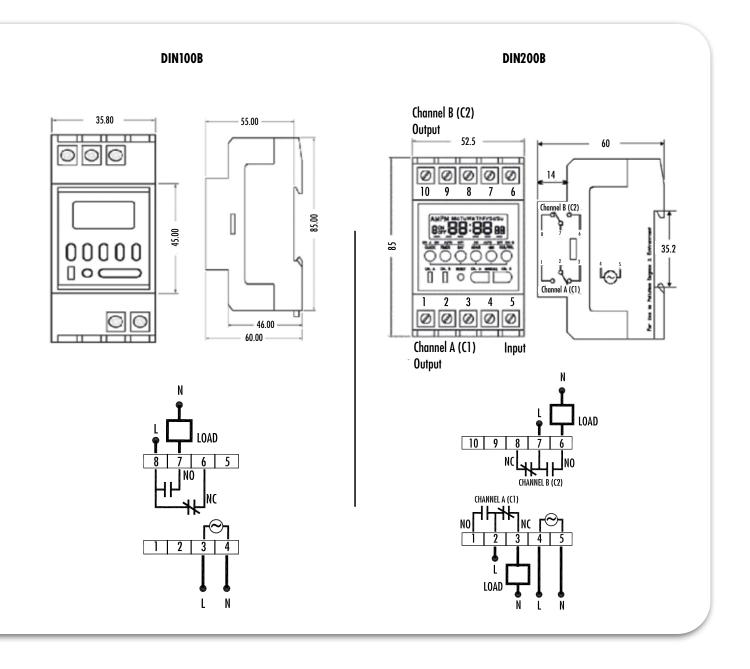

SMC SERIES MOMENTARY **CONTACT ADAPTER**

APPLICATIONS

- Converts maintained contacts for pulse switching
- Timer to latching contactor control
- Signaling



Photocell to latching contactor control

FEATURES

MAINTAINED INPUT: SMC3D accepts maintained input power from any 120 volt control. When power is applied or removed a short contact closure (pulse) is created on the dry output contacts.

MOMENTARY OUTPUT: SMC3D provides two dry output contacts. The ON contact provides a 2 second contact closure (pulse) when power is applied to the input contacts. The OFF contact provides a 2 second pulse when power is removed from the input contacts.

| SPECIFICATION | S |
|---------------|---|
|---------------|---|

INPUT VOLTAGE: 120VAC, 50/60Hz.

TERMINAL RANGE: #12 - #18AWG.

OPERATING TEMPERATURE: -31°F to +131°F (-35°C to + 55°C).


POWER CONSUMPTION: 6VA max.

ENCLOSURE: Noryl® Indoor/Outdoor NEMA 3R with lockable hasp (see page

557 for dimensions).

| CATALOG | UPC | INPUT SUPPLY | OUTPUT |
|---------|-------|---------------|-------------------|
| NO. | CODE | (VAC) 50/60Hz | CONTACTS |
| SMC3D | 52011 | 120 | SPDT Momentary |

| TYPE | VOLTAGE | RATI | RATING | |
|-----------------|---------|-------|--------|--|
| | (VAC) | NO | NC | |
| Resistive | 120 | 10A | 10A | |
| General Purpose | 120 | 10A | 10A | |
| Motor | 120 | 1/4HP | | |

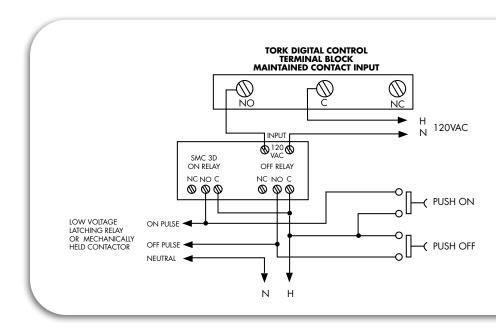

5401 SERIES

INCREASED AMPERAGE & VOLTAGE SWITCHING **40 AMP CONTACTORS**

APPLICATIONS



- Lighting loads
 - Exhaust fans
- Electric and hot water heaters
 - Refrigeration and defrosting

| | NO. | CODE | VOLTS | CONTACTORS | CONTACTS | |
|---|-------|-------|-------|------------|----------|--|
| EATURES | 5401A | 81019 | 120 | 1 | 3PST | |
| NTACT RATINGS: Can switch up to 40 AMPS | 5441A | 81020 | 120 | 4 | 3PST | |

5401A

| TYPE | VOLTAGE (VAC) | FLA | RATING |
|-------------------------|------------------|----------|--------------|
| Tungsten* | 120 | - | 30A |
| Ballast* | 120/277 | - | 40A |
| LED Driver* | 120/277 | - | 40A |
| Motor (Single Phase) | 120 240 | 40 40 | 3HP 7.5HP |
| Motor | 240 | 40 | 10HP |

5441A

Coil Data: 120VAC @ 60Hz 6VA Holding/seal; 60VA inrush

40

20HP

480


(3 Phase)


33

CONTACT RATINGS: Can switch up to 40 AMPS per pole from 120VAC to 277V lighting loads, one to three circuits simultaneously.

EASY WIRING: Includes 120 volt control wiring compartment. 5441 has terminal strip pre-mounted for quick connection.

ENCLOSURE: Metal NEMA 1 Indoor enclosure (see page 557 for enclosure dimensions).



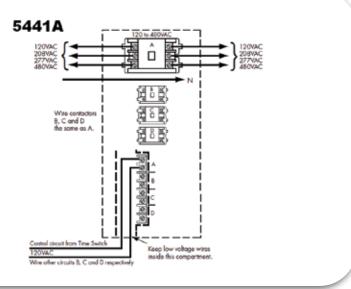

^{*} Ratings for single phase load

HPS STARTER FOR HIGH PRESSURE SODIUM LAMPS STARTING AID



APPLICATIONS

Designed to operate as a starting aid, for all
 H.P.S. ballasts from 35 to 400 watts, with lamp voltage of 55 or 100 volts.

SPECIFICATIONS

LINE VOLTAGE: 105 - 347VAC.

LAMP VOLTAGE: 55 or 100VAC.

LAMP WATTAGE: 35 to 400 watts.

OPERATING TEMPERATURE: -40°F to +221°F (-40°C to + 105°C).

LEAD LENGTH: 9 inches.

ENCLOSURE: Durable, high temperature

Lexan® housing.


FEATURES

SMART VOLTAGE: Delivers appropriate trigger spikes for lamp ignition, then reduces voltage to good lamps. Continues to feed voltage spikes to old or poorly working lamps.

HIGH GRADE MATERIAL: All components are sealed with high grade die-electric material to protect against contaminants and other adverse environmental conditions.

EASY INSTALLATION: Universal 3 wire design, color coded for ease of installation.

| HPS30 | 81030 | High Pressure Sodium Starter | | |
|----------------|-------------|------------------------------|--|--|
| CATALOG NO. | UPC CODE | DESCRIPTION | | |

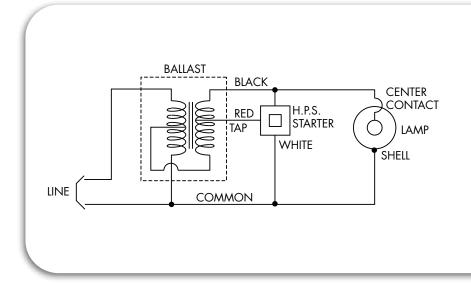

SURGE SUPPRESSOR

FOR HIGH ELECTRICAL NOISE


APPLICATIONS


 For high electrical noise interference, recommended for all digital controls.



| CATALOG UPC DESCRIPTION NO. CODE | 90058-1 | 81024 | Surge Suppressor |
|----------------------------------|---------|-------|------------------|
| | | | DESCRIPTION |



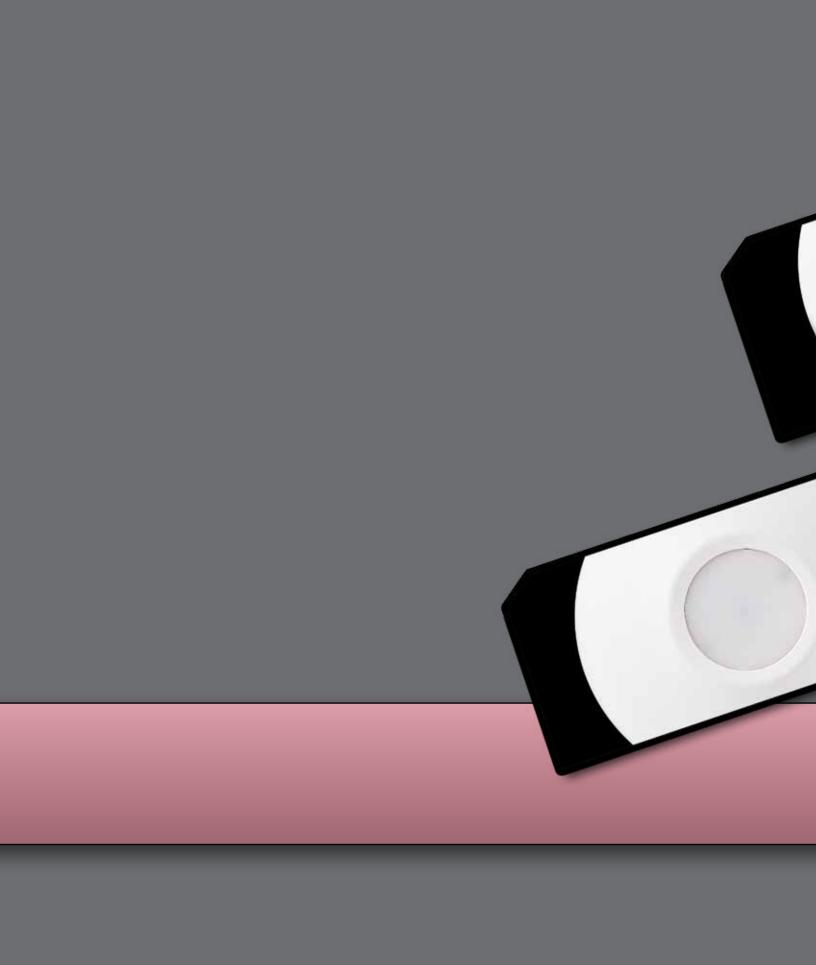

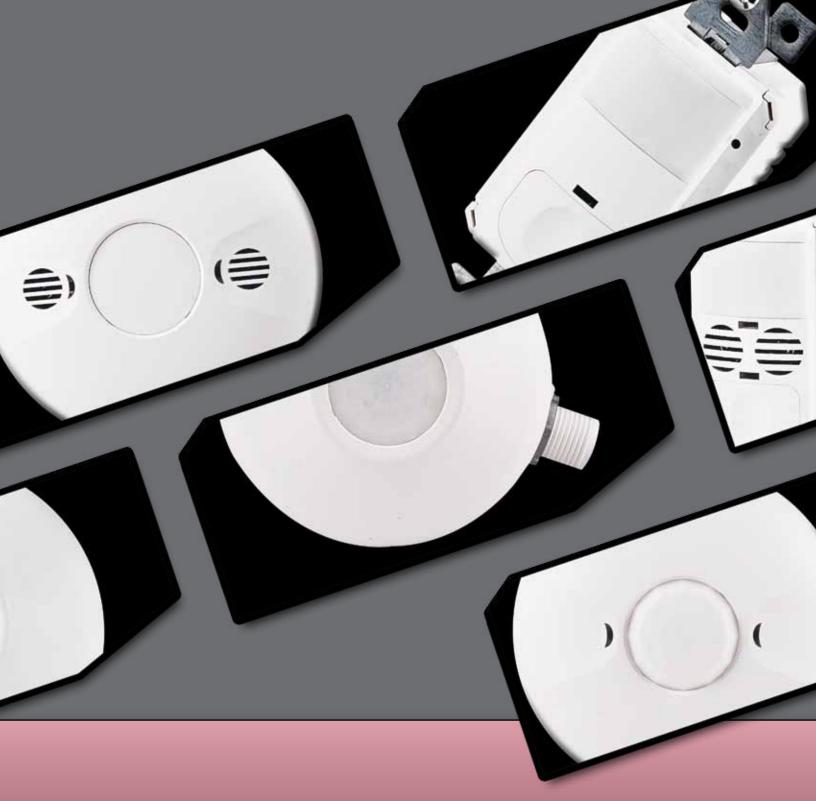

TORK® OCCUPANCY SENSORS

SENSOR TECHNOLOGY & PLACEMENT GUIDE

TECHNOLOGY PIR AND ULTRASONIC

A **Passive Infrared Sensor** (PIR sensor), is a device that measures infrared radiation (IR), or heat, from objects in its field of view. Because it only receives information, it is considered passive. The IR sensor views a human body as an IR generating object. The lens of the occupancy sensor breaks up the field of view into IR sensitive bands. The occupancy sensor is designed to only react when heat is sensed moving from band to band. For PIR occupancy sensors to work object must have direct "line of sight" to the PIR sensor.


An *Ultrasonic Sensors* (US sensor) is a technology that works on a principle similar to radar or sonar. It is an active technology that sends and receives. It emits an inaudible high-frequency sound wave and evaluates the echo which is received back after bouncing around in the room. This allows the sensor to evaluate the whole room and can "look" over walls and obstructions to identify movement.

Both technologies show higher sensitivity closer to the sensor to allow small movements to be noticed. Sensitivity reduces further away from the sensor and may require a walking step to activate the sensor.

PLACEMENT GUIDELINES WALL SENSOR

A **Wall Switch Sensor** provides a 180° coverage pattern, extending outward from the sensor. This will allow for instant turn ON when an occupant enters the space. Total area covered will be over 400 square feet.


- Proper placement gives the sensor a clear line of sight to the entry door without viewing the hallway.
- The occupant must be able to see the sensor from their normal work position otherwise the sensor will not be able to detect their presence.
- For offices where there are other obstructions between the sensor and the
 occupant or the entry door, a ceiling sensor is required.

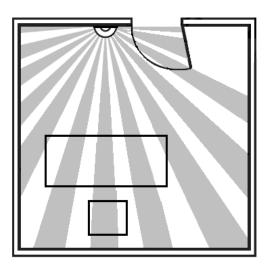


PLACEMENT GUIDELINES CEILING SENSOR

A *Ceiling Sensor* provides a 360° coverage pattern of up to 1200 square feet when using passive infrared only. When using dual technology the coverage pattern extends to over 2000 square feet. Barriers within the space that block line-of-sight to sensor detection will decrease coverage area when using passive infrared by itself, ultrasonic dual technology will allow the sensor to get around the obstructions.

- Designed for ceiling mounting at a height of 8-10 feet (mounting sensor at greater heights decreases the sensitivity to motion, while lower mounting height will decrease range).
- The sensor needs a visually unobstructed view of the normally occupied workspace and entry door(s).
- Avoid sensor placement with a direct view out a doorway. Placing the sensor offset from the center and away from the door is recommended
- If the occupant cannot see a PIR sensor from their normal work position, the sensor will not be able to detect their presence.
- File cabinets, partitions, or walls are typical types of obstructions. If there are other obstructions between the sensor and the occupant, an ultra-sonic or dual technology ceiling sensor is recommended.
- When the light level feature is used, mount within 15 feet of the widows or skylight and avoid mounting the sensor close to lighting fixtures
- Place the sensor no closer than 5 feet to an HVAC air duct when using dual technology sensors.
- Open office designs encourage placement of the sensors to allow overlapping coverage of small motion range and a clear view into each cubicle. Walking step motion may cover the entry to the space. Dual technology units provide added sensitivity to small motion.

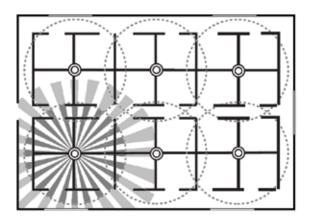

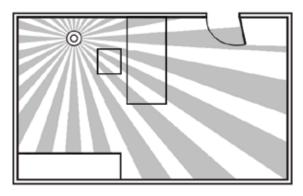

WOS SERIES PIR WALL SWITCH OCCUPANCY SENSOR

APPLICATIONS



- Offices areas
 Meeting rooms
 - Equipment room & storage spaces



ASHRAE 90.1

SPECIFICATIONS

VOLTAGE: 120VAC 50/60 Hz

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 1200 sq. ft.

WARRANTY: 3 YRS.

CONTACT RATINGS:

120V 800W Tungsten 120V 1000W Electronic Ballast

120V 1/4 HP Motor

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

MODES: Two selectable modes: Automatic On/Off or energy saving Walk Through. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.


FLASH WARNING: Optional load flicker 2 minutes before Off.

TAMPER RESISTANT: Captive button, rugged lens, and optional disable button function for public areas. Use in bathrooms to avoid manual off condition for occupant as another person leaves.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

| CATALOG NO. | UPC CODE | INPUT SUPPLY VAC 50/60Hz | WIRING |
|----------------|-------------|-----------------------------|---------------------|
| WOS-SN | 98213 | 120 | Requires Neutral |

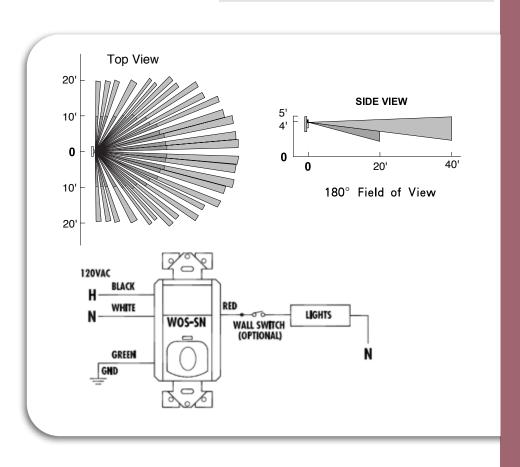

WOS-M SERIES PIR WALL SWITCH OCCUPANCY SENSOR

APPLICATIONS



- Offices areas
- Meeting rooms
- ─**=** Equipment room & storage spaces
- New construction & retrofit



SPECIFICATIONS

VOLTAGE:

120/230/277VAC 50/60 Hz

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 1200 sq. ft.

WARRANTY: 5 YRS.

CONTACT RATINGS:

120V 800W Tungsten

120V 1000W Electronic Ballast

230V 1500W Electronic Ballast

277V 1800W Electronic Ballast

120V ¼ HP Motor

| CATALOG NO. | UPC CODE | INPUT SUPPLY VAC 50/60Hz | WIRING |
|----------------|-------------|-----------------------------|------------------------|
| WOS-M | 98217 | 120/230/277 | No Neutral Required |
| WOS-MN | 98215 | 120/230/277 | Requires Neutral |

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

MODES: Four selectable modes: Automatic On/Off, Manual on (vacancy), energy saving Walk Through, or Test. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.


DAYLIGHT PHOTOSENSOR: Optional light-level turn off from 5 to 200fc. Save energy if windows provide enough light.

FLASH WARNING: Optional load flicker 2 minutes before Off.

TAMPER RESISTANT: Captive button, rugged lens, and optional disable button function for public areas. Use in bathrooms to avoid manual off condition for occupant as another person leaves.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

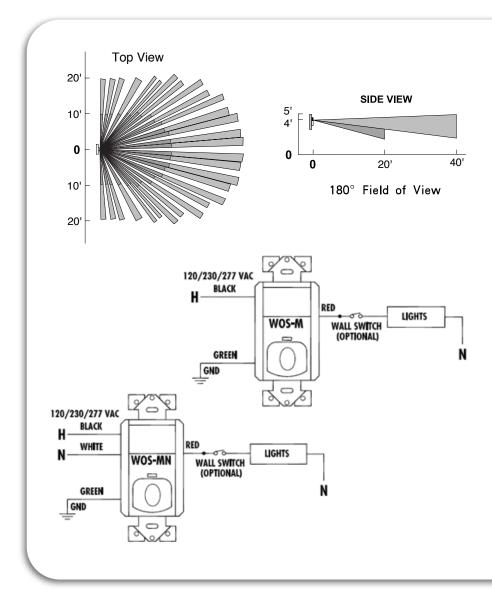

WOS-M2R SERIES PIR WALL SWITCH TWO RELAY OCCUPANCY SENSOR

APPLICATIONS



- Offices areas
 - Meeting rooms
 - Equipment room & storage spaces
 - New construction & retrofit



SPECIFICATIONS

VOLTAGE:

120/230/277VAC 50/60 Hz

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 1200 sq. ft.

WARRANTY: 5 YRS.

CONTACT RATINGS:

120V 800W Tungsten 120V 1000W Electronic Ballast 230V 1500W Electronic Ballast 277V 1800W Electronic Ballast

120V ¼ HP Motor

| CATALOG NO. | UPC CODE | INPUT SUPPLY VAC 50/60Hz | WIRING |
|----------------|-------------|-----------------------------|------------------------|
| WOS-M2R | 98221 | 120/230/277 | No Neutral Required |
| WOS-MN2R | 98219 | 120/230/277 | Requires Neutral |

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming. Each relay can have different settings.

- BATHROOM MODE: set fan relay time delay longer than lighting relay.
- TWO STEP LIGHT LEVEL: set each relay to turn off at different daylighting levels
- PUBLIC AREAS: Disable one relay button manual OFF function. Use in bathrooms to avoid full off condition for occupant as another person leaves.

MODES: Four selectable modes: Automatic On/Off, Manual on (vacancy), energy saving Walk Through, or Test. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.


DAYLIGHT PHOTOSENSOR: Optional light-level turn off from 5 to 200fc. Save energy if windows provide enough light.

FLASH WARNING: Optional load flicker 2 minutes before Off.

TAMPER RESISTANT: Captive button, rugged lens, and optional disable button function for public areas.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

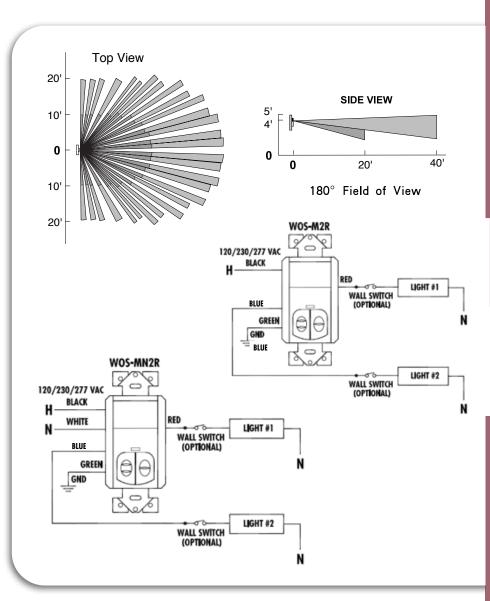

WOS-M2T SERIES ULTRASONIC AND PIR WALL SWITCH OCCUPANCY SENSOR

c(VL)us



APPLICATIONS

- **─** Offices areas
- Meeting rooms
- **—** Equipment room & storage spaces
- New construction & retrofit

SPECIFICATIONS

VOLTAGE:

120/230/277VAC 50/60 Hz

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE:

PIR 1200 sq. ft. Ultra-Sonic 400 sq. ft.

WARRANTY: 5 YRS.

CONTACT RATINGS:

120V 800W Tungsten 120V 1000W Electronic Ballast 230V 1500W Electronic Ballast 277V 1800W Electronic Ballast 120V ¼ HP Motor

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming. Each relay can have different settings.

- INITIAL ON: customize and set one technology only to trigger turn on.
- MAINTAIN ON: customize and set one technology to keep lights on.
- PUBLIC AREAS: Disable button manual OFF function. Use in bathrooms to avoid full off condition for occupant as another person leaves.

MODES: Four selectable modes: Automatic On/Off, Manual on (vacancy), energy saving Walk Through, or Test. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.

DAYLIGHT PHOTOSENSOR: Optional light-level turn off from 5 to 200fc. Save energy if windows provide enough light.

FLASH WARNING: Optional load flicker 2 minutes before Off.


TAMPER RESISTANT: Captive button, rugged lens, and optional disable button function for public areas.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

SENSOR CHOICES: Factory default setting allows either technology to trigger the unit. Optional is a disable function of one technology for initial and/or maintain on operations.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

| WOS-MN2T | 98223 | 120/230/277 | Requires Neutral |
|----------------|-------------|-----------------------------|---------------------|
| CATALOG NO. | UPC CODE | INPUT SUPPLY VAC 50/60Hz | WIRING |

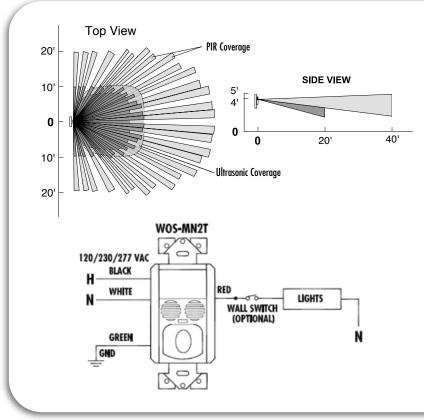

COS-L2T SERIES

ULTRASONIC AND PIR
CEILING MOUNTING
OCCUPANCY SENSOR

APPLICATIONS

- c (UL) us
- ─**■** Large offices areas
 - Larger meeting rooms
 - Classrooms
 - Bathroom & storage spaces

SPECIFICATIONS

VOLTAGE:

24VDC

(=

CURRENT CONSUMPTION:

9mA

ASHRAE 90.1

POWER SUPPLY:

TPR-24I or TRP-24B Power Packs provided separately

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE:

PIR 1200 sq. ft. Ultra-Sonic 900 sq. ft.

WARRANTY: 5 YRS.

| CATALOG NO. | UPC CODE | INPUT Supply | DESCRIPTION |
|----------------|-------------|-----------------|---------------------|
| COS-L2T | 98207 | 24VDC | White |
| TRP-24I | 98227 | 120/277VAC | Power Pack |
| COS-ADP | 98229 | 1/2" pendant/si | de mounting adapter |

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

- INITIAL ON: customize and set one technology only to trigger turn on.
- MAINTAIN ON: customize and set one technology to keep lights on.

MODES: Three selectable modes: Automatic On/Off, energy saving Walk Through, and Test. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.


FLASH WARNING: Optional load flicker 2 minutes before Off.

COVERAGE AREA: Adjustable for three steps of sensitivity for ultrasonic and two steps for PIR.

SENSOR CHOICES: Factory default setting allows either technology to trigger the unit. Optional disable function of one technology for initial and/or maintain on operations.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

MOUNTING: Mounts direct to box or ceiling. Available is optional adapter for pendant or side mounting with ½" threaded nipple.

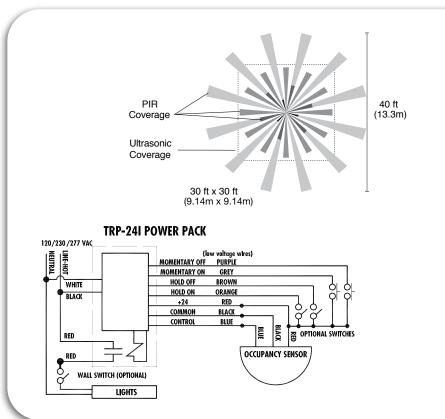

COS-L SERIES PIR CEILING MOUNTING OCCUPANCY SENSOR

APPLICATIONS

- c (ŲL) us
- Large offices areas
- Larger meeting rooms
- Classrooms
 - Equipment room & storage spaces

SPECIFICATIONS

VOLTAGE:

24VDC

CURRENT CONSUMPTION:

9mA

ASHRAE 90.1

POWER SUPPLY:

TPR-24I or TRP-24B Power Packs provided separately

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 1200 sq. ft.

WARRANTY: 5 YRS.

| CATALOG NO. | UPC CODE | INPUT SUPPLY | DESCRIPTION |
|----------------|-------------|-----------------|---------------------|
| COS-L | 98203 | 24VDC | White |
| TRP-24I | 98227 | 120/277VAC | Power Pack |
| COS-ADP | 98229 | 1/2" pendant/si | de mounting adapter |

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

MODES: Three selectable modes: Automatic On/Off, energy saving Walk Through, and Test. Factory default setting is Automatic.


TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.

FLASH WARNING: Optional load flicker 2 minutes before Off.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

MOUNTING: Mounts direct to box or ceiling. Available is optional adapter for pendant or side mounting with $\frac{1}{2}$ " threaded nipple.

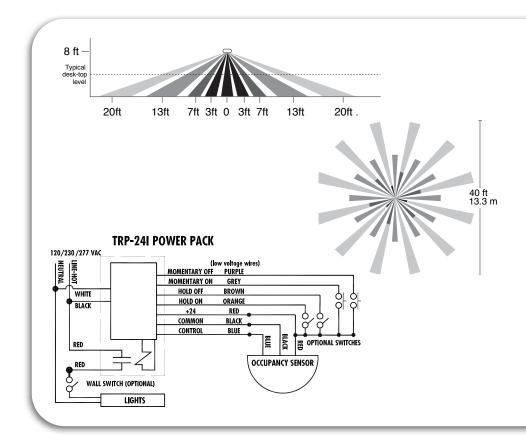



COS-LU SERIES

ULTRASONIC CEILING MOUNTING OCCUPANCY SENSOR

APPLICATIONS



- Large offices areas
 - Larger meeting rooms
 - Classrooms
 - Bathroom & storage spaces

SPECIFICATIONS

VOLTAGE:

24VDC

CURRENT CONSUMPTION:

9mA

ASHRAE 90.1

POWER SUPPLY:

TPR-24I or TRP-24B Power Packs provided separately.

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 900 sq. ft.

WARRANTY: 5 YRS.

| CATALOG NO. | UPC CODE | INPUT SUPPLY | DESCRIPTION |
|----------------|-------------|-----------------|---------------------|
| COS-LU | 98205 | 24VDC | White |
| TRP-24I | 98227 | 120/277VAC | Power Pack |
| COS-ADP | 98229 | 1/2" pendant/si | de mounting adapter |

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

MODES: Three selectable modes: Automatic On/Off, energy saving Walk Through, and Test. Factory default setting is Automatic.


TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.

FLASH WARNING: Optional load flicker 2 minutes before Off.

COVERAGE AREA: Adjustable for three steps of sensitivity.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

MOUNTING: Mounts direct to box or ceiling. Available is optional adapter for pendant or side mounting with 1/2" threaded nipple.

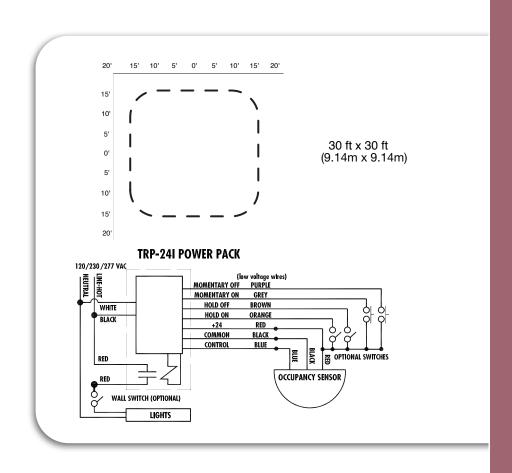

COS-M SERIES PIR CEILING MOUNTING **LINE VOLTAGE OCCUPANCY SENSOR**

APPLICATIONS

- c (VL) us
- Large offices areas
- Larger meeting rooms
- Classrooms
 - Equipment room & storage spaces



ASHRAE 90.1

VOLTAGE:

120/230/277VAC 50/60Hz

SPECIFICATIONS

POWER SUPPLY:

Built-in

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 1200 sq. ft.

WARRANTY: 5 YRS.

CONTACT RATINGS:

120V 800W Tungsten 120V 1000W Electronic Ballast 230V 1500W Electronic Ballast 277V 1800W Electronic Ballast

120V 1/4 HP Motor

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

MODES: Three selectable modes: Automatic On/Off, energy saving Walk Through, and Test. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.


FLASH WARNING: Optional load flicker 2 minutes before Off.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

MOUNTING: Mounts direct to a box. Available is optional adapter for pendant or side mounting with 1/2" threaded nipple.

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) | DESCRIPTION |
|----------------|-------------|--------------------------|--------------------|
| COS-M | 98201 | 120/230/277 | White |
| COS-ADP | 98229 | 1/2" pendant/si | de mounting adapte |

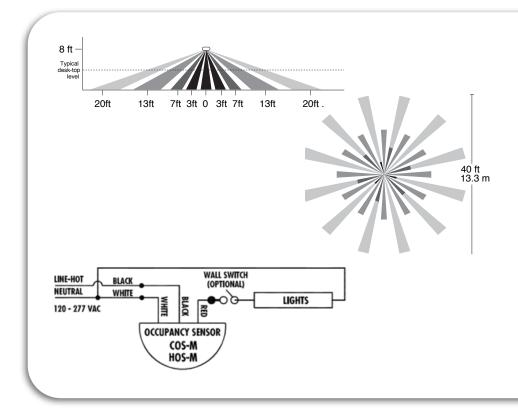



HOS-M SERIES

HIGH BAY PIR MOUNTING LINE VOLTAGE OCCUPANCY SENSOR

APPLICATIONS



- Warehouse
 - Tall aisle
 - High ceiling equipment room & storage spaces



ASHRAE 90.1

VOLTAGE:

120/230/277VAC 50/60Hz

SPECIFICATIONS

POWER SUPPLY:

Built-in

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

COVERAGE: 1000 sq. ft.

WARRANTY: 5 YRS.

CONTACT RATINGS:

120V 800W Tungsten 120V 1000W Electronic Ballast 230V 1500W Electronic Ballast 277V 1800W Electronic Ballast

120V ¼ HP Motor

FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

MODES: Three selectable modes: Automatic On/Off, energy saving Walk Through, and Test. Factory default setting is Automatic.

TIME DELAY: 6 steps settings 5, 10, 15, 20, 25, and 30 minutes. Factory default setting is 10 minutes.


FLASH WARNING: Optional load flicker 2 minutes before Off.

COVERAGE AREA: Preset for full coverage area. Optional half size area is selectable.

TEST MODE: Used for initial installation. Changes back Auto mode within 30 minutes without resetting.

MOUNTING: Includes as standard an adapter for pendant or side mounting with ½" threaded nipple. Also mounts direct to box or ceiling.

| НС | OS-M | 98209 | 120/230/277 | White |
|----|-------------|-------------|--------------------------|-------------|
| | ALOG NO. | UPC CODE | INPUT SUPPLY (VAC) | DESCRIPTION |

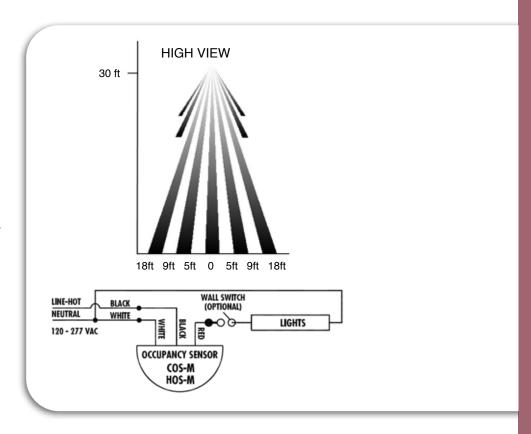

CPS-L SERIES CEILING MOUNTING PHOTO SENSOR

APPLICATIONS

- ONS c ULus
- Side window areas of offices
- Spaces with skylights
- Classrooms



SPECIFICATIONS

VOLTAGE:

24VDC

CURRENT CONSUMPTION:

9mA

POWER SUPPLY:

TPR-24B Power Packs provided separately

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

WARRANTY: 5 YRS.


FEATURES

SOFTWARE SET: Completely customizable functions through button push programming.

LIGHT LEVEL SETTING: Light level between 5 to 200 fc.

MOUNTING: Mounts direct to box or ceiling. Available is optional adapter for pendant or side mounting with $\frac{1}{2}$ " threaded nipple.

| CATALOG NO. | UPC CODE | INPUT SUPPLY | DESCRIPTION |
|----------------|-------------|-----------------|----------------------|
| CPS-L | 98211 | 24VDC | White |
| TRP-24B | 98225 | 120/277VAC | Power Pack |
| COS-ADP | 98229 | 1/2" pendant/si | ide mounting adapter |

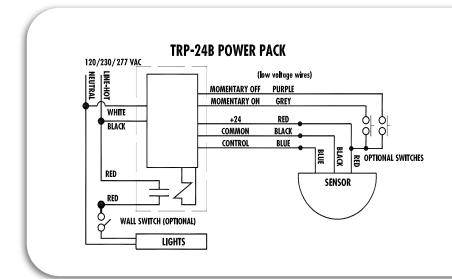



TRP-24 SERIES POWER PACK FOR OCCUPANCY SENSORS



SPECIFICATIONS

VOLTAGE:

120/230/277VAC 50/60Hz

OPERATING TEMPERATURE:

32°to 131°F (0°to 55°C)

WARRANTY: 5 YRS.

CONTACT RATINGS:

120V 15A Incandescent 120V 20A Ballast 230V 20A Ballast 277V 20A Ballast

120V 1 HP Motor

APPLICATIONS



- Power and switching for occupancy or light sensors
- Power and switching for SS410 auto-off switch
- BAS compatible
- Demand shedding applications
- Low cost momentary switching of loads

| CATALOG NO. | UPC CODE | INPUT SUPPLY VAC 50/60Hz | OUTPUT CONTACTS |
|----------------|-------------|--------------------------------|--------------------|
| TRP-24B | 98225 | 120/230/277 | SPST |
| TRP-24I | 98227 | 120/230/277 | SPST |
| LCS115M | 82082 | Momentary | / Switch SPST |

FEATURES

OPERATION: Switches line voltage loads ON/OFF based on a contact closure from an occupancy sensor, AUTO OFF switch, or relay.

SENSOR CONTROL: Three wires for typical device control. Red and black wires for 24VDC output to power a device. Blue control wire to receive ON/OFF signal back from device.


TRP-24B INPUT: Two additional input wires to control TRP.


- 1. ON from momentary switch.
- 2. OFF from momentary switch.

TRP-241 INPUT: Four additional input wires to control TRP.

- 1. Hold OFF for demand shed control.
- 2. Hold ON override.
- 3. ON from momentary switch.
- 4. OFF from momentary switch.

MOUNTING: Box mount to 1/2" KO

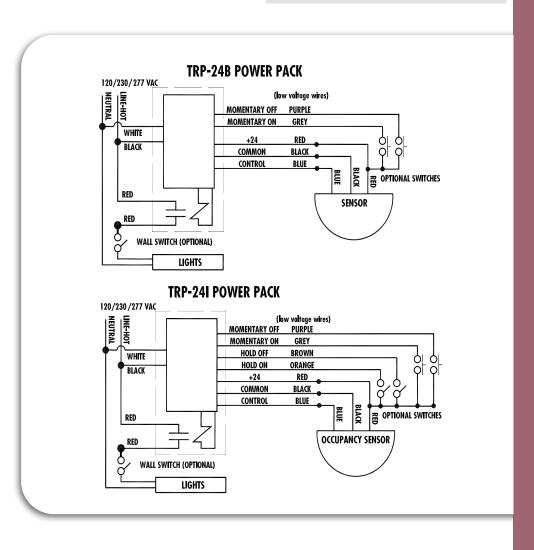

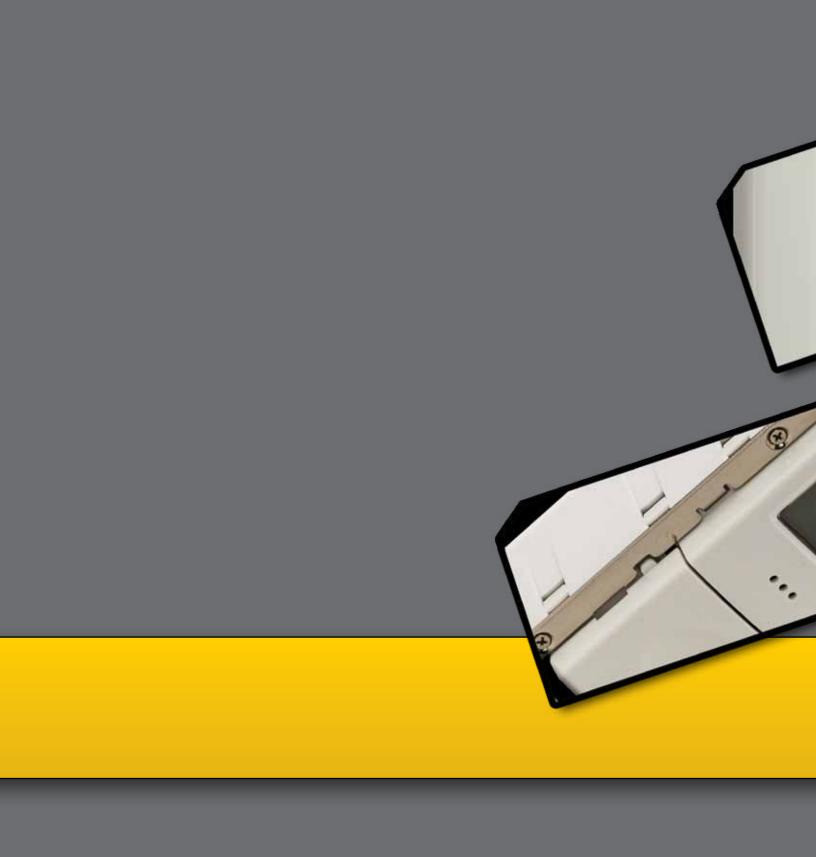



TORK® IN-WALL TIME SWITCHES

QUICK REFERENCE GUIDE

| | | SS700Z | SS721Z | SS720A | SS720Z | SA170 | 701A 711A | SS403 | SS423 | SS410 | SS | D1060 D212 | A | C |
|-----------------------|----------|----------------------------|----------------------------|------------------|----------------------------|-------------------|-----------------------|---------------------|---------------------|---------------------|------------------------|------------------------|------------------------|------------------------|
| Page N | lo. | 509 | 509 | 511 | 512 | 513 | 514 | 515 | 515 | 515 | 517 | 518 | 519 | 520 |
| Timer Ty | уре | SunSet 7 Day Digital | SunSet 7 Day Digital | 7 Day Digital | SunSet 7 Day Digital | ZipSet Digital | 24 Hour Mechanical | Auto OFF Digital | Auto OFF Digital | Auto OFF Digital | Auto OFF Electronic | Auto OFF Electronic | Auto OFF Mechanical | Auto OFF Mechanical |
| Voltag | je | 120/277 | 120/277 | 120 | 120 | 120 | 120 | 120/277 | 120/277 | 24 | 24/120/ 208-240/277 | 120 | 125/250/ 277 | 125/250/ 277 |
| Minimum | ON | 1 min. | 1 min. | 1 min. | 1 min. | 1 min. | 30 min. | 5 min-24 hr | 5 min-24 hr | 5 min-24 hr | 1 min-18 hr | 10-60 min. 2-12 hr | Various 2 min-12 hr | Various 2 min-12 hr |
| Settings | OFF | 1 min. | 1 min. | 1 min. | 1 min. | 1 min. | 30 min. | 5 min. | 5 min. | 5 min. | 1 min. | 10 min. | | |
| Manual Ov | verride | Yes | Yes | Yes | Yes | Yes | Yes | | | | | | | |
| SunS (Astrono | | Yes | Yes | | Yes | ZipSet | | | | | | | | |
| ON/OFF Se | t Points | 10 Pair | 10 Pair | 7 Pair | 7 Pair | 1 Pair | 24 | | | | | | | |
| Flash Wa | rning | | | | | | | Yes | Yes | Yes | Yes | | | |
| Audible W | arning | | | | | | | Yes | Yes | Yes | Yes | | | |
| Power Outage | e Backup | Capacitor | Capacitor | Battery | Battery | Battery | | | | | | | | |
| Switch T | уре | SPST | SPST | SPST | SPST | SPST | SPST | SPST | SPST | SPDT | SPST or SPDT | SPST | SPDT | SPDT or DPST |
| Resistive R | latings | 16A | 16A | 15A | 15A | 15A | 15 & 20A | 15A | 15A | 1A | 4A or 7.5A | 15A | 20/10/ 10A | 20/10/ 10A |
| LED Rati | | 10A | 10A | | | | | 1200W | 1200W | | | | | |
| Neutral Re for Wir | | No | Yes | Yes | Yes | Yes | Yes | No | Yes | Yes | No | Yes | No | No |
| 3-Way W | iring | Yes | Yes | No | No | No | No | Yes | Yes | Yes | SS13 Yes | No | No | No |





APPLICATIONS



- Commercial outdoor security lighting
- Interior lobby lighting
- Contactors for fans and motors
 - Sign lighting





SPECIFICATIONS

BACK-UP

WITHOUT **BATTERIES!**

TIMING ACCURACY: Line frequency.

INPUT VOLTAGE: 120/277VAC,

50/60Hz.

WIRE SIZE: #12AWG input/output -

#16AWG 3-way (remote).

OPERATING TEMPERATURE: $32^{\circ}F$ to $+104^{\circ}F$ (0°C to $+40^{\circ}C$).

FEATURES

SCHEDULING: 10 ON and OFF pairs of set points for individual programs on each day of the week. 11 day groups speed programming. Minimum setting is 1 minute.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Sunset and sunrise times are adjustable from 10°-60° Northern or Southern latitudes. Can be individually offset +/- 1-240 minutes for earlier or later operation.

RANDOM MODE: Varies ON and OFF times to create lived in look when away.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).

LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.

MANUAL MODE: Does not run programs until set to AUTO (automatic) mode.

VACATION MODE: No operation when away.

EASY WIRING:

SS700Z does not require a neutral, can be used as a 3-way switch.

SS721Z Requires a neutral, can be used as a 3-way switch.

CLOCK FORMAT: AM/PM. **POWER OUTAGE BACKUP:**

Permanent schedule retention. Supercapacitor provides 2 days of real time backup.

COMMERCIAL GRADE SPECS:

Control lighting contactors and 277VAC loads. Compatible with CFL lamps.

FULL SWITCHING: No minimum


load requirement.

| ı | CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60 Hz | SWITCH TYPE | COLOR |
|---|----------------|-------------|-----------------------------------|----------------|--------------|
| | SS700Z | 14019 | 120/277 | SPST | White |
| | SS700ZA | 14020 | 120/277 | SPST | Light Almond |
| | SS721Z | 14027 | 120/277 | SPST | White |
| | SS721ZA | 14028 | 120/277 | SPST | Light Almond |

| TYPE | SS700Z SERIES RATING | VOLTAGE (VAC) | SS721Z SERIES RATINGS |
|------------|-------------------------|---------------|--------------------------|
| Resistive | 16A | 120-277 | 16A |
| Ballast | 10A | 120-277 | 13A |
| LED Driver | 10A | 120-277 | 10A |
| Tungsten | 8A | 120 | 8A |
| Pilot Duty | 360VA | 120 | 720VA |
| Motor | 1/2HP | 120 | 1/2HP |




WIRING DIAGRAM: INSTALLATION 55700Z

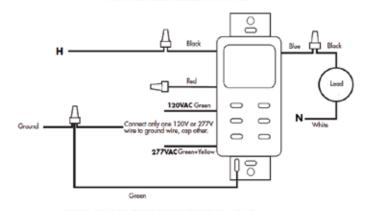


WIRING DIAGRAM: THREE-WAY INSTALLATION SS700Z

Connect a wire inside the gang-box between Traveler A and Hot.

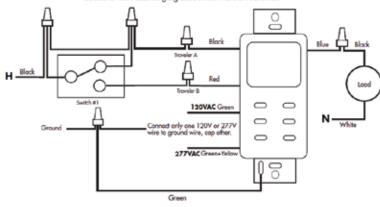


WIRING DIAGRAM: INSTALLATION SS721Z

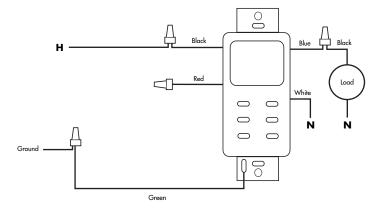

WIRING DIAGRAM: THREE-WAY INSTALLATION SS721Z

Connect a wire inside the gang-box between Traveler A and Hot.

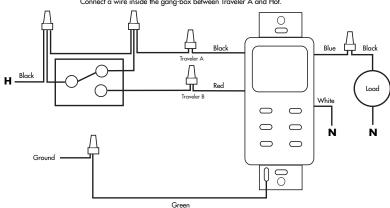

SS720A SERIES 7 DAY IN-WALL RESIDENTIAL TIMER

APPLICATIONS



- Residential Interior lights
 - Random for lived-in look
 - Small fans and motors
 - Appliances



SPECIFICATIONS

TIMING ACCURACY: +/- 1

minute/month

INPUT VOLTAGE: 125VAC, 60Hz.

WIRE SIZE: #14AWG.

OPERATING TEMPERATURE: 32°F to +104°F (0°C to +40°C).

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60 Hz | COLOR |
|----------------|-------------|-----------------------------|--------------|
| SS720A | 14017 | 120 | White |
| SS720AA | 14018 | 120 | Light Almond |

| ТҮРЕ | VOLTAGE (VAC) | RATING |
|--------------------|---------------|--------|
| General Purpose | 120 | 15A |
| Resistive | 120 | 15A |
| Tungsten | 120 | 15A |
| Motor | 120 | 1HP |
| Electronic Ballast | 120 | 500VA |

FEATURES

SCHEDULING: 7 ON and OFF pairs of set points for individual programs on each day of the week. Minimum setting is 1 minute.

RANDOM MODE: Varies ON and OFF times to create "lived in" look when away.

DAYLIGHT SAVING: Manual button push

for one hour adjustment.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes.


WIRING: Requires a neutral.

CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP: Rechargeable Ni-Cad battery retains time and schedule.

WALL PLATE: Supplied with standard single

gang decorator wall plate.

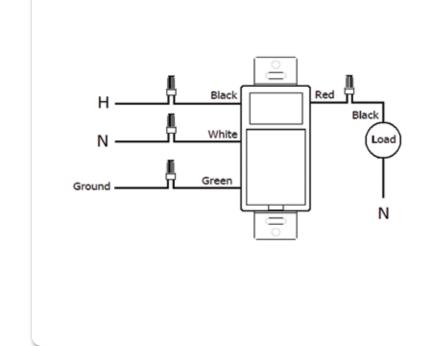

TORK® SS720Z

SunSet IN-WALL RESIDENTIAL TIMER SUNSET / SUNRISE / 7 DAY

APPLICATIONS



- Residential Interior lights
- Small fans and motors
- Appliances



7

SPECIFICATIONS

TIMING ACCURACY: +/- 1 minute/

month

INPUT VOLTAGE: 120VAC, 60Hz.

WIRE SIZE: #14AWG

OPERATING TEMPERATURE: 32°F to +104°F (0°C to + 40°C).

| CATALOG | UPC | INPUT SUPPLY | COLOR |
|---------|-------|--------------|-------|
| NO. | CODE | (VAC) 60 Hz | |
| SS720Z | 14023 | 120 | White |

| ТҮРЕ | VOLTAGE (VAC) | RATING |
|--------------------|---------------|---------------|
| General Purpose | 120 | 15A |
| Resistive | 120 | 15A |
| Tungsten | 120 | 960W |
| Motor | 120 | 1 ∕2HP |
| Electronic Ballast | 120 | 500VA |

FEATURES

SCHEDULING: 7 ON and OFF pairs of set points for individual programs on each day of the week. Minimum setting is 1 minute.

SunSet ASTRONOMIC: Adjusts daily to changes in sunset times. Sunset and sunrise times with five zones: North USA/Southern Canada, Central USA, South USA, Northern Canada/Alaska, and Hawaii/Puerto Rico.

RANDOM MODE: Varies ON and OFF times to create "lived in" look when away.

DAYLIGHT SAVING: Automatic adjustment (can be omitted).


LEAP YEAR: Automatic Compensation.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic operation then resumes. WIRING: Requires a neutral. CLOCK FORMAT: AM/PM.

POWER OUTAGE BACKUP:

Rechargeable Ni-Cad battery retains time and schedule.

WALL PLATE: Supplied with standard single gang decorator wall plate.

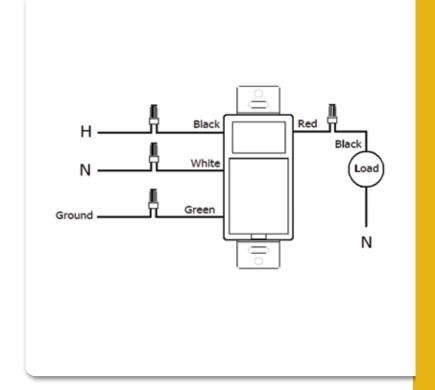

SA170 SERIES RESIDENTIAL TIMER **SUNSET / TIME OFF**

APPLICATIONS





Small fans and motors

Appliances



*Wall plate not included

SPECIFICATIONS

TIMING ACCURACY: +/- 1

minute/month

INPUT VOLTAGE: 120VAC, 60Hz.

WIRE SIZE: #14AWG.

OPERATING TEMPERATURE:

 $32^{\circ}F$ to $+104^{\circ}F$ (0°C to $+40^{\circ}C$).

| - | CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60 Hz | COLOR |
|------|----------------|-------------|-----------------------------|-------|
| NEWI | SA170 | 16528 | 120 | White |

| ТҮРЕ | VOLTAGE (VAC) | RATING |
|-----------|---------------|--------|
| Resistive | 120 | 15A |
| Inductive | 120 | 15A |
| Tungsten | 120 | 5A |
| Motor | 120 | 1/2HP |

FEATURES

Tip-Set™ factory preset time. Just enter area code and it finds correct time and sunset time.

SCHEDULING: One On/Off set point pair is active at a time. Schedule 1, Schedule 2, a combination of 1 & 2, or ZipSet™. Day combinations for 7-5-2 speed programming.

RANDOM MODE: Varies ON and OFF times to create "lived in" look when away.

COUNTDOWN: Button press turns lights ON and starts a 5 minute countdown to OFF.

DAYLIGHT SAVING: Manual button push


for one hour adjustment.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF, automatic

operation then resumes.

WIRING: Requires a neutral. **CLOCK FORMAT:** AM/PM.

POWER OUTAGE BACKUP: Lithium batteries retain time and schedule.

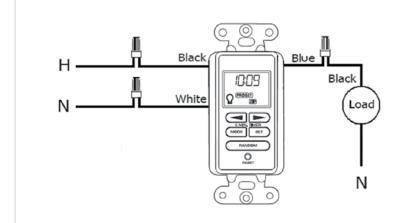

701A & 711A SERIES 24 HOUR IN-WALL TIMER

TORK

SPECIFICATIONS

INPUT VOLTAGE: 125VAC, 60Hz.

WIRE SIZE: #14AWG.

OPERATING TEMPERATURE: 32°F to +104°F (0°C to +40°C).

APPLICATIONS



■ Porch or patio

Doorway

− Pool

Outdoor security lighting

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60 Hz | COLOR |
|----------------|-------------|-----------------------------|--------------|
| 701A | 10113 | 125 | White |
| 701AA | 10118 | 125 | Light Almond |
| 711A | 10114 | 125 | White |

| TYPE | VOLTAGE (VAC) | RATING | |
|-----------------|---------------|-------------|-------------|
| HIFE | | 701A SERIES | 711A SERIES |
| General Purpose | 125 | 20A | 15A |
| Resistive | 125 | 20A | 15A |
| Tungsten | 125 | 1500W | 1250W |
| Motor | 125 | 1 HP | 1/2 HP |

FEATURES

SCHEDULING: Minimum ON setting is 30 minutes. Dial has 48 captive trippers.

BYPASS SWITCH: Slide switch for ON, OFF, or TIMER (automatic) operation.

VACATION MODE: Set timer OFF with

no change of tripper settings.


WIRING: Requires a neutral.

CLOCK FORMAT: AM/PM marked

on dial.

WALL PLATE: Supplied with single


gang wallplate.

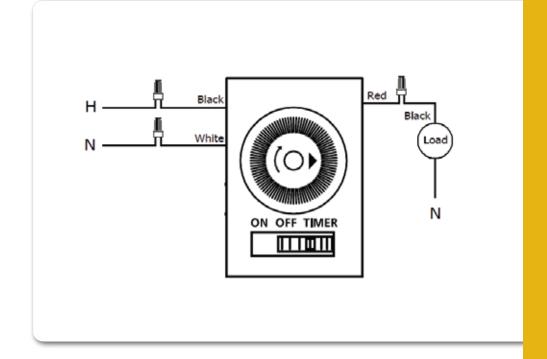

TORK® SS400 SERIES DIGITAL AUTO OFF IN-WALL TIMER

APPLICATIONS





- Energy code timed override
- Exhaust fans
- Equipment room and storage spaces



0

SS400 Series
*Wall plate included

PROGRAMMABLE!

SPECIFICATIONS

TIMING ACCURACY: Line Frequency

INPUT VOLTAGE: SS403/SS423 — 120/230/277VAC 50/60 Hz SS410 — 24VDC OR 24VAC 50/60 Hz

WIRE SIZE: SS403/SS423 - #14AWG input/output - #16AWG 3-way (remote)

SS410 - #18AWG

OPERATING TEMPERATURE: 32°F

to +104°F (0°C to + 40°C)

WARRANTY: 5 Yrs.

FEATURES

WIRING CHOICES:

SS403 — no neutral for retrofit

SS423 — with neutral for new construction

SS410 — multiple circuits with power packs

- low voltage for class 2 wiring

ENERGY CODE PRESET: 2 hour timing for Title 24 and IECC (default). 4 hour timing for ASHRAE 90.1 (with quick dip switch adjustment)

PROGRAMMABLE: 5 minutes to 24 hour: 5 minute steps from 5 minutes to 1 hour. 10 minute steps from 1 to 4 hours. 30 minute steps from 4 to 12 hours. 1 hour steps from 12 to 24 hours.

SCROLL LOCK: Limits user adjustment to a maximum equal to the preset time.

FLASH WARNING: Optional one second flicker turns load off/on 2 minutes before end of time cycle.

BEEPER WARNING: Optional beep will sound every 15 seconds during the last 2 minutes of the time cycle.

TAMPER RESISTANT: Wall plate locks access to dip switch adjustments.


THREE-WAY & MULTI-WAY: Three-way compatible with existing switch. Multi-way requires momentary switches at the additional locations. Maximum distance 100 feet.

| | no. |
|---------------------------------|-------|
| DISPLAY: Backlit LCD Display. | SS403 |
| COLOR: White (single gang | |
| decorator wall plate included). | SS423 |


| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60 Hz | SWITCH TYPE | COLOR |
|----------------|-------------|-----------------------------------|----------------|-------|
| SS403 | 14029 | 120/230/277 | SPST | White |
| SS423 | 14030 | 120/230/277 | SPST | White |
| SS410 | 14033 | 24VDC or 24VAC | SPDT | White |

| TYPE | VOLTAGE | SS403 Rating | VOLTAGE (VAC) | SS423 RATING |
|------------------------|------------|-----------------|---------------|-----------------|
| Resistive | 120-277VAC | 15A | 120-277 | 15A |
| Ballast | 120-277VAC | 10A | 120-277 | 13A |
| LED Lamp Driver | 120-277VAC | 1200W | 120-277 | 1200W |
| Tungsten | 120VAC | A8 | 120 | 8A |
| Pilot Duty | 120VAC | 360VA | 120-277 | 720VA |
| Motor | 120VAC | 1/4HP | 120-277 | 1HP |
| | | SS410 | | |
| VOLTAGE | RATING | | VOLTAGE (VAC) | RATING |
| 28VDC | .5A Max | | 24 | 1A Max |
| Minimum Load 1 ma @ 5V | | | | |




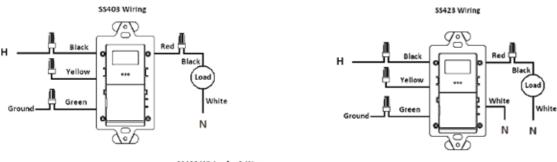


SS403 Wiring for 3-Way

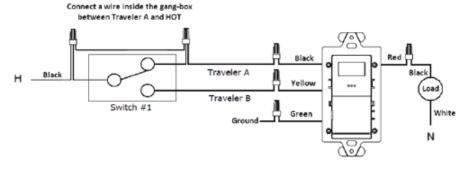


SS403 Wiring for 4-Way
Use mometary switches at all additional locations.
Tork #LCS115M

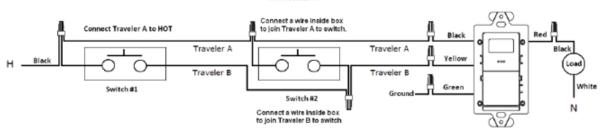

SS410 Series Wiring

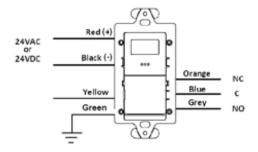

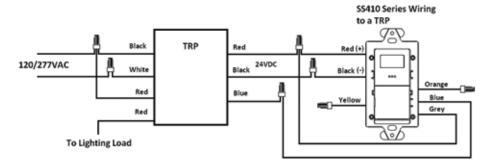

SS SERIES AUTO OFF IN-WALL TIMER

APPLICATIONS



- —■ Bathroom fans and lights
 - Indoor/Outdoor lighting
- **─** Storage areas
 - Hospitality areas



SPECIFICATIONS

TIMING ACCURACY:

±5% @ 60° to 80°F.

INPUT VOLTAGE:

24/120/208-240/277VAC, 50/60Hz.

WIRE SIZE: #18AWG.

OPERATING TEMPERATURE:

 0° F to $+100^{\circ}$ F (-17°C to $+37^{\circ}$ C).

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 50/60Hz | WARNING BEFORE TIME OUT | SWITCH TYPE |
|----------------|-------------|-------------------------------|----------------------------|----------------|
| SS20 | 14005 | 24/120/208-240/277 | None | Single pole |
| SS20F | 14008 | 24/120/208-240/277 | *Flicker | Single pole |
| SS13F | 14007 | 24/120/208-240/277 | *Flicker | 3-way |
| SS13B | 14006 | 24/120/208-240/277 | **Beep | 3-way |

^{*}Flicker feature turns load OFF for $\frac{1}{2}$ second, 2 minutes before end of timed cycle and again 1 minute before end of timed cycle.

^{**}Beep feature will begin a $\frac{1}{2}$ second audible warning every 12 seconds during the last 2 minutes of timed cycle.

| TYPE | CONTACT | MINIMUM LOAD | |
|------------------|---------------------|--------------|-------|
| IIFE | RATINGS | VOLTS | WATTS |
| | .25-4.0A Resistive | 24 | 6 |
| CC1 OF O | .25-4.0A Ballast* | 120 | 30 |
| SS13F & SS13B | .25-4.0A Tungsten | 208 | 50 |
| 33130 | 1/8 HP @ 120VAC | 240 | 60 |
| | 1/3 HP @ 240VAC | 277 | 70 |
| | .50-7.25A Resistive | 24 | 12 |
| CC00 o | .50-7.25A Ballast* | 120 | 60 |
| SS20 & SS20F | .50-4.0A Tungsten | 208 | 105 |
| 33201 | 1/6 HP @ 120VAC | 240 | 120 |
| | 1/2 HP @ 240VAC | 277 | 150 |

^{*}Not compatible with compact fluorescent lamps (CFL) and electronic fluorescent ballasts.

FEATURES

VARIABLE TIMING: Choose from 1 minute to 18 hours.

FLASH WARNING: "F" suffix models with flicker feature turns load off for 1/2 second, 2 minutes before end of timed cycle and again 1 minute before end of timed cycle.

AUDIBLE WARNING: "B" suffix model will buzz that every 12 seconds during the last 2 minutes of timed cycle.


TAMPER RESISITANT: Time ON interval preset is hidden behind wall plate.

EASY SET: Small screw driver adjustment provides quick set-up of timing.

EASY WIRING: No neutral needed, great for retrofit.

3-WAY: SS13 SERIES replaces standard 3-way switch with no re-wiring.

COLOR: White.

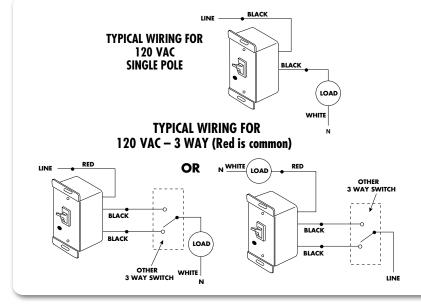



D SERIES ELECTRONIC AUTO OFF IN-WALL TIMER

APPLICATIONS



- Whole house fans
- Indoor/Outdoor lighting
- Bathroom fans and lights
- Self storage

2 HOUR 4 HOUR 8 HOUR 12 HOUR OFF

SPECIFICATIONS

TIMING ACCURACY: Line voltage. INPUT VOLTAGE: 120VAC, 60Hz.


WIRE SIZE: #14AWG.

OPERATING TEMPERATURE:

32°F to 122°F (0°C to 50°C).

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | TIME SETTINGS | OUTPUT CONTACTS |
|----------------|-------------|-------------------------------|------------------|------------------------|
| D212H | 14021 | 120 | lvory | 2, 4, 8, 12 HOURS |
| D212HA | 14022 | 120 | Light Almond | 2, 4, 8, 12 HOURS |
| D212HW | 14023 | 120 | White | 2, 4, 8, 12 HOURS |
| D1060M | 14025 | 120 | lvory | 10, 20, 30, 60 MINUTES |
| D1060LA | 14024 | 120 | Light Almond | 10, 20, 30, 60 MINUTES |
| D1060MW | 14025 | 120 | White | 10, 20, 30, 60 MINUTES |

| TYPE | VOLTAGE (VAC) | RATING |
|-----------------|---------------|--------|
| General Purpose | 120 | 15A |
| Resistive | 120 | 1000W |
| Tungsten | 120 | 1000W |
| Motor | 120 | 1/4 HP |
| Ballast | 120 | 1000VA |

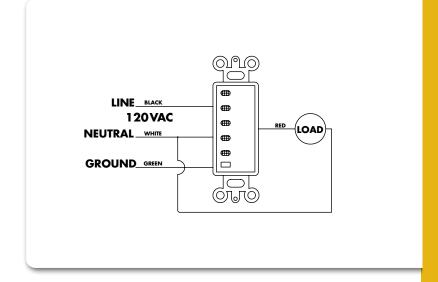

FEATURES

VARIABLE TIMING:

Button push changes time ON setting.

D1060M: 10, 20, 30, 60 minute. **D212H:** 2, 4, 8, 12 hour.

LED DISPLAY: Indicator moves to new range

as timer counts down.

TAMPER RESISTANT: Time ON interval

preset.

EASY SET: No adjustments, just wire and go!

WIRING: Requires a neutral.

THREE COLORS: Ivory, Light Almond, White.

A SERIES SPRINGWOUND AUTO OFF IN-WALL TIMER

APPLICATIONS

- c (UL) us
- Whole house fans
- Indoor/Outdoor lightingBathroom fans and lights
- Self storage



*Wallplate not included

NEW! SPDT, 2 IN 1 CONTACTS

SPECIFICATIONS

INPUT VOLTAGE:

125/250/277VAC, 50/60Hz.

TERMINAL SIZE: #12AWG.

OPERATING TEMPERATURE:

32°F to 122°F (0°C to 50°C).

| CATALOG NO. | UPC CODE | HOLD Feature | COLOR | | | |
|----------------|-------------|-----------------|--------------|--|--|--|
| 15 MINUTI | E MAX. | | | | | |
| A515MH | 15020 | With Hold | lvory | | | |
| A515MHW | 15120 | Willi Holu | White | | | |
| A515M | 15013 | | lvory | | | |
| A515MW | 15113 | No Hold | White | | | |
| A515MA | 15127 | | Light Almond | | | |
| 30 MINUTI | E MAX. | | | | | |
| A530MH | 15021 | With Hold | lvory | | | |
| A530MHW | 15121 | | White | | | |
| A530M | 15014 | | lvory | | | |
| A530MW | 15114 | No Hold | White | | | |
| A530MA | 15128 | | Light Almond | | | |
| 60 MINUTI | E MAX. | | | | | |
| A560MH | 15022 | With Hold | lvory | | | |
| A560MHW | 15122 | Willi Holu | White | | | |
| A560M | 15015 | No Hold | lvory | | | |
| A560MW | 15115 | No Holu | White | | | |
| 2 HOUR MAX. | | | | | | |
| A502HHW | 15123 | With Hold | White | | | |
| A502H | 15016 | No Hold | lvory | | | |
| A502HW | 15116 | No Holu | White | | | |
| 6 HOUR | MAX. | | | | | |
| A506HHW | 15125 | With Hold | White | | | |
| A506H | 15018 | No Hold | lvory | | | |
| A506HW | 15118 | no noid | White | | | |
| 12 HOUR | MAX. | | | | | |
| A512HH | 15026 | With Hold | lvory | | | |
| A512HHW | 15126 | | White | | | |
| A512H | 15019 | No Hold | lvory | | | |
| A512HW | 15119 | NV NVIU | White | | | |

FEATURES

VARIABLE TIMING: Twist knob for time ON setting. Time ON lengths from 15 minutes to 12 hour vary by model.

HOLD FEATURE: Some models have position for constant ON.

EASY SET: No adjustments. Just wire and go!

EASY WIRING: No neutral required. Great for retrofit! Use as single or in multi-gang box with no de-rating.

SWITCH TYPE: SPDT "2 in 1" contacts wire has SPST also.

COLOR: Ivory, Light Almond, White.

WALL PLATE: Fits standard or decorator style wall plates, see below

(not included).

| USE FOR SPST | USE FOR SPDT |
|--------------|---------------|
| LINE 1 | LINE 1 |
| | |
| \Diamond | |
| LOAD 1 | LOAD 2 LOAD 1 |

VOLTAGE (VAC)

250 277

125

250 277

125

125 250 **RATING**

20A

10A 10A

20A

10A 10A

7A

1HP 2HP

TYPE


Resistive

Inductive

Tungsten

Motor







NC



CAUTION: This timer is not to be used in precision timing applications where inaccurate timing could have dangerous consequences (i.e. sun lamp, sauna, etc.).

C SERIES COMMERCIAL STYLE SPRINGWOUND AUTO OFF IN-WALL TIMER

APPLICATIONS C(



- Ventilating fans
- HVAC
- ──■ Whirlpools
 ──■ Self storage
 - Motors and pumps



*Wallplate included

NEW! SPDT, 2 IN 1 CONTACTS

SPECIFICATIONS

INPUT VOLTAGE:

125/250/277VAC, 50/60Hz.

TERMINAL SIZE: #12AWG.

OPERATING TEMPERATURE:

32°F to 122°F (0°C to 50°C).

| TYPE | VOLTAGE (VAC) | RATING |
|-----------|-------------------|-------------------|
| Resistive | 125 250 277 | 20A 10A 10A |
| Inductive | 125 250 277 | 20A 10A 10A |
| Tungsten | 125 | 7A |
| Motor | 125 250 | 1HP 2HP |

| CATALOG NO. 15 MINUT | UPC CODE TE MAX. | HOLD FEATURE |
|----------------------------|------------------------|-----------------|
| C515M | 15501 | No Hold |
| 30 MINUT | E MAX. | |
| C530M | 15503 | No Hold |
| 60 MINUT | E MAX. | |
| C560M | 15505 | No Hold |
| C560MH | 15506 | With Hold |
| C460M* | 15011 | No Hold |
| 2 HOUR | MAX. | |
| C502H | 15507 | No Hold |
| 6 HOUR | MAX. | |
| C506H | 15511 | No Hold |
| 12 HOUR | MAX. | |
| C512H | 15513 | No Hold |
| C512HH | 15514 | With Hold |
| C412H* | 15010 | No Hold |
| *DDCT quitch tuno | | |

*DPST switch type.

FEATURES

VARIABLE TIMING: Twist knob for time ON setting. Time ON lengths from 15 minutes to 12 hour vary by model.


HOLD FEATURE: Some models have position for constant ON.

EASY SET: No adjustments. Just wire and go!


EASY WIRING: No neutral required. Great for retrofit! **SWITCH TYPE:** SPDT "2 in 1" contacts wire as SPST also, except C460M and C412H are DPST.

COLOR: Metal-brushed aluminum.

WALL PLATE: Includes real metal wall plate with screw mounting, to add extra security for commercial applications.



CAUTION: This timer is not to be used in precision timing applications where inaccurate timing could have dangerous consequences (i.e. sun lamp, sauna, etc.).

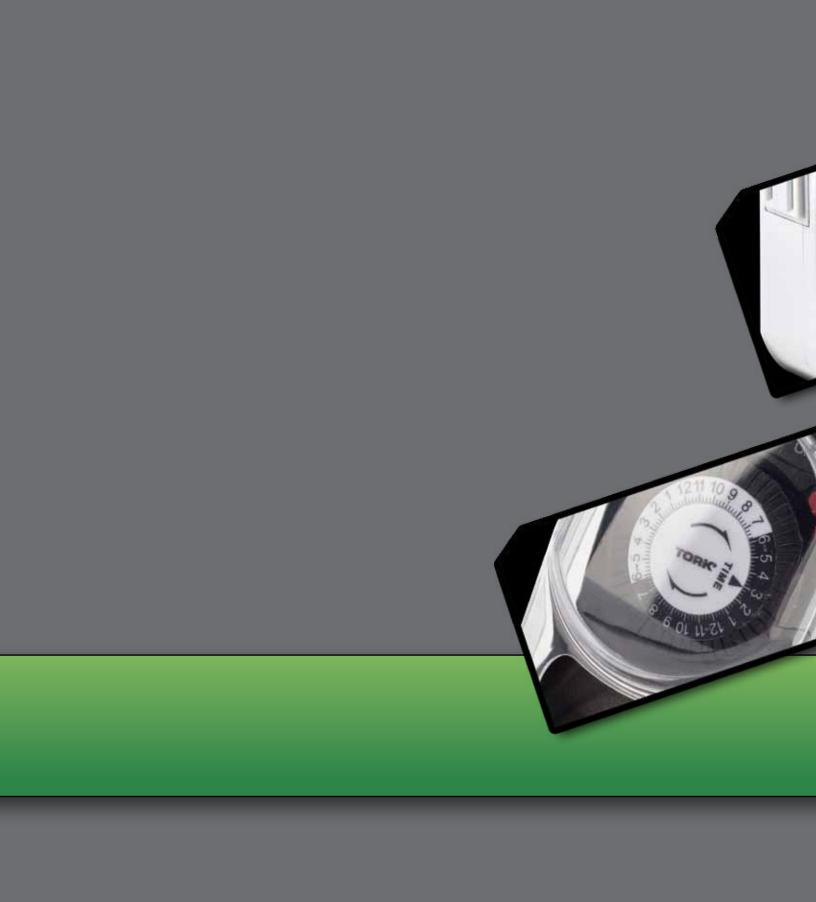



TORK® PLUG-IN TIMERS

400 SERIES INDOOR PLUG-IN MECHANICAL TIMERS

APPLICATIONS



- Automatically turn ON/OFF items in the home.
- Control lamps, radios, televisions, appliances.
- —■ Give the home a "lived in" look while away.
 - Save energy and provide security.







403A

FEATURES

REPEAT SCHEDULE: Daily.

VARIABLE TIMING: Multiple ON/OFF times.

ON/OFF: Manual ON/TIMER switch.



▲ 405A

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (▶) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|--|--------------------|--------------|------------------------------------|-----------------------------|
| 401A | 16001 | | 1 | Polarized | Multiple ON/OFF Lighting Timer | 15 minute |
| 402A | 16002 | 125 VAC, 15A, 1875W Resistive | 1 | Grounded | Heavy Duty 24 hour Timer | 15 minute |
| 403A | 16013 | 125VAC, 10A, 1250W Tungsten 125VAC, 1/3HP | 1 | Polarized | Powerful & Compact Automatic Timer | 30 minute |
| 405A | 16014 | | 2 | Grounded | Heavy Duty 15 AMP Automatic Timer | 15 minute |

NOTE: "A" = Indicates outlet location.



SA100 SERIES INDOOR PLUG-IN MECHANICAL TIMERS



APPLICATIONS



- Automatically turn ON/OFF items in the home.
- Control lamps, radios, televisions, appliances.
- Give the home a "lived in" look while away.
- Save energy and provide security.



SA011



SA105



SA100



SA110

FEATURES

REPEAT SCHEDULE: Daily.

VARIABLE TIMING: Multiple ON/OFF times.

ON/OFF: Manual ON/TIMER switch.

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (►) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|---|--------------------------|------------------------|--|--------------------------------|
| SA011 | 16501 | 120VAC 15A Resistive, 120VAC 15A Inductive , 120VAC 1800W Tungsten, 120VAC 1/2HP Motor | 1 | Polarized | Lamp Timer with LED night light | Two Pair of On/Off trippers |
| SA100 | 16507 | | 1 | Polarized | Basic Timer with cover to hide dial | 15 Minutes |
| SA105 | 16510 | 120VAC 15A Resistive 120VAC 15A Inductive 120VAC 1800W Tungsten | 1 Timed 1 Untimed | Polarized Polarized | Table Top Timer for easy access with 6" cord | 15 Minutes |
| SA110 | 16513 | | 1 Timed 1 Untimed | Grounded Polarized | Heavy Duty Appliance Timer with cover to hide dial | 15 Minutes |

NOTE: "**\[\]**" = Indicates outlet location.

SA 100 & 400 SERIES INDOOR DIGITAL PLUG-IN TIMERS



APPLICATIONS



- Automatically turn ON/OFF items in the home.
 - Vary schedules daily.
- Give the home a "lived in" look while away.
- Save energy and provide security.





FEATURES

SA134:

24 hour programming Battery Back-up for power outages

SA130 & 455A:

7 day programming Random feature for lived in look Manual Daylight Savings Battery Back-up for power outages

SunSet™ TIMER 457Z:


Sunset On with 7 day programmable Off or sunrise Off Random feature for lived in look Automatic Daylight Savings Battery Back-up for power outages Never come home to a dark house



SA134

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (▶) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|--|--------------------------|--------------|--|---|
| SA134 | 16522 | 120VAC 8.3 amp Resistive 120VAC 600W Tungsten | 1 | Polarized | Easy Set 24 hour daily repeat timer | 2 On/Off Settings |
| SA130* | 16519 | 120VAC 15A Resistive , 120VAC 15A Inductive, 120VAC 500W Tungsten 120VAC 1/2 HP Motor | 1 Timed 1 Untimed | Polarized | Easy Set Lamp Timer with cover to hide buttons | 2 On/Off settings. 1 setting may be active at a time |
| 455D | 16015 | 125VAC 15A General Purpose 125VAC 15A Resistive | 2 | Grounded | Seven Day Programmable | 24 ON/OFFs Different schedule for each day of the week. Multiple ON/OFFs |
| 457Z | 16016 | 125VAC 1000W Tungsten | 2 | Grounded | SunSet™ Timer Dusk to Dawn with automatic daylight savings | 20 ON/OFFs Different schedule for each day of the week. Multiple ON/OFFs |

NOTE: "**\[\]**" = Indicates outlet location.





SA200 & SA500 SERIES WIRELESS PLUG-IN CONTROLS



APPLICATIONS



- Remotely turn ON/OFF items.
- Control lamps, radios, appliances, outdoor lighting.
- Safety: enter and leave rooms in full light.
- Provide a convenient control from your chair.



FEATURES

INDOOR REMOTE OUTLET - SA500:

Control indoor outlet up to 80' away
Transmitter has 3 pair ON/OFF buttons to allow independent control of 3 receivers
Match receiver and outlet with simple dial. No fussy programming.
Get one for each room. No cross talk.
Wireless control without moving across room

OUTDOOR REMOTE OUTLET - SA230:

Control indoor outlet up to 80' away Matched receiver and outlet. No programming Transmitter has 1 pair ON/OFF button Wireless control from the comfort of inside

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (►) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|---|--------------------------|--------------|----------------------------------|---|
| SA500 | 16555 | 125VAC 8A Resistive 125VAC 625W Tungsten | 1 | Grounded | Indoor Remote Controlled Outlet | Manual On/Off with push button transmitter |
| SA230 | 16564 | 125VAC 8A Resistive 125VAC 600W Tungsten | 2 | Grounded | Outdoor Remote Controlled Outlet | Manual On/Off with push button transmitter |

NOTE: "**\(\rightarrow**" = Indicates outlet location.

600 & SA200 SERIES OUTDOOR PLUG-IN MECHANICAL TIMERS



APPLICATIONS



- Automatically turn ON/OFF outdoor lighting.
- Save energy. Don't run lights all night.
- Match dusk On with light activated timer.





601A



MECHANICAL TIMERS:

TIMER REPEAT SCHEDULE: Daily. VARIABLE TIMING: Multiple ON/OFF times. MANUAL SWITCH: ON or TIMER mode

LIGHT ACTIVATED TIMERS:

TIMER REPEAT SCHEDULE: Daily turns on at dusk VARIABLE TIMING: Dial turn to choose a countdown time to turn Off hours after dusk







| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (►) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|--|---|--------------------------|--------------|--|---|
| 601A | 16020 | 125 VAC, 15A, 1875W General Purpose 125VAC, 15A, 1875W Resistive | 1 | Grounded | Outdoor Lighting Timer | 15 Minutes |
| 602A | 16021 | 125VAC, 10A, 1250W Tungsten 125VAC, 1/2HP | 2 | Grounded | Outdoor Lighting Timer | 15 Minutes |
| SA205* | 16534 | 120VAC 15A Resistive 120VAC 15A Inductive 120VAC 1800W Tungsten 120VAC 1800W Incandescent 120VAC 1/2 HP Motor | 1 Timed 1 Untimed | Grounded | Landscape Timer | 15 Minutes |
| 652B | 125VAC 15A General Purpose 125VAC 15A Resistive | | 2 | Grounded | Light Activated Outdoor Lighting Timer | Turns on at Dusk and countdown Off 2, 4, 6 or 8 hours later |

 $^{^{}st}$ ETL listed for U.S. and Canada.



. NOTE: "A" = Indicates outlet location.

600 & **SA200 SERIES OUTDOOR PLUG-IN DIGITAL TIMERS**



APPLICATIONS



- Automatically turn ON/OFF outdoor lighting
- Save energy. Don't run lights all night
- Match dusk On with light activated timer









DIGITAL TIMER:

7 day programming **Manual Daylight Savings** Random feature for lived in look Battery Back-up for power outages

PHOTO-TIMERS:

Dusk to Dawn operation Set a fixed time off before Dawn Battery Back-up for power outages

LIGHT ACTIVATED TIMERS:

TIMER REPEAT SCHEDULE: Daily turns on at dusk.

VARIABLE TIMING: Choose a countdown time to turn Off from 1 to 9 hours after dusk.

654A USER SELECT MODE: Start countdown at any time and repeats daily.



SA204

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (►) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|---|--------------------------|--------------|---|---|
| 621D | 16056 | 125 VAC, 15A, 1875W General Purpose | 2 | Grounded | Digital Outdoor Timer | 7 On/Off pairs. Schedule for each day of week |
| 611D | 16018 | 125VAC, 15A, 1875W Resistive 125VAC, 1000W Tungsten 125VAC, 8A Ballast | 1 | Grounded | Digital Outdoor Photo-Timer | Photocell Turns on at Dusk and off at Dawn |
| 631D | 16027 | 125VAC, 1/2HP | 2 | Grounded | Digital Outdoor Photo-Timer | or off at a pre-set time |
| SA204* | 16561 | 120VAC 8A Resistive 120VAC 600W Tungsten | 2 | Grounded | Light Activated Landscape Timer | Turns on at Dusk and countdown off 1 through 9 hours later |
| 654A | 16025 | 125VAC 15A General Purpose, 125VAC 15A 16025 Resistive, 125VAC 625W Tungsten 125VAC 1/3HP, TV-5 | | Grounded | Light Activated Outdoor Lighting Timer or User Selected Daily Repeat | Turns on at Dusk and countdown off 1 through 9 hours later. Includes user select mode. |

 st ETL listed for U.S. and Canada.

.((T))... NOTE: "A" = Indicates outlet location.

SA200 SERIES OUTDOOR PLUG-IN STAKE TIMERS



APPLICATIONS



- Automatically turn ON/OFF outdoor lighting
 Save energy. Don't run lights all night
 Multiple outlets for holiday lighting



FEATURES

REPEAT SCHEDULE: Daily.

VARIABLE TIMING: Multiple ON/OFF times. MANUAL SWITCH: ON or TIMER mode.

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS (▶) | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|---|--------------------------|-----------------|---------------------------|-----------------------------|
| SA215 | 16540 | 125V 15A Resistive 125V 1250W Tungsten 125V 1/2HP Motor | 6 | Grounded | Holiday Décor Stake Timer | 30 minutes |

NOTE: "**\(\Line \)**" = Indicates outlet location.



SA200 SERIES OUTDOOR Zip-Set DIGITAL PLUG-IN TIMERS



APPLICATIONS



- Automatically turn ON/OFF outdoor lighting
- Save energy. Don't run lights all night
- Match dusk On everyday



FEATURES

- Fast programming with ZIP-SET™ One-Step™ set-up.
 Just enter your area code
- ZIP-SET™ turns lights ON at sunset & OFF at countdown or preset time.
- 7-5-2 settings for full week, weekdays, and weekends
- Option to set with one of three on/off programs
- Manual Daylight Savings
- Random feature for lived in look
- Battery Back-up for power outages

| CATALOG NO. | UPC CODE | RATINGS | NO. OF OUTLETS | TYPE OF PLUG | DESCRIPTION | VARIABLE TIMING SEGMENTS |
|----------------|-------------|--|----------------------|--------------|---|---|
| SA210 | 16537 | 120VAC 15A Resistive 120VAC 15A Inductive 120VAC 1000W Tungsten 120VAC 1/4 HP Motor | 2 Timed 1 Untimed | Grounded | Zip-Set™ Outdoor Living Wall Mount Timer | Sunset On and countdown hours to Off or same fixed time off each day |
| SA220 | 16534 | 120VAC 15A Resistive 120VAC 15A Inductive 120VAC 600W Tungsten 120VAC 1/4 HP Motor | 6 Timed 1 Untimed | Grounded | Zip-Set™ Outdoor Lighting Stake Timer | Sunset On and countdown hours to Off or same fixed time off each day |





TORK*ALERT*™ SIGNALING DEVICES

MECHANICAL STROBE HORNS

APPLICATIONS

 High performance for industrial signaling applications. Offers high sound output, low current draw and dependable operation. Strobes use

շ<mark>ֆր</mark>ոջ

xenon flashtube, ideal for maximum efficiency and reliability.



TA5508H-G1

FEATURES

ALARM: Penetrating mechanical sound.

WIRING: Low current draw. Horn may be wired separately

MOUNTING: 4" square surface mounting.

| CATALOG NO. | UPC CODE | INPUT VOLTAGE | INPUT CURRENT (AMPS) | dB @10 FEET | CANDELA |
|----------------|-------------|------------------|----------------------------|----------------|---------|
| TA880-N5 | 96015 | 120VAC | 0.115 | 96 | 15 |
| TA5508H-G1 | 96071 | 24VDC | .059 | strobe only | 15/75 |

NOTE: TA880-N5 For outdoor use, unit must be mounted in a TA-WBBF outdoor backbox. See page 550 for ordering. TA5508H-G1 for indoor mounting only.

MECHANICAL HORNS



APPLICATIONS

Loud tone with typical decibel output of 87 dB at 10 feet. Low frequency resonation for strong penetration of noisy areas like boiler rooms, water pumping stations, elevators and air compressor rooms.

FEATURES

INPUT VOLTAGE: Wide input voltage ratings for compatibility with unregulated power supplies.

WIRING: Screw terminals for convenient IN/OUT wiring. Low current draw for minimizing power supply and wiring cost.

HOUSING: Steel, painted Dawn Mist. Resonant grill design for high sound output.

MOUNTING: To indoor box TA-BBSF or outdoor box TA-WBBF, see accessories page 550.

| CATALOG NO. | UPC CODE | INPUT Voltage | INPUT CURRENT (AMPS) |
|--------------------|-------------|----------------------|-------------------------|
| SURFAC | E TYPE | | |
| TA874-N5 | 96023 | 120VAC, 60Hz | 0.070 |
| TA874-N5R (Red) | 97613 | 120VAC, 60Hz | 0.070 |
| TA875-G1 | 97687 | 24VDC | 0.035 |
| WITH WEATH | ERPROOF BAC | KBOX TA-WBBF UL LIST | ED FOR OUTDOOR USE |
| TA876-N5 | 96026 | 120VAC, 60Hz | 0.070 |

NOTE: Use TORK signal timers for 24 hour or 7 day scheduling, see page 485.



MULTI-TONE ELECTRONIC HORNS 24VDC &115VAC

APPLICATIONS

 For indoor and outdoor use.
 Superior sound penetration for various room conditions. Screw terminals accept #12AWG.



TA-MTS



| TA875-1G1 | 24VDC HORN | |
|--------------------|-------------------|------------------------|
| ALARM Tone | CURRENT (AMPS) | TYPICAL dB @10 FEET |
| BELL | 0.020 | 91 |
| HI-LO | 0.025 | 96 |
| CHIME | 0.028 | 93 |
| SINGLE STROKE BELL | 0.026 | 93 |
| HORN | 0.023 | 97 |
| 3 BEEPS, PAUSE | 0.023 | 97 |
| SIREN | 0.040 | 95 |
| SLOW WHOOP | 0.040 | 96 |

| | TA: | -MTS 115VAC HO | ORN | |
|-------------|--------|----------------|-----------|-----------|
| ALARM | AMPS (| @ 120VAC | TYPICAL d | B@10 FEET |
| TONE | HIGH | STANDARD | OUTPUT | OUTPUT |
| HORN | 0.050 | 0.042 | 85 | 82 |
| BELL | 0.041 | 0.039 | 82 | 75 |
| HORN 2 | 0.050 | 0.040 | 85 | 79 |
| CODE 3 HORN | 0.050 | 0.042 | 82 | 75 |
| CODE 3 TONE | 0.042 | 0.040 | 79 | 75 |
| SLOW WHOOP | 0.050 | 0.042 | 85 | 82 |
| SIREN | 0.045 | 0.041 | 85 | 82 |
| HI-LO | 0.042 | 0.039 | 82 | 79 |

| CATALOG NO. | UPC CODE | INPUT VOLTAGE | DESCRIPTION |
|----------------|-------------|------------------|--------------------------|
| TA875-1G1 | 97641 | 20-31VDC | Multi-tone Electric Horn |
| TA-MTS | 97674 | 115 VAC | Multi-tone Electric Horn |

FEATURES

OPERATING TEMPERATURE:

TA-MTS: $-31^{\circ}F$ to $+150^{\circ}F$ ($-35^{\circ}C$ to $+66^{\circ}C$).

DIMENSIONS AND MOUNTING:

TA-MTS: 4 1/18"H x 4 1/8"W x 3 17/32"D Can be mounted on celing or wall.
TA875-1G1: 4 3/4"H x 4 3/4"W x 1 3/8"D 1 gang, 2 gang or 4" square backbox.

HEAVY DUTY BELLS 4", 6", 10" DIAMETERS AC VIBRATING BELLS

APPLICATIONS



For indoor or outdoor applications.
 High sound output, durable and dependable performance. Ideal for schools and hopsitals.

FEATURES

TERMINAL SIZE: #12 - 22 AWG.

WIRING: Screw terminals permit fast IN/OUT field wiring.

HOUSING: Steel gong and cast aluminum. See page 551 for dimensional drawings.

MOUNTING: To indoor box TA-BBSF or outdoor box TA-WBBF, see accessories page 550.

| CATALOG NO. | UPC CODE | SHELL SIZE | VOLTAGE | INPUT CURRENT (AMPS) | dB @ 10 FEET | COLOR |
|----------------|-------------|---------------|---------|----------------------------|--------------------|-----------|
| TA340-4G5 | 96001 | 4" | 24VAC | 0.320 | 81-90 | Dawn Mist |
| TA340-4N5 | 96002 | 4″ | 120VAC | 0.065 | 81-90 | Dawn Mist |
| TA340-6G5 | 96003 | 6" | 24VAC | 0.320 | 81-95 | Dawn Mist |
| TA340-6N5 | 96004 | 6" | 120VAC | 0.065 | 81-95 | Dawn Mist |
| TA340-10G5 | 96005 | 10" | 24VAC | 0.320 | 84-98 | Dawn Mist |
| TA434-4N5 | 98005 | 4" | 120VAC | 0.065 | 81-95 | Red |
| TA434-6N5 | 97521 | 6" | 120VAC | 0.065 | 81-95 | Red |
| TA434-10N5 | 96522 | 10" | 120VAC | 0.065 | 84-98 | Red |

LIGHT DUTY AND GENERAL PURPOSE BELLS & BUZZER

APPLICATIONS

 Designed to operate on either bell ringing transformers or batteries.
 Non-adjustable sound.



FEATURES

ALARM: Bell ringing, non-adjustable sound.

DIMENSIONS FOR TA725: 3" H x 2¹/₂" W x 1" D.

MOUNTING: Fully enclosed sturdy steel bases and covers. Base and cover snap together, no screws required.

| CATALOG NO. | UPC CODE | DESCRIPTION | VAC | VDC | AMPS | dB |
|----------------|-------------|--------------------------------|------|-----|------|----------|
| TA740 | 96228 | 2 ¹ /2" Gong | 8-16 | 3-6 | 1 | 76 @ 10' |
| TA744 | 96230 | 4" Gong | 8-16 | 3-6 | 1 | 78 @ 10' |
| TA725 | 96226 | Buzzer | 8-16 | 3-6 | 1 | 88 @ 3' |

CHIMES & CHIME KITS

APPLICATIONS

 Powerful and loud, pleasant sounding push-button chimes. Ideal for homes, apartments and offices.

| CATALOG NO. | UPC CODE | DESCRIPTION | DIMENSIONS |
|----------------|-------------|--|-----------------------------|
| TAC212WS | 96064 | 16VAC Chime + Push Button clip for Stucco + 10VA Transformer | 7 3/16″L x 4″W x 2″D |
| TAC212WL | 96054 | 16VAC Chime +1 Illuminated & 1 Non-illuminated Push-button +10VA Transformer | 7 1/4″L x 4 3/4″W x 2 1/2″D |

FEATURES

INPUT: 16V, 10VA, 120VAC.

ALARM: Chime.

MOUNTING: Fully enclosed sturdy steel bases.

WEATHERPROOF MOTOR DRIVEN SIREN

APPLICATIONS



 For industrial and outdoor use. Ideal for evacuation and warning systems.

FEATURES

INPUT VOLTAGE: 120AC & DC, 60Hz.

ALARM: Loud, distinctive tone. Designed to be effective over standard horns or bells.

HOUSING: Red enamel paint over heavy gauge aluminum housing. Fully enclosed motor. 180° swivel and adjustable direction.

| Power wires 2 feet long (2) 9/32" mounting |
|---|
| holes |
| Mount siren (hardware not included) |
| 7-1/2" dia. (2) nuts, loosen to adjust siren direction. 1/2" conduit connector 1/2" conduit (not furnished) Siren power wires Junction box & (2) wire nuts (not furnished) |

DIMENSIONS

| CATALOG NO. | UPC CODE | INPUT VOLTAGE | dB @10 FEET | AMPS | VA |
|----------------|-------------|------------------|----------------|------|-----|
| TA315-1N5 | 96599 | 120VAC/DC | 117 | 2.5 | 300 |

MANUAL FIRE **ALARM PULL-DOWN STATION** PULL DOWN ALARM (II) **APPLICATIONS**



Designed for indoor use. Ideal for schools, hospitals, industrial plants, warehouses and retail stores. Key required to close and reset device. Meets requirements, BSA, MEA, CA and UL.

FEATURES

ALARM: Loud, distinctive tone. Designed to be compatible with any control panel to initiate local alarm signals, trip municipal fire alarm box and start fire pumps.

MOUNTING: Sturdy metal construction, mounts to a standard single gang electrical box.

| CATALOG NO. | UPC CODE | SWITCH | VOLTS | AMPS | |
|----------------|-------------|----------|-----------|------|--|
| TA270A | 96521 | SPST. NO | 30V AC/DC | 1 | |

TELEPHONE RELAY

APPLICATIONS



This device activates appliances when a telephone ring voltage is detected. For indoor and outdoor use with horns, bells or strobes. Recommended use where ambient noise levels are high. FCC approved.

FEATURES

INPUT: Accepts RJ-11C phone plug.

WIRING: Hard wire connections,

for analog phone lines.

MOUNTING: Weatherproof, indoor and outdoor, includes mounting bracket.

| TA-B-8332 | 97100 | 39-150V/20-30Hz | 115VAC-5A, 230VAC-2A | Up to 115VDC-500MA | 0.6 |
|-----------|-------|-----------------|-------------------------|-----------------------|-------------|
| CATALOG | UPC | INPUT TELEPHONE | AC INPUT | RINGER | PEAK |
| NO. | CODE | RING VOLTAGE | VOLTAGE | EQUIVALENCE | CANDLEPOWER |



WALL CLOCKS QUARTZ & ELECTRIC



APPLICATIONS

 Each model meets United States Government Specifications. All Clocks provide second hand for accurate timing.

| | | 3 | $\bar{\Lambda}$ | П | U | R | ES |
|--|--|---|-----------------|---|---|---|----|
|--|--|---|-----------------|---|---|---|----|

QUARTZ

Accurate to one minute per year. Low power consumption for long battery life. Uses AA battery (not supplied).

ELECTRIC (4)

110VAC, 60 Hz synchronous motor. 66 inch line cord and plug. Does not require grounding.

MOUNTING: Concealed mounting brackets allow for simple, neat placement on walls.

| | | QUARTZ CLO | CK | |
|-----------------------------|----------------------|------------------------|------------------|------------------------|
| CATALOG NO. | UPC CODE | TYPE | SIZE | FRAME COLOR |
| TA1886 G | 96156 | QUARTZ | 8" | Grey |
| TA1886 B | 96155 | QUARTZ | 8" | Brown |
| TA1887 G | 96159 | QUARTZ | 12" | Grey |
| TA1887 B | 96157 | QUARTZ | 12″ | Brown |
| TA1887 BK | 96158 | QUARTZ | 12" | Black |
| | | | | |
| | | ELECTRIC CLO | CK | |
| CATALOG NO. | UPC CODE | ELECTRIC CLO | CK SIZE | FRAME COLOR |
| CATALOG NO. | UPC CODE 96152 | | | FRAME COLOR Grey |
| NO. | CODE | ТҮРЕ | SIZE | COLOR |
| NO. TA1880 G | 96152 | TYPE | SIZE 8" | COLOR Grey |
| NO. TA1880 G TA1880 B | 96152 96151 | TYPE ELECTRIC ELECTRIC | SIZE 8" 8" | Grey Brown |

ELECTRIC DOOR OPENERS REMOTE CONTROL & CONTACT DEVICES

APPLICATIONS

 For unlocking or locking metal or wooden doors using low voltage wiring. For AC, use TA591 or TA592 transformer.

MORTISE TYPE REMOTE OPENER

Reversible for right or left hand door. Use with mortise entrance locks having a latch bolt with up to $\frac{1}{2}$ " width and throw. 6" wire leads. Dimensional drawings available.

| DEVICE | CATALOG NO. | UPC CODE | VOLTS | AMPS |
|--------|----------------|-------------|-------------------|-----------------------|
| | TA09 | 96960 | 8-16VAC 3-6VDC | .95-1.75 1.25-1.80 |
| | TA154 | 96962 | 16VAC 3-6VDC | .95-1.75 1.25-1.80 |

RIM TYPE REMOTE OPENER

Reversible for right or left hand door. Standard surface type used with lock latches with up to $\frac{5}{8}$ " width and throw. 6" wire leads. Dimensional drawings available

| DEVICE | CATALOG NO. | UPC CODE | VOLTS |
|---------|----------------|-------------|-----------------|
| 1 1 1 1 | TA152 | 96961 | 8-16VAC, 3-6VDC |

MAGNETIC SWITCH CONTACTS

For activating a variety of signals, ideal for limiting space applications. Self-insulating and can be mounted in any direction. All units include companion magnet. Dimensions: 2%6 "L x $\frac{1}{2}$ "W x $\frac{1}{2}$ "D

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS MAX. |
|---------|----------------|-------------|------------------------------------|----------------|--------------|
| • [•] | TA60 | 96975 | Circuit closed with magnet engaged | | |
| 2 | TA61 | 96976 | Make & break NO and NC | 24VAC 12VDC | .5 |
| | TA62 | 96977 | Circuit open with magnet engaged | | |
| | TA67W | 96979 | Terminal Cover | | |

DOOR/WINDOW CONTACTS, ROLLING BALL TYPE

Signals automatically with the opening and closing of doors, windows and transoms. Operates from pressure in any direction. Non-tilt, non-jamming design. Fits ¾" hole; no need to mortise.

| | · · · | | - | | |
|--------|----------------|-------------|---|-----------------|--------------|
| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS MAX. |
| 0 | TA44 | 96995 | Normally closed Push to open | | |
| | TA45 | 96996 | Normally open Push to close | 12-24V AC/DC | 2 |
| 0/3 | TA46 | 96997 | Momentary contact Push to make & break | | |

ELECTRIC DOOR SWITCH

For turning lights/signals on or off when doors are opened or closed. Ideal for closets, dark rooms, storage areas of walk-in refrigeration. Rust resistant steel case with 4 knockouts, antique brass plate. Box dimensions: 11/4"W x 3 1/4"H x 2"D. Plate dimensions: 11/4"W x 4"

| ox unitolisions. 171 17 X c | A dimensions. 171 W A G 70 H A Z B. Flate dimensions. 171 W A T | | | | | | |
|-----------------------------|---|-------------|-------------------------------|------------------|--------------|--|--|
| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS MAX. | | |
| | TA502 | 96964 | Light ON when door is open | 125VAC 250VAC | 6 | | |

DOOR TRIP SWITCH

Signals automatically as door is openend. Commonly used on store doors to announce entrance of customers. Mounts on top of door frame. Solid cast brass. Size: $3 \times 15\%$ "

| DEVICE | CATALOG NO. | UPC CODE | VOLTS | AMPS MAX. |
|--------|----------------|-------------|----------|--------------|
| | TA236 | 96963 | 12-24VAC | 2 |



PUSH-BUTTONS

ILLUMINATED, NON-ILLUMINATED & WEATHERPROOF

APPLICATIONS

 For outdoor use to activate low voltage bells, buzzers, horns or any other audible signal. Ideal for factory doors, receiving departments, small office buildings, limited access retail stores and private homes.

siones and private nomes.

ILLUMINATED PUSH-BUTTONS, UP TO 16VAC

| ILLUMINALLD I O | סווטע ווכ | 113, 01 | IO IUTAC | |
|-----------------|----------------|-------------|----------|----------------------|
| BUTTON | CATALOG NO. | UPC CODE | COLOR | SIZE |
| | TA603L | 96035 | Gold | 1 3/4" (diameter) |
| 8 | TA631L | 96089 | White | 2 3/4" x 7/8" |
| | TA656B | 96039 | Gold | 15/16 x 2 3/4" |
| | TA215LB | 96031 | Brass | 1 1/4 x 2″ |
| | TA620L* | 96037 | Chrome | 5/8" (diameter) |
| | TA620LB* | 96038 | Brass | 5/8" (diameter) |

WEATHERPROOF PUSH-BUTTONS / SOLID CAST BRASS

| BUTTON | CATALOG NO. | UPC CODE | DESCRIPTION | INPUT VOLTAGE |
|--------|----------------|-------------|------------------------------|--|
| | TA1786B | 96090 | Without conduit backplate | Momentary Contacts 4 amps AC/DC @ 12V |
| | TA1786CB | 96091 | With conduit backplate | 4 amps AC, 2 amps DC @ 24V 2 amps AC 1 amp DC @48V |

NON-ILLUMINATED PUSH-BUTTONS, UP TO 24VAC

| MON ILLOMINATED | | ,0110113, | 01 10 21 | ************************************** |
|-----------------|----------------|-------------|-------------------|--|
| BUTTON | CATALOG NO. | UPC CODE | COLOR | SIZE |
| | TA600 | 96041 | Polished Brass | 2 1/4" (diameter) |
| | TA603 | 96044 | Polished Brass | 1 3/4" (diameter) |
| P | TA631 | 96088 | White | 2 3/4" x 7/8" |
| | TA635 | 96047 | Ivory, black bar | 2 3/4" x 7/8" |
| | TA666BK | 96048 | Black, ivory bar | 23/4" X 23/4" |
| | TA602 | 96043 | Polished Brass | 13/8" x 5 1/4" |
| | TA601 | 96042 | Sprayed Brass | 2 x 2 9/16" |
| | TA620* | 96045 | Chrome | 5/8" (diameter) |
| | TA620B* | 96046 | Brass | 5/8" (diameter) |

^{*}Stainless steel plate to fit TA620 models: Order TA 147-1

WARNING LIGHTS INDUSTRIAL UNITS

| LETTER | INDICATES COLOR |
|--------|--------------------|
| R | Red |
| A | Amber |
| C | Clear |
| В | Blue |

APPLICATIONS

½" conduit mounting. Full selection of dome colors, see "Ordering Info". For outdoor use. All units must be mounted vertically with base at bottom.

TA47N5 / TA47R5 - ALL PURPOSE 360° BEACON

Large parabolic reflector rotates around a 100 wall bulb. Long range beam. Use to indicate equipment malfunctions, security intrusion, etc.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS |
|--------|----------------|-------------|---|-----------------|------|
| | TA47RN5 | 96061 | 90 FPM Corrosion resistant/Outdoor use Glass filled polypropylene housing | 117VAC | |
| | TA47AN5 | 96161 | Acrylic dome | 117VAC | .9 |
| | TA47AR5 | 96162 | Tamper resistant dome clamps Nominal current draw 9 1/2"H x 8 1/2" diameter | 240VAC, 60Hz | |

TA52N5 - COMPACT ROTATING BEACON



Light intensifying reflector rotates arounf a low current 25 watt bulb. Bayonet socket for easy lamp replacement. Ideal for restricted or dangerous areas.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS |
|--------|----------------|-------------|--|--------|------|
| -M | TA52RN5 | 96063 | 80-90 FPM 360° rotation | | |
| T. | TA52AN5 | 96163 | Dependable belt & turntable design Acrylic dome | 117VAC | .21 |
| | TA52BN5 | 96263 | Nominal current draw 6 1/2"H x 55/8" diameter | | |

TA93-2N5 - MIDI-STROBE

Solid state circuitry in a low profile design. No moving parts means less Maintenance!

| | | , | | J | | |
|--|--------|----------------|-------------|---|--------|------|
| | DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS |
| | | TA93-2RN5 | 99622 | 70-80 FPM Solid state electronic circuitry | | |
| | | TA93-2AN5 | 97623 | High output 3-4 watt, 3.6 joules Vertically mounted flash tube Snap out socket base for 360° Fresnel dome optics Nominal current draw 6 1/2"H x 5 1/8" diameter | 117VAC | .04 |
| | | TA93-2CN5 | 96968 | | | |
| | | TA93-2BN5 | 97624 | | | |

TA94N5 - ELECTRONIC STROBE

High intensity strobe tube with inner fluted lens for maximum brilliance. No moving parts makes it immune to shock and vibration. Ideal for security alert.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS |
|--------|----------------|-------------|--|--------|------|
| 121 | TA94RN5 | 97626 | 70-80 FPM Solid state electronic circuitry High output 3-4 watt, 3.6 joules Acrylic done | 117VAC | .04 |
| | TA94AN5 | 97627 | Acrylic dome Glass filled polypropylene housing Suitable for outdoor use | | |
| | TA94BN5 | 97628 | Suitable tor outdoor use 9 1/2"H x 8 1/2" diameter | | |

WARNING LIGHTS VEHICULAR UNITS

| LETTER | INDICATES COLOR |
|--------|--------------------|
| R | Red |
| | Amber |

APPLICATIONS

1/2" conduit mounting.
 Full selection of dome colors, see "Ordering Info".
 For outdoor use. All units must be mounted vertically with base at bottom.

TA53E1 - ROTATING BEACON

Single point shock-mounting. Ideal for use on security or service vehicles.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS |
|--------|----------------|-------------|---|-------|
| | TA53AF1 | 96185 | 90-100 FPM | 36VDC |
| | TA53AG1 | 96184 | Dependable belt & turntable design 25 watt lamp Acrylic Dome Nominal current draw 7 1/2"H x 6" diameter | 24VDC |

TA54E1 - PORTABLE, MAGNETIC, ROTATING BEACON

Single point shock-mounting. Ideal for use on security or service vehicles.

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS |
|--------|----------------|-------------|---|-------|
| | TA54AE1 | 96187 | 75 FPM, 12 watt lamp Quiet belt-drive motor. Teardron design fits under windshields | 12VDC |
| | TA54RE1 | 96087 | Teardrop design fits under windshields. Includes glare shield, velcro tape 4 1/2" H x 7 1/2" diameter | |

TA131DN5 / TA131DU1 – DOUBLE FLASH SUPER STROBE

Ideal for industrial applications requiring extremely high visibility. One model covers all popular mounting methods: ½" pipe, surface, flange, electrical box.



| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS | AMPS |
|--------|----------------|-------------|---|---------|------|
| | TA131DRN5 | 96510 | | 120046 | 2 |
| 1.5 | TA131DAN5 | 96610 | 60 FPM, 7.5 JPF High intensity 85,000 peak CP Flashtube Rated at 7000-8000 hrs. | 120VAC | .2 |
| | TA131DRU1 | 96511 | Durable Lexan® housing 5"H x 7 1/4" diameter | 10.5- | |
| | TA131DAU1 | 97611 | | 31.0VDC | |

TA879 - VEHICULAR BACKUP ALARM

Solid state electronic unit. Helps to comply with OSHA and State regulations. Makes distinctive noise, ideal for extreme variations in background noise

| DEVICE | CATALOG NO. | UPC CODE | DESCRIPTION | VOLTS |
|--------|----------------|-------------|---|----------------|
| | TA879 | 96102 | 2 sound levels 97 or 87 dB +/- dB at 4ft Multi-voltage Water-resistant housing | 12 to 48VDC |

NOTE: "FPM" = Flashes per minute "JPF" = Joules per flash

For replacement parts and accessories, see page 550.

POWER SUPPLY UNITS 24 VDC UNITS

APPLICATIONS

Units provide power to multiple signaling devices, depending on requirements.



FEATURES

TA606

Regulated and filtered 24VDC up to 600mA. Easy-to-use screw terminals, accepts #16-24AWG. No conduit is required for installation.

Dual output unit, each providing 2 Amps fo current. If connected in parallel, will provide up to 4 Amps. Circuit breaker provides input protection.

| CATALOG NO. | UPC CODE | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | REGULATION | RIPPLE VOLTAGE |
|----------------|-------------|------------------|-------------------|-------------------|------------|-------------------|
| TA606 | 96109 | 117VAC | 24VDC | 600mA | | |
| TA640 | 96110 | 115VAC | 24VDC | 4 A | +/-5% | 10mVRMS |

TRANSFORMERS







Engineered to ensure long use for bells, buzzers and chimes.

| CATALOG NO. | UPC CODE | TYPE | VOLTS-AMPS (VA) | PRIMARY VOLTAGE AC | SECONDARY VOLTAGE AC | Hz |
|----------------|-------------|------------|--------------------|--------------------------|----------------------------|-------|
| TA590 | 96104 | Bell | 5 | 120 | 10 | 60 |
| TA591 | 96105 | Chime | 10 | 120 | 16 | 60 |
| TA592 | 96106 | Tri-Volt | 10-10-20 | 120 | 8-16-24 | 50/60 |
| TA598 | 96602 | Tri-Volt | 20-30-30 | 120 | 8-16-24 | 60 |
| TA599 | 96108 | Heavy Duty | 40 | 120 | 24 | 60 |
| TA1245Y-50 | 96166 | Heavy Duty | 50VA | 120/208/240 | 24 | 60 |
| TA1245Y-75 | 96167 | Heavy Duty | 75VA | 120/208/240 | 24 | 60 |


ACCESSORIES, REPLACEMENT PARTS

| UNIT | CATALOG NO. | UPC CODE | DESCRIPTION |
|------------------|----------------|-------------|---|
| TA93-2 | TA-L6-2 | 96982 | 110VAC Xenon Flash Tube |
| TA52 | TA-L8 | 96134 | 110VAC Bulb |
| TA94 | TA-L10 | 96136 | 110VAC Xenon Flash Tube |
| TA-94 | TA-L10-1 | 96981 | 110VAC Xenon Flash Tube |
| TA502 | TA502SW | 96966 | Replacement switch |
| TA874 Series | TA-BBSF | 97694 | Backbox — 4" painted Dawn Mist 3/4" and 1" KO's |
| TA874 Series | TA-WBBF | 97692 | Weatherproof Backbox — 1/2" KOs 4" painted Dawn Mist |
| TA-BBSF, TA-WBBF | TA-SFPF | 97707 | Semi-Flush plate — Dawn Mist |
| TA-BBSF, TA-WBBF | TA-SFPFR | 97697 | Semi-Flush plate — Red |
| TA47, TA94 | TA-ADR | 96111 | Acrylic Dome — Red |
| TA47, TA94 | TA-ADA | 96311 | Acrylic Dome — Amber |
| TA52, TA53 | TA-D5B | 96419 | Acrylic Dome — Blue |
| TA54 | TA-D6A | 96320 | Dome — Amber |
| TA93, TA94 | TA-D7R | 96121 | Fresnal Dome — Red |
| TA93, TA94 | TA-D7A | 96321 | Fresnal Dome — Amber |
| TA93, TA94 | TA-D7C | 96621 | Fresnal Dome — Clear |
| TA131D | TA-D8R | 96970 | Acrylic Dome — Red |


TORK ALERT TM DIMENSIONAL DRAWINGS


REMOTE CONTROL DOOR OPENERS




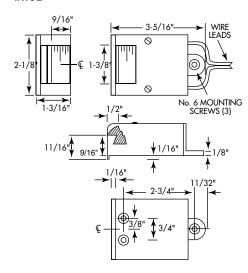


HEAVY DUTY BELLS



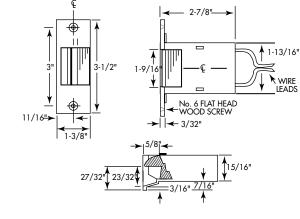








WEATHERPROOF BUTTON

TA1786B ONLY

TA154





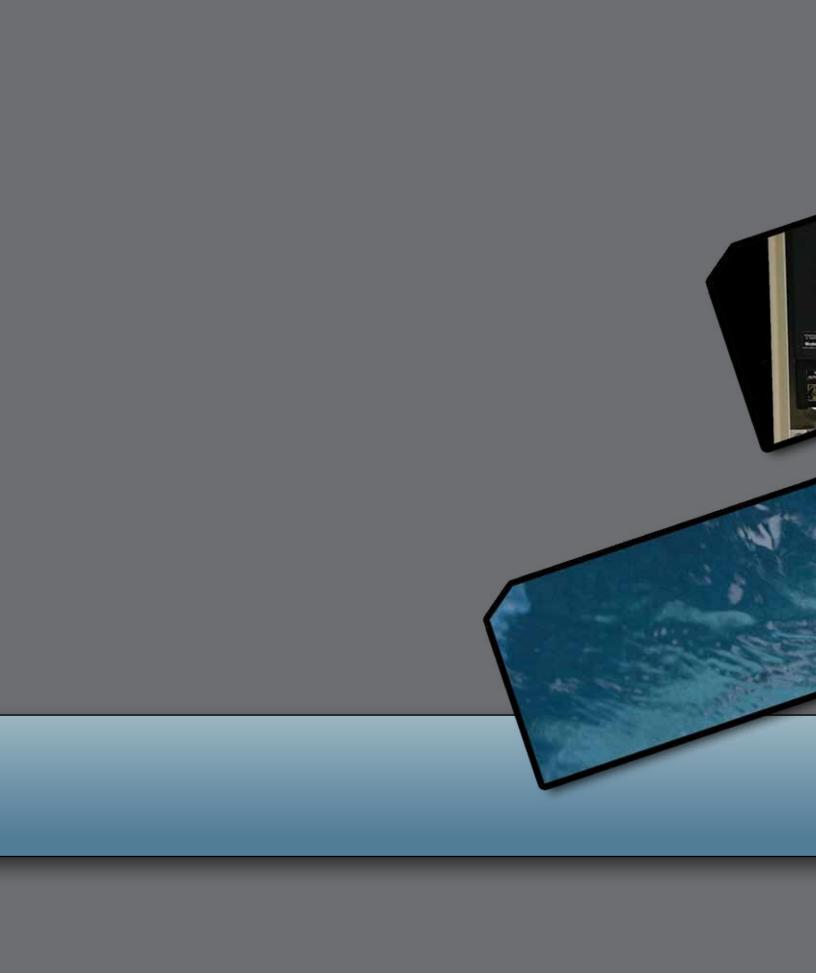



TORK® POOL & SPA CONTROLS

PP PANEL SERIES POOL AND SPA PANELS

APPLICATIONS

- Pumps
- Swimming pools
- **─** Fountains
 - Ponds



FEATURES

COMBINATION PANEL: The PP Panel Series provides a flexible platform to create a custom pool and spa control at an off the shelf price. Start with a blank panel and add timers, freeze controls, circuit breakers, switches and outlets for a custom installation.

PP-100R: 100 amp load center 120-240V, 5/10 circuit breaker base.

PP-125R: 125 amp load center 120-240V, 8/16 circuit breaker base.

CONTROLS: Freeze protection or mechanical and digital timers are all available with unique features not found elsewhere in the industry. Find specification details on pages 557 and 558.

BREAKERS: Listed for Cutler Hammer (BR), GE (THQL), Murray/Siemens (MP) and Square D (HOM) (not included).

REVERSIBLE DOOR: Easy-Hinge patented removable and reversible door. Change from left to right opening. Solves installation issues in the field.

WHILE-IN-USE COMPARTMENT: Inside mounting for two devices with cord exit.

DEVICE MOUNTING: Provision for mounting one or two devices in any combination accepts toggle, GFCI, X-10 and UPB type devices in, PP-100R and PP-125R enclosures.

TRANSFORMER: Select panels include 120V input: 100 watt with output 12V/13V or 300 watt with output 12V/13V/14V.

ENCLOSURE: Metal NEMA 3R with lockable hasp. See page 558 for dimensions.





| CATALOG NO. | UPC CODE | CONTROL | CONTROL INPUT | ADDITIONAL INFORMATION |
|-----------------|-------------|---------|------------------|---|
| PP-100R | 94016 | - | - | Panel only. Add controls from page 557 and 558. |
| PP-125R | 94017 | - | - | Panel only. Add controls page 557 and 558. |
| PP-125R-P4 | 53007 | P1104-M | 240VAC | Add another control from page 557 and 558. |
| PP-125R-P4-100X | 94018 | P1104-M | 240VAC | Includes 100 watt Low Voltage Transformer |
| PP-125R-P4-300X | 94019 | P1104-M | 240VAC | Includes 300 watt Low Voltage Transformer |

P1100 SERIES

SWIMMING POOL TIMERS, 24 HOUR ELECTROMECHANICAL CONTROL

QUICK INSTALL/RELEASE LEVER:

For easy installation and removal when installing into pool panels.

LOAD INDICATOR LAMP

CONVENIENT EXTERNAL ROCKER SWITCH:

3 position switch: OFF/ON/AUTO. Use switch to turn OFF pump at the end of pool season.

c**Al**°us

REAL TIME SWITCH FACE: Easy to set and check time.

CAPTIVE TRIPPERS: 15 minute intervals, no lost trippers.

HEATER CONTACTS: FM suffix includes "Fireman Switch" to turn off pool heater 20-30 minutes before timer turns OFF. Contact rates SPST, 15A @120V.

**THERMOSTAT: PFP models include built in Freeze Protection. No extra wiring. Thermostat turns on load at user settable level between 33°F and 42°F. Moving water prevents costly freeze damage.

ACCESSORY CONTACT: PF models include extra contact to accept PFPT Freeze Protection Accessory. Thermostat turns ON load at user settable level between 33°F and 42°F. Moving water prevents costly freeze damage.

TIMER INTERLOCK: Makes one second timer dependant on operation of another timer.



| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | CONTACTS | RESISTIVE/ INDUCTIVE RATINGS | HP RATING | NOTES |
|----------------|-------------|----------------------------|----------|------------------------------------|-----------------------------|---|
| ♣° PFP2-M | 94026 | 240 | DPST | 40A | 7.5HP @ 240V | Thermostat only |
| ♣ PFP3-M | 94027 | 120/240 w/neutral | DPST | 40A | 3 HP @ 120V 7.5HP @ 240V | Thermostat only |
| P1101-M | 10056 | 120 | DPST | 40A | 3 HP @ 120V | |
| P1101FM-M | 10060 | 120 | DPST | 40A | 3 HP @ 120V | Fireman Switch |
| PF1101-M | 94020 | 120 | DPST | 40A | 3 HP @ 120V | Accepts PFPT thermostat input |
| PF1101FM-M | 94024 | 120 | DPST | 40A | 3 HP @ 120V | Fireman Switch & Accepts PFPT thermostat input |
| ❖ PFP1102-M | 94022 | 240 | DPST | 40A | 7.5HP @ 240V | Freeze Protection included |
| ❖ PFP1103-M | 94023 | 120/240 w/neutral | DPST | 40A | 3 HP @ 120V 7.5HP @ 240V | Freeze Protection included |
| P1104-M | 10057 | 240 | DPST | 40A | 7.5HP @ 240V | |
| P1104FM-M | 10061 | 240 | DPST | 40A | 7.5HP @ 240V | Fireman Switch |
| ❖ PF1104-M | 94021 | 240 | DPST | 40A | 7.5HP @ 240V | Accepts PFPT thermostat input |
| PF1104FM-M | 94025 | 240 | DPST | 40A | 7.5HP @ 240V | Fireman Switch & Accepts PFPT thermostat input |
| .∲° PFPT | 94028 | 120/240 | - | - | - | Thermostat accessory |

*PFPT



NOTE: " = Indicates Freeze Protection.



PEW1100 SERIES SWIMMING POOL TIMERS, 7 DAY DIGITAL CONTROL

QUICK INSTALL/RELEASE LEVER: For easy installation and removal when installing into pool panels.

LOAD INDICATOR LAMP

LARGE LCD DISPLAY

LARGE "MANUAL" BUTTON: 3 operating modes available: OFF/ON/AUTO. Using the OFF mode, the pool can be closed down without disrupting the time settings.

c**FL**°us

POWER OUTAGE BACKUP: Battery retains time and schedule.

7 DAY PROGRAMMING ONE MINUTE INTERVAL:

Allows for the control of various electrical equipment on a 7 day schedule. 15 schedule weekly programs.

** THERMOSTAT: PFPEW models include built in Freeze Protection. No extra wiring. Thermostat turns on load at user settable level between 33°F and 42°F. Moving water prevents costly freeze damage.

ACCESSORY CONTACT: PFEW models include extra contact to accept PFPT Freeze Protection Accessory.

Thermostat turns ON load at user settable level between 33°F and 42°F. Moving water prevents costly freeze damage.

TIMER INTERLOCK: Makes one timer dependant on operation of another timer.



| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | CONTACTS | RESISTIVE/ INDUCTIVE RATINGS | HP RATING | NOTES |
|----------------|-------------|----------------------------|----------|------------------------------------|-----------------------------|-------------------------------|
| PEW101-M | 82432 | 120 | DPST | 40A | 3 HP @ 120 | |
| PFEW101-M | 94029 | 120 | DPST | 40A | 3 HP @ 120 | Accepts PFPT thermostat input |
| ♣° PFPEW1102-M | 94031 | 240 | DPST | 40A | 7.5HP @ 240V | Freeze protection included |
| ❖ PFPEW1103-M | 94032 | 120/240 w/neutral | DPST | 40A | 3 HP @ 120V 7.5HP @ 240V | Freeze protection included |
| PEW104-M | 82442 | 240 | DPST | 40A | 7.5HP @ 240V | |
| PFEW104-M | 94030 | 240 | DPST | 40A | 7.5HP @ 240V | Accepts PFPT thermostat input |

NOTE: " " = Indicates Freeze Protection.

1100 SERIES SAME ON/OFF TIMES EACH DAY SWIMMING POOL TIME SWITCHES

APPLICATIONS









SPECIFICATIONS

INPUT VOLTAGE: 120 or 208-277VAC,

60Hz (varies by model).

TIMING ACCURACY: Line frequency.

TERMINAL RANGE: #8 - #14AWG.

OPERATING TEMPERATURE: -40° to 165°F (-40° to +74°C).

POWER CONSUMPTION: 3 watt max.

ENCLOSURE: Lockable hasp. Type varies by model. See page 557 for dimensions and additional enclosure information.

FEATURES

SCHEDULING: Minimum ON setting is 20 minutes with a minimum OFF setting of 75 minutes. Dial accommodates up to 12 pairs of trippers. One pair included.

MANUAL OVERRIDE: Until the next regularly scheduled ON or OFF automatic operation then resumes.

| TYPE | VOLTAGE | CONTACT RATING |
|-----------------|---------------------|-------------------|
| General Purpose | 120-277VAC | 40A |
| Resistive | 120-277VAC | 40A |
| Tungsten | 120VAC | 40A |
| Ballast | 120-277VAC | 20A |
| LED Driver* | 120-277VAC | 20A |
| Motor | 120VAC 240VAC | 2HP 5HP |
| | 277VAC Single Phase | |

*UL only or & cULus on B suffix units

| CATALOG NO. | UPC CODE | INPUT SUPPLY (VAC) 60Hz | OUTPUT CONTACTS | ENCLOSURE TYPE |
|----------------|-------------|-------------------------------|-----------------------------------|--|
| 1101 | 10011 | 120 | SPST | Metal Indoor NEMA 1 |
| 1101BM-IAP* | 10073 | 120 | SPST | Mechanism and mounting plate |
| 1104 | 10014 | 208-277 | DPST | Metal Indoor NEMA 1 |
| 1104B-P* | 10070 | 208-277 | DPST | Polycarbonate Indoor/Outdoor NEMA 3R |
| 1104B-0* | 10075 | 208-277 | DPST | Metal Indoor/Outdoor NEMA 3 |
| 1104BM-IAP* | 10074 | 240 | DPST | Mechanism and mounting plate |
| 1101FM-N | 10043 | 120 | SPST | Noryl® Indoor/Outdoor NEMA 3R with fireman switch |
| 1104FM-N | 10044 | 208-277 | DPST | Noryl® Indoor/Outdoor NEMA 3R with fireman switch |
| 1101FM-M | 10043 | 120 | SPST | Mechanism with fireman switch |
| 1104FM-M | 10044 | 208-277 | DPST | Mechanism with fireman switch |
| 1101D | 10028 | 120 | Two 1101 SPST each | Metal Indoor/Outdoor NEMA 3R |
| 1104D | 10029 | 208-277 | Two 1104 DPST each | Metal Indoor/Outdoor NEMA 3R |
| 1104DF | 10032 | 208-277 | One 1104 One 1104FM | Metal Indoor/Outdoor NEMA 3R |
| Replacemen | t Trippers | Order #P Order #PF48 for a | 47 for a pair o pair of ON/OFI | f ON/OFF trippers F trippers for 1100FM series |

Replacement Motor

#101 (120V) & #201 (208-277V)



^{*} B suffix units cULus cQL)us

JPB75175

APPLICATIONS



 For installation of underwater pool lights or low voltage connections.

FEATURES

Durable PVC molded case
INTERIOR & EXTERIOR bonding
Flexibility for conduit sizing
Built-in strain relief cord clamps
Line or low voltage wiring
Complete compliance with UL Standard 1241

| ı | CATALOG NO. | UPC CODE | DESCRIPTIONS | CONDUIT HUBS |
|---|----------------|-------------|-------------------------|------------------------------|
| | JBP75175 | 95457 | Two Light Junction Box | 3/4" / 1/2" / 1" |
| | JBP57510 | 95485 | Four Light Junction Box | 1/2" / 3/4" / 3/4" / 1" / 1" |



FEATURES

PUMP PROTECTION: Unit always starts on HIGH with 5 minute countdown before switching to low.

SCHEDULING: Up to 3 HIGH/LOW/OFF cycles repeat each day. Minimum setting 5 minute.

MANUAL OVERRIDE: Hold OFF until midnight then follows the next regularly scheduled HIGH/LOW/OFF operation.

DAYLIGHT SAVING: Automatic adjustment (can be omitted)

LEAP YEAR: Automatic Compensation

CLOCK FORMAT: AM/PM

POWER OUTAGE BACKUP: Permanent schedule retention. Super capacitor provides 4 days of real time backup.

| CATALOG | UPC | INPUT SUPPLY | OUTPUT |
|---------|-------|---------------|----------|
| NO. | CODE | (VAC) 50-60Hz | CONTACTS |
| DPC201 | 82457 | 120-277 | SPST |

| LOAD | RA | TINGS |
|------------|--------|------------------------------------|
| TYPE | 120VAC | 208-277VAC |
| Motor | 1HP | 1 1/2 HP@208VAC 2 HP@240-277VAC |
| Resistive | 40A | 40A |
| Inductive | 40A | 40A |
| Ballast | 30A | 20A |
| Tungsten | 15A | |
| Pilot Duty | 720VA | 720VA |

SPECIFICATIONS

TIMING ACCURACY: Line Frequency.

INPUT VOLTAGE:

120-277VAC, 50/60Hz (automatic detection)


TERMINAL RANGE: #8 - #16AWG.

OPERATING TEMPERATURE:

 -40° to $+149^{\circ}$ F (-40° to $+65^{\circ}$ C)


POWER CONSUMPTION: 6VA max.

ENCLOSURE: Indoor/Outdoor NEMA 3 Metal with locking hasp. See page 557 for dimensions and additional enclosure information.

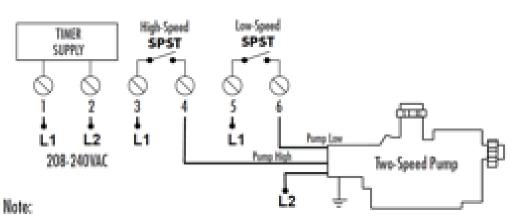


B) For 120VAC motors use Neutral in place of L2

ENCLOSURES

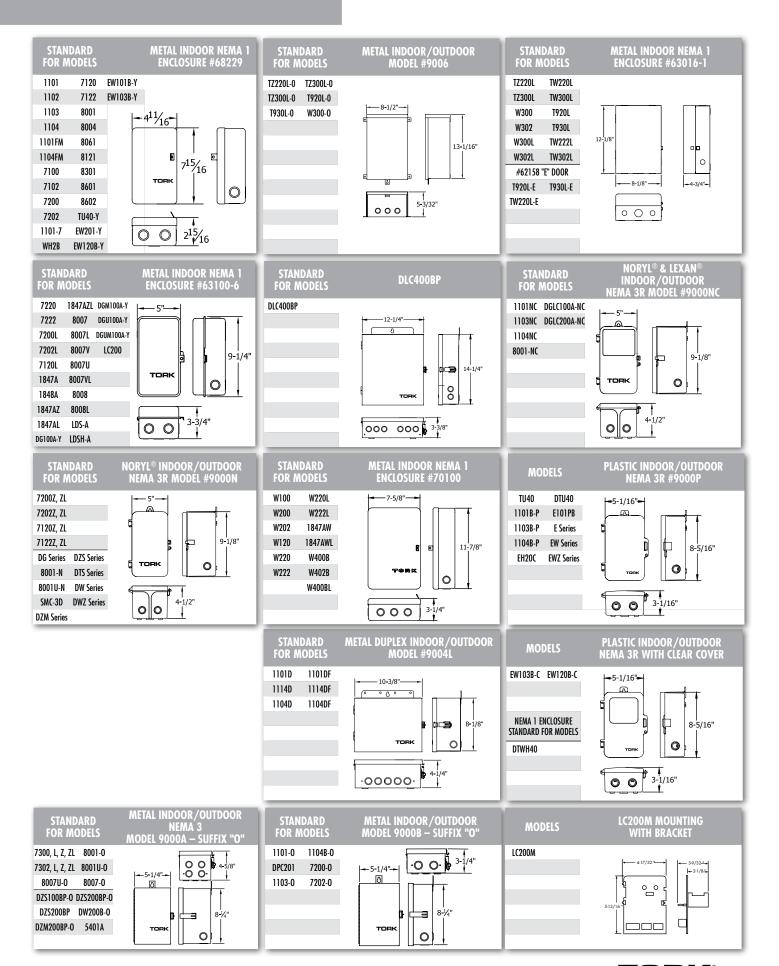

ENCLOSURES

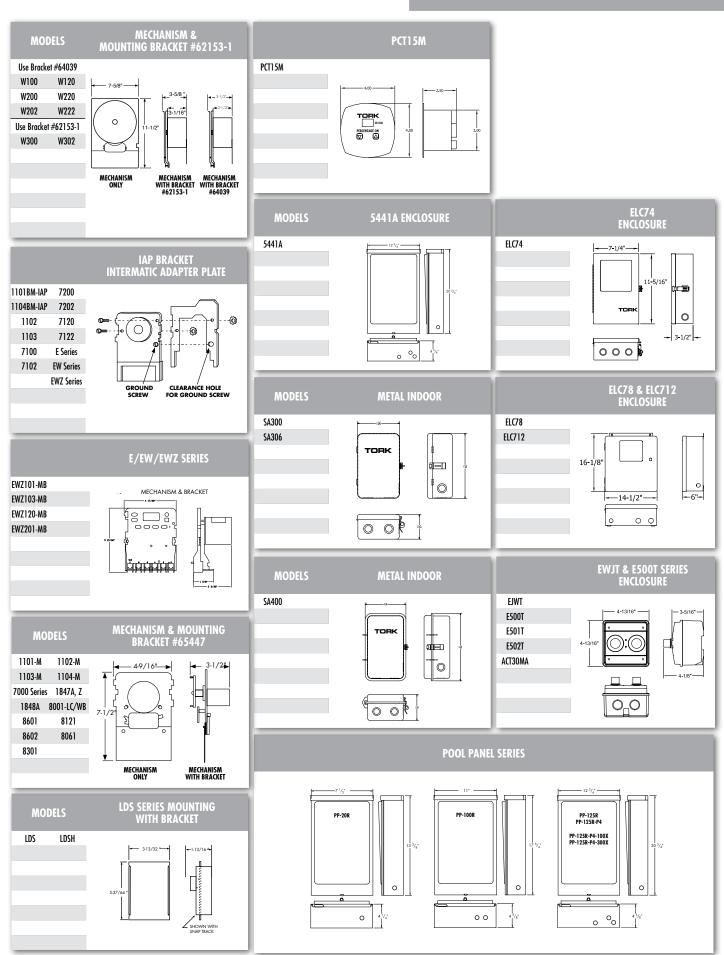

ALPHANUMERIC INDEX

| 0T − 1000T 13 2002 406 5231 413 0TC − 6TC − 1 39 2005A 411 5237 − U 413 1101 − 1042 133 2005B 412 5237 − U 414 1101 − 1 423,535 2006 406 5401A 488 1101 − 1 423,535 2007B 412 5404A 410 1101BM − 1 423,535 2007B 412 5404A 410 1101BM − 1 423,253 2008B 412 5404A 410 1101BM − 1 532 2018 406 5441A 488 1101BM − 1 533 2018 406 5441A 488 1101D − 1 533 2021 407 5500 − 4416 410 1101BM − 1 533 2021 407 5500 − 4416 410 1101- 1 423 2024 − 24042 135 5737TM 415 1101- 4 423 2107 403 601A 522 | ITEM | PAGE | ITEM | PAGE | ITEM | PAGE |
|--|-------------|----------|-----------------|------|------------------|------|
| 1012 - 1042 | OT — 1000T | 13 | 2002 | 406 | 5231 | 413 |
| 1010 | OTC — 6TC-1 | 39 | 2005A | 411 | 5237 | 413 |
| 1011-7 | 1012 – 1042 | 133 | 2005B | 412 | 5237-UL | 414 |
| 1018M-IAP | 1101 | 423, 553 | 2006 | 406 | 5401A | 488 |
| 1018-P | 1101-7 | 423 | 2007A | 411 | 5403A | 410 |
| 1010 | 1101BM-IAP | 423, 553 | 2007B | 412 | 5404A | 410 |
| 1101HA-M | 1101B-P | 423 | 2008B | 412 | 5404-3A | 410 |
| 1101 H.N | 1101D | 553 | 2018 | 406 | 5441A | 488 |
| 101-HC | 1101FM-M | 553 | 2021 | 407 | 5500 | 416 |
| 1010-0 | 1101FM-N | 553 | 2022 | 407 | 5500-OC | 416 |
| 1102B | 1101-NC | 423 | 2024 — 2042 | 135 | 5737TM | 415 |
| 1103. | 1101-0 | 423 | 2101 | 403 | 5737TZ | 415 |
| 11038.P | 1102B | 423 | 2104 | 403 | 601A | 527 |
| 1103M. | 1103 | 423 | 2107 | 403 | 602A | 527 |
| 1103-NC | 1103B-P | 423 | 2115 | 404 | 611D | 528 |
| 1103-0 | 1103M | 423 | 2116 | 404 | 621D | 528 |
| 1104 | 1103-NC | 423 | 2117 | 404 | 631D | 528 |
| 1104BM-IAP | 1103-0 | 423 | 2223 | 416 | 640-PM | |
| 1104BM-IAP | 1104 | 423, 553 | 2224 | 416 | 652A | 527 |
| 1104BM-MB | | • | | | | |
| 1104B-0 | | • | 300T-2 — 800T-4 | 19 | 654A | 528 |
| 1104B-P 423,553 36175 − 481750. 325 701AA 520 1104D .553 3000 .408 705-16 − 1150-20 .314 1104FM-M .553 3002 .408 711A .514 1104FM-M .553 3006 .408 750P − 1450P .323 1104FM-N .553 3010 .408 7100 .425-426 1104-NC .423 .42504 − 4.100014 .17 7102 .425-426 1847A .433-434 401A .523 7120 .425-426 1847AL .433-434 401A .523 7120L .425-426 1847AW .433-434 403A .523 7120Z .425-427 1847AWL .433-434 405A .523 7120Z .425-427 1847AZI .433-434 418 − 60175 .319-320 712Z .425-426 1847AZI .433-434 418-10-58 .327-328 712ZI .425-426 2/O-14 .129 418-5B − 14120-5B .335 7200-0 .425-426 2/OIP − 2-600TP < | | | | | | |
| 1104D | | • | | | | |
| 1104DF | 1104D | | 3000 | 408 | 705-16 — 1150-20 | 314 |
| 1104FM-M 553 3006 408 750P - 1450P 323 1104FM-N 553 3010 408 7100 425-426 1104-NC 423 4-250L4 - 4-1000L4 17 7102 425-426 1847A 433-434 401A 523 7120 425-426 1847AU 433-434 402A 523 7120L 425-426 1847AWI 433-434 403A 523 7120Z 425-427 1847AZ 433-434 405A 523 7120ZL 425-427 1847AZL 433-434 418 - 60175 319-320 712Z 425-426 1847AZL 433-434 418-10-55 327-328 712ZIL 425-426 1848A 433-434 418-10-818H-ID 324 7200L 425-426 2/O-14 129 418-SB - 14120-SB 335 7200-0 425-426 2/OTP - 2-600TP 23 418X - 14500X 319-320 7200 425-426 2-14 - 4-14 129 4 | | | | | 711A | 514 |
| 1104FM-N .553 3010 .408 7100 .425-426 1104-NC .423 .4250L4 - 4-1000L4 .17 .7102 .425-426 1847A .433-434 .401A .523 .7120 .425-426 1847AL .433-434 .402A .523 .7120L .425-426 1847AWL .433-434 .403A .523 .7120Z .425-427 1847AZ .433-434 .405A .523 .7120ZL .425-427 1847AZ .433-434 .418-60175 .319-320 .7122 .425-426 1847AZL .433-434 .418-10-818H-ID .324 .7200L .425-426 1848A .433-434 .418-1D-818H-ID .324 .7200L .425-426 2/O-14 .129 .418-58-14120-58 .335 .7200-0 .425-426 2/OTP - 2-600TP .23 .418X-14500X .319-320 .7200 .425-426 2-14-4-14 .129 .455D .525 .7200Z .427-428 2-210T-=2-1000T .13 .457Z .525 .7200Z .425-426 | | | | | | |
| 1104-NC 423 4-25014 - 4-100014 17 7102 425-426 1847A 433-434 401A 523 7120 425-426 1847AL 433-434 402A 523 7120L 425-426 1847AW. 433-434 403A 523 7120Z 425-427 1847AWL 433-434 405A 523 7120ZL 425-427 1847AZ 433-434 418-60175 319-320 7122 425-426 1847AZL 433-434 418-10-818H-1D 324 7200L 425-427 1848A 433-434 418-1D-818H-1D 324 7200L 425-426 2/0-14 129 418-58-14120-58 335 720-0 425-426 2/0TP - 2-600TP 23 418X-14500X 319-320 7200 425-426 2-14-4-14 129 455D 525 7200Z 427-428 2-210T=2-1000T 13 457Z 525 7200ZL 427-428 2-35012 - 8-35018 31 4180 - 601750 321 7202 425-426 25R - 750SR 3 | | | | | | |
| 1847A 433–434 401A 523 7120 425–426 1847AL 433–434 402A 523 7120L 425–426 1847AW 433–434 403A 523 7120Z 425–427 1847AWL 433–434 405A 523 7120ZL 425–427 1847AZ 433–434 418 – 60175 319–320 7122 425–426 1847AZL 433–434 418-41-450-5 327–328 712ZL 425–427 1848A 433–434 418-1D-818H-ID 324 7200L 425–426 2/0-14 129 418-5B-14120-SB 335 7200-0 425–426 2/0TP - 2-600TP 23 418X - 14500X 319–320 7200 425–426 2-14 - 4-14 129 4550 525 7200Z 427–428 2-350I2 ≠ 2-1000T 13 457Z 525 7200ZL 427–428 2-350I2 + 8-350I8 31 4180 - 601750 321 7202 425–426 2-14, 4C-14 129 5001M 409 7202 425–426 2SC - 750SR < | | | | | | |
| 1847AL 433-434 402A 523 7120L 425-426 1847AW 433-434 403A 523 7120Z 425-427 1847AWL 433-434 405A 523 7120ZL 425-427 1847AZ 433-434 418 - 60175 319-320 7122 425-426 1847AZL 433-434 418-4 - 1450-5 327-328 7122ZL 425-427 1848A 433-434 418-10 - 818H-1D 324 7200L 425-426 2/0-14 129 418-58 - 14120-58 335 7200-0 425-426 2/0TP - 2-600TP 23 418X - 14500X 319-320 7200 425-426 2-14 - 4-14 129 455D 525 7200Z 427-428 2-210T≠2-1000T 13 457Z 525 7200ZL 427-428 2-35014 - 8-35018 31 4180 - 601750 321 7202 425-426 2-35072 - 8-35074 31 530MH - 141200MH 333 7202L 425-426 2SR - 750SR 21 5004M 409 7202C 425-426 | | | | | | |
| 1847AW 433-434 403A 523 7120Z 425-427 1847AWL 433-434 405A 523 7120ZL 425-427 1847AZ 433-434 418 - 60175 319-320 7122 425-426 1847AZL 433-434 418 - 1450-5 327-328 7122ZL 425-427 1848A 433-434 418-1D - 818H-ID 324 7200L 425-426 2/0-14 129 418-5B - 14120-5B 335 7200-0 425-426 2/0TP - 2-600TP 23 418X - 14500X 319-320 7200 425-426 2-14 - 4-14 129 455D 525 7200Z 427-428 2-210T≠2-1000T 13 457Z 525 7200ZL 427-428 2-35014 - 8-35018 31 4180 - 601750 321 7202 425-426 25C-14, 4C-14 129 5001M 409 7202C 425-426 25R - 750SR 21 5004M 409 7202C 427-428 200-3-2 285 5007M 409 7202L 427-428 25012 - 60012 | | | | | | |
| 1847AWL 433–434 405A 523 7120ZL 425–427 1847AZ 433–434 418 – 60175 319–320 7122 425–426 1847AZL 433–434 418-4 – 1450-5 327–328 7122ZL 425–427 1848A 433–434 418-ID – 818H-ID 324 7200L 425–426 2/0-14 129 418-SB – 14120-SB 335 7200-0 425–426 2/0TP – 2-600TP 23 418X – 14500X 319–320 7200 425–426 2-14 – 4-14 129 455D 525 7200Z 427–428 2-210T≠2-1000T 13 457Z 525 7200ZL 427–428 2-35014 – 8-35018 31 4180 – 601750 321 7202 425–426 2-35012 – 8-35074 31 530MH – 141200MH 333 7202L 425–426 25R – 750SR 21 5004M 409 7202C 427–428 200-3-2 285 5007M 409 7202ZL 427–428 25012 – 60012 15 5008M 409 7220L 425–426 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td></t<> | | | | | | |
| 1847AZ 433—434 418 - 60175 319—320 7122 .425—426 1847AZL 433—434 418 - 4 - 1450-5 .327—328 7122ZL .425—427 1848A .433—434 418 - ID — 818H-ID .324 7200L .425—426 2/0—14 .129 418-5B — 14120-SB .335 7200-0 .425—426 2/0TP — 2-600TP .23 418X — 14500X .319—320 7200 .425—426 2-14 — 4-14 .129 .455D .525 7200Z .427—428 2-210T≠2-1000T .13 .457Z .525 7200ZL .425—426 2-35014 — 8-35018 .31 .4180 — 601750 .321 .7202 .425—426 2-35012 — 8-35014 .31 .530MH — 141200MH .333 .7202L .425—426 25R — 750SR .21 .5004M .409 .7202-0 .425—426 25R — 750SR .21 .5004M .409 .7202T .427—428 25012 — 600L2 .15 .5008M .409 .7220L .425—426 2000 .405 .5021M .409 .7220L | | | | | | |
| $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | | | | | |
| $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | | | | | |
| $\begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | | | | | |
| $\begin{array}{cccccccccccccccccccccccccccccccccccc$ | | | | | | |
| 2-210T≠2-1000T 13 457Z 525 7200ZL .427–428 2-350L4 − 8-350L8 31 4180 − 601750 .321 7202 .425–426 2-350T2 − 8-350T4 .31 530MH − 141200MH .333 7202L .425–426 2C-14, 4C-14 .129 5001M .409 7202-0 .425–426 2SR − 750SR .21 5004M .409 7202Z .427–428 200-3-2 .285 5007M .409 720ZL .427–428 250L2 − 600L2 .15 5008M .409 7220 .425–426 2000 .405 5021M .409 7220L .425–426 2000-2 .405 5024M .409 7222 .425–426 | · | | | | | |
| 2-350L4 - 8-350L8 31 4180 - 601750 321 7202 .425-426 2-350T2 - 8-350T4 31 530MH - 141200MH .333 7202L .425-426 2C-14, 4C-14 129 5001M .409 7202-0 .425-426 2SR - 750SR .21 5004M .409 7202Z .427-428 200-3-2 .285 5007M .409 720ZL .427-428 250L2 - 600L2 .15 5008M .409 7220 .425-426 2000 .405 5021M .409 7220L .425-426 2000-2 .405 5024M .409 7222 .425-426 | | | | | | |
| 2-350T2 - 8-350T4 31 530MH - 141200MH 333 7202L .425-426 2C-14, 4C-14 129 5001M .409 7202-0 .425-426 2SR - 750SR .21 5004M .409 7202Z .427-428 200-3-2 .285 5007M .409 720ZL .427-428 250L2 - 600L2 .15 5008M .409 7220 .425-426 2000 .405 5021M .409 7220L .425-426 2000-2 .405 5024M .409 7222 .425-426 | | | | | | |
| 2C-14, 4C-14 129 5001M 409 7202-0 .425-426 2SR - 750SR .21 5004M 409 7202Z .427-428 200-3-2 .285 5007M 409 7202ZL .427-428 25012 - 60012 .15 5008M 409 7220 .425-426 2000 .405 5021M 409 7220L .425-426 2000-2 .405 5024M 409 7222 .425-426 | | | | | | |
| 2SR - 750SR 21 5004M 409 7202Z .427-428 200-3-2 285 5007M 409 7202TL .427-428 250L2 - 600L2 .15 5008M 409 7220 .425-426 2000 .405 5021M 409 7220L .425-426 2000-2 .405 5024M 409 7222 .425-426 | | | | | | |
| 200-3-2 285 5007M 409 7202ZL 427–428 250L2 - 600L2 15 5008M 409 7220 425–426 2000 405 5021M 409 7220L 425–426 2000-2 405 5024M 409 7222 425–426 | | | | | | |
| 250L2 - 600L2 .15 5008M .409 7220 .425-426 2000 .405 5021M .409 7220L .425-426 2000-2 .405 5024M .409 7222 .425-426 | | | | | | |
| 2000 405 5021M 409 7220L 425–426 2000-2 405 5024M 409 7222 425–426 | | | | | | |
| 2000-2 | | | | | | |
| | | | | | | |
| | | | | | | |

| ITEM | PAGE | ITEM | PAGE | ITEM | PAGE |
|---------------|--------------|-------------|----------|----------------|---------|
| 7300 | 425–426 | A506H | 519 | CAL | |
| 7300L | 425–426 | A506HHW | 519 | CB-11 — CB-120 | 132 |
| 7300Z | 427–428 | A506HW | 519 | CB | 159 |
| 7300ZL | 427–428 | A512H | 519 | CBH | 159 |
| 7302 | 425–426 | A512HH | 519 | CCM | 158 |
| 7302L | | | 519 | | |
| 7302Z | | | 519 | | |
| 7302ZL | | | 519 | | |
| 73866 | | | 519 | | |
| 75(000)CW, CQ | | | 519 | | |
| 76(000)PS | | | 519 | | |
| | | | | | • |
| 76(000)PW | | | 519 | | 499 |
| 77(000)RQ | | | 519 | | 498 |
| 77(000)RW | | | 519 | | 500 |
| 78(000)TQ | | | 519 | | 501 |
| 78(000)TS | | | 519 | | 503 |
| 78(000)TW | | | 519 | CSP | 104 |
| 79(000)LW | 308–310 | A560M | 519 | σ | 102 |
| 79(000)LQ | 309 | A560MH | 519 | CTH | 103 |
| 79(000)MS | 299–300, 307 | A560MHW | 519 | CTP | 331 |
| 79(000)MSR | 307 | A560MW | | D1060LA | |
| 850-R | | ACT30MA | 484 | | |
| 8001 | | | 342 | | 518 |
| 8001-LC/WB | | | 49 | | 154 |
| 8001-N | | | | | 518 |
| 8001-NC | | | 51 | | 518 |
| 8001-0 | | | 108 | | 518 |
| | | | | | |
| 8001U | | | 53 | | 157 |
| 8001U-N | | | 271 | | 41 |
| 8001U-0 | | | | | |
| 8004 | | | 382, 384 | | |
| 8007 | 429 | BS400T, T2 | 25 | DG100A-Y | |
| 8007L | 429 | BT | 356 | DG180A | 479–480 |
| 8007-0 | 429 | BTP | 23 | DG200A | |
| 8007U | 429 | BY | 157 | DG280A | |
| 8007U-0 | 429 | C | 267 | DG280A-24 | 479–480 |
| 8007V | 429 | C-8 — C-750 | | DGLC100A-NC | |
| 8007VL | 429 | C2 – C9 | 59 | | |
| 8008 | | | 520 | | |
| 8008L | | | 520 | | 459–460 |
| 8061 | | | 520 | | 479–480 |
| 8121 | | | 520 | | 479–480 |
| | | | | | |
| 8301 | | | 520 | | 479–480 |
| 8601 | | | 520 | | 471–472 |
| 90058-1 | | | 520 | | 471–472 |
| A502H | | | 520 | | 471–472 |
| A502HHW | 519 | C560M | 520 | DIN100B | |
| | | | | | |

ALPHANUMERIC INDEX

| DLC400BP 475-476 ESB2 310 FLLP DMT 285 ESGHS 218 FLM DPC201 .555-556 ESGS .215 FLPTM DRD, DRE, DRF, DRJ, DRT .126 ESGTS. .216 FQC DS .168 ESSLK .217 FS DSS .355 ESUF .214 FS-136 DTS100B .463-464 ET-CP .263-264 FS-814 DTS200B .463-464 EW101B .455-456 FSIC DTS400B .463-464 EW101B-Y .455-456 FSP DTW40 .447-448 EW103B .455-456 FSPP DTWH40 .447-448 EW103B-Y .455-456 FTBFP DW200B .461-462 EW120B-Y .455-456 FTS DWZ100B .461-462 EW120B-Y .455-456 FW DZM200BP- .467-468 EW20B-Y .455-456 G-(1)-S-BS DZS100BP- .465-466 EW201B-Y | 379378255359359359359359 |
|--|--|
| DPC201 555–556 ESGS 215 FLPTM DRD, DRE, DRF, DRJ, DRT 126 ESGTS 216 FQC DS 168 ESSLK 217 FS DSS 355 ESUF 214 FS-136 DTS100B 463–464 ET-CP 263–264 FS-814 DTS200B 463–464 EW101B 455–456 FSIC DTS400B 463–464 EW101B-Y 455–456 FSP DTU40 447–448 EW103B 455–456 FSPP DTWH40 447–448 EW103B-Y 455–456 FTBFP DW200B 461–462 EW103B-Y 455–456 FTH DW200B-O 461–462 EW120B 455–456 FW DZM200BP 467–468 EW120B-Y 455–456 G-(1)-S-BS DZM200BP-O 467–468 EW201B-Y 455–456 G-(1)-S-DBR DZS100BP 465–466 EW201B-Y 455–456 G-(1)-S-DBR | 378122255359359359359 |
| DRD, DRE, DRF, DRJ, DRT 126 ESGTS. .216 FQC DS .168 ESSLK. .217 FS DSS .355 ESUF .214 FS-136. DTS100B .463–464 ET-CP .263–264 FS-814. DTS200B .463–464 EW101B .455–456 FSIC DTS400B .463–464 EW101B-Y .455–456 FSP DTU40 .447–448 EW103B .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 122 255 359 359 359 359 |
| DS .168 ESSLK. .217 FS DSS .355 ESUF .214 FS-136. DTS100B .463–464 ET-CP .263–264 FS-814. DTS200B .463–464 EW101B. .455–456 FSIC DTS400B .463–464 EW101B-Y .455–456 FSP DTU40 .447–448 EW103B. .455–456 FSPP DTWH40 .447–448 EW103B-Y .455–456 FTBFP. DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | |
| DSS .355 ESUF .214 FS-136 DTS100B .463–464 ET-CP .263–264 FS-814 DTS200B .463–464 EW101B .455–456 FSIC DTS400B .463–464 EW101B-Y .455–456 FSPP DTU40 .447–448 EW103B .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FW DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP .467–468 EW201B .455–456 G-(1)-S-DBR DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 359 359 359 359 125 |
| DSS .355 ESUF .214 FS-136 DTS100B .463–464 ET-CP .263–264 FS-814 DTS200B .463–464 EW101B .455–456 FSIC DTS400B .463–464 EW101B-Y .455–456 FSPP DTU40 .447–448 EW103B .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FW DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP .467–468 EW201B .455–456 G-(1)-S-DBR DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 359 359 359 359 125 |
| DTS100B .463–464 ET-CP .263–264 FS-814 DTS200B .463–464 EW101B .455–456 FSIC DTS400B .463–464 EW101B-Y .455–456 FSP DTU40 .447–448 EW103B .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP .467–468 EW201B .455–456 G-(1)-S-DBR DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 359 359 359 125 |
| DTS200B .463–464 EW101B .455–456 FSIC DTS400B .463–464 EW101B-Y .455–456 FSP DTU40 .447–448 EW103B .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B .455–456 G-(1)-S-DBR DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 359 359 359 |
| DTS400B .463–464 EW101B-Y .455–456 FSP DTU40 .447–448 EW103B. .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP. DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B. .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 359 359 125 |
| DTU40 .447–448 EW103B .455–456 FSPP DTWH40 .447–448 EW103B-C .455–456 FTBFP DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 359 |
| DTWH40 .447–448 EW103B-C .455–456 FTBFP. DW200B .461–462 EW103B-Y .455–456 FTH DW200B-O .461–462 EW120B .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | 125 |
| DW200B .461–462 EW103B-Y .455–456 FTH DW200B-0 .461–462 EW120B .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-0 .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | |
| DW200B-O. .461–462 EW120B. .455–456 FTS DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP. .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B. .455–456 G-(1)-S-DB. DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR. | |
| DWZ100B .461–462 EW120B-C .455–456 FW DZM200BP .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-O .467–468 EW201B .455–456 G-(1)-S-DB DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR | |
| DZM200BP. .467–468 EW120B-Y .455–456 G-(1)-S-BS DZM200BP-0 .467–468 EW201B. .455–456 G-(1)-S-DB. DZS100BP .465–466 EW201B-Y .455–456 G-(1)-S-DBR. | |
| DZM200BP-0 | |
| DZS100BP | |
| | 237 |
| D7S100RP-0 465_466 FWDT 315 G-1 _ G-66 | 239 |
| DESIGNAL O | 240-242 |
| DZS200BP | 238 |
| DZS200BP-12 | 240 |
| DZS200BP-24 | |
| DZS200BP-0 | |
| DZS400BP | |
| DZS400BP-0 | |
| | |
| | |
| E101PB | |
| E103B | |
| E120B | |
| E201B | |
| E500T | |
| E501T | 245 |
| E502T | 79-82 |
| EC | 25 |
| EEL | 89 |
| EG | |
| EH2OC | |
| EJWT | |
| EL | |
| ELC712 | |
| | |
| ELC74 | |
| ELC78 | |
| EMFW386, 392 FD349 GSC, GSH | |
| EMHD389 FL | |
| EMFW386 FLBR379 GST | 394 |
| EMTW386, 388 FLHBR380 GZ | |
| EMWL | 246 |
| EPC-A | |
| EPC-LC | 246 |

| ITEM | PAGE | ITEM | PAGE | ITEM | PAGE |
|----------|---------|------------|----------|----------------------|---------|
| HLC | 47 | LCS115M | 473, 504 | PFP3 | 551 |
| HMSS | | LDS | 477–478 | PFPEW1102-M | 552 |
| HN | 166 | LDS-A | 477–478 | PFPEW1103-M | 552 |
| HOS-M | 502 | LDSH | 477–478 | PFPT | 551 |
| HPS30 | 489 | LDSH-A | 477–478 | PFS | 288 |
| HSC | | LK | 139 | PG | 256 |
| | 287 | | 71–76 | PHMN | |
| | 254 | • | 93 | PIWC | |
| | 288 | | 35 | PL | |
| | 288 | | 289 | PLH | |
| | 287 | | 157 | PM | |
| | | , | | | |
| ' | 287 | | 350 | PNC | |
| | 225 | | 342 | Polaris Custom | |
| | | | 105–106 | Polaris Installation | |
| | | • | 153 | PP-100R | |
| IFS | 291–292 | NC | 343 | PP-125R | 549–550 |
| IM | | NCH | 343 | PP-125R-P4 | 549–550 |
| IPCS | 113–114 | NH-1, NH-2 | 160 | PP-125R-P4-100X | 549–550 |
| IPL | | NMS, NMT | 137 | PP-125R-P4-300X | 549–550 |
| | 185-188 | NSi-12 | 155 | PT | 55 |
| | 191 | | 107 | PT-12V — PT-22V | |
| | 189 | | 157 | PTC | |
| | 171 | | 157 | PTO | |
| | 193 | | 168 | PTS | |
| | | | | | |
| | | | 291 | QF | |
| | 175 | | 153 | R | |
| | | | 551 | RDC 1/0 | |
| | | | 551 | RLD | 351 |
| ISPC | 199 | P1101-M | 551 | ROS | 220 |
| ISR | 179 | P1104FM-M | 551 | RS200 | 393 |
| ISW | 173 | P1104-M | 551 | RSK | 221 |
| IT | 177 | P47 | 553 | S | |
| ITB | 127 | PAA | 45 | S300 | 23 |
| | | | 45 | SA 382 — SA 582 | 255 |
| | 171 | | 345–349 | SA011 | |
| | 177 | • | 483 | SA100 | |
| | 177 | | 552 | SA10-400, SA500-1000 | |
| | | | | | |
| | 171 | | 552 | SA105 | |
| | 175 | | 285 | SA110 | |
| | 122 | | 551 | SA130 | |
| | | PF1101-M | 551 | SA134 | |
| JBP75175 | | PF1104FM-M | 551 | SA170 | 513 |
| KA | 154 | PF1104-M | 551 | SA204 | 528 |
| KC | | PFEW101-M | 551 | SA205 | 527 |
| L, L-P | 67-70 | PFEW104-M | 552 | SA210 | 530 |
| ' | | | 551 | SA215 | |
| | | | 551 | SA220 | |
| | 469–470 | | 551 | SA230 | |
| LCZUUM | | 1114 | | JALUU | |

ALPHANUMERIC INDEX

| ITEM | PAGE | ITEM | PAGE | ITEM | PAGE |
|------------------|---------|------------|---------|------------|------|
| SA300 | 451–452 | T920L-E | 437–438 | TA53AF1 | 542 |
| SA306 | 451–452 | T920L-0 | 437–438 | TA53AG1 | |
| SA400 | 451–452 | T930L | 437–438 | TA54AE1 | 542 |
| SA500 | 526 | T930L-E | 437–438 | TA54RE1 | 542 |
| SB | | T930L-0 | 437–438 | TA5508H-G1 | |
| SC | | TA09 | 539 | TA590 | |
| SC | | TA1245Y-50 | 543 | TA591 | 543 |
| SC-B | | TA1245Y-75 | 543 | TA592 | 543 |
| SF | | TA131DAN5 | 542 | TA598 | |
| SFTZ | 35 | TA131DAU1 | | | 543 |
| SITG | | TA131DRN5 | | | 539 |
| SKAB, SKCB, SKDB | | TA131DRU1 | | | 540 |
| SKSS | | TA152 | | | 540 |
| SKUF | | TA154 | | | 540 |
| SL-N | | TA1786B | | | 540 |
| SLUL | | TA1786CB | | | 540 |
| SLW | | TA1880 B | | | 543 |
| SM | | TA1880 G | | | 539 |
| SMC3D | | TA1882 B | | | 539 |
| SOTZ | | TA1882 G | | | |
| SPM | | | | | |
| | | TA1886 B | | | 540 |
| SR | | TA1886 G | | | 540 |
| SRNY | | TA1887 B | | | 540 |
| SRPE | | TA1887 BK | | | 540 |
| SS13B | | TA1887 G | | | 540 |
| SS13F | | TA215LB | | | 540 |
| SS20 | | TA236 | | | |
| SS20F | | TA270A | | | |
| SS34 — SS66 | | TA315-1N5 | | | 540 |
| SS403 | | TA340-10G5 | | | |
| SS410 | | TA340-4G5 | | TA725 | |
| SS423 | | TA340-4N5 | | TA740 | |
| SS700Z | 509–510 | TA340-6G5 | 534 | TA744 | |
| SS700ZA | 509–510 | TA340-6N5 | 535 | TA874-N5 | |
| SS720A | 511 | TA434-10N5 | 534 | TA874-N5R | |
| SS720AA | 511 | TA434-4N5 | 534 | TA875-1G1 | |
| SS720Z | | TA434-6N5 | 534 | TA875-G1 | |
| SS721Z | 509–510 | TA44 | 539 | TA876-N5 | |
| SS721ZA | 509–510 | TA45 | 539 | TA879 | 542 |
| SS8100 — SS26250 | 326 | TA46 | 539 | TA880-N5 | 533 |
| SSBW | 167 | TA47AN5 | 541 | TA93-2AN5 | |
| SSCT | | TA47AR5 | 541 | TA93-2BN5 | 541 |
| SSFW | 167 | TA47RN5 | 541 | TA93-2CN5 | |
| SSHN | | TA502 | | | 541 |
| SSSLW | | TA502SW | | | 541 |
| STL | | TA52AN5 | | | 541 |
| SWL | | TA52BN5 | | | 541 |
| T920L | | TA52RN5 | | | 544 |

| ITEM | PAGE | ITEM | PAGE | ITEM | PAGE |
|---------------------|--------------|------------|---------------|---------------------|------------------|
| TA-ADR | | | 439–440 | | 432 |
| TA-B-8332 | | TW-222L | 439–440 | WLD | |
| TA-BBSF | | | 439–440 | | 352 |
| TAC212WL | | | 439–440 | | 353 |
| TAC212WS | | | 165 | | 495 |
| TA-D5B | | | 165 | | |
| TA-D6A | | | | | 495 |
| TA-D7A | | | 165 | | 496 |
| TA-D7C | | | 441–442 | | |
| | | | | | 497 |
| TA-D7R | | | 441–442 | | 494 |
| TA-D8R | | | 441–442 | | 371 |
| TA-DOK | | | 441–442 | | 372 |
| TA-L10 | | | 441–442 | | 371 |
| TA-L10-1 | | | 441–442 | | 374 |
| TA-L6-2 | | | 157 | | 374 |
| TA-L8 | | | 250–251 | | 375 |
| TA-MTS | 534 | | 394 | | 375 |
| TA-SFPF | 544 | ULT, ULTD | 356 | WPMRKY | 376 |
| TA-SFPFR | 544 | USB-MMP | 467 | WPM | 373 |
| TA-WBBF | 544 | ٧ | 465, 467, 475 | WRD | 59-62 |
| TB | 121 | V850-V7200 | 334 | WWC, WWC-GR, WWC-N1 | , WWC-N2 261–262 |
| TBO — TB4 | 124 | VL | 355 | | |
| TBS | 123 | VM | 354 | | |
| TC | 111 | VRM | 390 | | |
| TCP | 112 | VRS | 391 | | |
| TES | | | 393 | | |
| TFZ | | | 393 | | |
| TGE | | | 47 | | |
| THK | | | | | |
| π | | | | | |
| TL-5-1, TL-6-1 | | | 435–436 | | |
| TL-ADJ5 | | | 435–436 | | |
| | | | | | |
| TL-CCIH | | | | | |
| TL-CRP | | | | | |
| TL-DC | | | 435–436 | | |
| TL-ISS | | | 435–436 | | |
| TL-LP, TL-LNP | | | 435–436 | | |
| TL-RCR | | | 435–436 | | |
| TL-WS6 | | | 435–436 | | |
| Tool and Die Charts | 141-149 | W302 | 435–436 | | |
| TOP | 267 | W302L | 435–436 | | |
| TRP-24I | 498–500, 504 | W400B | 435–436 | | |
| TRP-24B | 503–504 | W400BL | 435–436 | | |
| TRT | 337 | W402B | 435–436 | | |
| TS | 37 | WAGS | 213 | | |
| TU40 | 421 | WAHS | 225, 231 | | |
| TU40-Y | | | 259–260 | | |
| TW-220L | | | 259–260 | | |
| | | , | | | |