



Conveniently power mobile devices quickly and reliably without the need for bulky AC adapters.

R26USBAC6, R26USBCC6


radiant® Tamper-Resistant Duplex Receptacles with USB charging capabilities are equipped with the fastest USB charger on the market. Charge your smartphones, tablets, and laptops up to 40% faster than 3-5A USB chargers, while enjoying the added power convenience of tamper-resistant receptacles that meet NEC® requirements. Industry-leading charging capacity of 6.0A, shared between both ports. Protects children: patented shutter system helps prevent improper insertion of foreign objects – now with black “invisi-shutters” for an invisible effect. The external brass back-wire pressure-plate and posted side-wire terminal screws make installation fast and easy.

Features & Benefits

Combination AC USB receptacles include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.

Posted side-wire terminal screws and external back-wire pressure plates for faster termination.

Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.

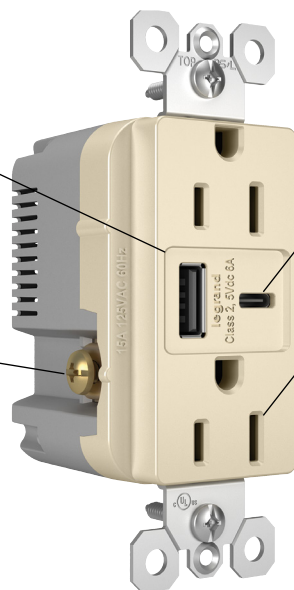

R26USBAC6LA

Type-A and Type-C ports carry minimum rating of 10,000 insertions.

AC USB receptacles are tamper-resistant to meet NEC. Patented shutter system — now with black “invisi-shutters” for an invisible effect preferred by end users — helps prevent improper insertion of foreign objects.

Slim design allows for installation in standard-depth wall boxes.



- **Overall 6A USB charging capability** with smart current-sharing technology to allow for full 3A through a singular Type-C port.
- **AC USB receptacles available in 15A, 125V.**

- **Back and side wire termination options** accepts #14–#10AWG solid & stranded wires, Copper-clad aluminum, and copper wire.
- **Multiple color options available.**

3rd Party Compliance



cULus listed, UL listed. Complies with test requirements UL 498, UL 1310
 CSA C22.2 No. 42, CSA c22.2 No. 223

Technical Information

Performance

Electrical

Dielectric Withstand Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Maximum Temperature Rise	30°C after 50 cycles at full-rated current after 50 cycles of overload are 150% of rated current with direct current
No-Load Power Draw	10.7 mW Meets Department of Energy (DoE) Level VI requirement
FCC Part 15	Class B

Mechanical


Terminal Accommodation	Back and side wire termination options accepts #14–#10AWG solid & stranded wires, Copper-clad aluminum, and copper wire
Product Identification	Ratings are a permanent part of the device

Environmental


Flammability	UL94 V2 (for device cover) 5V (for device body and frame)
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact
RoHS	Compliant

Materials

Face	Polycarbonate
Back Body	Nylon
Line Contacts	CDA 260 Brass
Mounting Strap	.049" Zinc-Plated Steel
Terminal Screws	Tri-Drive Zinc-Plated Steel with Either Clear or Black Chromate for Color Identification
Ground Screw	Tri-Drive Steel with Green Chromate
Mounting Screws	Tri-Drive Steel

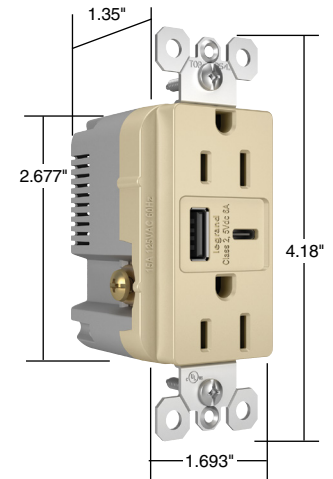

R26USBAC6I

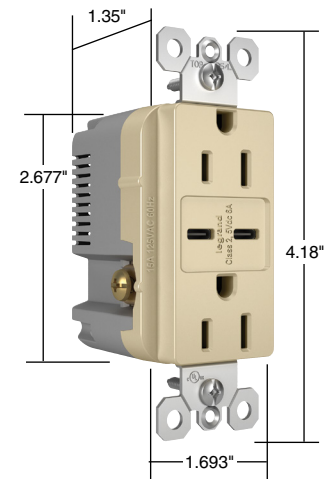




R26USBC6I

Warranty




1 Year

Ordering Information

Ultra-Fast USB Type AC Chargers with Duplex Tamper-Resistant Receptacles

Catalog Number	Rating		Color	Total Charging Capacity	3rd Party Compliance		
	A	V			 UL498 UL1310	 cULus	 C22.2 No. 42 C22.2 No. 223
R26USBAC6BK	15	125	Black	6 Amp	•	•	•
R26USBAC6DBCCV4	15	125	Dark Bronze	6 Amp	•	•	•
R26USBAC6I	15	125	Ivory	6 Amp	•	•	•
R26USBAC6LA	15	125	Light Almond	6 Amp	•	•	•
R26USBAC6NICC6	15	125	Nickel	6 Amp	•	•	•
R26USBAC6W	15	125	White	6 Amp	•	•	•

Ultra-Fast USB Type CC Chargers with Duplex Tamper-Resistant Receptacles

Catalog Number	Rating		Color	Total Charging Capacity	3rd Party Compliance		
	A	V			 UL498 UL1310	 cULus	 C22.2 No. 42 C22.2 No. 223
R26USBCC6BK	15	125	Black	6 Amp	•	•	•
R26USBCC6DBCCV4	15	125	Dark Bronze	6 Amp	•	•	•
R26USBCC6I	15	125	Ivory	6 Amp	•	•	•
R26USBCC6LA	15	125	Light Almond	6 Amp	•	•	•
R26USBCC6NICCV6	15	125	Nickel	6 Amp	•	•	•
R26USBCC6W	15	125	White	6 Amp	•	•	•



NEMA
5-15R

Vertical Markets

- Residential
- Multiple Dwelling
- Hospitality/Lodging

Also available in the radiant® collection...

- GFCI Receptacles
- Standard & Tamper-Resistant Receptacles
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Combination Devices
- Adjustable Night Lights
- Screwless Wall Plates
- Sensors
- Home Automation Controls
- Wireless Qi & USB charging receptacles



The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
905.738.9195
www.legrand.ca





Conveniently power mobile devices quickly and reliably without the need for bulky AC adapters.

R26USBAC6, R26USBCC6


radiant® Tamper-Resistant Duplex Receptacles with USB charging capabilities are equipped with the fastest USB charger on the market. Charge your smartphones, tablets, and laptops up to 40% faster than 3-5A USB chargers, while enjoying the added power convenience of tamper-resistant receptacles that meet NEC® requirements. Industry-leading charging capacity of 6.0A, shared between both ports. Protects children: patented shutter system helps prevent improper insertion of foreign objects – now with black “invisi-shutters” for an invisible effect. The external brass back-wire pressure-plate and posted side-wire terminal screws make installation fast and easy.

Features & Benefits

Combination AC USB receptacles include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.

Posted side-wire terminal screws and external back-wire pressure plates for faster termination.

Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.

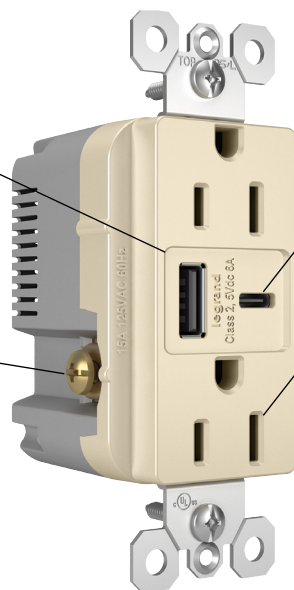

Type-A and Type-C ports carry minimum rating of 10,000 insertions.

AC USB receptacles are tamper-resistant to meet NEC. Patented shutter system — now with black “invisi-shutters” for an invisible effect preferred by end users — helps prevent improper insertion of foreign objects.

Slim design allows for installation in standard-depth wall boxes.



R26USBAC6LA

- **Overall 6A USB charging capability** with smart current-sharing technology to allow for full 3A through a singular Type-C port.
- **AC USB receptacles available in 15A, 125V.**

- **Back and side wire termination options** accepts #14–#10AWG solid & stranded wires, Copper-clad aluminum, and copper wire.
- **Multiple color options available.**

3rd Party Compliance



cULus listed, UL listed. Complies with test requirements UL 498, UL 1310
 CSA C22.2 No. 42, CSA c22.2 No. 223

Technical Information

Performance

Electrical

Dielectric Withstand Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Maximum Temperature Rise	30°C after 50 cycles at full-rated current after 50 cycles of overload are 150% of rated current with direct current
No-Load Power Draw	10.7 mW Meets Department of Energy (DoE) Level VI requirement
FCC Part 15	Class B

Mechanical


Terminal Accommodation	Back and side wire termination options accepts #14–#10AWG solid & stranded wires, Copper-clad aluminum, and copper wire
Product Identification	Ratings are a permanent part of the device

Environmental


Flammability	UL94 V2 (for device cover) 5V (for device body and frame)
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact
RoHS	Compliant

Materials

Face	Polycarbonate
Back Body	Nylon
Line Contacts	CDA 260 Brass
Mounting Strap	.049" Zinc-Plated Steel
Terminal Screws	Tri-Drive Zinc-Plated Steel with Either Clear or Black Chromate for Color Identification
Ground Screw	Tri-Drive Steel with Green Chromate
Mounting Screws	Tri-Drive Steel

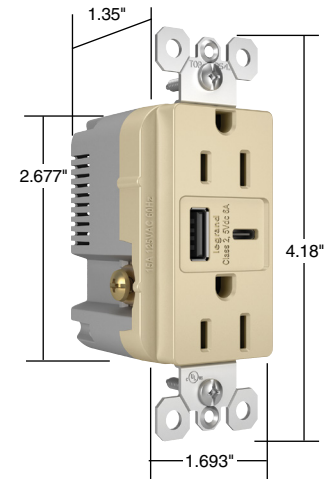

R26USBAC6I

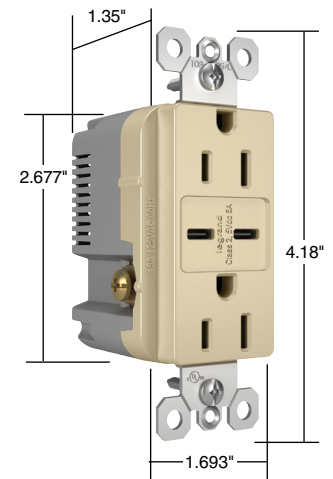

R26USBC6I

Warranty

1 Year

Ordering Information

Ultra-Fast USB Type AC Chargers with Duplex Tamper-Resistant Receptacles

Catalog Number	Rating		Color	Total Charging Capacity	3rd Party Compliance		
	A	V			UL498 UL1310	cULus	C22.2 No. 42 C22.2 No. 223
R26USBAC6BK	15	125	Black	6 Amp	•	•	•
R26USBAC6DBCCV4	15	125	Dark Bronze	6 Amp	•	•	•
R26USBAC6I	15	125	Ivory	6 Amp	•	•	•
R26USBAC6LA	15	125	Light Almond	6 Amp	•	•	•
R26USBAC6NICC6	15	125	Nickel	6 Amp	•	•	•
R26USBAC6W	15	125	White	6 Amp	•	•	•

Ultra-Fast USB Type CC Chargers with Duplex Tamper-Resistant Receptacles

Catalog Number	Rating		Color	Total Charging Capacity	3rd Party Compliance		
	A	V			UL498 UL1310	cULus	C22.2 No. 42 C22.2 No. 223
R26USBCC6BK	15	125	Black	6 Amp	•	•	•
R26USBCC6DBCCV4	15	125	Dark Bronze	6 Amp	•	•	•
R26USBCC6I	15	125	Ivory	6 Amp	•	•	•
R26USBCC6LA	15	125	Light Almond	6 Amp	•	•	•
R26USBCC6NICCV6	15	125	Nickel	6 Amp	•	•	•
R26USBCC6W	15	125	White	6 Amp	•	•	•



NEMA
5-15R

Vertical Markets

- Residential
- Multiple Dwelling
- Hospitality/Lodging

Also available in the radiant® collection...

- GFCI Receptacles
- Standard & Tamper-Resistant Receptacles
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Combination Devices
- Adjustable Night Lights
- Screwless Wall Plates
- Sensors
- Home Automation Controls
- Wireless Qi & USB charging receptacles



The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us
905.738.9195
www.legrand.ca

